

TEST REPORT

Report No.	CISRR25051910106
Project No.	CISR250519101
FCC ID	2BFQI-V102
Applicant	Jiangxi Jichi Technology Co., Ltd.
Address	PlantNo.3,BlockB13-1-2,B14-1,JinggangshanEconomicandDevelopment Zone,Ji'anCity,Jiangxi Province,China
Manufacturer	Jiangxi Jichi Technology Co., Ltd.
Address	PlantNo.3,BlockB13-1-2,B14-1,JinggangshanEconomicandDevelopment Zone,Ji'anCity,Jiangxi Province,China
Product Name	Keyboard
Trade Mark	N/A
Model/Type reference	V102
Listed Model(s)	N/A
Standard	Part 15 Subpart C Section 15.249
Test date	May 17, 2025 to May 22, 2025
Issue date	May 26, 2025
Test result	Complied



Prepared by: Jimmy Huang



Approved by: Genry Long

The test results relate only to the tested samples.

The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

Contents

1. REPORT VERSION	3
2. SUMMARY OF TEST RESULT	4
3. SUMMARY	5
3.1. Product Description	5
3.2. Radio Specification Description	5
3.3. Modification of EUT	6
3.4. Testing Site	6
3.5. Field Strength Calculation	6
3.6. DISTURBANCE Calculation	6
4. TEST CONFIGURATION	7
4.1. Test frequency list	7
4.2. Test mode	7
4.3. Support unit used in test configuration and system	7
4.4. Test sample information	7
4.5. Testing environmental condition	7
4.6. Statement of the measurement uncertainty	7
4.7. Equipment Used during the Test	8
5. TEST CONDITIONS AND RESULTS	10
5.1. Antenna Requirement	10
5.2. AC Conducted Emission	11
5.3. 20 dB Bandwidth	14
5.4. Radiated Band edge Emission	16
5.5. Radiated Spurious Emission	22
6. TEST SETUP PHOTOS	32
7. EXTERNAL AND INTERNAL PHOTOS	32
7.1 External photos	32
7.2 Internal photos	32

1. REPORT VERSION

Version No.	Issue date	Description
00	May 26, 2025	Original

2. SUMMARY OF TEST RESULT

Report clause	Test Item	Standard Requirement	Result
5.1	Antenna Requirement	15.203	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	20 dB Bandwidth	15.215 (c)	PASS
5.4	Radiated Band Edge Emission	15.205/15.209/15.249(d)	PASS
5.5	Radiated Spurious Emission	15.249(a)(c)(e)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Product Description

Main unit information:	
Product Name:	Keyboard
Trade Mark:	N/A
Model No.:	V102
Listed Model(s):	N/A
Model difference:	N/A
Power supply:	Input: DC 5V
Hardware version:	N/A
Software version:	N/A
Accessory unit (AU) information:	
Battery:	DC 3.7V

3.2. Radio Specification Description

Technology:	2.4G
Modulation:	GFSK
Operation frequency:	2404MHz~2472MHz
Channel number:	3
Antenna type:	PCB antenna
Antenna gain:	2.08dBi

Channel list:

CH1	2404
CH2	2438
CH3	2472

3.3. Modification of EUT

No modifications are made to the EUT during all test items.

3.4. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
FCC registration number	736346

3.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

3.6. DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

4. TEST CONFIGURATION

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

4.1. Test frequency list

Channel	Frequency (MHz)
CH-L	2404
CH-M	2438
CH-H	2472

4.2. Test mode

No	Test mode	Description
TM1	TX mode	Keep the EUT in continuously transmitting mode with GFSK modulation at lowest, middle and highest channel.
TM2	Link mode	Keep the EUT in Bluetooth linking mode with AE.
TM3	Charging mode	Keep the EUT in charging status

4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Item	Equipment name	Trade Name	Model No.
1	PC	Lenovo	ThinkPad
2	Adapter	Guangdong Sangu Technology Co. Ltd	SG-0501000AU

4.4. Test sample information

Type	sample no.
Engineer sample	CISRR250519101--S01
Normal sample	CISRR250519101--S01

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
-----	------------	-------------------------

1	AC Conducted Emission	1.63dB
2	20dB Bandwidth	0.002%
3	Radiated Band Edge Emission	3.76dB for 30MHz-1GHz 3.80dB for above 1GHz
4	Radiated Spurious Emission	3.76dB for 30MHz-1GHz 3.80dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

AC Conducted Emission						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2025-01-08	2026-01-07
2	Artificial power network	Schwarzbeck	NSLK8127	8127-01096	2025-01-08	2026-01-07
3	8-wire Impedance Stabilization Network	Schwarzbeck	NTFM 8158	8158-00337	2025-01-08	2026-01-07
4	Artificial power network	Schwarzbeck	ENV216	/	2025-01-08	2026-01-07

20 dB Bandwidth						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	MXG RF Signal Generator	Agilent	N5181A	MY50145362	2025-01-08	2026-01-07
2	Spectrum analyzer	R&S	FSV-40N	102130	2025-01-08	2026-01-07
3	Vector Signal Generator	Agilent	N5182A	MY50142364	2025-01-08	2026-01-07
4	Power Meter	WCS	WCS-PM	WCSPM230405A	2025-01-08	2026-01-07

Radiated Band Edge Emission Radiated Spurious Emission						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2025-01-08	2026-01-07
2	Amplifier	Tonscend	TAP9K3G40	AP23A8060270	2025-01-08	2026-01-07
3	Prime amplifier	Tonscend	TAP01018050	AP23A8060280	2025-01-08	2026-01-07
4	9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2024-09-02	2027-09-01
5	Spectrum analyzer	Agilent	N9020A	MY50530263	2025-01-08	2026-01-07
6	Spectrum analyzer	R&S	FSV-40N	102130	2025-01-08	2026-01-07

7	Bilog Antenna	Schwarzbeck	VULB 9163	1463	2023-01-09	2026-01-08
8	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2023-01-09	2026-01-08
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2023-01-09	2026-01-08
10	RF Cable	Tonscend	Cable 1	/	2025-01-08	2026-01-07
11	RF Cable	Tonscend	Cable 2	/	2025-01-08	2026-01-07
12	RF Cable	SKET	Cable 3	/	2025-01-08	2026-01-07
13	L.I.S.N.#1	Schwarzbeck	NSLK812 7	/	2025-01-08	2026-01-07
14	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	2025-01-08	2026-01-07
15	Horn Antenna	SCHWARZBECK	BBHA9170	1130	2023-01-09	2026-01-08
16	Preamplifier	Tonscend	TAP1804 0048	AP21C806126	2025-01-08	2026-01-07
17	Variable-frequency power source	Pinhong	PH1110	/	2025-01-08	2026-01-07
18	6dB Attenuator	SKET	DC-6G	/	2025-01-08	2026-01-07
19	Antenna tower	SKT	Bk-4AT-BS	AT202104010 1-V1	2025-01-08	2026-01-07

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Description


The EUT antenna is PCB antenna 2.08dBi), the directional gain of the antenna less than 6dBi. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen Bangce Testing Technology Co., Ltd. does not assume any responsibility.

5.2. AC Conducted Emission

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).				
Test Limit:	Frequency of emission (MHz)		Conducted limit (dBμV)		
			Quasi-peak	Average	
	0.15-0.5		66 to 56*	56 to 46*	
	0.5-5		56	46	
	5-30		60	50	
*Decreases with the logarithm of the frequency.					
Test Method:	ANSI C63.10-2020 section 6.2				
Procedure:	1. The EUT was setup according to ANSI C63.10 requirements. 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. 4. The peripheral devices are also connected to the main power through a LISN. (Refer to the block diagram of the test setup and photographs) 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz. 8. During the above scans, the emissions were maximized by cable manipulation.				
Operating Environment:					
Temperature :	22.5 °C	Humidity:	56.7 %	Atmospheric Pressure:	103 kPa
Pre test mode:		TM1, TM2, TM3			
Final test mode:		TM1, TM2, TM3			

Test Setup Diagram

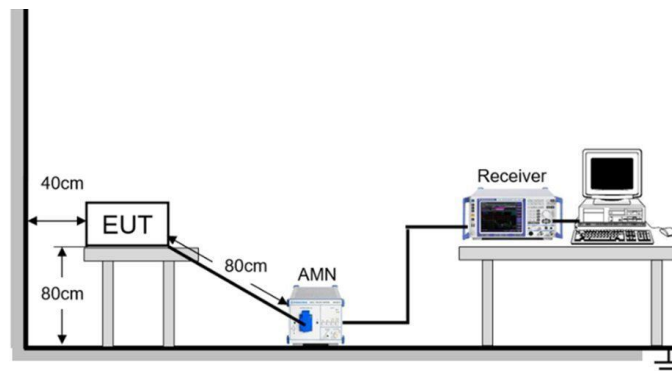

Test Result


Pass

Test Data

Note:


Have pre-scan all test mode, found TM3 mode which it was worst case, so only show the worst case's data on this report.

Mode3 / Line: Line

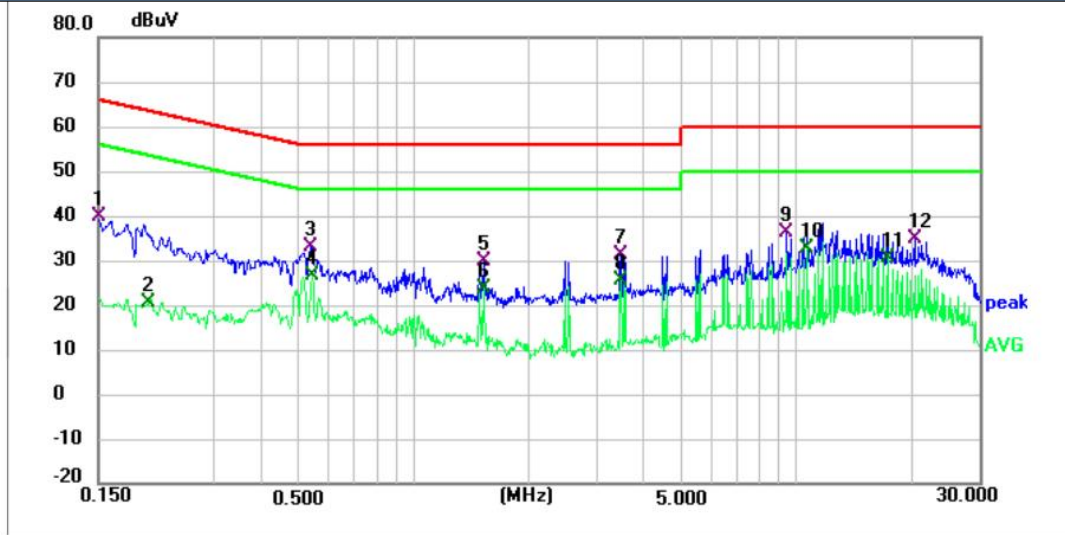

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	29.48	10.30	39.78	66.00	-26.22	QP
2	0.202	10.16	10.29	20.45	53.53	-33.08	AVG
3	0.538	22.69	10.35	33.04	56.00	-22.96	QP
4	0.542	16.15	10.35	26.50	46.00	-19.50	AVG
5	1.526	19.36	10.55	29.91	56.00	-26.09	QP
6	1.526	13.37	10.55	23.92	46.00	-22.08	AVG
7	3.474	20.07	11.12	31.19	56.00	-24.81	QP
8	3.474	14.47	11.12	25.59	46.00	-20.41	AVG
9	9.430	22.91	13.43	36.34	60.00	-23.66	QP
10 *	10.682	18.87	13.95	32.82	50.00	-17.18	AVG
11	17.370	14.63	15.91	30.54	50.00	-19.46	AVG
12	20.350	19.48	15.52	35.00	60.00	-25.00	QP

Mode3 / Line: Neutral

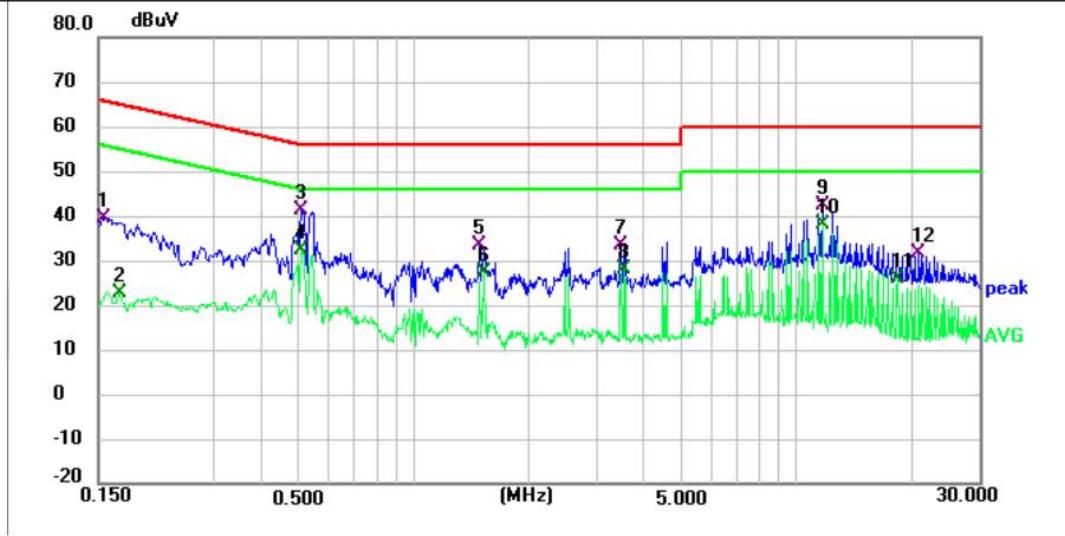

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.156	29.33	10.31	39.64	65.67	-26.03	QP
2	0.170	12.44	10.30	22.74	54.96	-32.22	AVG
3	0.510	31.07	10.35	41.42	56.00	-14.58	QP
4	0.510	21.95	10.35	32.30	46.00	-13.70	AVG
5	1.490	22.99	10.54	33.53	56.00	-22.47	QP
6	1.526	16.95	10.55	27.50	46.00	-18.50	AVG
7	3.474	22.37	11.13	33.50	56.00	-22.50	QP
8	3.562	17.02	11.17	28.19	46.00	-17.81	AVG
9	11.702	28.13	14.32	42.45	60.00	-17.55	QP
10 *	11.702	23.54	14.32	37.86	50.00	-12.14	AVG
11	18.374	10.16	15.88	26.04	50.00	-23.96	AVG
12	20.866	15.79	15.86	31.65	60.00	-28.35	QP


Note:

- 1). Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)
- 2). Margin = Result - Limit

5.3. 20 dB Bandwidth

Limit:

Test configuration:

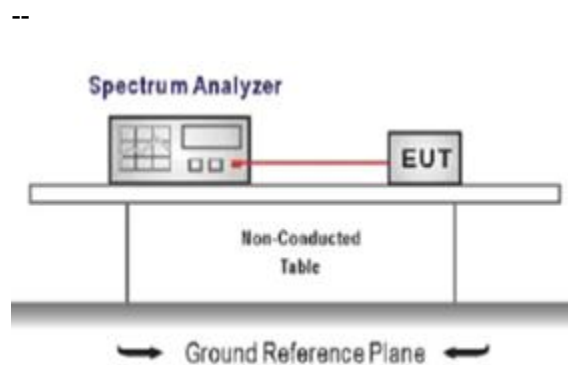

Test procedure:

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Operating Environment:

Temperature:	22.2 °C	Humidity:	56.3 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

Test Setup Diagram



Test Result

Pass

Test Data

Test Result of 20dB Bandwidth Measurement		
Test Frequency(MHz)	20dB Bandwidth(MHz)	Limit(MHz)
2404	1.221	Non-Specified
2438	1.226	Non-Specified
2472	1.229	Non-Specified




5.4. Radiated Band edge Emission

Limit:

FCC CFR Title 47 Part 15 Subpart C Section 15.249 (d):

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Test configuration:

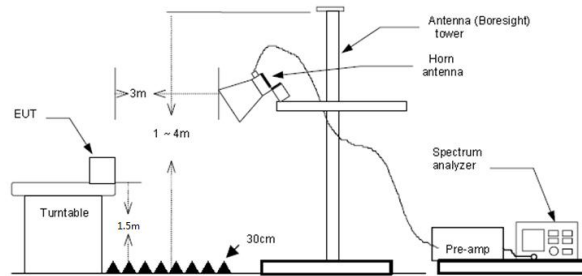


Test procedure:

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - d) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=Average, Trace=RMS for Average measurement

Operating Environment:

Temperature:	22.2 °C	Humidity:	56.5 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				

Test Setup Diagram

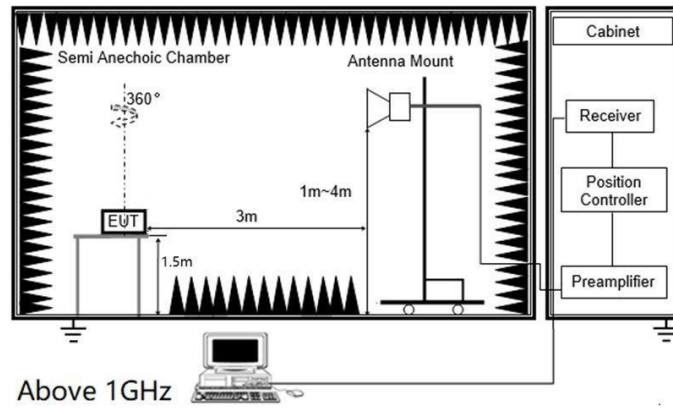

Test Result

Pass


Test Data

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit - Level
- 3) Average measurement was not performed if peak level is lower than average limit
- 4) Have pre-scan all test mode, found TM1 mode which it was worst case, so only show the worst case' s data on this report.
- 5) The other emission levels were very low against the limit.


Have pre-scan all test mode, found TM1 mode which it was worst case, so only show the worst case's data on this report.

Mode1 / Polarization: Horizontal / CH: L

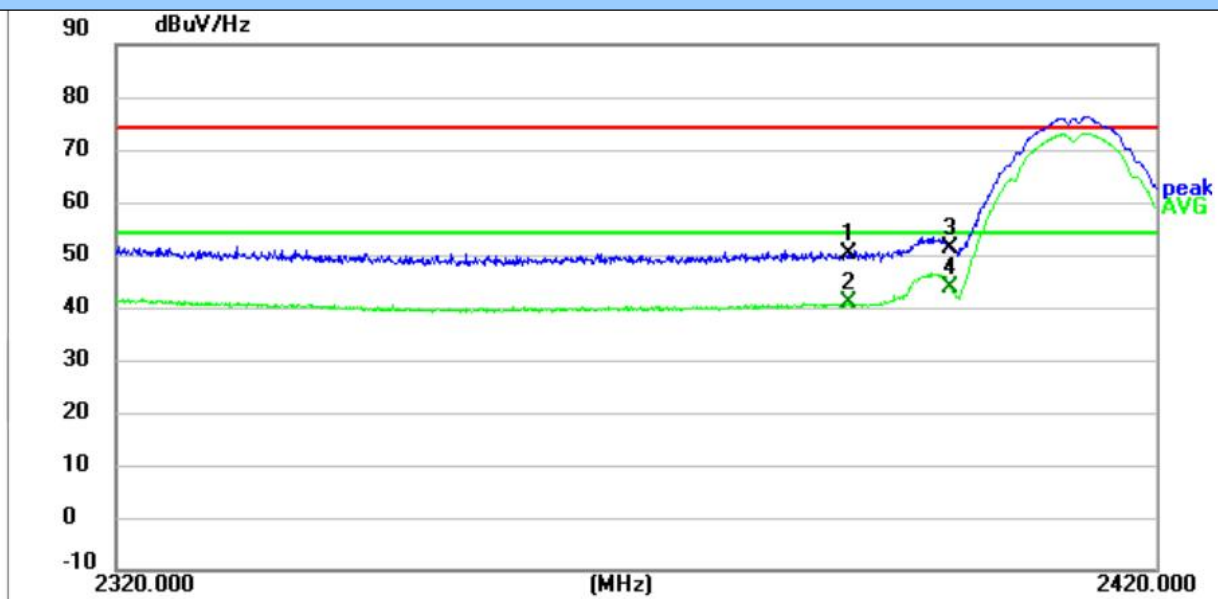


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2390.0000	47.71	2.34	50.05	74.00	23.95	peak
2	2390.0000	38.40	2.34	40.74	54.00	13.26	AVG
3	2400.0000	48.83	2.38	51.21	74.00	22.79	peak
4 *	2400.0000	41.22	2.38	43.60	54.00	10.40	AVG

Mode1 / Polarization: Vertical / CH: L

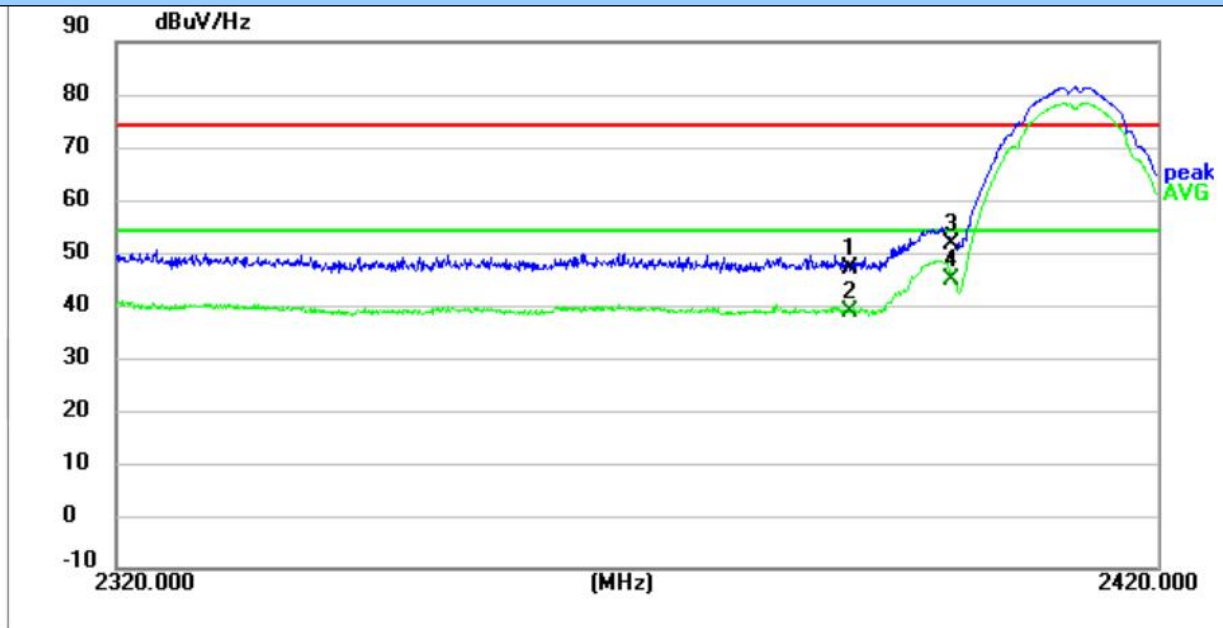


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2390.0000	44.79	2.34	47.13	74.00	26.87	peak
2	2390.0000	36.56	2.34	38.90	54.00	15.10	AVG
3	2400.0000	49.30	2.38	51.68	74.00	22.32	peak
4 *	2400.0000	42.52	2.38	44.90	54.00	9.10	AVG

Mode1 / Polarization: Horizontal / CH: H

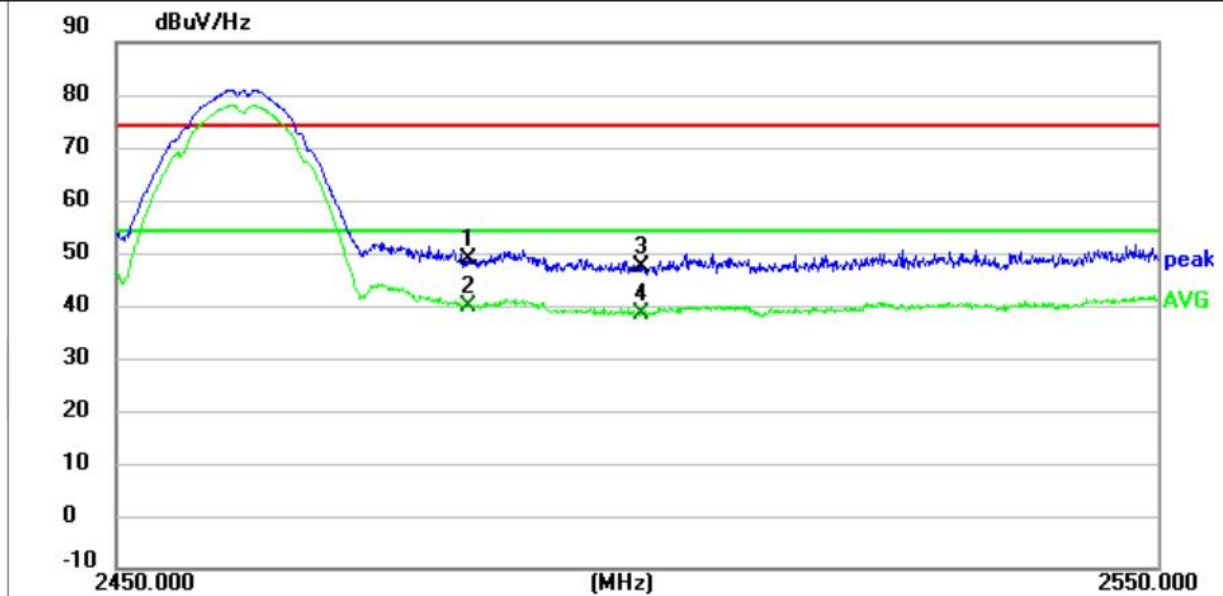

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2483.5000	46.22	2.66	48.88	74.00	25.12	peak
2 *	2483.5000	37.32	2.66	39.98	54.00	14.02	AVG
3	2500.0000	44.61	2.80	47.41	74.00	26.59	peak
4	2500.0000	35.52	2.80	38.32	54.00	15.68	AVG

Mode1 / Polarization: Vertical / CH: H

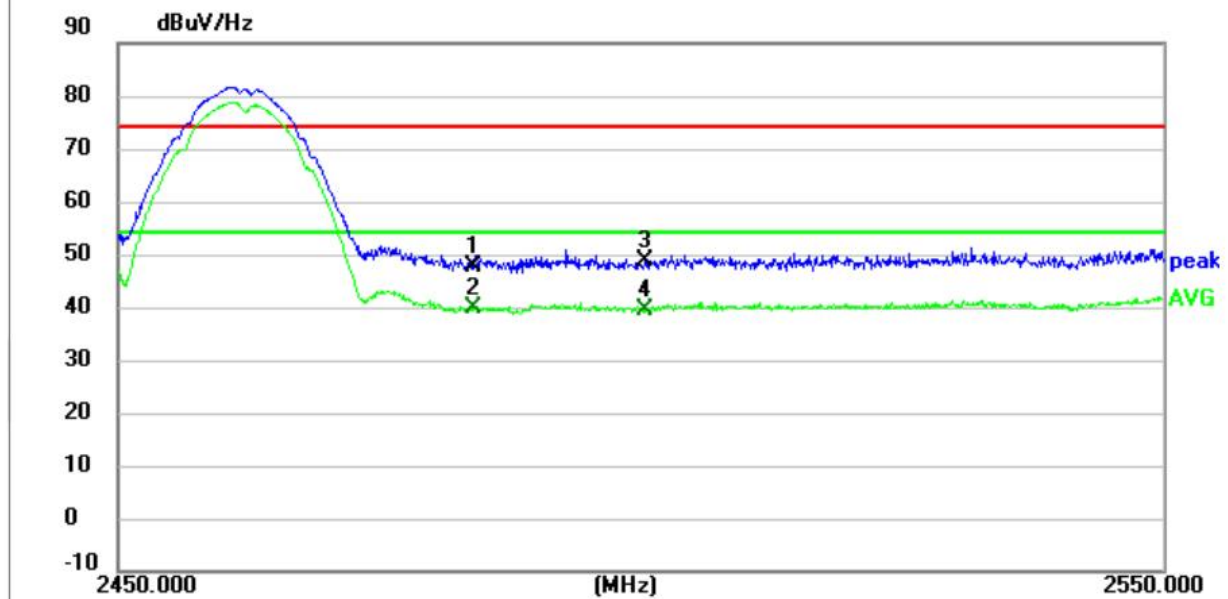

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	2483.5000	45.07	2.66	47.73	74.00	26.27	peak
2 *	2483.5000	37.00	2.66	39.66	54.00	14.34	AVG
3	2500.0000	46.08	2.80	48.88	74.00	25.12	peak
4	2500.0000	36.70	2.80	39.50	54.00	14.50	AVG

5.5. Radiated Spurious Emission

Limit:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak

Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)

FCC CFR Title 47 Part 15 Subpart C Section 15.249


As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the Antenna azimuth.

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz(Field strength of fundamental)	94.00	Average
	114.00	Peak
Above 1GHz(Field strength of harmonics)	54.00	Average
	74.00	Peak

Test configuration:


9kHz~30MHz

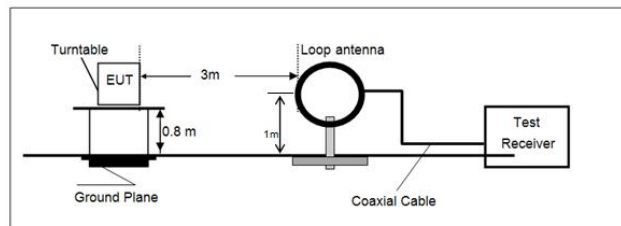

30 MHz ~ 1 GHz

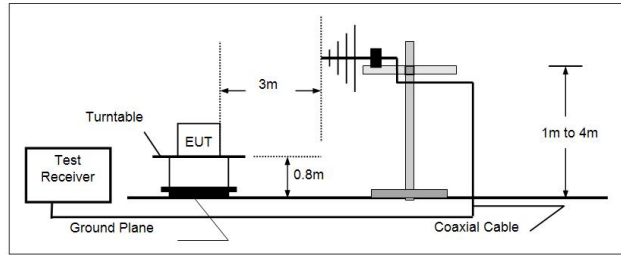

Above 1 GHz

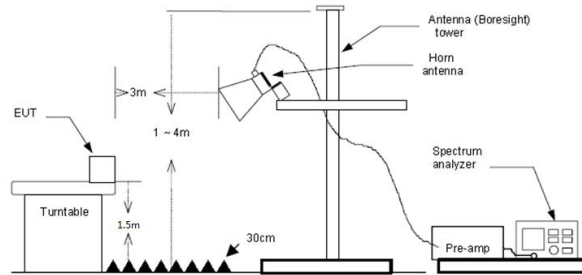

Test procedure:

1. The EUT was setup and tested according to ANSI C63.10.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - d) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=Average, Trace=RMS for Average measurement

Operating Environment:

Temperature :	22.2 °C	Humidity:	56.5 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				

Test Result

Pass

Test Data

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.
- 4) The other emission levels were very low against the limit.
- 5) This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.


For 9 kHz ~ 30 MHz

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

For 30 MHz ~ 1000 MHz

Have pre-scan all test mode, found TM1 mode CH00 which it was worst case, so only show the worst case's data on this report.

Mode1 / Polarization: Horizontal / CH: L

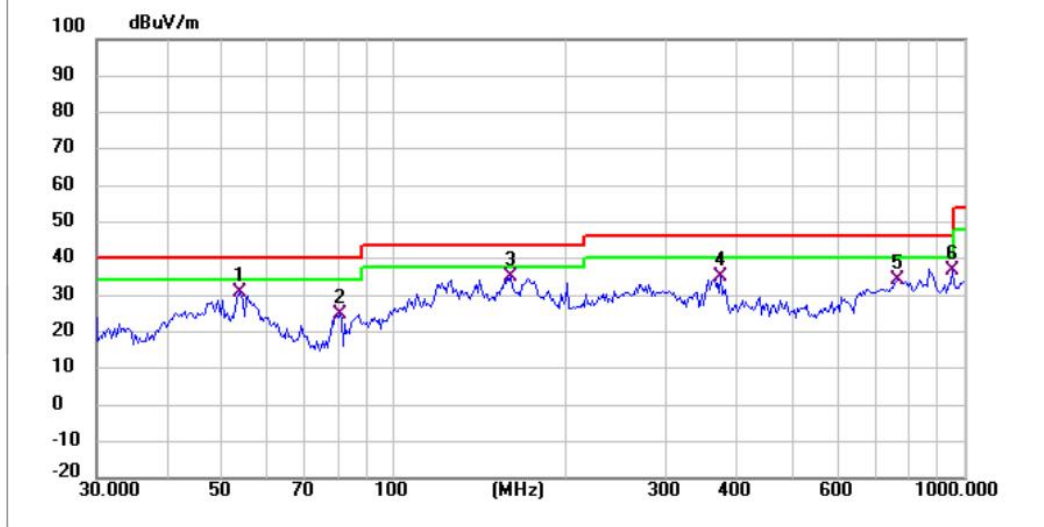

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.6931	60.92	-29.97	30.95	40.00	9.05	QP
2	80.0805	59.96	-34.98	24.98	40.00	15.02	QP
3 *	160.3454	67.96	-32.97	34.99	43.50	8.51	QP
4	374.6225	60.64	-25.51	35.13	46.00	10.87	QP
5	766.0570	51.43	-17.09	34.34	46.00	11.66	QP
6	952.0937	50.60	-13.99	36.61	46.00	9.39	QP

Mode1 / Polarization: Vertical / CH: L




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	49.7066	59.82	-29.12	30.70	40.00	9.30	QP
2	106.7587	60.16	-30.69	29.47	43.50	14.03	QP
3	200.6880	58.40	-29.83	28.57	43.50	14.93	QP
4	422.0577	60.87	-24.23	36.64	46.00	9.36	QP
5	566.6221	55.33	-20.15	35.18	46.00	10.82	QP
6	881.4067	47.02	-15.13	31.89	46.00	14.11	QP

For 1 GHz ~ 25 GHz


Have pre-scan all test mode, found TM1 mode which it was worst case, so only show the worst case's data on this report.

Mode1 / Polarization: Horizontal / CH: L

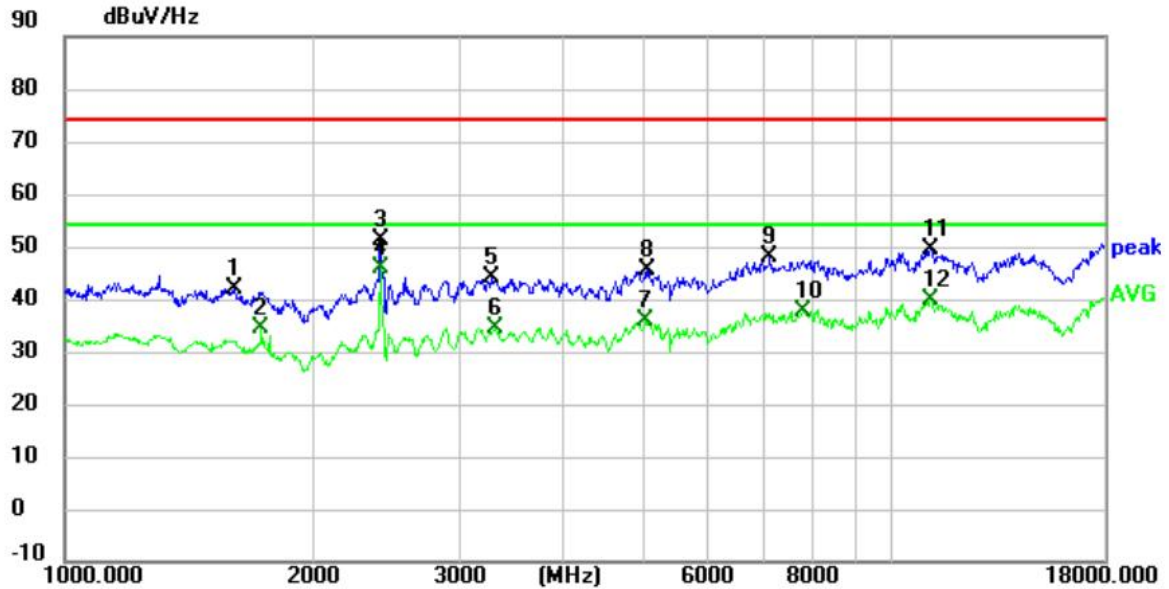

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1603.5000	43.18	-1.21	41.97	74.00	32.03	peak
2	1731.0000	35.13	-0.67	34.46	54.00	19.54	AVG
3	2412.7000	48.91	2.38	51.29	74.00	22.71	peak
4 *	2412.7000	43.59	2.38	45.97	54.00	8.03	AVG
5	3286.5000	37.50	6.47	43.97	74.00	30.03	peak
6	3320.5000	28.07	6.43	34.50	54.00	19.50	AVG
7	5035.8000	22.90	12.84	35.74	54.00	18.26	AVG
8	5056.2000	32.34	13.03	45.37	74.00	28.63	peak
9	7099.6000	26.57	21.58	48.15	74.00	25.85	peak
10	7805.1000	15.76	22.08	37.84	54.00	16.16	AVG
11	11137.1000	21.34	28.11	49.45	74.00	24.55	peak
12	11137.1000	11.80	28.11	39.91	54.00	14.09	AVG

Mode1 / Polarization: Vertical / CH: L

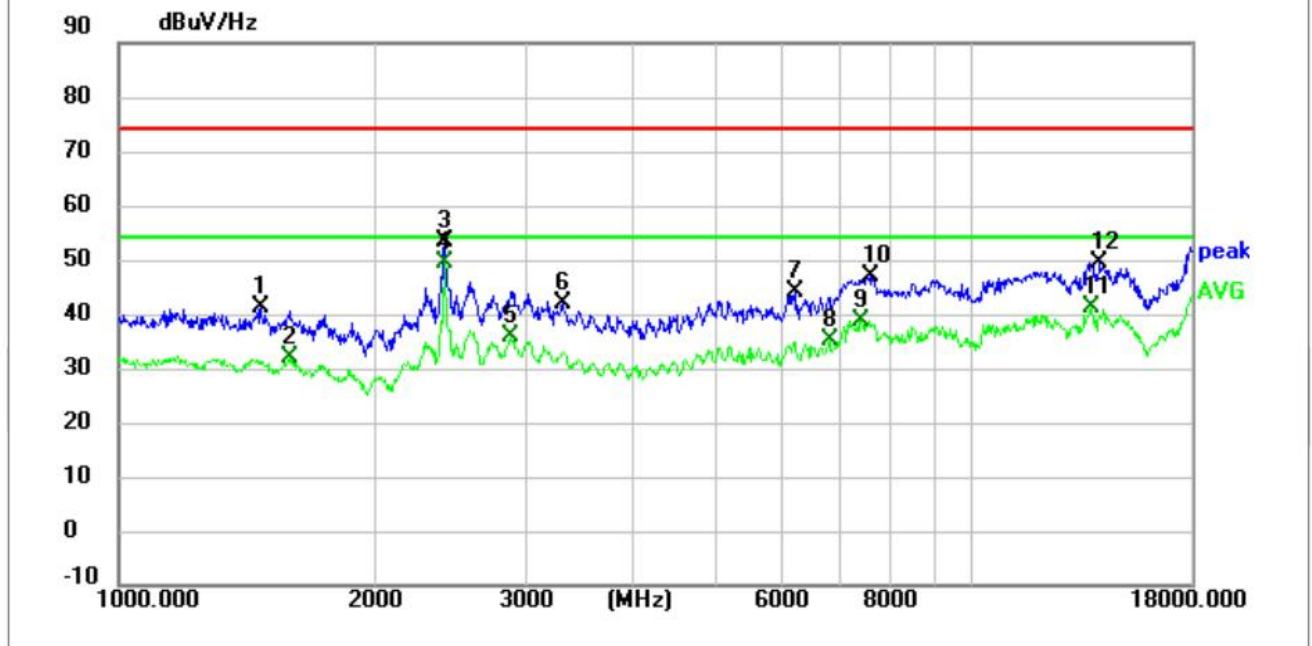


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1467.5000	42.59	-1.33	41.26	74.00	32.74	peak
2	1586.5000	33.06	-1.27	31.79	54.00	22.21	AVG
3	2412.7000	51.14	2.38	53.52	74.00	20.48	peak
4 *	2412.7000	46.98	2.38	49.36	54.00	4.64	AVG
5	2885.3000	30.08	5.75	35.83	54.00	18.17	AVG
6	3312.0000	35.56	6.42	41.98	74.00	32.02	peak
7	6195.2000	27.69	16.50	44.19	74.00	29.81	peak
8	6803.8000	14.96	20.14	35.10	54.00	18.90	AVG
9	7412.4000	16.66	22.16	38.82	54.00	15.18	AVG
10	7616.4000	23.99	22.82	46.81	74.00	27.19	peak
11	13777.2000	52.27	-11.18	41.09	54.00	12.91	AVG
12	14095.1000	60.16	-10.71	49.45	74.00	24.55	peak

Test channel:2404MHz


Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBuV/m)	Margin (dB)	Remark	Polarity
2404.00	91.70	29.18	4.02	38.35	-5.15	86.55	114	27.45	Peak	Horizontal
2404.00	80.99	29.18	4.02	38.35	-5.15	75.84	94	18.16	Average	Horizontal
2404.00	81.23	29.18	4.02	38.35	-5.15	76.08	114	37.92	Peak	Vertical
2404.00	67.79	29.18	4.02	38.35	-5.15	62.64	94	31.36	Average	Vertical

Mode1 / Polarization: Horizontal / CH: M

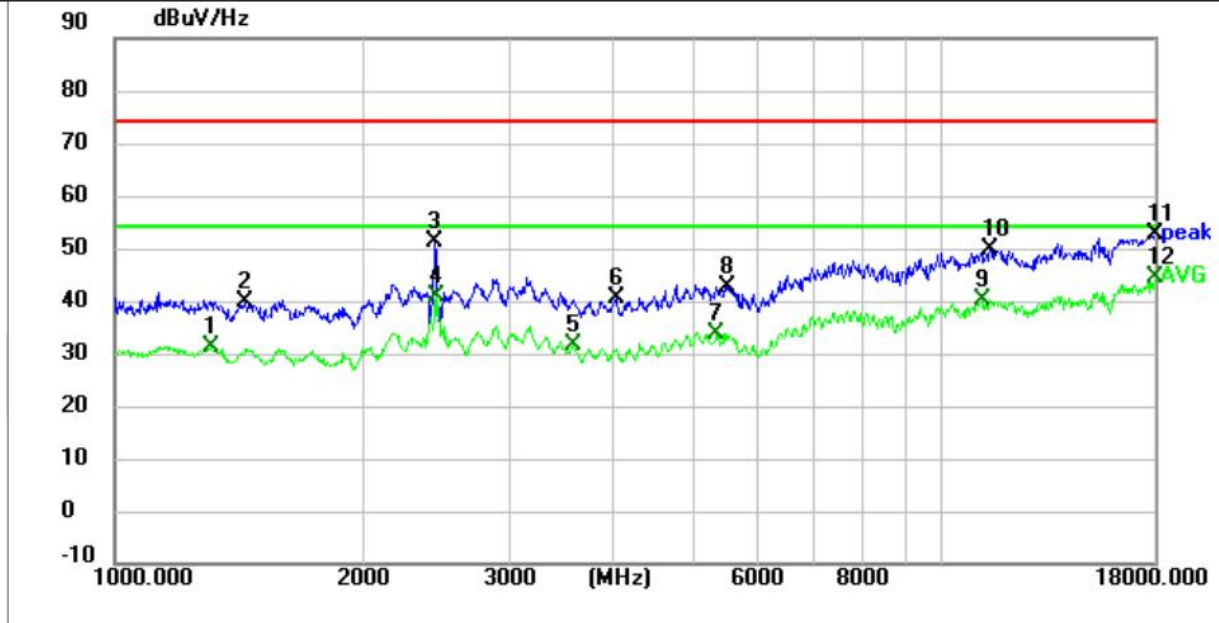

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1311.1000	32.70	-1.62	31.08	54.00	22.92	AVG
2	1442.0000	41.26	-1.37	39.89	74.00	34.11	peak
3	2439.9000	48.70	2.39	51.09	74.00	22.91	peak
4	2443.3000	38.43	2.39	40.82	54.00	13.18	AVG
5	3587.4000	25.30	6.34	31.64	54.00	22.36	AVG
6	4032.8000	33.20	7.30	40.50	74.00	33.50	peak
7	5333.3000	20.16	13.63	33.79	54.00	20.21	AVG
8	5506.7000	27.77	14.85	42.62	74.00	31.38	peak
9	11143.9000	12.05	28.11	40.16	54.00	13.84	AVG
10	11429.5000	21.38	28.29	49.67	74.00	24.33	peak
11	18000.0000	61.73	-8.90	52.83	74.00	21.17	peak
12 *	18000.0000	53.23	-8.90	44.33	54.00	9.67	AVG

Mode1 / Polarization: Vertical / CH: M

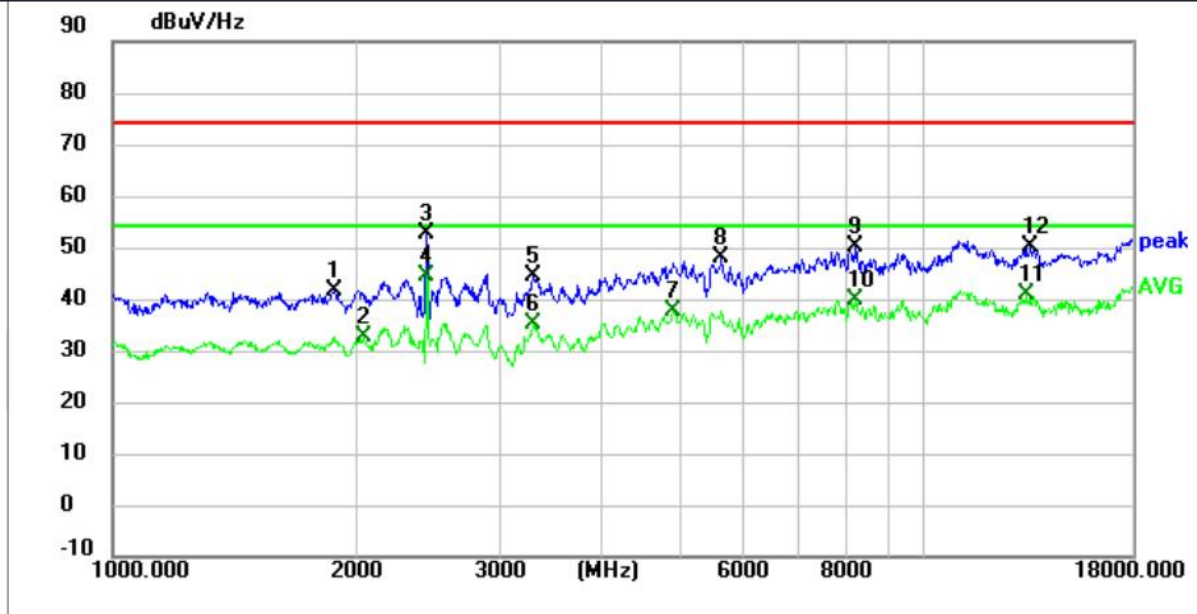


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1880.6000	41.54	-0.10	41.44	74.00	32.56	peak
2	2042.1000	31.38	1.27	32.65	54.00	21.35	AVG
3	2434.8000	50.15	2.39	52.54	74.00	21.46	peak
4 *	2439.9000	41.95	2.39	44.34	54.00	9.66	AVG
5	3295.0000	38.01	6.44	44.45	74.00	29.55	peak
6	3301.8000	28.78	6.42	35.20	54.00	18.80	AVG
7	4903.2000	26.18	11.41	37.59	54.00	16.41	AVG
8	5618.9000	33.25	14.79	48.04	74.00	25.96	peak
9	8233.5000	27.49	22.76	50.25	74.00	23.75	peak
10	8233.5000	17.05	22.76	39.81	54.00	14.19	AVG
11	13345.4000	52.34	-11.58	40.76	54.00	13.24	AVG
12	13501.8000	61.59	-11.50	50.09	74.00	23.91	peak

Test channel:2438MHz


Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBuV/m)	Margin (dB)	Remark	Polarity
2438.00	91.17	29.23	4.02	38.2	-4.95	86.22	114	27.78	Peak	Horizontal
2438.00	80.89	29.23	4.02	38.2	-4.95	75.94	94	18.06	Average	Horizontal
2438.00	82.39	29.23	4.02	38.2	-4.95	77.44	114	36.56	Peak	Vertical
2438.00	68.88	29.23	4.02	38.2	-4.95	63.93	94	30.07	Average	Vertical

Mode1 / Polarization: Horizontal / CH: H

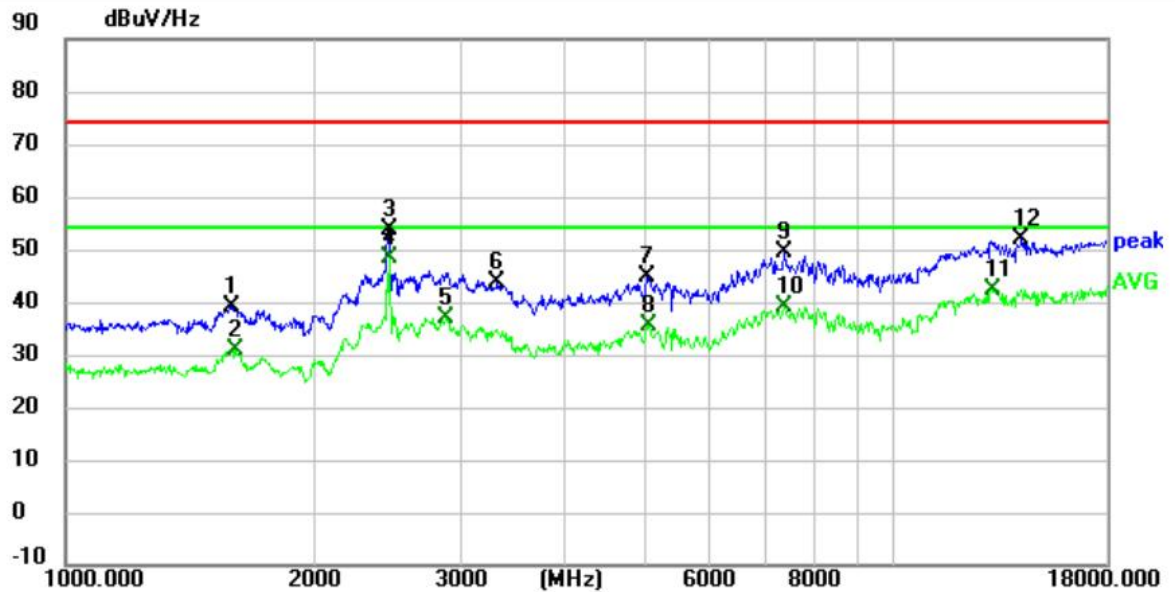

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1589.9000	40.37	-1.25	39.12	74.00	34.88	peak
2	1606.9000	32.08	-1.21	30.87	54.00	23.13	AVG
3	2462.0000	51.12	2.49	53.61	74.00	20.39	peak
4 *	2462.0000	45.75	2.49	48.24	54.00	5.76	AVG
5	2881.9000	31.41	5.72	37.13	54.00	16.87	AVG
6	3318.8000	37.15	6.43	43.58	74.00	30.42	peak
7	5039.2000	31.78	12.90	44.68	74.00	29.32	peak
8	5051.1000	22.41	13.03	35.44	54.00	18.56	AVG
9	7380.1000	27.32	22.12	49.44	74.00	24.56	peak
10	7380.1000	17.16	22.12	39.28	54.00	14.72	AVG
11	13172.0000	54.38	-11.96	42.42	54.00	11.58	AVG
12	14229.4000	62.37	-10.55	51.82	74.00	22.18	peak

Mode1 / Polarization: Vertical / CH: H

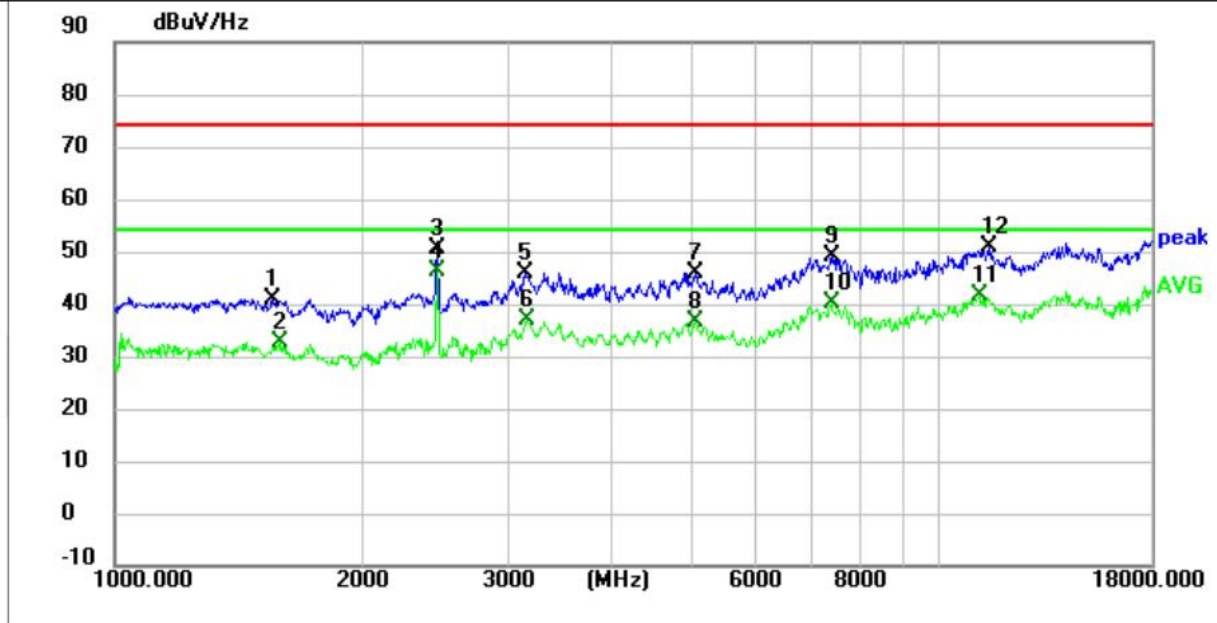

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/Hz)	Limit (dBuV/Hz)	Margin (dB)	Detector
1	1552.5000	42.24	-1.39	40.85	74.00	33.15	peak
2	1584.8000	33.86	-1.27	32.59	54.00	21.41	AVG
3	2462.0000	48.11	2.49	50.60	74.00	23.40	peak
4 *	2462.0000	43.84	2.49	46.33	54.00	7.67	AVG
5	3145.4000	39.68	6.34	46.02	74.00	27.98	peak
6	3167.5000	30.38	6.43	36.81	54.00	17.19	AVG
7	5064.7000	32.78	13.03	45.81	74.00	28.19	peak
8	5064.7000	23.40	13.03	36.43	54.00	17.57	AVG
9	7400.5000	26.89	22.12	49.01	74.00	24.99	peak
10	7400.5000	18.10	22.12	40.22	54.00	13.78	AVG
11	11142.2000	13.35	28.11	41.46	54.00	12.54	AVG
12	11444.8000	22.54	28.28	50.82	74.00	23.18	peak

Test channel:2472MHz

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
2472.00	94.68	29.2	4.02	38.3	-5.08	89.60	114	24.40	Peak	Horizontal
2472.00	80.91	29.2	4.02	38.3	-5.08	75.83	94	18.17	Average	Horizontal
2472.00	83.36	29.2	4.02	38.3	-5.08	78.28	114	35.72	Peak	Vertical
2472.00	67.91	29.2	4.02	38.3	-5.08	62.83	94	31.17	Average	Vertical

Note:

1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor

2) Margin = Limit – Level

3) Average measurement was not performed if peak level is lower than average limit (54dBuV/m) for above 1GHz.

6. TEST SETUP PHOTOS

Please refer to report for Test CISRR25051910105 of the EUT.

7. EXTERNAL AND INTERNAL PHOTOS

7.1 External photos

Please refer to report for Test CISRR25051910105 of the EUT.

7.2 Internal photos

Please refer to report for Test CISRR25051910105 of the EUT.

-----End of the report-----