

# 产品规格承认书

## SPECIFICATIONS

客户:

CUSTOMER: \_\_\_\_\_

产品名称:

DESCRIPTION: \_\_\_\_\_

monopol e

客户型号:

CUSTOMER PART No: \_\_\_\_\_

产品型号:

OUR MODEL NO: \_\_\_\_\_

**PBX3216DA01**

日期:

DATE: \_\_\_\_\_

确认签字, 盖章后请返回承认书一份

PLEASE RETURV TO US ONE COPY OF "SPECIFICATION FOR APPROVAL"

WITY YOUR APPROVED SIGNATURES

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES = ± HOLEDIA = ±			 PENGBANXING	深圳市朋伴兴业科技有限公司 Shenzhen Pengbian Industrial Technology Co., LTD	
SCALE: N/A	UNIT: mm			THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : Sera	CHECKED BY: XD				
DESIGNED BY: Sera	APPROVED BY: XD				
TITLE: CHIP2450-3216 Specification		DOCUMENT NO.	3216		SPEC REV.
					P1

**PBX3216DA01 Specification**


Operating Temp. : -40°C~+85°C

**1. FEATURES:**


- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

**2. APPLICATIONS:**

- Bluetooth, Wireless LAN, Mobile TV
- Home RF System, etc

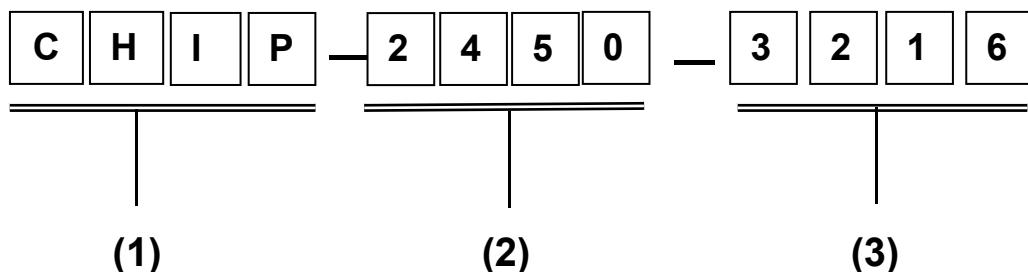**3. PRODUCT IDENTIFICATION**

- (1) Product type: Multilayer chip Antenna
- (2) Center Frequency: 2450MHz
- (3) External Dimensions (L×W) (mm): 3.2\*1.6

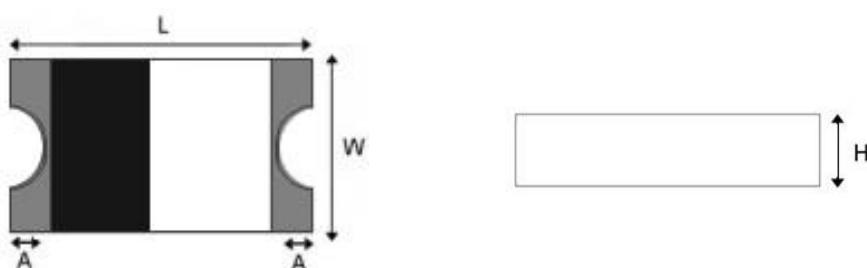**4. SHAPE AND DIMENSIONS:**

L	W	H	A
3.2±0.2	1.6±0.2	0.75±0.1	0.4±0.1

UNLESS OTHER SPECIFIED TOLERANCES ON:  
 $X=\pm$     $X.X=\pm$     $X.XX=\pm$   
**ANGLES** =  $\pm$    **HOLE DIA** =  $\pm$



**深圳市朋伴兴业科技有限公司**  
Shenzhen Pengbian Industrial Technology Co., LTD

SCALE: N/A

UNIT: mm

DRAWN BY: Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE: CHIP2450-3216 Specification

DOCUMENT NO.

3216

SPEC REV.

P1

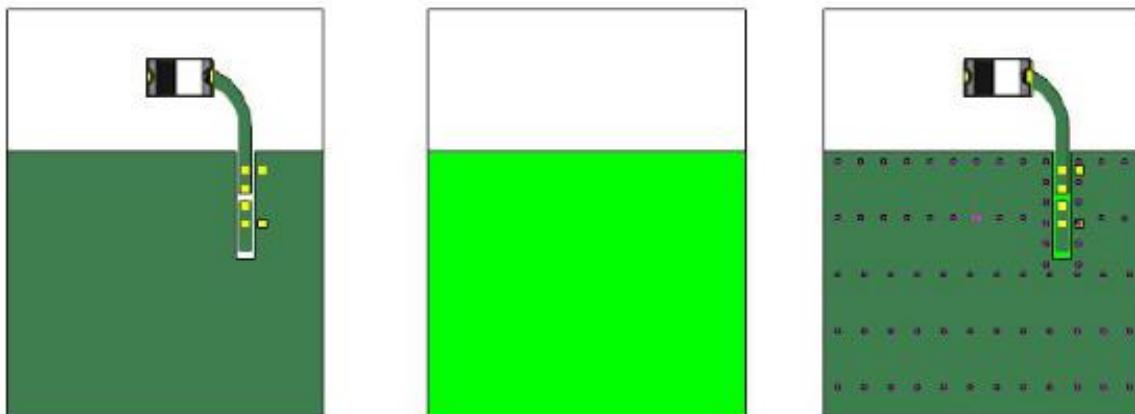


CHIP2450-3216

顶层铺铜

焊盘

底层铺铜

打孔

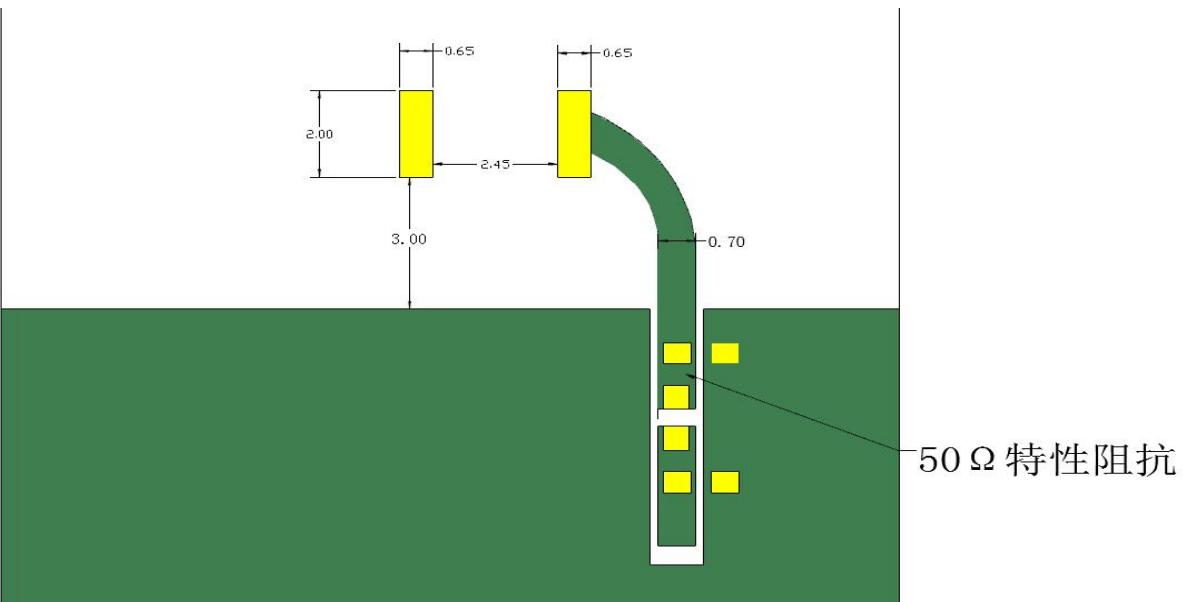

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X = \pm$        $X.X = \pm$        $X.XX = \pm$   
**ANGLES** =  $\pm$       **HOLE DIA** =  $\pm$

SCALE: N/A

DRAWN BY: Sera

DESIGNED BY: Sera

UNIT: mm

CHECKED BY: XD

APPROVED BY: XD



PENGBANXING

深圳市朋伴兴业科技有限公司

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE: CHIP2450-3216 Specification

DOCUMENT NO.

3216

SPEC REV.

P1

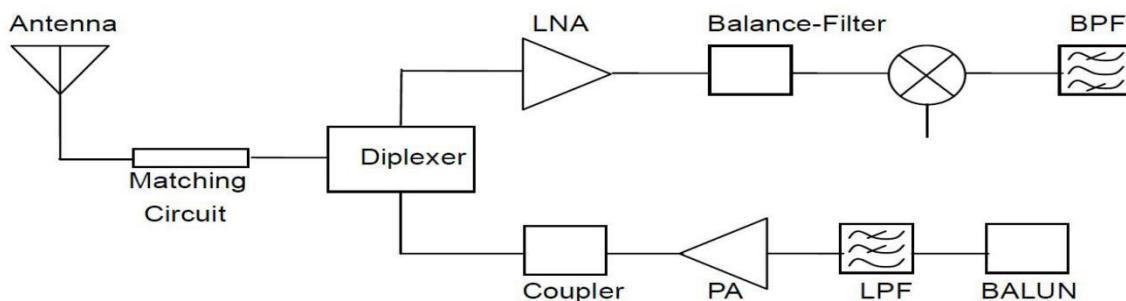**APPLICATION GUIDE****5. SPECIFICATIONS:**

No.	Product number	PBX3216DA01	
1	<b>Central Frequency</b>	2440	MHz
2	<b>Bandwidth</b>	100 (Min.)	MHz
3	<b>Return Loss</b>	-11.96 (Max.)	dB
4	<b>Peak Gain</b>	2.7	dBi
5	<b>Impedance</b>	50	$\Omega$
6	<b>Operating Temperature</b>	-40~+85	°C
7	<b>Maximum Power</b>	5	W
8	<b>Resistance to soldering heat</b>	10 (@260°C)	Sec.
9	<b>Polarization</b>	Linear	
10	<b>Azimuth Beam width</b>	Omni-directional	
11	<b>Termination</b>	Sn (leadless)	

UNLESS OTHER SPECIFIED TOLERANCES ON:  
 $X = \pm$     $X.X = \pm$     $X.XX = \pm$   
**ANGLES** =  $\pm$    **HOLE DIA** =  $\pm$



深圳市朋伴兴业科技有限公司  
 Shenzhen  
 Pengbian Industrial Technology Co., LTD

SCALE: N/A      UNIT: mm  
 DRAWN BY: Sera      CHECKED BY: XD  
 DESIGNED BY: Sera      APPROVED BY: XD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-3216 Specification

DOCUMENT NO.	3216	SPEC REV.
		P1

## 6. Electrical Characteristics :



Frequency (MHz)	2400	2450	2500
Avg. Gain (dBi)	-1.83	-1.86	-2.97
Peck Gain (dBi)	2.7	2.58	1.34
Efficiency (%)	65.5	65.22	50.45

UNLESS OTHER SPECIFIED TOLERANCES ON:  
 X=±      X.X=±      X.XX=±  
 ANGLES =±      HOLEDIA =±



深圳市朋伴兴业科技有限公司 Shenzhen Pengbian Industrial Technology Co., LTD

SCALE: N/A      UNIT: mm  
 DRAWN BY: Sera      CHECKED BY: XD  
 DESIGNED BY: Sera      APPROVED BY: XD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-3216 Specification

DOCUMENT NO.


3216

SPEC REV.

P1


## X-Y Plane

2450.000MHz E1

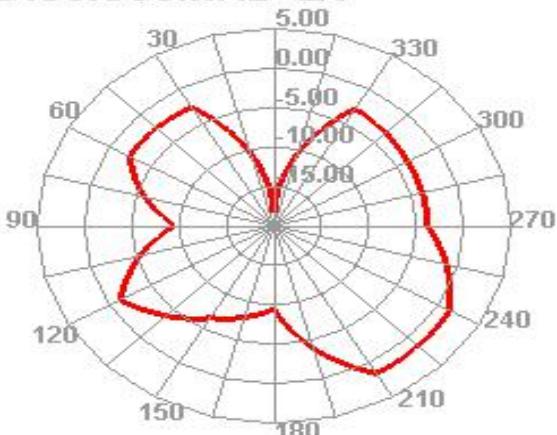


## X-Y Plane

2450.000MHz E2

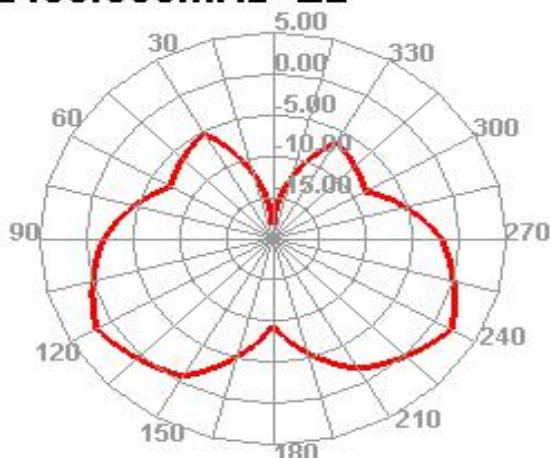

## X-Y Plane

2450.000MHz H

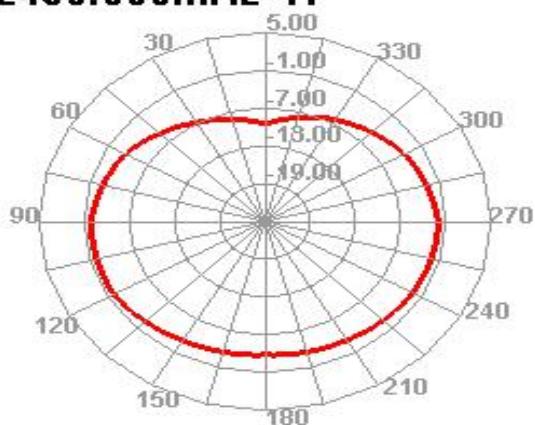

UNLESS OTHER SPECIFIED TOLERANCES ON:  
 $X = \pm$        $X.X = \pm$        $X.XX = \pm$   
 $\text{ANGLES} = \pm$        $\text{HOLEDIA} = \pm$

SCALE: N/A

DRAWN BY: Sera

DESIGNED BY: Sera

UNIT: mm

CHECKED BY: XD

APPROVED BY: XD



深圳市朋伴兴业科技有限公司  
Shenzhen  
Pengbian Industrial Technology Co., LTD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY  
TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS  
THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR  
DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-3216 Specification



DOCUMENT  
NO.

3216

SPEC REV.  
P1

## 3D Radiation Pattern

2450.000MHz

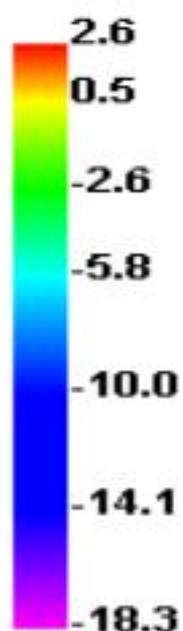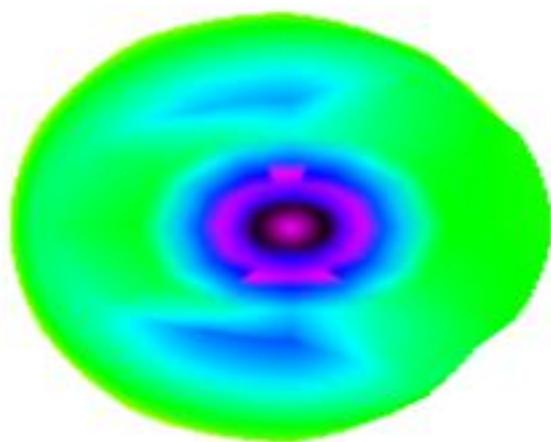

UNLESS OTHER SPECIFIED TOLERANCES ON:  
 X=± X.X=± X.XX=±  
**ANGLES** = ± **HOLE DIA** = ±

SCALE: N/A

DRAWN BY: Sera

DESIGNED BY: Sera

UNIT: mm

CHECKED BY: XD

APPROVED BY: XD



深圳市朋伴兴业科技有限公司 Shenzhen  
 Pengbian Industrial Technology Co., LTD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY  
 TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS  
 THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR  
 DEVICES WITHOUT PERMISSION

TITLE: CHIP2450-3216 Specification

DOCUMENT  
NO.

3216

SPEC REV.  
P1

## 7. Environmental Characteristics

### (1) Reliability Test

Item	Condition	Specification
Thermal shock	1. $30 \pm 3$ minutes at $-40^\circ C \pm 5^\circ C$ , 2. Convert to $+105^\circ C$ (5 minutes) 3. $30 \pm 3$ minutes at $+105^\circ C \pm 5^\circ C$ , 4. Convert to $-40^\circ C$ (5 minutes) 5. Total 100 continuous cycles	No apparent damage Fulfill the electrical spec. after test.
Humidity resistance	1. Humidity: 85% R.H. 2. Temperature: $85 \pm 5^\circ C$ 3. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
High temperature resistance	1. Temperature: $150^\circ C \pm 5^\circ C$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Low temperature resistance	1. Temperature: $-40^\circ C \pm 5^\circ C$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Soldering heat resistance	1. Solder bath temperature : $260 \pm 5^\circ C$ 2. Bathing time: $10 \pm 1$ seconds	No apparent damage
Solderability	The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of $245 \pm 5^\circ C$ for $3 \pm 1$ seconds.	No apparent damage

### (2) Storage Condition

#### (a) At warehouse:

The temperature should be within  $0 \sim 30^\circ C$  and humidity should be less than 60% RH.

The product should be used within 1 year from the time of delivery.

#### (b) On board:


The temperature should be within  $-40 \sim 85^\circ C$  and humidity should be less than 85% RH.

### (3) Operating Temperature Range

Operating temperature range :  $-40^\circ C$  to  $+105^\circ C$ .

UNLESS OTHER SPECIFIED TOLERANCES ON: $X = \pm$ $X.X = \pm$ $X.XX = \pm$ $ANGLES = \pm$ $HOLE DIA = \pm$		 <b>深圳市朋伴兴业科技有限公司</b>
SCALE: N/A	UNIT: mm	
DRAWN BY : Sera	CHECKED BY: XD	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: Sera	APPROVED BY: XD	
TITLE: CHIP2450-3216 Specification		DOCUMENT NO.      3216      SPEC REV. <span style="float: right;">P1</span>

## 8. Recommended Reflow Soldering

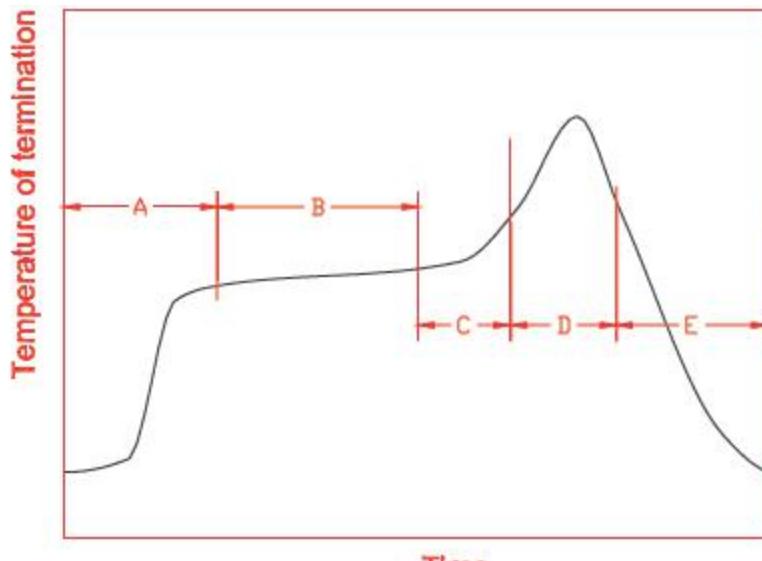

		Time	
A	1 <sup>st</sup> rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 <sup>nd</sup> rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	if 220°C	50s~60s
		if 230°C	40s~50s
		if 240°C	30s~40s
		if 250°C	20s~40s
		if 260°C	20s~40s
E	Regular cooling	200°C to 100°C	1°C/s ~ 4°C/s

\*reference: J-STD-020C

### (1) Soldering Gun Procedure

Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350° C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.

### (2) Soldering Volume


Note that excess of soldering volume will easily get crack the body of this product.

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES = ± HOLEDIA = ±		 <b>深圳市朋伴兴业科技有限公司</b> <small>Shenzhen Pengbian Industrial Technology Co., LTD</small>
SCALE: N/A	UNIT: mm	
DRAWN BY : Sera	CHECKED BY: XD	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: Sera	APPROVED BY: XD	
TITLE: CHIP2450-3216 Specification		DOCUMENT NO. 3216
		SPEC REV. P1

## 9. Taping Package and Label Marking: (unit: mm)


(1) Quantity/Reel: 5000pcs/Reel

(2) Carrier tape dimensions

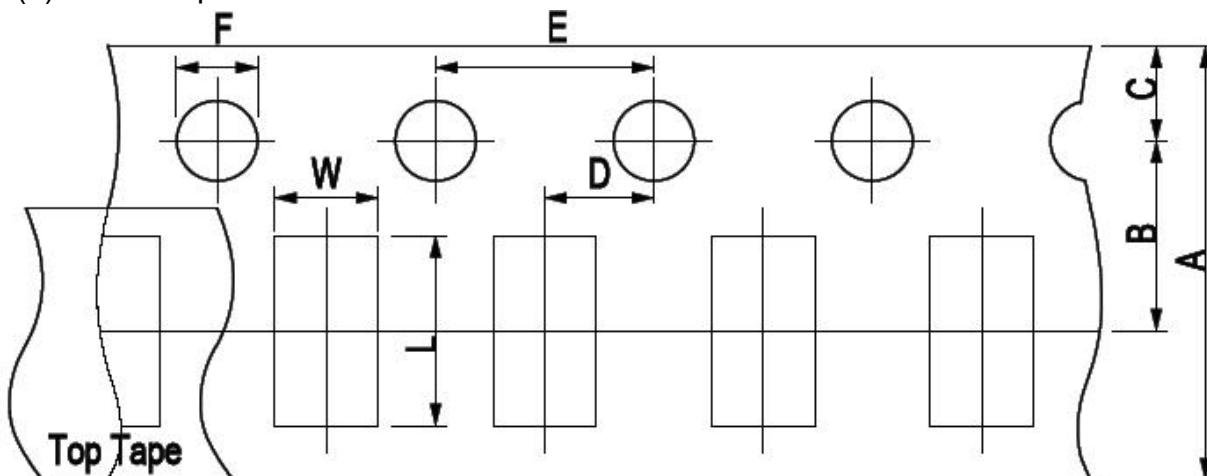

Type	A	B	C	D	E	F	L	W
2450-21	$8.00 \pm 0.3$	$3.50 \pm 0.05$	$1.75 \pm 0.1$	$2.00 \pm 0.05$	$4.00 \pm 0.1$	$1.50 \pm 0.1$	$2.30 \pm 0.1$	$1.55 \pm 0.1$

(3) Taping reel dimensions

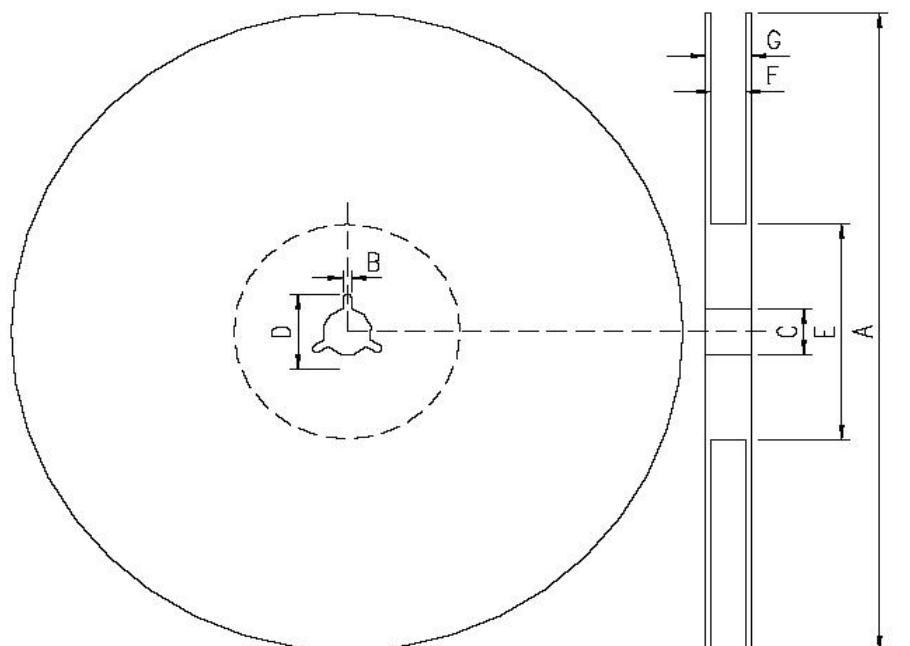

A	$178.0 \pm 2.0$
B	$2.0 \pm 0.5$
C	$13.0 \pm 0.5$
D	$21.0 \pm 0.8$
E	$62.0 \pm 1.5$
F	$9.0 \pm 0.5$
G	$13.0 \pm 1.0$

UNLESS OTHER SPECIFIED TOLERANCES ON:  
 $X = \pm$        $X.X = \pm$        $X.XX = \pm$   
**ANGLES** =  $\pm$       **HOLE DIA** =  $\pm$

SCALE: N/A

DRAWN BY: Sera

DESIGNED BY: Sera

TITLE: CHIP2450-3216 Specification



深圳市朋伴兴业科技有限公司 Shenzhen  
Pengbian Industrial Technology Co., LTD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PBXY TECHNOLOGY Limited AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

3216

SPEC REV.

P1