


Antenna Specification

Specifications

Antenna gain	-0.58 dBi (Max)					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.26 dBi	-0.76 dBi	-0.58 dBi	-5.25 dBi	-2.46 dBi	-1.86 dBi
Frequency range	2.400GHZ-2.500GHZ					
Connector type	Direct					
Model Name	2.4G F ANT					
Impedance	50 Ohm					
Antenna type	PCB ANT					
Manufacture	Hunan Yunxi Electronic Commerce Co., Ltd. Room 99, 3rd Floor, A2 Building, Chuanggu Industrial Park, No.568 Queyuan Road, Tianxin District, Changsha City, Hunan Province, China 410114					

AntennaPhoto&Length (mm)

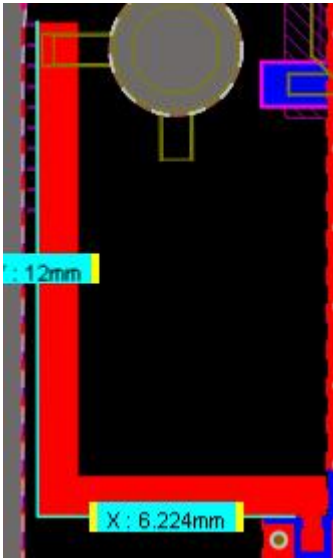

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div



Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.765802	-36.5604	-7.48023
2500	-0.585582	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div



Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.2537	-22.1424	-12.4294
2450	-2.4652	-24.5837	-10.4702
2500	-1.86120	-29.5214	-9.20432