



TEST REPORT

Product Name: WIFI MODULE
FCC ID: 2BGY7-HZ
Trademark: N/A
Model Number: HZ-LY22UV1.0
Prepared For: Huizhou Huizhi Technology Co., Ltd
Address: 356 Longhai Fourth Road, Dayawan West District, Huizhou City, China
Manufacturer: Huizhou Huizhi Technology Co., Ltd
Address: 356 Longhai Fourth Road, Dayawan West District, Huizhou City, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 07, 2024
Sample tested Date: May. 07, 2024 to Jun. 05, 2024
Issue Date: Jun. 05, 2024
Report No.: CTB240523068RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	59
8.1 Block Diagram Of Test Setup	59
8.2 Limit	59
8.3 Test procedure	59
9. CONDUCTED OUTPUT POWER	76
9.1 Block Diagram Of Test Setup	76
9.2 Limit	76
9.3 Test procedure	76
9.4 Test Result	77
10. 6DB OCCUPIED BANDWIDTH	78
10.1 Block Diagram Of Test Setup	78
10.2 Limit	78
10.3 Test procedure	78
10.4 Test Result	79
11. POWER SPECTRAL DENSITY	89
11.1 Block Diagram Of Test Setup	89
11.2 Limit	89
11.3 Test procedure	89
11.4 Test Result	90
12. ANTENNA REQUIREMENT	99
13. EUT TEST SETUP PHOTOGRAPHS	100

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240523068RFX	Jun. 05, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	HZ-LY22UV1.0
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 17.601dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): Built-in antenna
Antenna Gain:	WiFi (2.4G): Ant1: 2.31dBi Ant2: 2.31dBi
Ratings:	DC 5V by notebook

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Laptop	DELL	Vostro 5490	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 2.31dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=1.16dB,

So the directional gain for PSD is 3.47dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 2.31dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	5V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05



11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

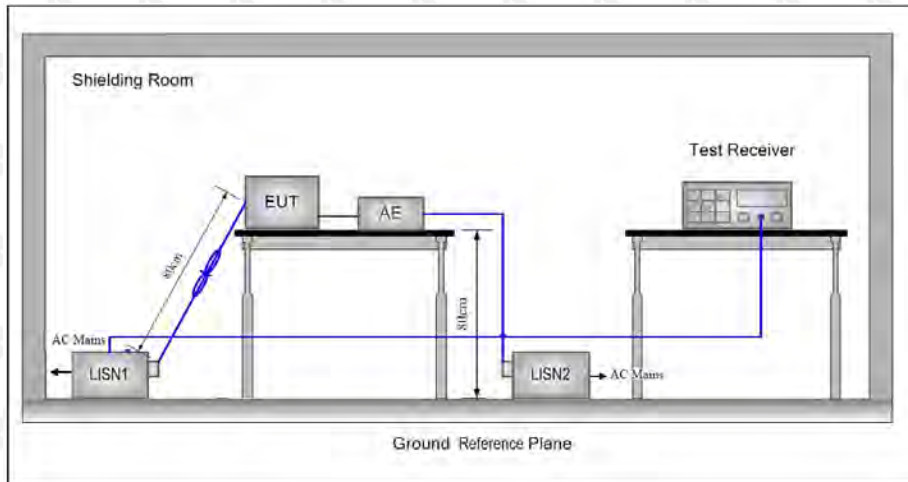

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

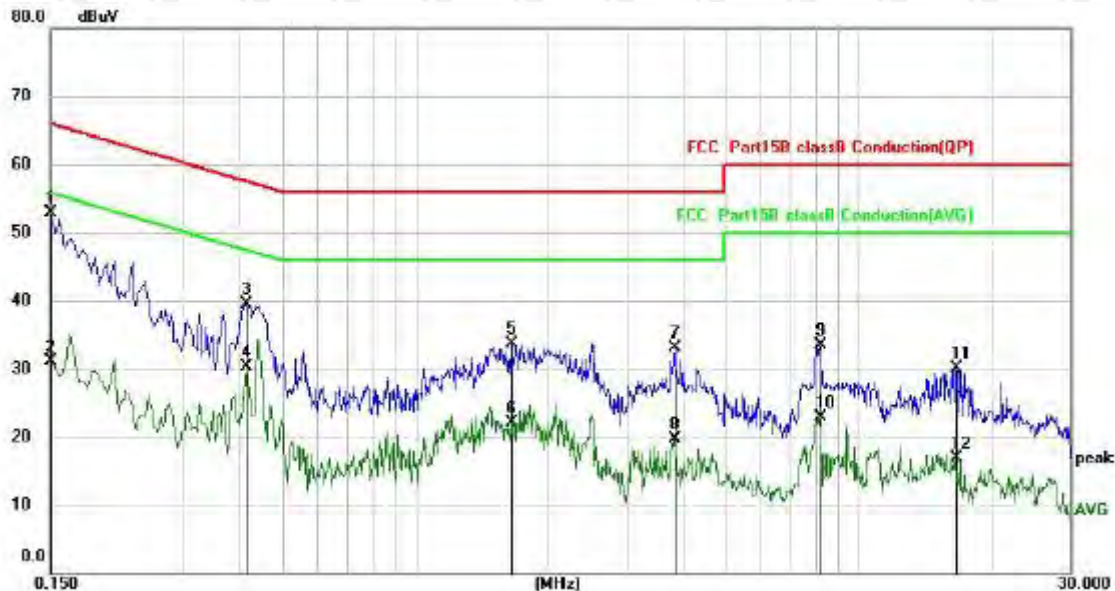

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1500	42.90	9.95	52.85	66.00	-13.15	QP
2		0.1500	21.15	9.95	31.10	56.00	-24.90	AVG
3		0.4138	29.53	9.98	39.51	57.57	-18.06	QP
4		0.4138	20.39	9.98	30.37	47.57	-17.20	AVG
5		1.6500	23.57	10.06	33.63	56.00	-22.37	QP
6		1.6500	12.01	10.06	22.07	46.00	-23.93	AVG
7		3.8580	22.87	10.27	33.14	56.00	-22.86	QP
8		3.8580	9.46	10.27	19.73	46.00	-26.27	AVG
9		8.1500	22.95	10.54	33.49	60.00	-26.51	QP
10		8.1500	12.35	10.54	22.89	50.00	-27.11	AVG
11		16.5619	19.40	10.76	30.16	60.00	-29.84	QP
12		16.5619	6.13	10.76	16.89	50.00	-33.11	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

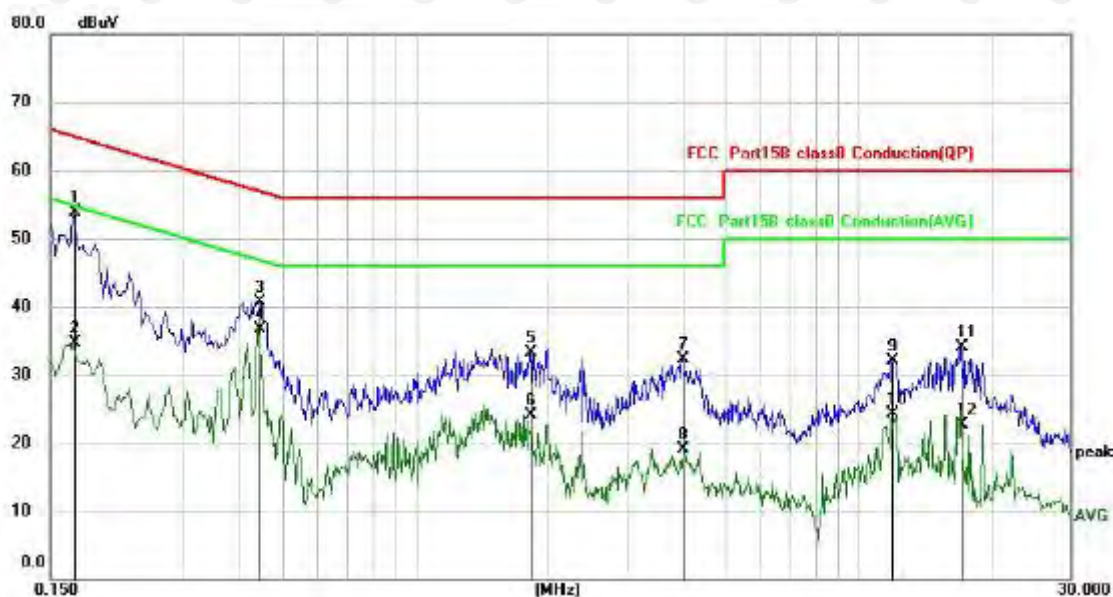

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	43.93	9.95	53.88	64.96	-11.08	QP
2		0.1700	24.76	9.95	34.71	54.96	-20.25	AVG
3		0.4460	30.80	9.98	40.78	56.95	-16.17	QP
4	*	0.4460	26.67	9.98	36.65	46.95	-10.30	AVG
5		1.8100	23.15	10.07	33.22	56.00	-22.78	QP
6		1.8100	13.94	10.07	24.01	46.00	-21.99	AVG
7		4.0060	22.11	10.28	32.39	56.00	-23.61	QP
8		4.0060	8.73	10.28	19.01	46.00	-26.99	AVG
9		11.9259	21.48	10.64	32.12	60.00	-27.88	QP
10		11.9259	13.61	10.64	24.25	50.00	-25.75	AVG
11		17.0856	23.36	10.77	34.13	60.00	-25.87	QP
12		17.0856	11.85	10.77	22.62	50.00	-27.38	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

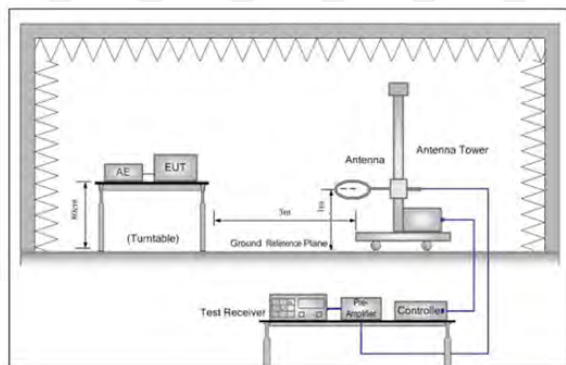


Figure 1. Below 30MHz

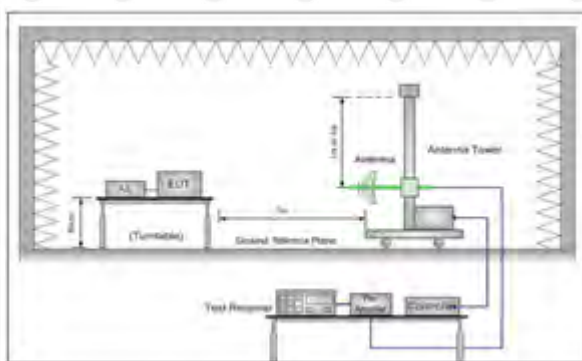


Figure 2. 30MHz to 1GHz

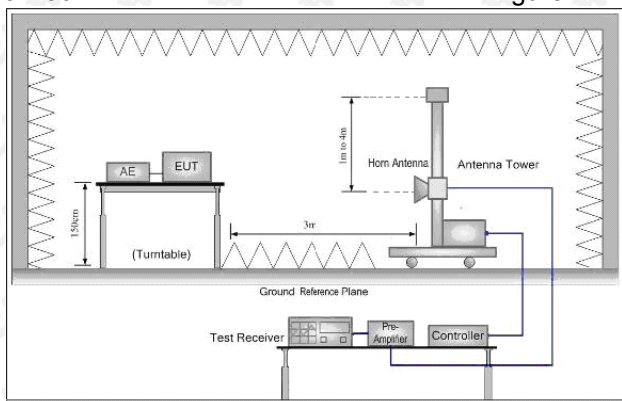


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.0245	26.73	-5.03	21.70	40.00	-18.30	QP
2		66.0342	26.26	-7.53	18.73	40.00	-21.27	QP
3		149.2239	28.61	-3.26	25.35	43.50	-18.15	QP
4		254.7284	30.16	-6.70	23.46	46.00	-22.54	QP
5		504.7062	31.54	0.16	31.70	46.00	-14.30	QP
6	*	948.7610	26.74	7.36	34.10	46.00	-11.90	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBuV	dB	dBuV/m	dB/m	dB
1		38.6838	26.76	-5.12	21.64	40.00	-18.36
2		58.4074	26.78	-6.72	20.06	40.00	-19.94
3		153.2003	28.57	-3.29	25.28	43.50	-18.22
4	*	245.9509	39.66	-6.95	32.71	46.00	-13.29
5		431.0315	32.89	-1.47	31.42	46.00	-14.58
6		965.5420	28.02	7.53	35.55	54.00	-18.45

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412


Horizontal:

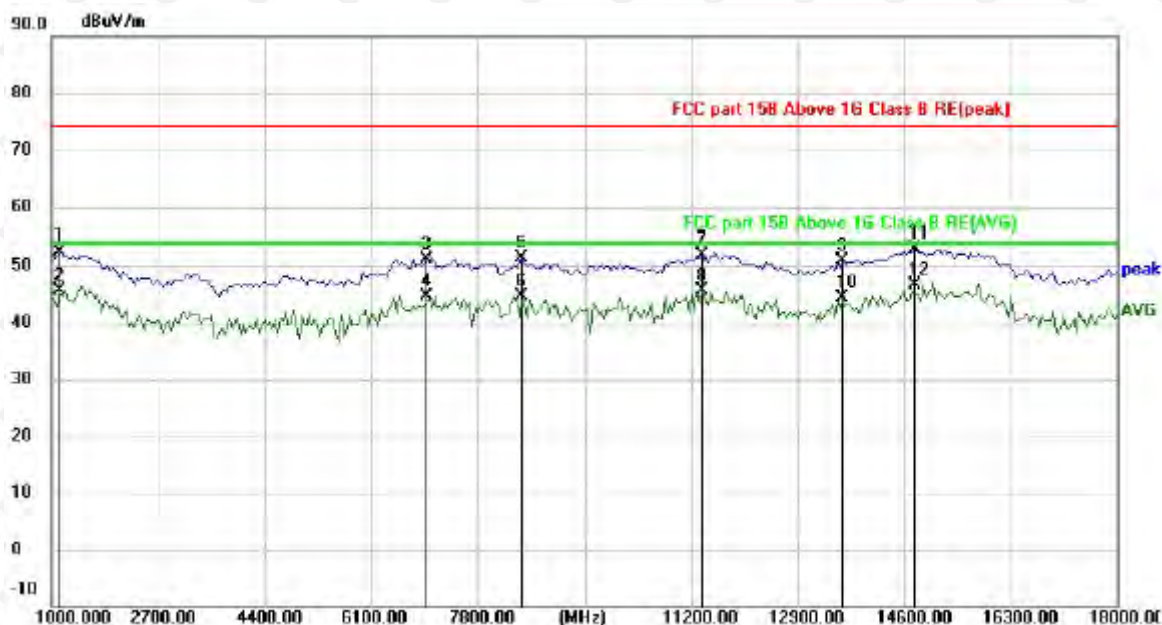

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1127.500	48.48	3.97	52.45	74.00	-21.55	peak
2		1127.500	41.70	3.97	45.67	54.00	-8.33	AVG
3		6992.500	39.10	12.03	51.13	74.00	-22.87	peak
4		6992.500	32.56	12.03	44.59	54.00	-9.41	AVG
5		8522.500	37.40	13.93	51.33	74.00	-22.67	peak
6		8522.500	30.79	13.93	44.72	54.00	-9.28	AVG
7		11370.000	34.56	17.34	51.90	74.00	-22.10	peak
8		11370.000	28.30	17.34	45.64	54.00	-8.36	AVG
9		13622.500	30.21	20.61	50.82	74.00	-23.18	peak
10		13622.500	23.70	20.61	44.31	54.00	-9.69	AVG
11		14770.000	30.33	22.63	52.96	74.00	-21.04	peak
12	*	14770.000	23.94	22.63	46.57	54.00	-7.43	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Vertical:

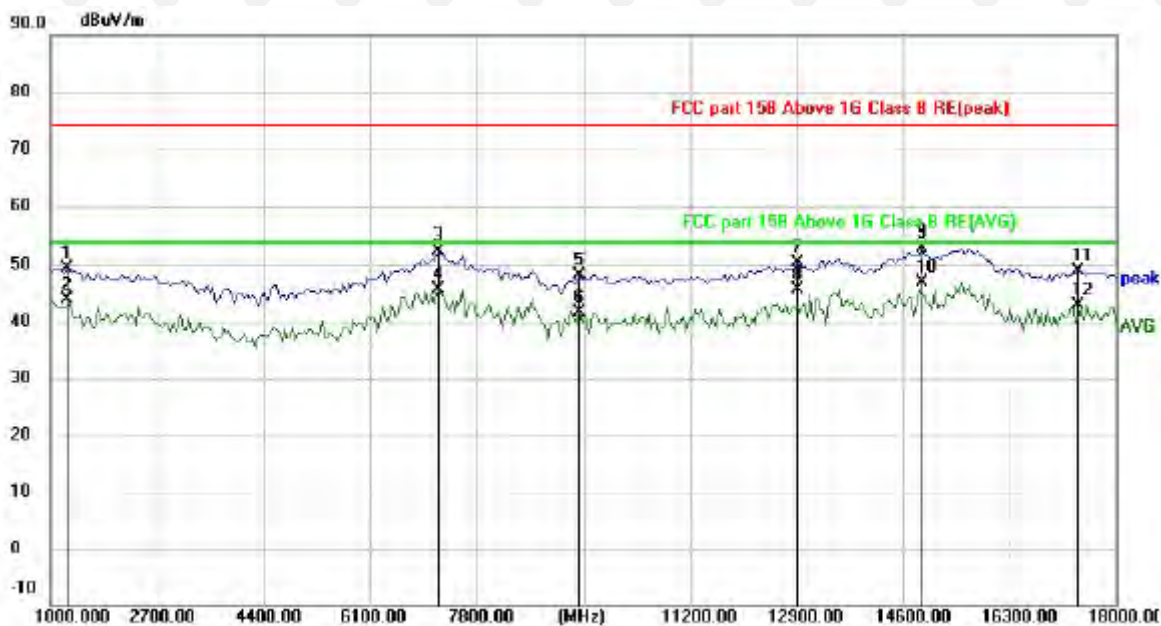


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1255.000	45.50	3.83	49.33	74.00	-24.67	peak
2		1255.000	39.94	3.83	43.77	54.00	-10.23	AVG
3		7205.000	39.76	12.54	52.30	74.00	-21.70	peak
4		7205.000	33.10	12.54	45.64	54.00	-8.36	AVG
5		9415.000	30.72	17.37	48.09	74.00	-25.91	peak
6		9415.000	24.18	17.37	41.55	54.00	-12.45	AVG
7		12900.00	31.76	18.54	50.30	74.00	-23.70	peak
8		12900.00	27.18	18.54	45.72	54.00	-8.28	AVG
9		14897.50	30.01	22.91	52.92	74.00	-21.08	peak
10	*	14897.50	23.91	22.91	46.82	54.00	-7.18	AVG
11		17405.00	23.44	25.38	48.82	74.00	-25.18	peak
12		17405.00	17.46	25.38	42.84	54.00	-11.16	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

ANT1 MID CH6 (802.11b Mode)/2437


Horizontal:

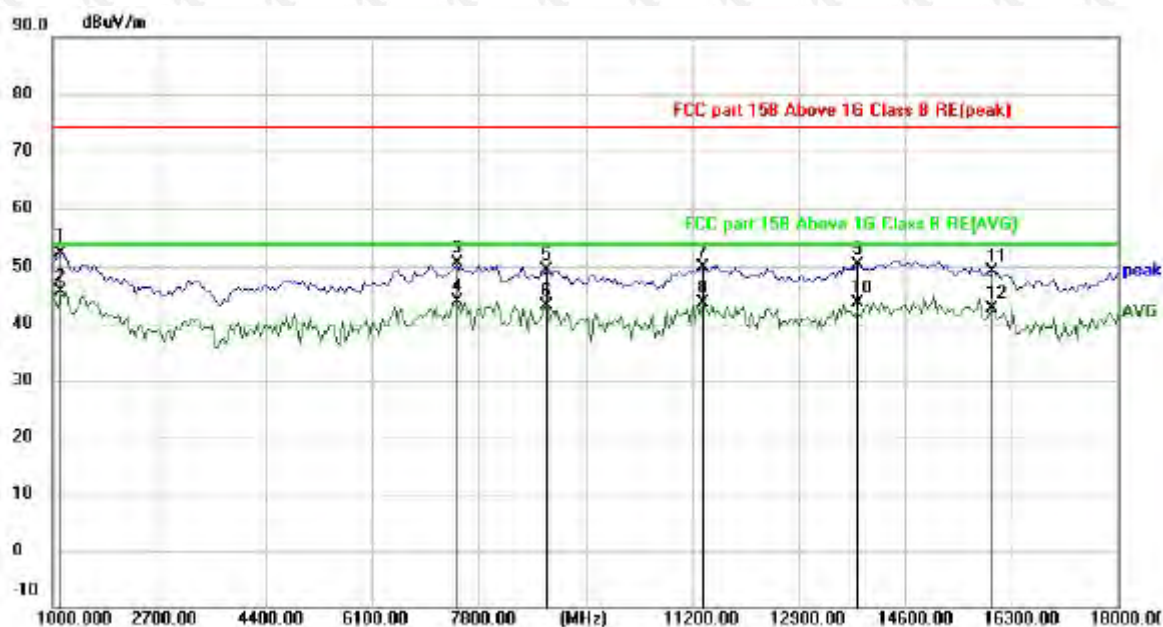

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1127.500	48.48	3.97	52.45	74.00	-21.55	peak
2	*	1127.500	41.70	3.97	45.67	54.00	-8.33	AVG
3		7460.000	37.42	13.17	50.59	74.00	-23.41	peak
4		7460.000	30.65	13.17	43.82	54.00	-10.18	AVG
5		8905.000	33.83	15.60	49.43	74.00	-24.57	peak
6		8905.000	27.62	15.60	43.22	54.00	-10.78	AVG
7		11370.00	32.56	17.34	49.90	74.00	-24.10	peak
8		11370.00	26.30	17.34	43.64	54.00	-10.36	AVG
9		13835.00	29.28	21.02	50.30	74.00	-23.70	peak
10		13835.00	22.63	21.02	43.65	54.00	-10.35	AVG
11		16002.50	27.27	21.90	49.17	74.00	-24.83	peak
12		16002.50	20.73	21.90	42.63	54.00	-11.37	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

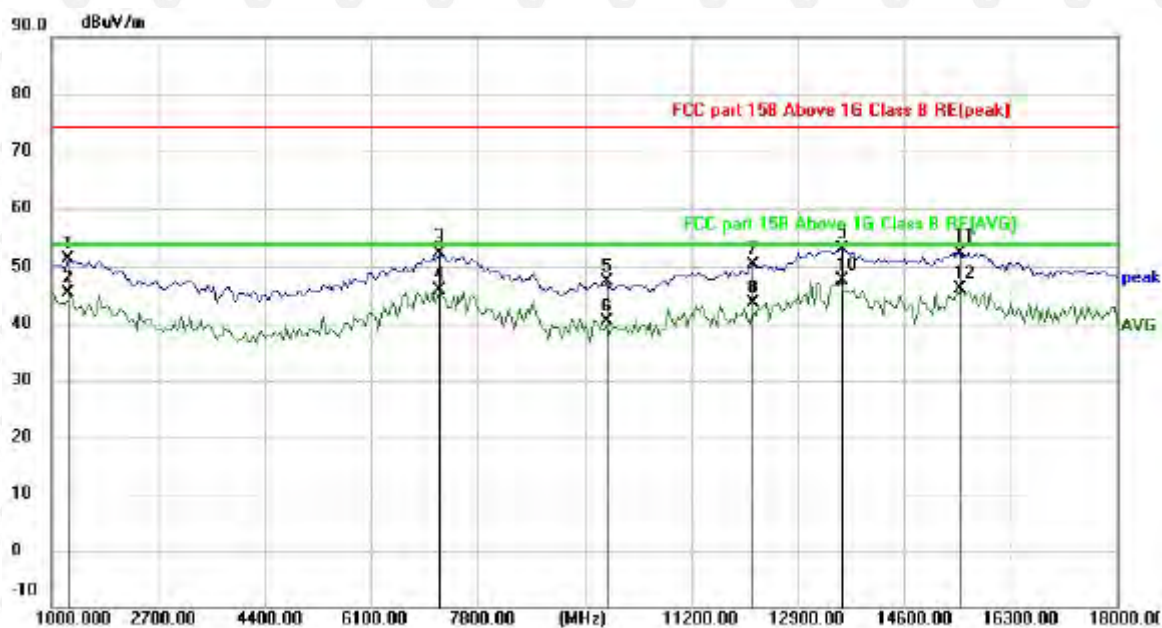


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1255.000	47.50	3.83	51.33	74.00	-22.67	peak
2		1255.000	41.44	3.83	45.27	54.00	-8.73	AVG
3		7205.000	39.76	12.54	52.30	74.00	-21.70	peak
4		7205.000	33.24	12.54	45.78	54.00	-8.22	AVG
5		9840.000	30.09	17.36	47.45	74.00	-26.55	peak
6		9840.000	22.98	17.36	40.34	54.00	-13.66	AVG
7		12177.50	32.25	18.02	50.27	74.00	-23.73	peak
8		12177.50	25.72	18.02	43.74	54.00	-10.26	AVG
9		13622.50	32.51	20.60	53.11	74.00	-20.89	peak
10	*	13622.50	27.12	20.60	47.72	54.00	-6.28	AVG
11		15492.50	29.85	22.58	52.43	74.00	-21.57	peak
12		15492.50	23.45	22.58	46.03	54.00	-7.97	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

ANT1 HIGH CH11 (802.11b Mode)/2462


Horizontal:

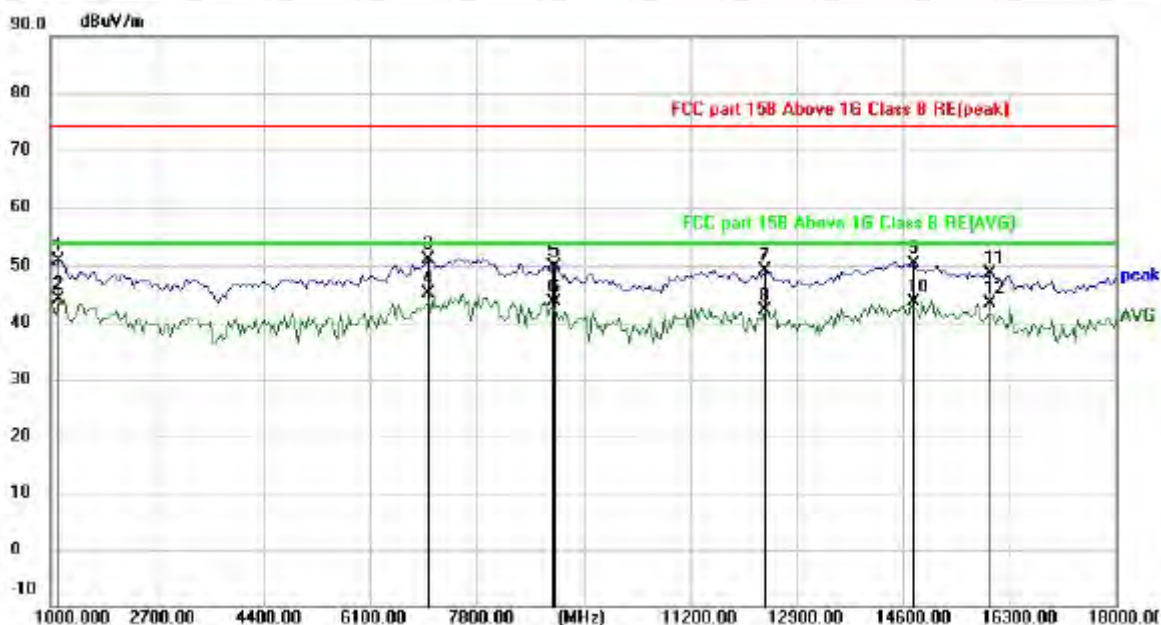

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1127.500	46.98	3.97	50.95	74.00	-23.05	peak
2		1127.500	40.20	3.97	44.17	54.00	-9.83	AVG
3		7035.000	39.06	12.13	51.19	74.00	-22.81	peak
4	*	7035.000	32.92	12.13	45.05	54.00	-8.95	AVG
5		9032.500	33.77	16.13	49.90	74.00	-24.10	peak
6		9032.500	27.51	16.13	43.64	54.00	-10.36	AVG
7		12390.000	30.58	18.46	49.04	74.00	-24.96	peak
8		12390.000	23.74	18.46	42.20	54.00	-11.80	AVG
9		14770.000	27.83	22.63	50.46	74.00	-23.54	peak
10		14770.000	20.94	22.63	43.57	54.00	-10.43	AVG
11		16002.500	26.77	21.90	48.67	74.00	-25.33	peak
12		16002.500	21.60	21.90	43.50	54.00	-10.50	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

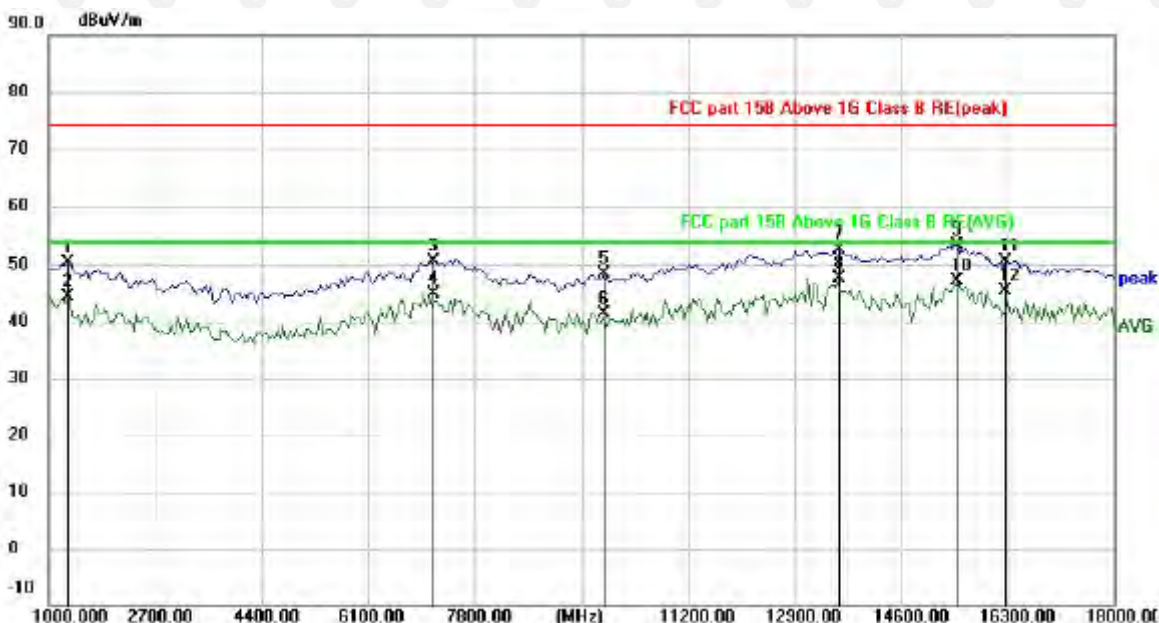


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1297.500	46.57	3.78	50.35	74.00	-23.65	peak
2		1297.500	40.67	3.78	44.45	54.00	-9.55	AVG
3		7162.500	38.27	12.44	50.71	74.00	-23.29	peak
4		7162.500	32.34	12.44	44.78	54.00	-9.22	AVG
5		9840.000	31.09	17.36	48.45	74.00	-25.55	peak
6		9840.000	24.01	17.36	41.37	54.00	-12.63	AVG
7		13622.50	32.01	20.60	52.61	74.00	-21.39	peak
8	*	13622.50	27.12	20.60	47.72	54.00	-6.28	AVG
9		15492.50	30.85	22.58	53.43	74.00	-20.57	peak
10		15492.50	24.45	22.58	47.03	54.00	-6.97	AVG
11		16257.50	28.24	22.41	50.65	74.00	-23.35	peak
12		16257.50	22.98	22.41	45.39	54.00	-8.61	AVG

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

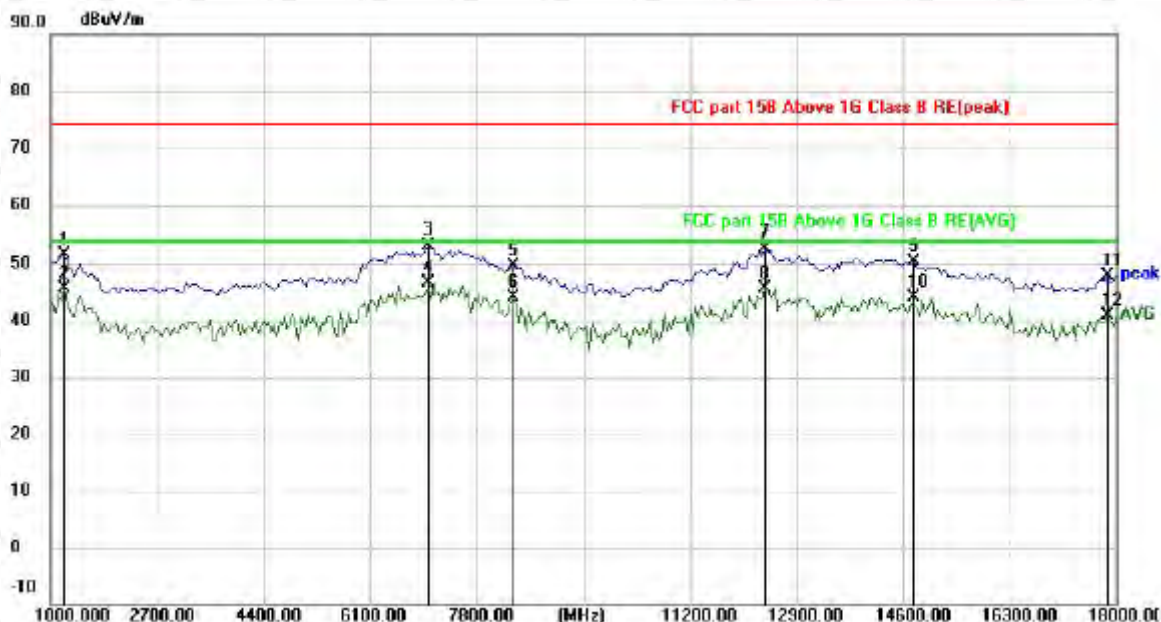

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1212.500	47.76	3.87	51.63	74.00	-22.37	peak
2		1212.500	41.66	3.87	45.53	54.00	-8.47	AVG
3		7035.000	41.06	12.13	53.19	74.00	-20.81	peak
4	*	7035.000	34.46	12.13	46.59	54.00	-7.41	AVG
5		8395.000	35.83	13.80	49.63	74.00	-24.37	peak
6		8395.000	30.42	13.80	44.22	54.00	-9.78	AVG
7		12390.00	34.08	18.46	52.54	74.00	-21.46	peak
8		12390.00	27.24	18.46	45.70	54.00	-8.30	AVG
9		14770.00	27.83	22.63	50.46	74.00	-23.54	peak
10		14770.00	21.61	22.63	44.24	54.00	-9.76	AVG
11		17872.50	21.13	26.67	47.80	74.00	-26.20	peak
12		17872.50	14.15	26.67	40.82	54.00	-13.18	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1340.000	48.87	3.74	52.61	74.00	-21.39	peak
2		1340.000	42.71	3.74	46.45	54.00	-7.55	AVG
3		6525.000	41.06	11.27	52.33	74.00	-21.67	peak
4	*	6525.000	36.08	11.27	47.35	54.00	-6.65	AVG
5		9840.000	30.09	17.36	47.45	74.00	-26.55	peak
6		9840.000	26.09	17.36	43.45	54.00	-10.55	AVG
7		12177.50	34.75	18.02	52.77	74.00	-21.23	peak
8		12177.50	27.93	18.02	45.95	54.00	-8.05	AVG
9		13367.50	32.33	19.90	52.23	74.00	-21.77	peak
10		13367.50	27.12	19.90	47.02	54.00	-6.98	AVG
11		15492.50	30.85	22.58	53.43	74.00	-20.57	peak
12		15492.50	24.01	22.58	46.59	54.00	-7.41	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

ANT1 MID CH6 (802.11g Mode)/2437


Horizontal:



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1212.500	46.76	3.87	50.63	74.00	-23.37	peak
2		1212.500	40.66	3.87	44.53	54.00	-9.47	AVG
3		6525.000	40.75	11.27	52.02	74.00	-21.98	peak
4		6525.000	34.96	11.27	46.23	54.00	-7.77	AVG
5		7927.500	37.69	13.61	51.30	74.00	-22.70	peak
6		7927.500	30.88	13.61	44.49	54.00	-9.51	AVG
7		12390.00	34.58	18.46	53.04	74.00	-20.96	peak
8	*	12390.00	28.61	18.46	47.07	54.00	-6.93	AVG
9		13835.00	29.28	21.02	50.30	74.00	-23.70	peak
10		13835.00	22.63	21.02	43.65	54.00	-10.35	AVG
11		15790.00	26.00	22.18	48.18	74.00	-25.82	peak
12		15790.00	20.82	22.18	43.00	54.00	-11.00	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

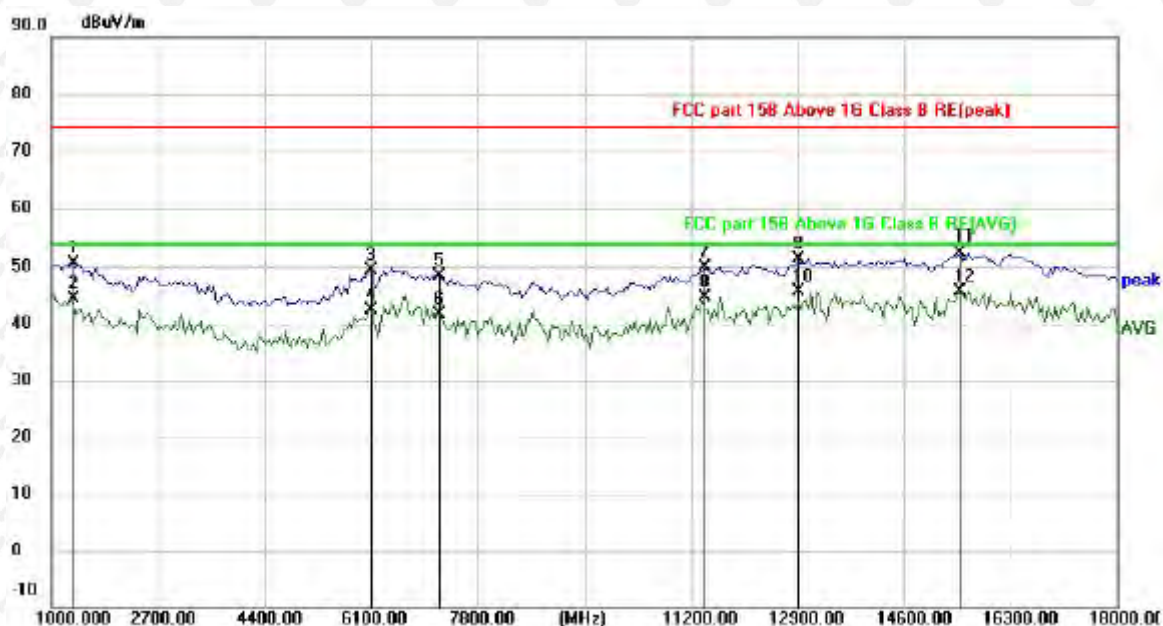


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1340.000	46.87	3.74	50.61	74.00	-23.39	peak
2		1340.000	40.71	3.74	44.45	54.00	-9.55	AVG
3		6100.000	38.80	10.55	49.35	74.00	-24.65	peak
4		6100.000	31.73	10.55	42.28	54.00	-11.72	AVG
5		7205.000	35.76	12.54	48.30	74.00	-25.70	peak
6		7205.000	29.10	12.54	41.64	54.00	-12.36	AVG
7		11412.50	32.45	17.38	49.83	74.00	-24.17	peak
8		11412.50	27.35	17.38	44.73	54.00	-9.27	AVG
9		12900.00	32.76	18.54	51.30	74.00	-22.70	peak
10	*	12900.00	27.18	18.54	45.72	54.00	-8.28	AVG
11		15492.50	29.85	22.58	52.43	74.00	-21.57	peak
12		15492.50	23.01	22.58	45.59	54.00	-8.41	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

ANT1 HIGH CH11 (802.11g Mode)/2462


Horizontal:

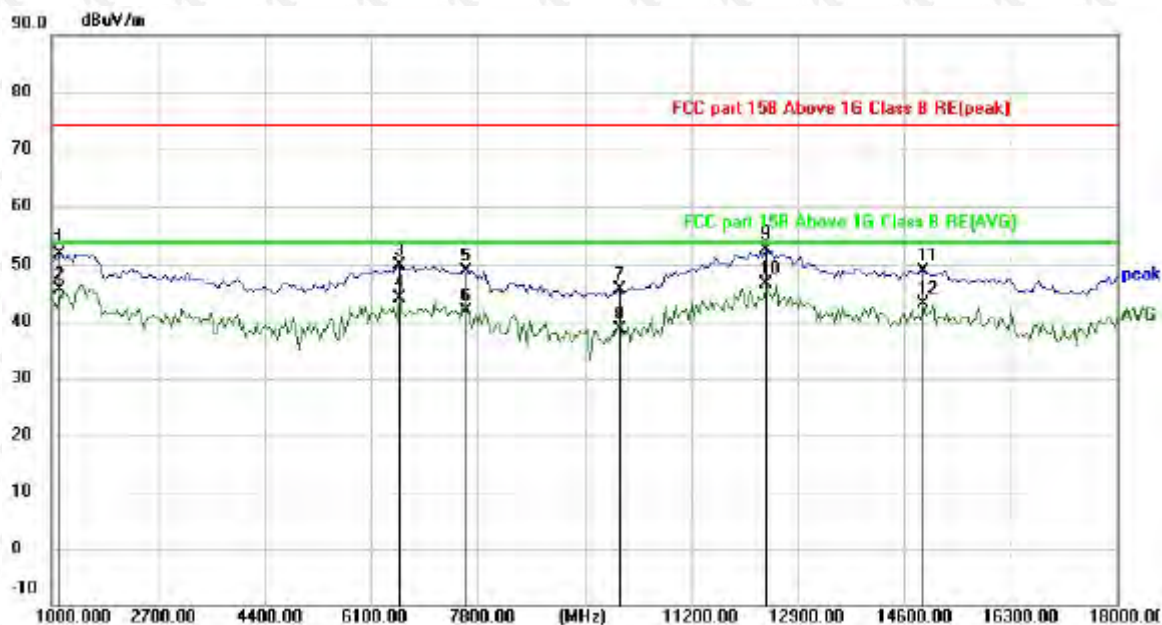

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1127.500	47.98	3.97	51.95	74.00	-22.05	peak
2		1127.500	41.61	3.97	45.58	54.00	-8.42	AVG
3		6567.500	38.58	11.34	49.92	74.00	-24.08	peak
4		6567.500	32.89	11.34	44.23	54.00	-9.77	AVG
5		7630.000	35.63	13.37	49.00	74.00	-25.00	peak
6		7630.000	28.62	13.37	41.99	54.00	-12.01	AVG
7		10052.50	28.44	17.11	45.55	74.00	-28.45	peak
8		10052.50	21.54	17.11	38.65	54.00	-15.35	AVG
9		12390.00	34.08	18.46	52.54	74.00	-21.46	peak
10	*	12390.00	28.11	18.46	46.57	54.00	-7.43	AVG
11		14897.50	26.03	22.91	48.94	74.00	-25.06	peak
12		14897.50	20.33	22.91	43.24	54.00	-10.76	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

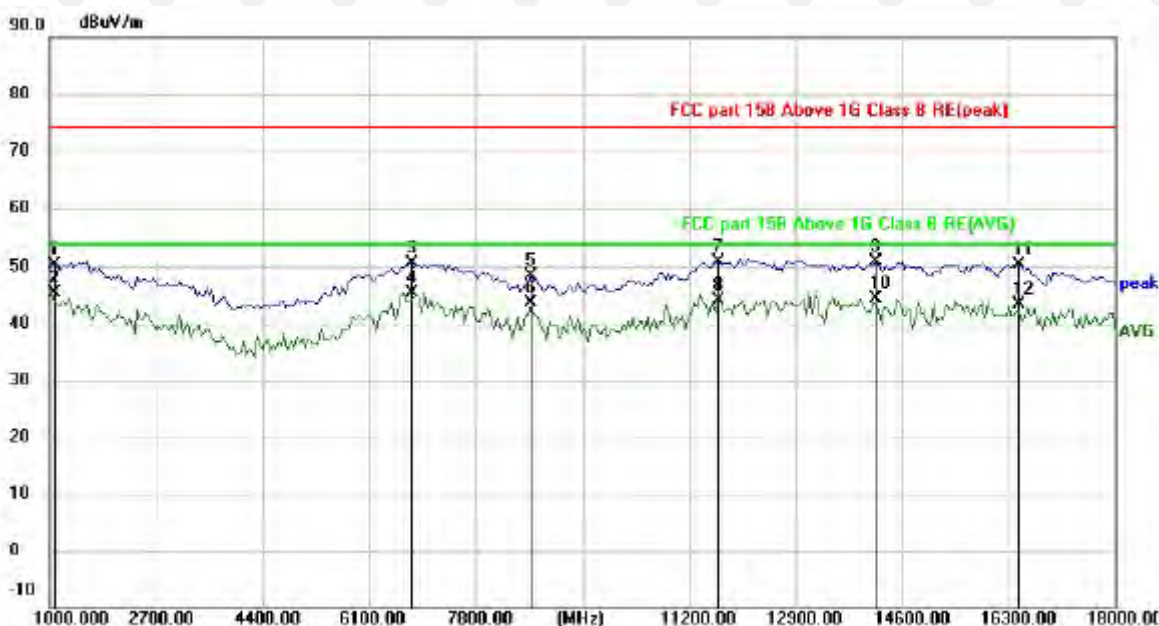

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1085.000	46.25	4.03	50.28	74.00	-23.72	peak
2		1085.000	41.24	4.03	45.27	54.00	-8.73	AVG
3		6780.000	38.87	11.68	50.55	74.00	-23.45	peak
4	*	6780.000	33.67	11.68	45.35	54.00	-8.65	AVG
5		8692.500	33.74	14.67	48.41	74.00	-25.59	peak
6		8692.500	29.02	14.67	43.69	54.00	-10.31	AVG
7		11667.50	33.26	17.58	50.84	74.00	-23.16	peak
8		11667.50	26.66	17.58	44.24	54.00	-9.76	AVG
9		14175.00	29.38	21.56	50.94	74.00	-23.06	peak
10		14175.00	22.92	21.56	44.48	54.00	-9.52	AVG
11		16470.00	27.53	22.84	50.37	74.00	-23.63	peak
12		16470.00	20.66	22.84	43.50	54.00	-10.50	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1127.500	45.98	3.97	49.95	74.00	-24.05	peak
2		1127.500	39.40	3.97	43.37	54.00	-10.63	AVG
3		6992.500	39.10	12.03	51.13	74.00	-22.87	peak
4		6992.500	32.56	12.03	44.59	54.00	-9.41	AVG
5		7927.500	35.69	13.61	49.30	74.00	-24.70	peak
6		7927.500	28.15	13.61	41.76	54.00	-12.24	AVG
7		11582.50	32.77	17.52	50.29	74.00	-23.71	peak
8		11582.50	25.86	17.52	43.38	54.00	-10.62	AVG
9		13750.00	31.76	20.86	52.62	74.00	-21.38	peak
10		13750.00	25.29	20.86	46.15	54.00	-7.85	AVG
11		14897.50	31.03	22.91	53.94	74.00	-20.06	peak
12	*	14897.50	25.16	22.91	48.07	54.00	-5.93	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

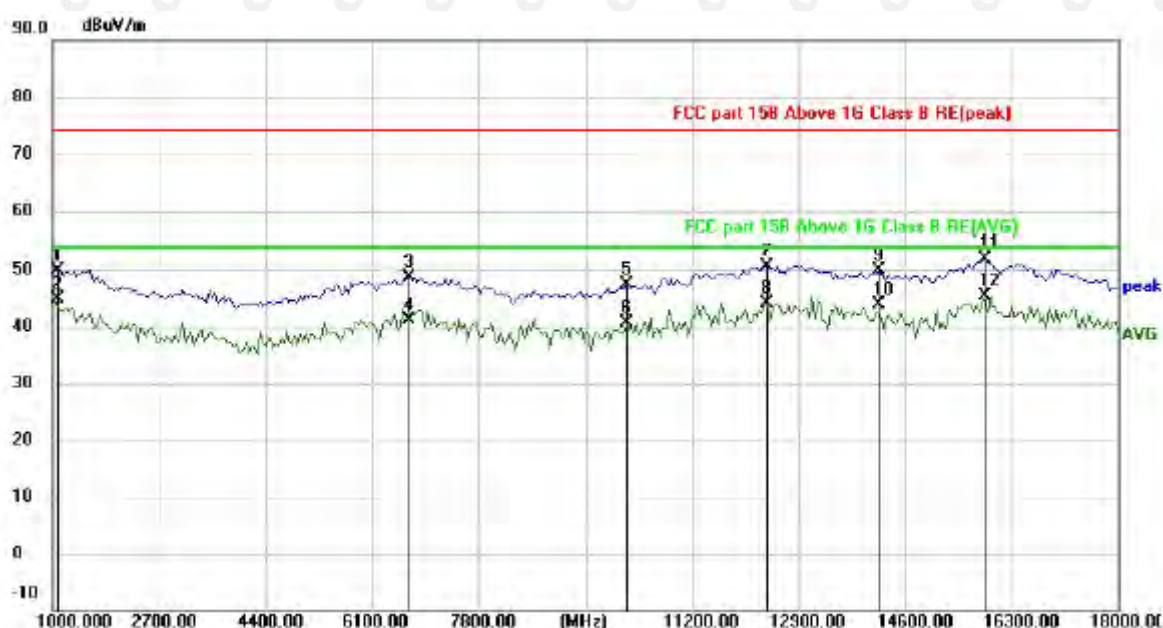


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1085.000	45.75	4.03	49.78	74.00	-24.22	peak
2		1085.000	40.74	4.03	44.77	54.00	-9.23	AVG
3		6695.000	37.16	11.55	48.71	74.00	-25.29	peak
4		6695.000	29.66	11.55	41.21	54.00	-12.79	AVG
5		10137.50	30.40	16.91	47.31	74.00	-26.69	peak
6		10137.50	23.64	16.91	40.55	54.00	-13.45	AVG
7		12390.00	32.42	18.27	50.69	74.00	-23.31	peak
8		12390.00	25.96	18.27	44.23	54.00	-9.77	AVG
9		14175.00	28.38	21.56	49.94	74.00	-24.06	peak
10		14175.00	22.41	21.56	43.97	54.00	-10.03	AVG
11		15875.00	29.93	22.07	52.00	74.00	-22.00	peak
12	*	15875.00	23.32	22.07	45.39	54.00	-8.61	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

LOW CH1 (802.11n/H20 Mode)/2437


Horizontal:

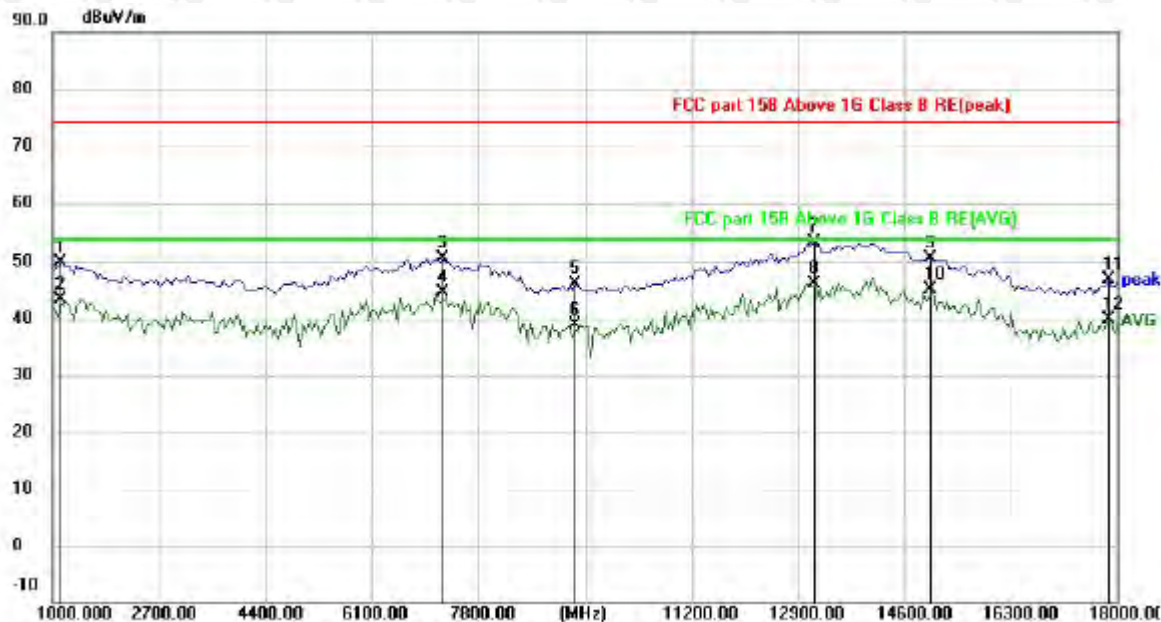

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1127.500	45.98	3.97	49.95	74.00	-24.05	peak
2		1127.500	39.40	3.97	43.37	54.00	-10.63	AVG
3		7247.500	37.98	12.65	50.63	74.00	-23.37	peak
4		7247.500	31.94	12.65	44.59	54.00	-9.41	AVG
5		9330.000	28.99	17.10	46.09	74.00	-27.91	peak
6		9330.000	21.87	17.10	38.97	54.00	-15.03	AVG
7		13155.00	33.86	19.52	53.38	74.00	-20.62	peak
8	*	13155.00	26.66	19.52	46.18	54.00	-7.82	AVG
9		15025.00	27.45	23.10	50.55	74.00	-23.45	peak
10		15025.00	22.14	23.10	45.24	54.00	-8.76	AVG
11		17872.50	20.13	26.67	46.80	74.00	-27.20	peak
12		17872.50	13.15	26.67	39.82	54.00	-14.18	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

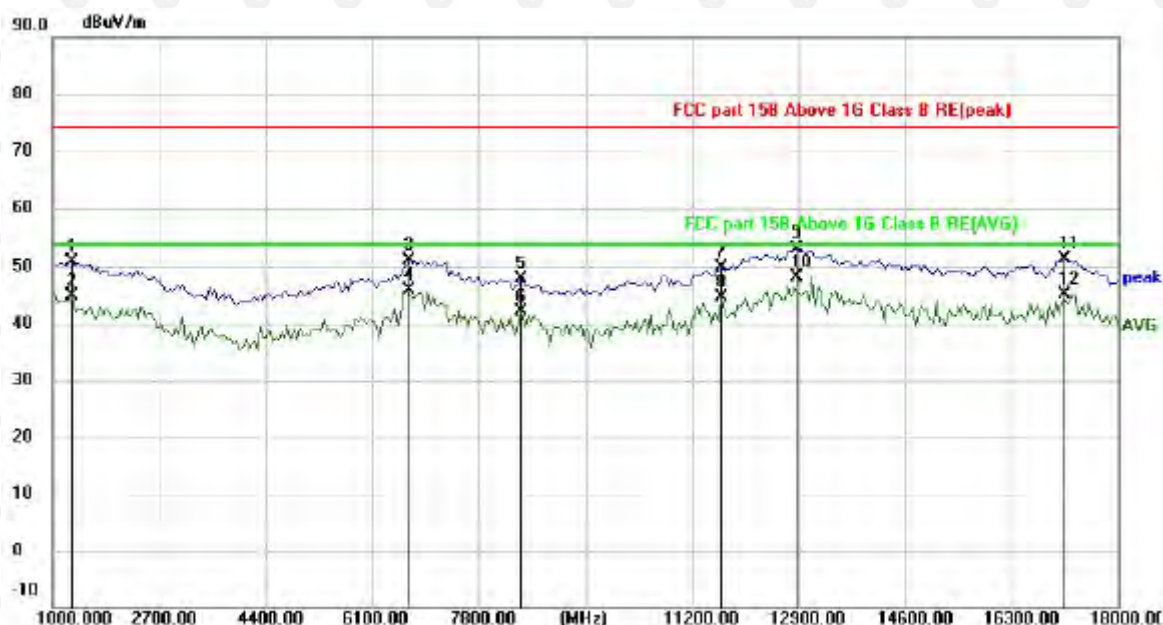

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1297.500	47.07	3.78	50.85	74.00	-23.15	peak
2		1297.500	41.17	3.78	44.95	54.00	-9.05	AVG
3		6695.000	39.66	11.55	51.21	74.00	-22.79	peak
4		6695.000	34.30	11.55	45.85	54.00	-8.15	AVG
5		8480.000	34.08	13.82	47.90	74.00	-26.10	peak
6		8480.000	28.19	13.82	42.01	54.00	-11.99	AVG
7		11667.50	32.26	17.58	49.84	74.00	-24.16	peak
8		11667.50	27.15	17.58	44.73	54.00	-9.27	AVG
9		12857.50	34.60	18.53	53.13	74.00	-20.87	peak
10	*	12857.50	29.69	18.53	48.22	54.00	-5.78	AVG
11		17150.00	27.65	23.73	51.38	74.00	-22.62	peak
12		17150.00	21.35	23.73	45.08	54.00	-8.92	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

LOW CH1 (802.11n/H20 Mode)/2462


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1127.500	46.48	3.97	50.45	74.00	-23.55	peak
2		1127.500	39.90	3.97	43.87	54.00	-10.13	AVG
3		7247.500	39.98	12.65	52.63	74.00	-21.37	peak
4	*	7247.500	33.44	12.65	46.09	54.00	-7.91	AVG
5		9330.000	29.49	17.10	46.59	74.00	-27.41	peak
6		9330.000	22.93	17.10	40.03	54.00	-13.97	AVG
7		13070.00	32.97	19.30	52.27	74.00	-21.73	peak
8		13070.00	25.92	19.30	45.22	54.00	-8.78	AVG
9		15237.50	27.00	22.86	49.86	74.00	-24.14	peak
10		15237.50	20.88	22.86	43.74	54.00	-10.26	AVG
11		16130.00	25.21	22.16	47.37	74.00	-26.63	peak
12		16130.00	18.83	22.16	40.99	54.00	-13.01	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

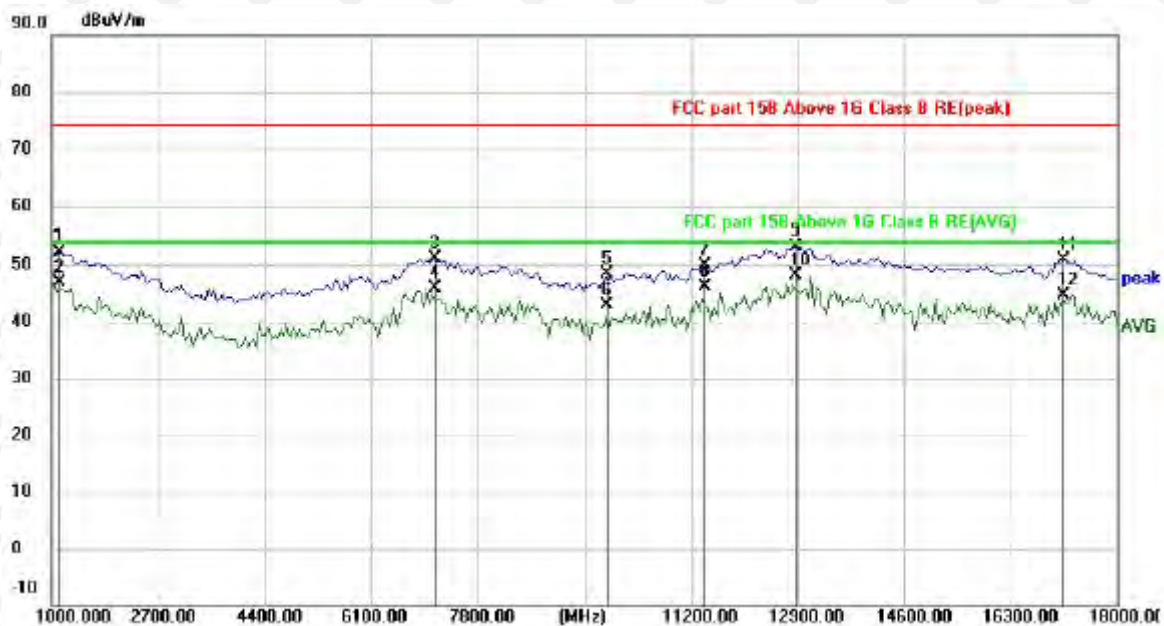

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1127.500	48.24	3.98	52.22	74.00	-21.78	peak
2		1127.500	42.79	3.98	46.77	54.00	-7.23	AVG
3		7120.000	38.73	12.33	51.06	74.00	-22.94	peak
4		7120.000	33.45	12.33	45.78	54.00	-8.22	AVG
5		9840.000	31.09	17.36	48.45	74.00	-25.55	peak
6		9840.000	25.59	17.36	42.95	54.00	-11.05	AVG
7		11412.50	32.45	17.38	49.83	74.00	-24.17	peak
8		11412.50	28.86	17.38	46.24	54.00	-7.76	AVG
9		12857.50	34.60	18.53	53.13	74.00	-20.87	peak
10	*	12857.50	29.69	18.53	48.22	54.00	-5.78	AVG
11		17150.00	27.15	23.73	50.88	74.00	-23.12	peak
12		17150.00	20.85	23.73	44.58	54.00	-9.42	AVG


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422


Horizontal:

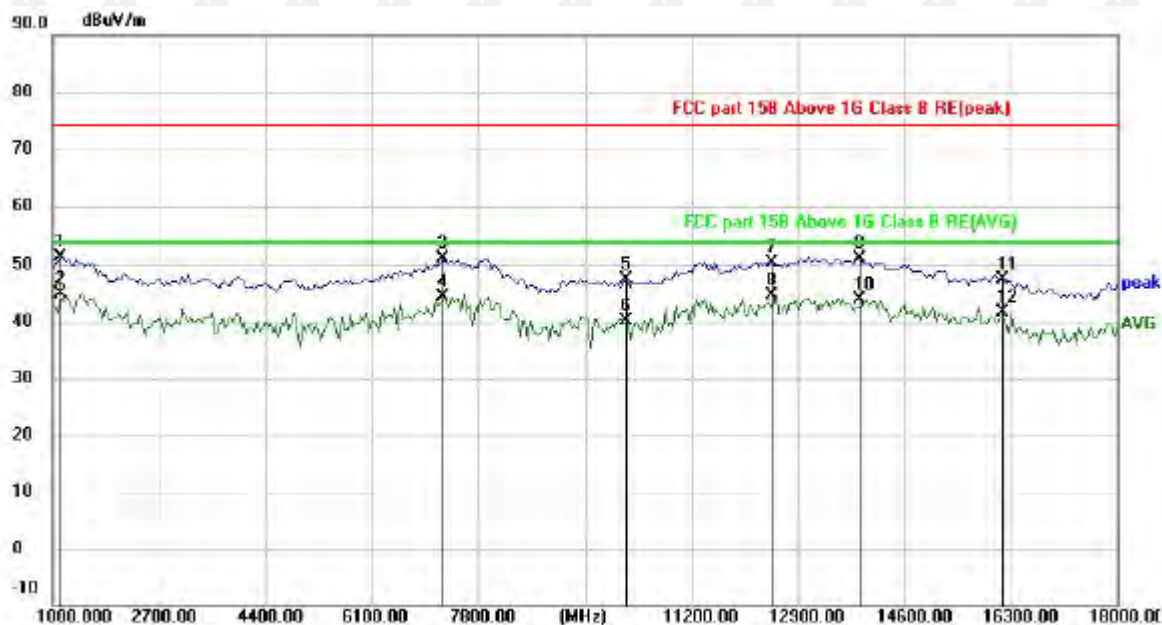

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1127.500	47.48	3.97	51.45	74.00	-22.55	peak
2	*	1127.500	40.90	3.97	44.87	54.00	-9.13	AVG
3		7247.500	38.48	12.65	51.13	74.00	-22.87	peak
4		7247.500	31.73	12.65	44.38	54.00	-9.62	AVG
5		10137.50	30.46	16.91	47.37	74.00	-26.63	peak
6		10137.50	23.30	16.91	40.21	54.00	-13.79	AVG
7		12475.00	31.84	18.61	50.45	74.00	-23.55	peak
8		12475.00	25.96	18.61	44.57	54.00	-9.43	AVG
9		13877.50	30.10	21.10	51.20	74.00	-22.80	peak
10		13877.50	22.70	21.10	43.80	54.00	-10.20	AVG
11		16172.50	25.25	22.24	47.49	74.00	-26.51	peak
12		16172.50	19.39	22.24	41.63	54.00	-12.37	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

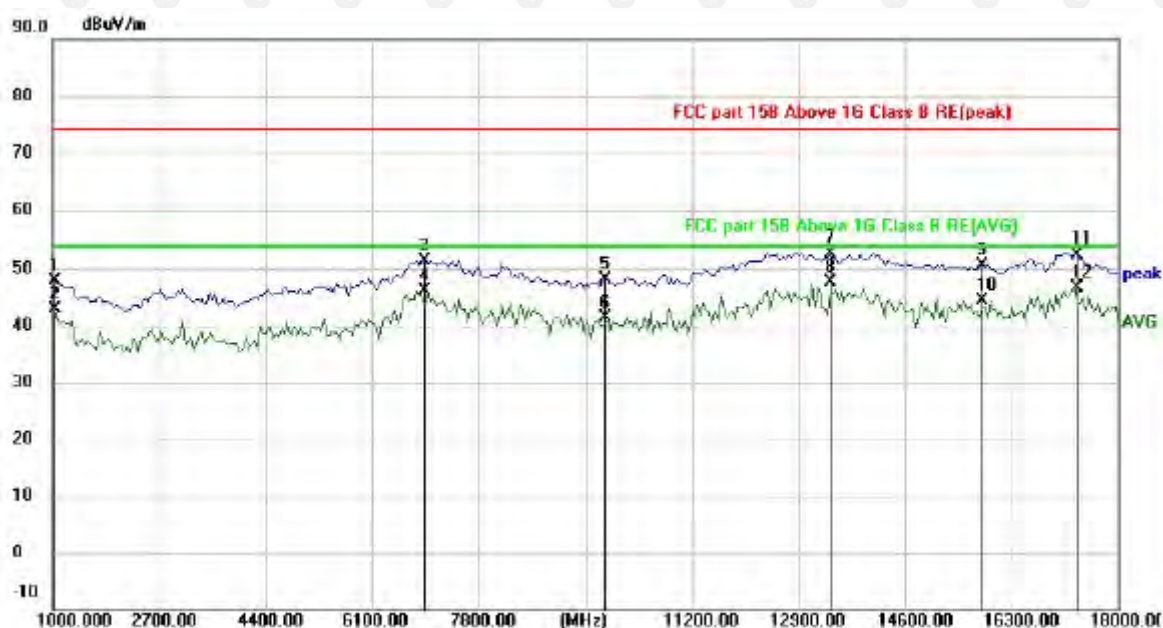


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1042.500	43.70	4.08	47.78	74.00	-26.22	peak
2		1042.500	38.69	4.08	42.77	54.00	-11.23	AVG
3		6950.000	39.47	11.96	51.43	74.00	-22.57	peak
4		6950.000	34.28	11.96	46.24	54.00	-7.76	AVG
5		9797.500	30.71	17.40	48.11	74.00	-25.89	peak
6		9797.500	23.97	17.40	41.37	54.00	-12.63	AVG
7		13410.00	32.65	20.05	52.70	74.00	-21.30	peak
8	*	13410.00	27.67	20.05	47.72	54.00	-6.28	AVG
9		15832.50	28.62	22.12	50.74	74.00	-23.26	peak
10		15832.50	22.27	22.12	44.39	54.00	-9.61	AVG
11		17362.50	27.25	25.11	52.36	74.00	-21.64	peak
12		17362.50	21.47	25.11	46.58	54.00	-7.42	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437


Horizontal:

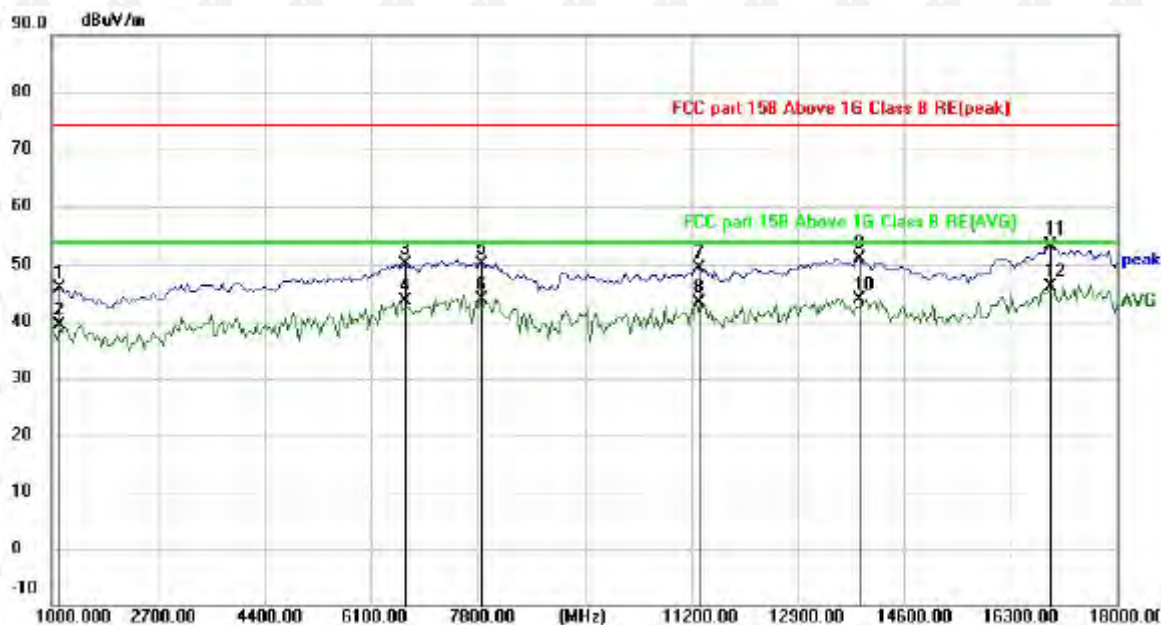

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1127.500	41.98	3.97	45.95	74.00	-28.05	peak
2		1127.500	35.40	3.97	39.37	54.00	-14.63	AVG
3		6652.500	38.67	11.48	50.15	74.00	-23.85	peak
4		6652.500	32.25	11.48	43.73	54.00	-10.27	AVG
5		7885.000	36.65	13.58	50.23	74.00	-23.77	peak
6		7885.000	30.24	13.58	43.82	54.00	-10.18	AVG
7		11327.50	32.04	17.30	49.34	74.00	-24.66	peak
8		11327.50	26.17	17.30	43.47	54.00	-10.53	AVG
9		13877.50	30.10	21.10	51.20	74.00	-22.80	peak
10		13877.50	22.71	21.10	43.81	54.00	-10.19	AVG
11		16937.50	30.63	22.77	53.40	74.00	-20.60	peak
12	*	16937.50	23.39	22.77	46.16	54.00	-7.84	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

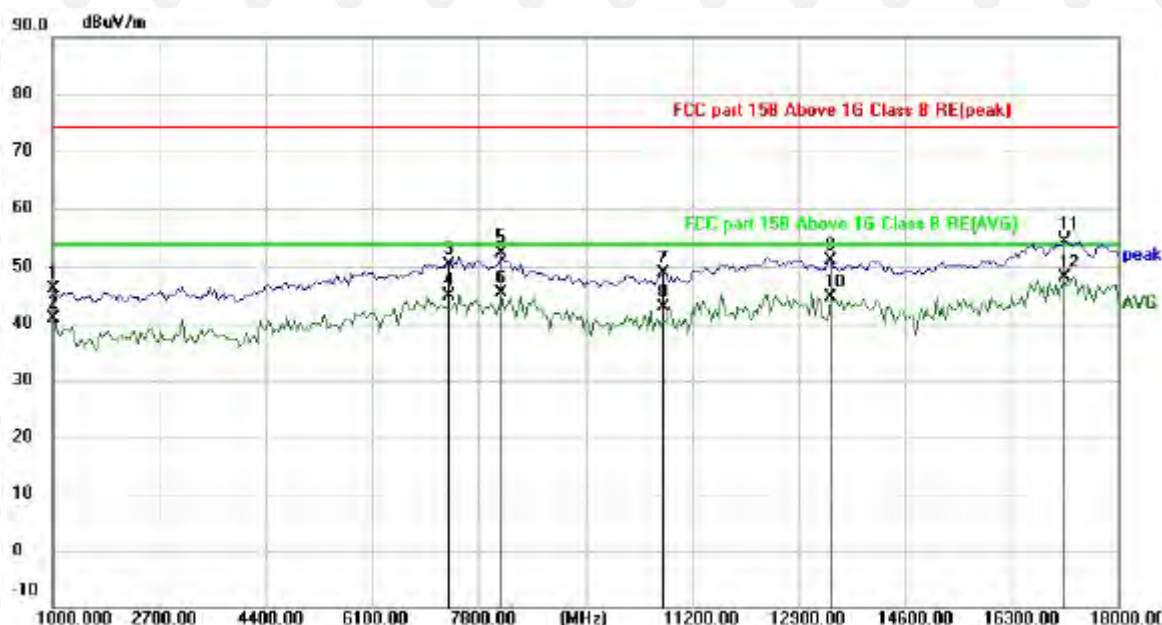


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1000.000	41.96	4.13	46.09	74.00	-27.91	peak
2		1000.000	36.64	4.13	40.77	54.00	-13.23	AVG
3		7332.500	37.59	12.86	50.45	74.00	-23.55	peak
4		7332.500	31.92	12.86	44.78	54.00	-9.22	AVG
5		8182.500	38.53	13.73	52.26	74.00	-21.74	peak
6		8182.500	31.57	13.73	45.30	54.00	-8.70	AVG
7		10732.50	32.36	16.49	48.85	74.00	-25.15	peak
8		10732.50	26.46	16.49	42.95	54.00	-11.05	AVG
9		13410.00	31.15	20.05	51.20	74.00	-22.80	peak
10		13410.00	24.47	20.05	44.52	54.00	-9.48	AVG
11		17150.00	30.65	23.73	54.38	74.00	-19.62	peak
12	*	17150.00	24.35	23.73	48.08	54.00	-5.92	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452


Horizontal:

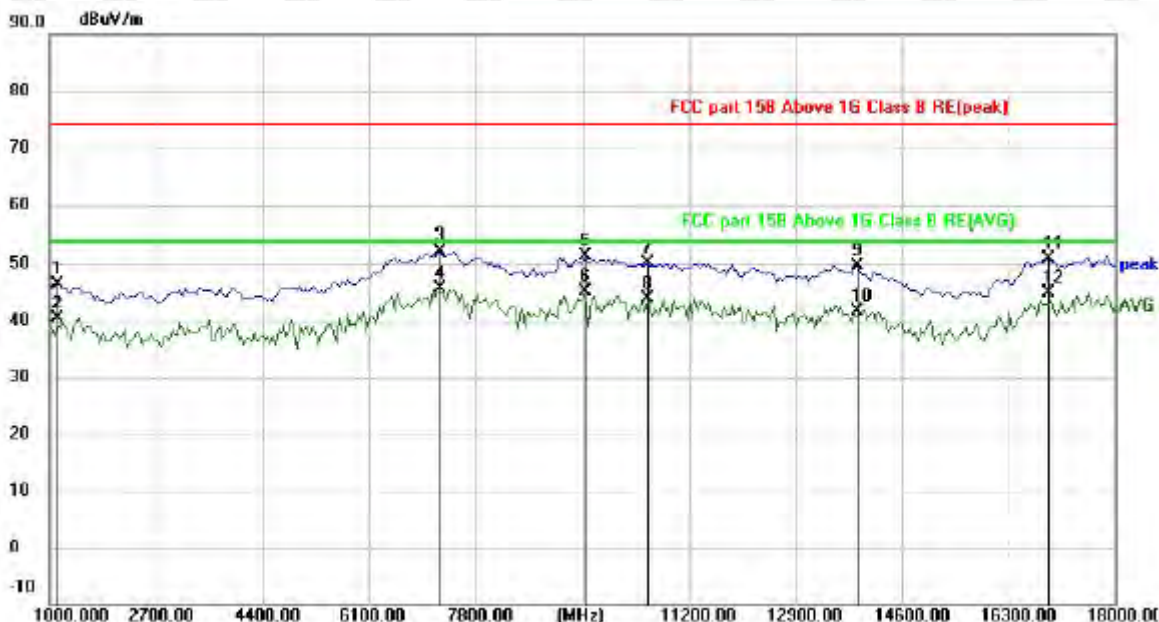

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1127.500	42.48	3.97	46.45	74.00	-27.55	peak
2		1127.500	36.40	3.97	40.37	54.00	-13.63	AVG
3		7247.500	39.48	12.65	52.13	74.00	-21.87	peak
4	*	7247.500	32.94	12.65	45.59	54.00	-8.41	AVG
5		9542.500	33.67	17.61	51.28	74.00	-22.72	peak
6		9542.500	27.54	17.61	45.15	54.00	-8.85	AVG
7		10520.00	33.96	16.10	50.06	74.00	-23.94	peak
8		10520.00	27.88	16.10	43.98	54.00	-10.02	AVG
9		13877.50	28.60	21.10	49.70	74.00	-24.30	peak
10		13877.50	20.54	21.10	41.64	54.00	-12.36	AVG
11		16937.50	28.13	22.77	50.90	74.00	-23.10	peak
12		16937.50	22.23	22.77	45.00	54.00	-9.00	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

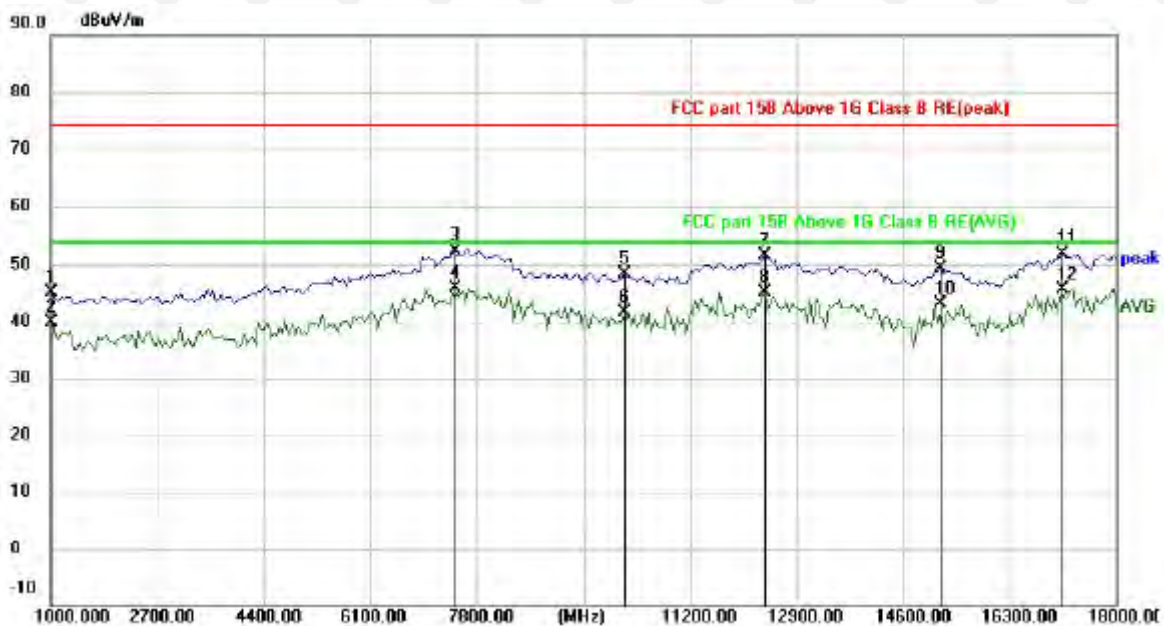

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1000.000	40.96	4.13	45.09	74.00	-28.91	peak
2		1000.000	35.64	4.13	39.77	54.00	-14.23	AVG
3		7460.000	39.31	13.17	52.48	74.00	-21.52	peak
4	*	7460.000	32.76	13.17	45.93	54.00	-8.07	AVG
5		10137.50	31.40	16.91	48.31	74.00	-25.69	peak
6		10137.50	24.77	16.91	41.68	54.00	-12.32	AVG
7		12390.00	33.42	18.27	51.69	74.00	-22.31	peak
8		12390.00	26.97	18.27	45.24	54.00	-8.76	AVG
9		15195.00	26.47	22.91	49.38	74.00	-24.62	peak
10		15195.00	20.13	22.91	43.04	54.00	-10.96	AVG
11		17150.00	28.15	23.73	51.88	74.00	-22.12	peak
12		17150.00	21.85	23.73	45.58	54.00	-8.42	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Remark:


- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)


Horizontal

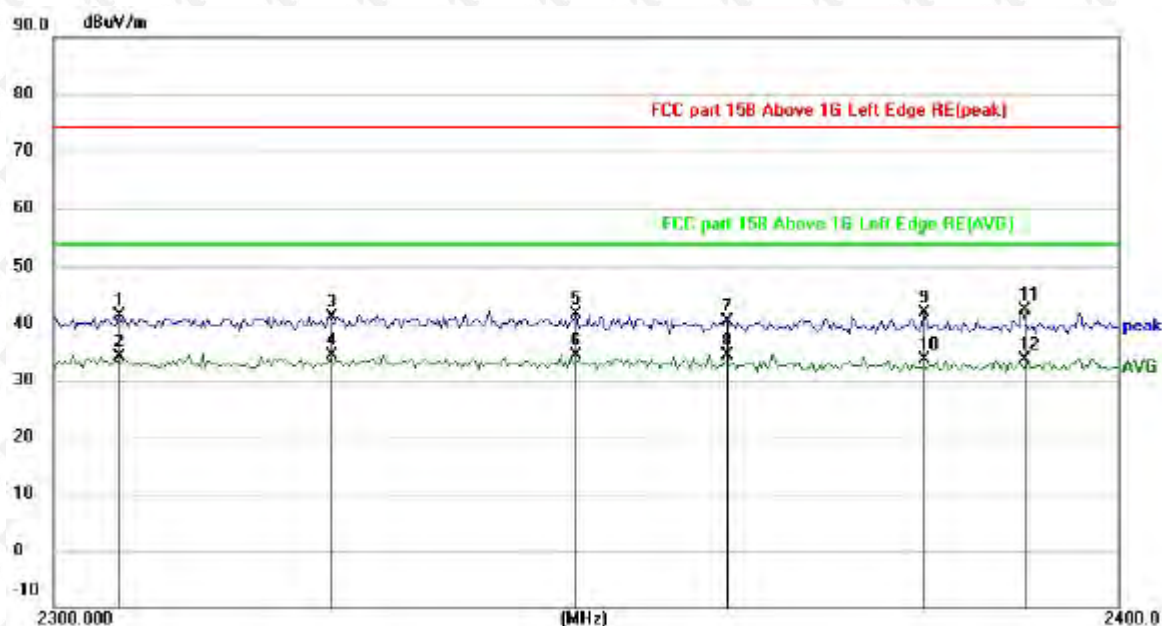

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2305.881	40.06	1.25	41.31	74.00	-32.69	peak
2		2305.881	32.78	1.25	34.03	54.00	-19.97	AVG
3		2325.592	40.07	1.15	41.22	74.00	-32.78	peak
4	*	2325.592	33.27	1.15	34.42	54.00	-19.58	AVG
5		2348.468	40.52	1.03	41.55	74.00	-32.45	peak
6		2348.468	33.32	1.03	34.35	54.00	-19.65	AVG
7		2362.754	39.48	0.95	40.43	74.00	-33.57	peak
8		2362.754	33.35	0.95	34.30	54.00	-19.70	AVG
9		2381.431	41.07	0.86	41.93	74.00	-32.07	peak
10		2381.431	32.88	0.86	33.74	54.00	-20.26	AVG
11		2390.825	41.60	0.81	42.41	74.00	-31.59	peak
12		2390.825	32.90	0.81	33.71	54.00	-20.29	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

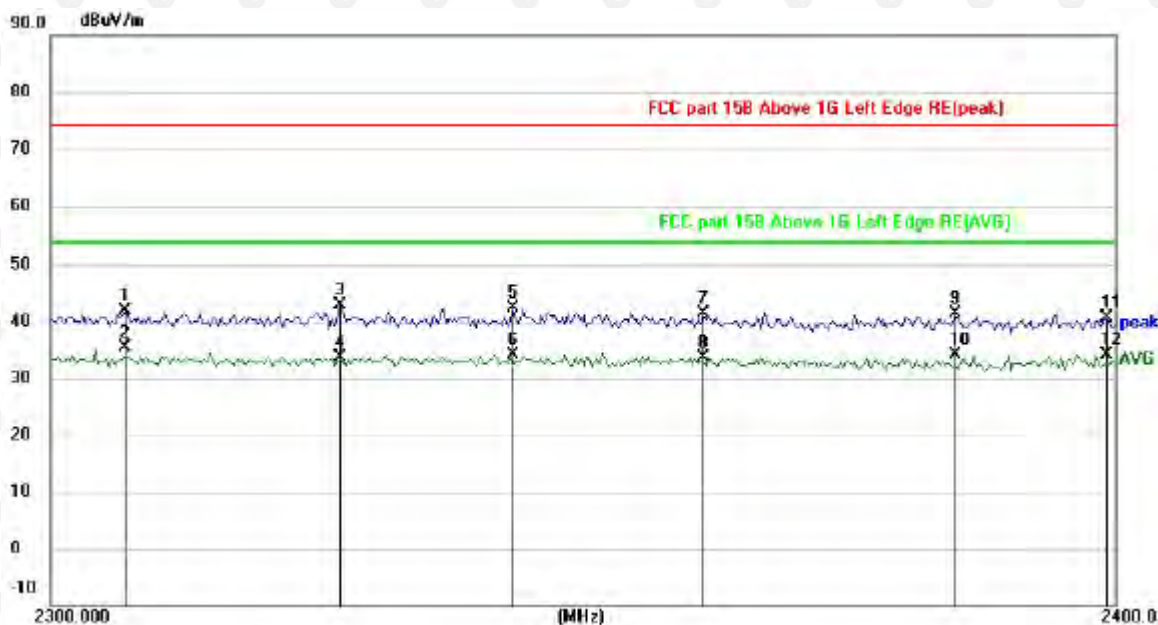


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2306.862	40.51	1.25	41.76	74.00	-32.24	peak
2	*	2306.862	34.23	1.25	35.48	54.00	-18.52	AVG
3		2326.829	41.78	1.14	42.92	74.00	-31.08	peak
4		2326.829	32.60	1.14	33.74	54.00	-20.26	AVG
5		2342.977	41.40	1.06	42.46	74.00	-31.54	peak
6		2342.977	32.96	1.06	34.02	54.00	-19.98	AVG
7		2360.744	40.39	0.97	41.36	74.00	-32.64	peak
8		2360.744	32.76	0.97	33.73	54.00	-20.27	AVG
9		2384.727	40.60	0.84	41.44	74.00	-32.56	peak
10		2384.727	33.37	0.84	34.21	54.00	-19.79	AVG
11		2398.979	39.85	0.76	40.61	74.00	-33.39	peak
12		2398.979	33.35	0.76	34.11	54.00	-19.89	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:


ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

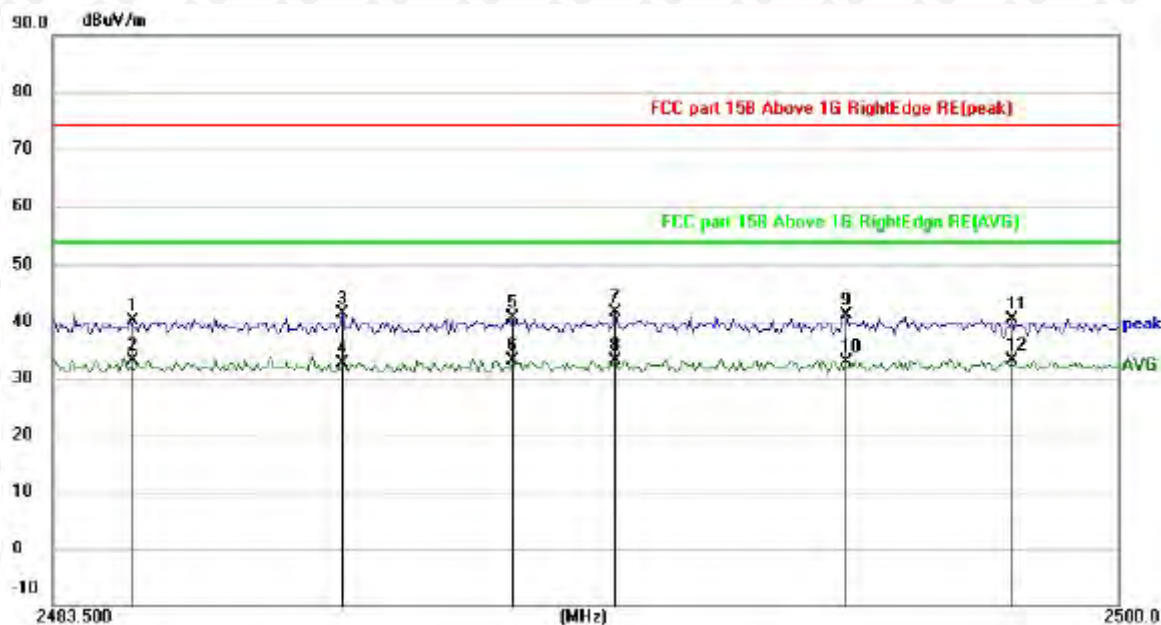

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2484.693	39.71	0.31	40.02	74.00	-33.98	peak
2		2484.693	32.89	0.31	33.20	54.00	-20.80	AVG
3		2487.985	41.19	0.29	41.48	74.00	-32.52	peak
4		2487.985	32.44	0.29	32.73	54.00	-21.27	AVG
5		2490.582	40.23	0.28	40.51	74.00	-33.49	peak
6	*	2490.582	32.97	0.28	33.25	54.00	-20.75	AVG
7		2492.190	41.42	0.27	41.69	74.00	-32.31	peak
8		2492.190	32.76	0.27	33.03	54.00	-20.97	AVG
9		2495.741	40.76	0.25	41.01	74.00	-32.99	peak
10		2495.741	32.74	0.25	32.99	54.00	-21.01	AVG
11		2498.345	40.13	0.24	40.37	74.00	-33.63	peak
12		2498.345	32.89	0.24	33.13	54.00	-20.87	AVG

Vertical:

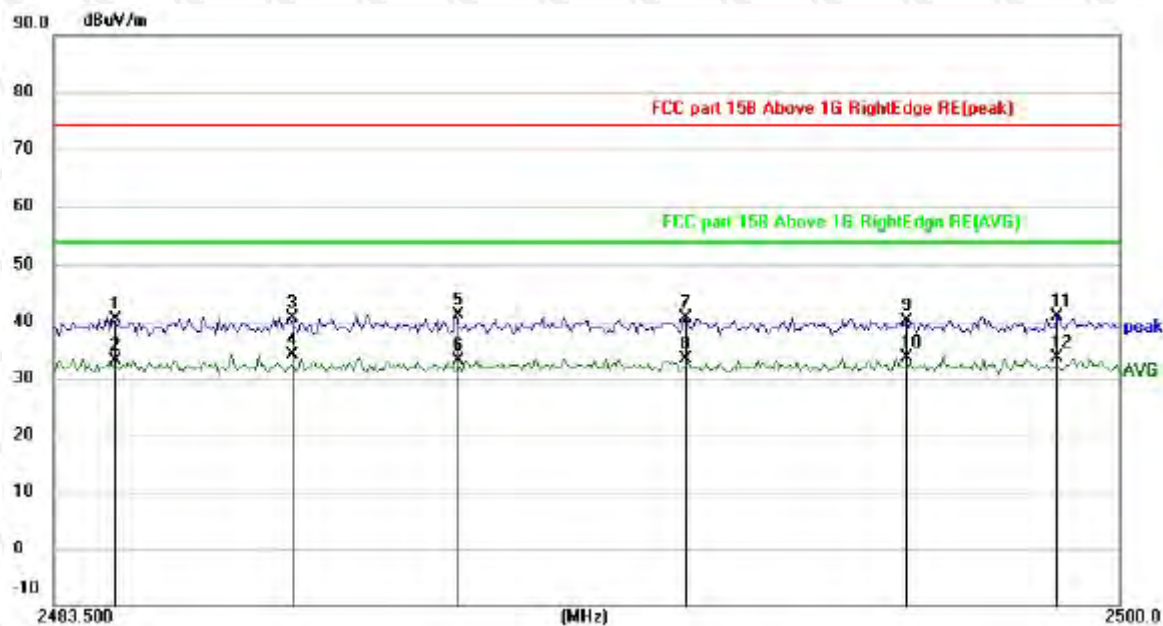


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2484.405	40.10	0.31	40.41	74.00	-33.59	peak
2		2484.405	32.94	0.31	33.25	54.00	-20.75	AVG
3		2487.162	40.37	0.30	40.67	74.00	-33.33	peak
4	*	2487.162	33.74	0.30	34.04	54.00	-19.96	AVG
5		2489.716	40.91	0.28	41.19	74.00	-32.81	peak
6		2489.716	32.93	0.28	33.21	54.00	-20.79	AVG
7		2493.263	40.24	0.27	40.51	74.00	-33.49	peak
8		2493.263	33.08	0.27	33.35	54.00	-20.65	AVG
9		2496.691	39.77	0.25	40.02	74.00	-33.98	peak
10		2496.691	33.48	0.25	33.73	54.00	-20.27	AVG
11		2499.048	40.53	0.24	40.77	74.00	-33.23	peak
12		2499.048	33.29	0.24	33.53	54.00	-20.47	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)


Horizontal

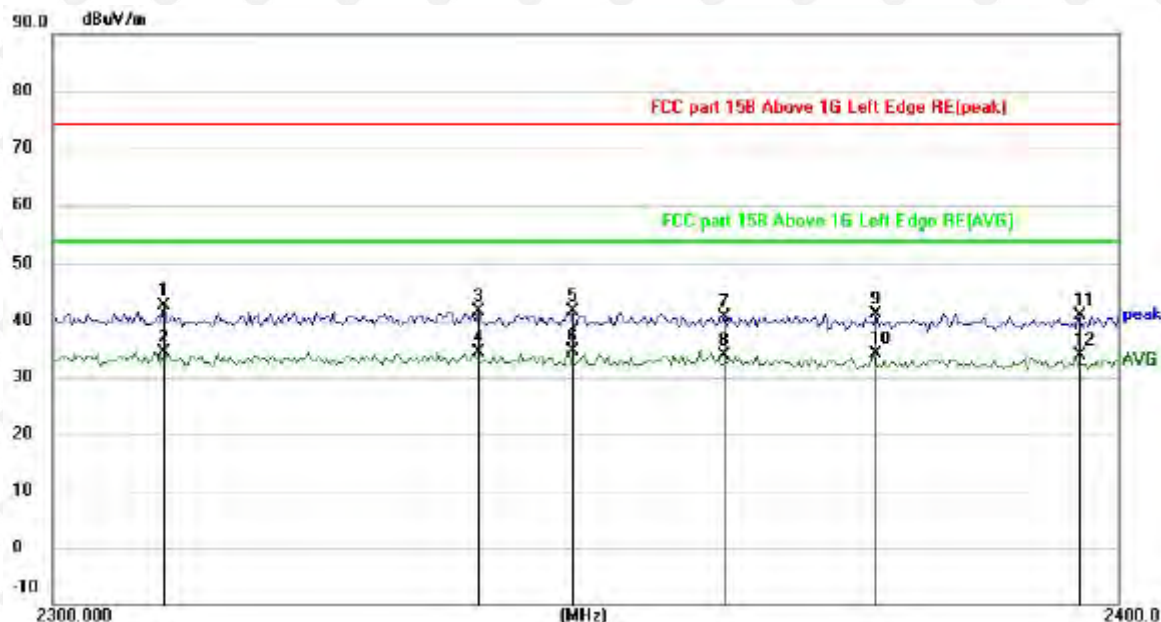

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2310.301	41.44	1.23	42.67	74.00	-31.33	peak
2		2310.301	33.13	1.23	34.36	54.00	-19.64	AVG
3		2339.490	40.63	1.08	41.71	74.00	-32.29	peak
4		2339.490	33.21	1.08	34.29	54.00	-19.71	AVG
5		2347.969	40.50	1.03	41.53	74.00	-32.47	peak
6	*	2347.969	33.66	1.03	34.69	54.00	-19.31	AVG
7		2362.503	39.72	0.96	40.68	74.00	-33.32	peak
8		2362.503	32.94	0.96	33.90	54.00	-20.10	AVG
9		2376.874	40.36	0.88	41.24	74.00	-32.76	peak
10		2376.874	33.22	0.88	34.10	54.00	-19.90	AVG
11		2396.173	40.05	0.78	40.83	74.00	-33.17	peak
12		2396.173	32.98	0.78	33.76	54.00	-20.24	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

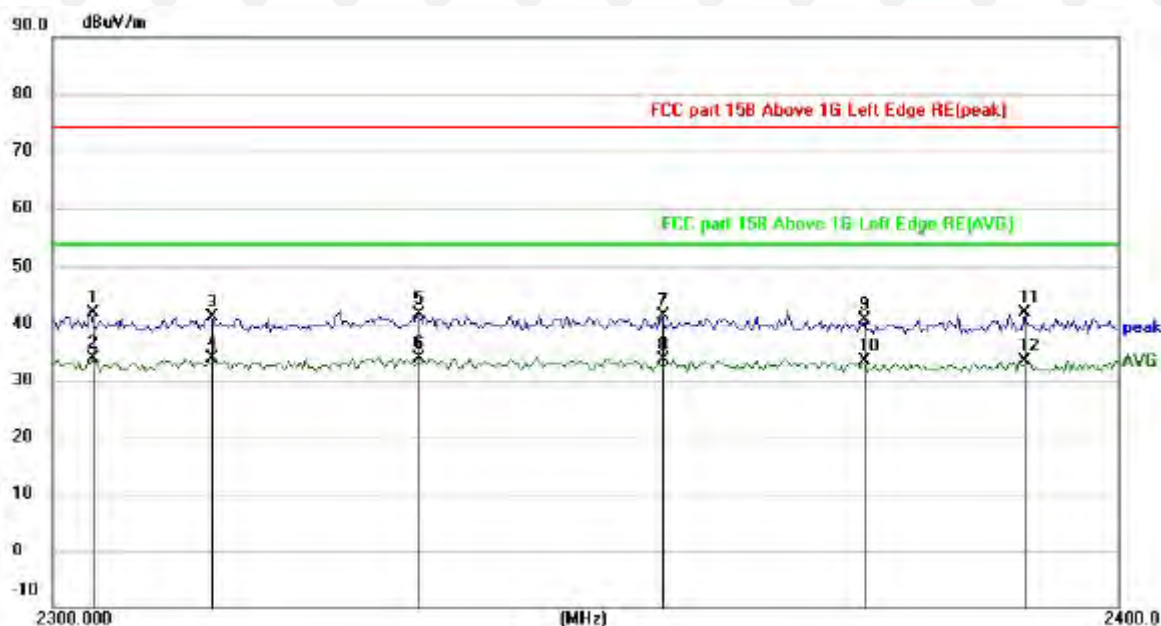


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		2303.429	40.71	1.27	41.98	74.00	-32.02	peak
2		2303.429	32.57	1.27	33.84	54.00	-20.16	AVG
3		2314.484	39.87	1.21	41.08	74.00	-32.92	peak
4		2314.484	32.63	1.21	33.84	54.00	-20.16	AVG
5		2333.772	40.41	1.11	41.52	74.00	-32.48	peak
6	*	2333.772	32.86	1.11	33.97	54.00	-20.03	AVG
7		2356.478	40.35	0.99	41.34	74.00	-32.66	peak
8		2356.478	32.65	0.99	33.64	54.00	-20.36	AVG
9		2375.863	39.86	0.89	40.75	74.00	-33.25	peak
10		2375.863	32.40	0.89	33.29	54.00	-20.71	AVG
11		2391.079	40.96	0.81	41.77	74.00	-32.23	peak
12		2391.079	32.51	0.81	33.32	54.00	-20.68	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)


Horizontal

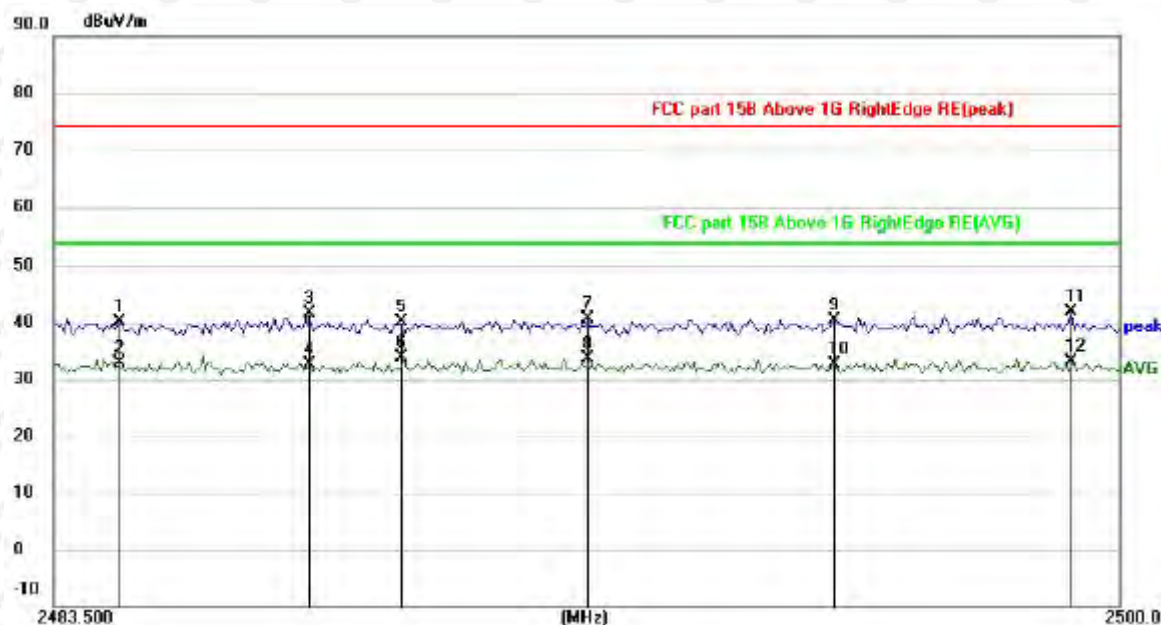

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		2484.487	39.93	0.31	40.24	74.00	-33.76	peak
2		2484.487	32.54	0.31	32.85	54.00	-21.15	AVG
3		2487.409	41.26	0.30	41.56	74.00	-32.44	peak
4		2487.409	32.42	0.30	32.72	54.00	-21.28	AVG
5		2488.851	39.79	0.29	40.08	74.00	-33.92	peak
6	*	2488.851	33.68	0.29	33.97	54.00	-20.03	AVG
7		2491.736	40.28	0.27	40.55	74.00	-33.45	peak
8		2491.736	33.26	0.27	33.53	54.00	-20.47	AVG
9		2495.575	40.22	0.25	40.47	74.00	-33.53	peak
10		2495.575	32.46	0.25	32.71	54.00	-21.29	AVG
11		2499.255	41.64	0.23	41.87	74.00	-32.13	peak
12		2499.255	32.93	0.23	33.16	54.00	-20.84	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Vertical:

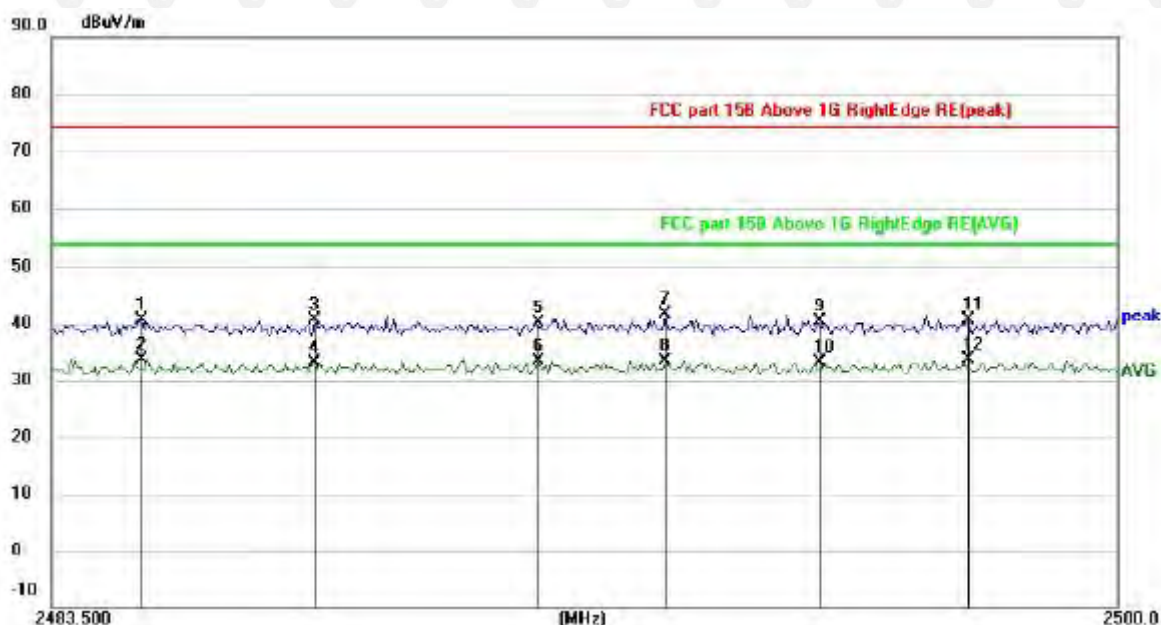


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2484.898	40.41	0.31	40.72	74.00	-33.28	peak
2		2484.898	33.35	0.31	33.66	54.00	-20.34	AVG
3		2487.573	40.26	0.30	40.56	74.00	-33.44	peak
4		2487.573	32.91	0.30	33.21	54.00	-20.79	AVG
5		2490.994	39.76	0.28	40.04	74.00	-33.96	peak
6		2490.994	33.13	0.28	33.41	54.00	-20.59	AVG
7		2492.974	41.40	0.27	41.67	74.00	-32.33	peak
8		2492.974	33.20	0.27	33.47	54.00	-20.53	AVG
9		2495.328	40.11	0.25	40.36	74.00	-33.64	peak
10		2495.328	32.76	0.25	33.01	54.00	-20.99	AVG
11		2497.683	40.50	0.24	40.74	74.00	-33.26	peak
12	*	2497.683	33.45	0.24	33.69	54.00	-20.31	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)


Horizontal

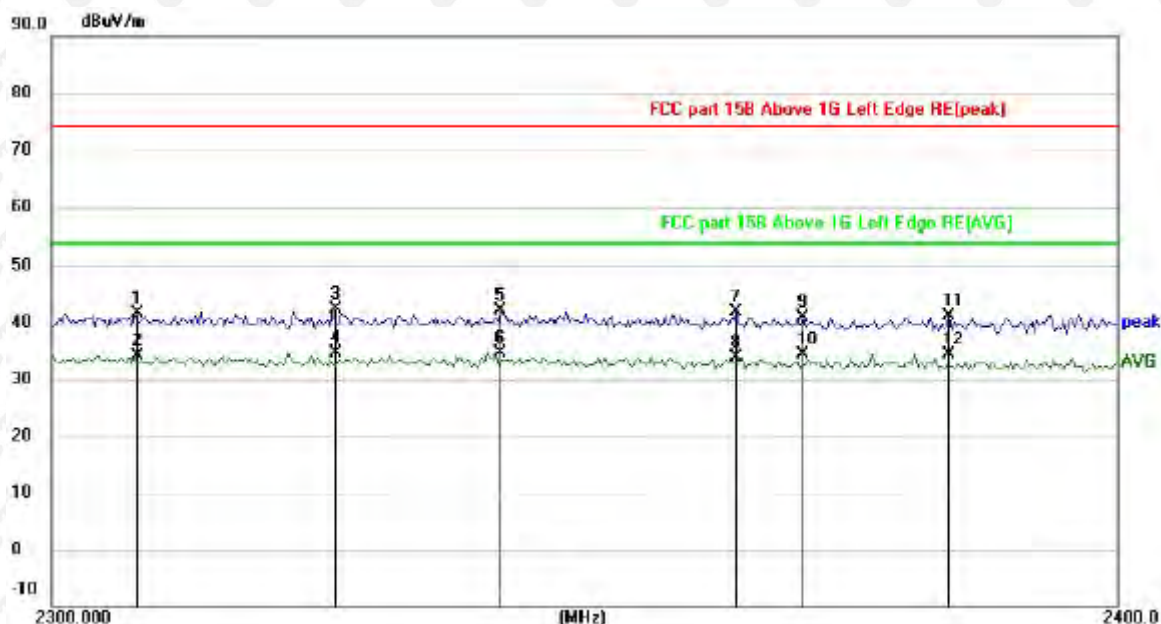

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2307.599	40.27	1.25	41.52	74.00	-32.48	peak
2		2307.599	32.80	1.25	34.05	54.00	-19.95	AVG
3		2326.087	41.12	1.15	42.27	74.00	-31.73	peak
4	*	2326.087	33.51	1.15	34.66	54.00	-19.34	AVG
5		2341.731	41.17	1.07	42.24	74.00	-31.76	peak
6		2341.731	33.51	1.07	34.58	54.00	-19.42	AVG
7		2363.760	40.89	0.95	41.84	74.00	-32.16	peak
8		2363.760	33.05	0.95	34.00	54.00	-20.00	AVG
9		2370.056	39.87	0.92	40.79	74.00	-33.21	peak
10		2370.056	33.39	0.92	34.31	54.00	-19.69	AVG
11		2383.966	40.37	0.84	41.21	74.00	-32.79	peak
12		2383.966	33.47	0.84	34.31	54.00	-19.69	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Vertical:

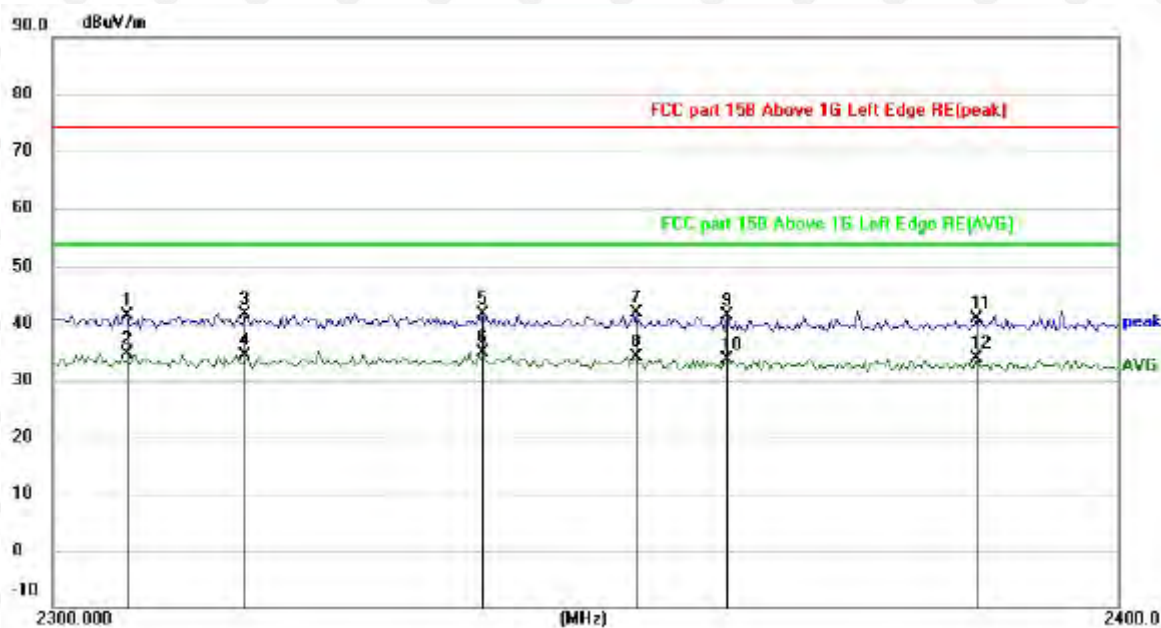


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		2306.862	40.24	1.25	41.49	74.00	-32.51	peak
2		2306.862	33.34	1.25	34.59	54.00	-19.41	AVG
3		2317.687	40.53	1.19	41.72	74.00	-32.28	peak
4		2317.687	33.11	1.19	34.30	54.00	-19.70	AVG
5		2339.739	40.67	1.08	41.75	74.00	-32.25	peak
6	*	2339.739	33.92	1.08	35.00	54.00	-19.00	AVG
7		2353.972	40.93	1.00	41.93	74.00	-32.07	peak
8		2353.972	33.19	1.00	34.19	54.00	-19.81	AVG
9		2362.754	40.32	0.95	41.27	74.00	-32.73	peak
10		2362.754	32.79	0.95	33.74	54.00	-20.26	AVG
11		2386.504	39.93	0.83	40.76	74.00	-33.24	peak
12		2386.504	33.14	0.83	33.97	54.00	-20.03	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)


Horizontal

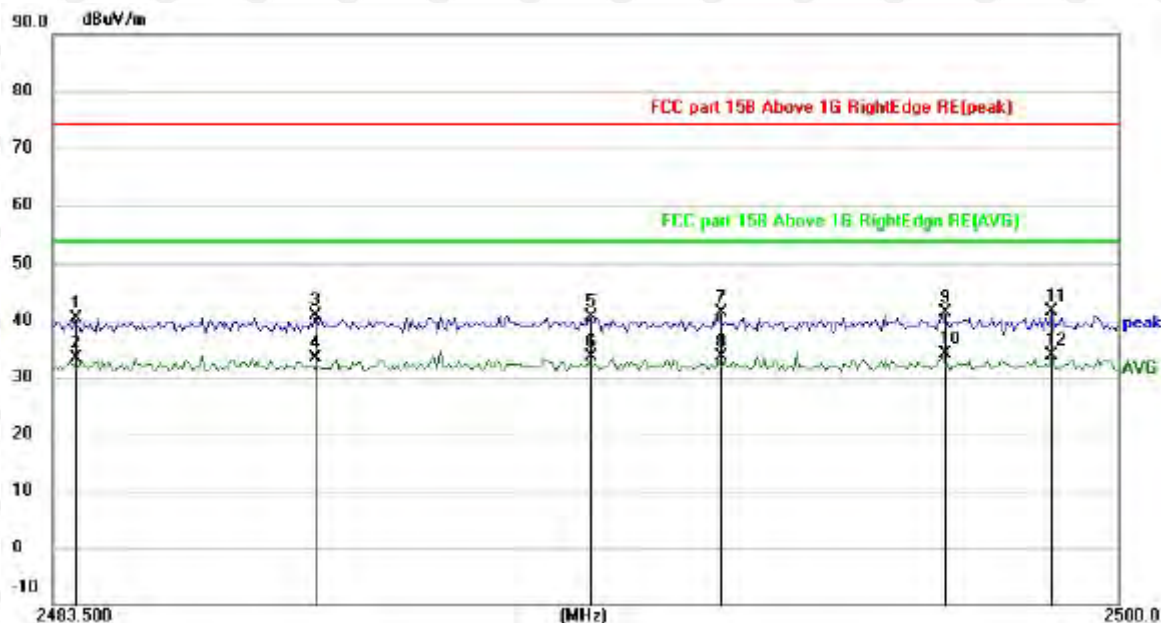

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2483.829	40.09	0.32	40.41	74.00	-33.59	peak
2		2483.829	33.00	0.32	33.32	54.00	-20.68	AVG
3		2487.573	40.63	0.30	40.93	74.00	-33.07	peak
4		2487.573	33.04	0.30	33.34	54.00	-20.66	AVG
5		2491.778	40.46	0.27	40.73	74.00	-33.27	peak
6		2491.778	33.33	0.27	33.60	54.00	-20.40	AVG
7		2493.800	41.09	0.26	41.35	74.00	-32.65	peak
8		2493.800	33.33	0.26	33.59	54.00	-20.41	AVG
9		2497.270	41.19	0.24	41.43	74.00	-32.57	peak
10	*	2497.270	33.82	0.24	34.06	54.00	-19.94	AVG
11		2498.965	41.37	0.24	41.61	74.00	-32.39	peak
12		2498.965	33.64	0.24	33.88	54.00	-20.12	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

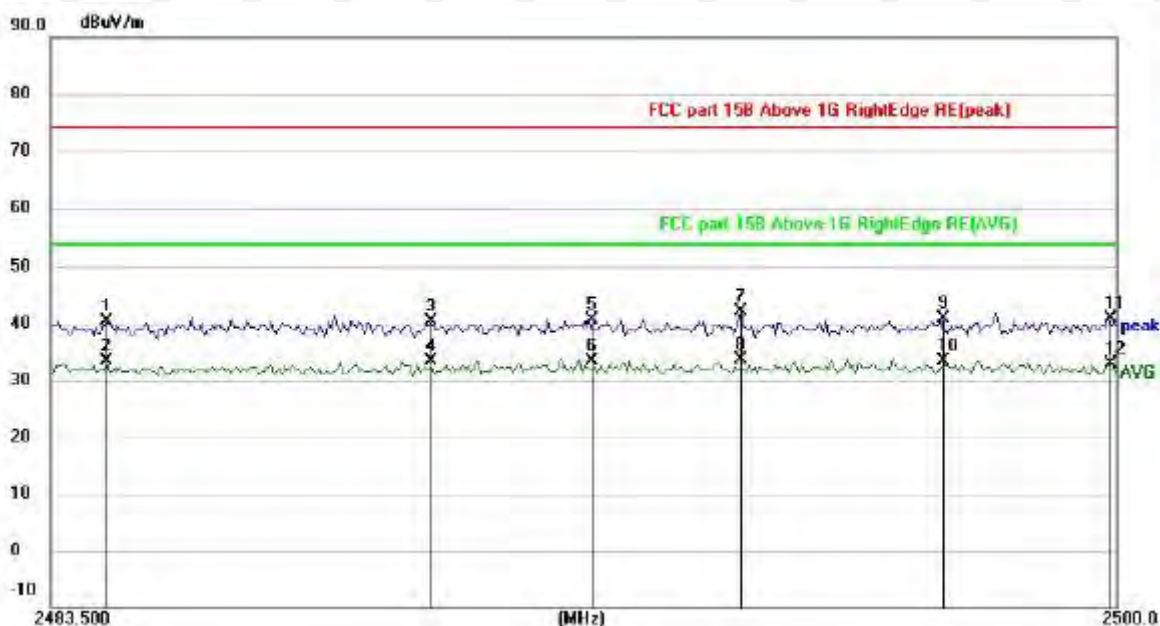


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		2484.363	40.14	0.31	40.45	74.00	-33.55	peak
2		2484.363	32.99	0.31	33.30	54.00	-20.70	AVG
3		2489.386	40.15	0.29	40.44	74.00	-33.56	peak
4		2489.386	33.10	0.29	33.39	54.00	-20.61	AVG
5		2491.819	40.44	0.27	40.71	74.00	-33.29	peak
6		2491.819	33.22	0.27	33.49	54.00	-20.51	AVG
7		2494.171	41.92	0.26	42.18	74.00	-31.82	peak
8	*	2494.171	33.44	0.26	33.70	54.00	-20.30	AVG
9		2497.270	40.53	0.24	40.77	74.00	-33.23	peak
10		2497.270	33.16	0.24	33.40	54.00	-20.60	AVG
11		2499.876	40.56	0.23	40.79	74.00	-33.21	peak
12		2499.876	32.73	0.23	32.96	54.00	-21.04	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)


Horizontal

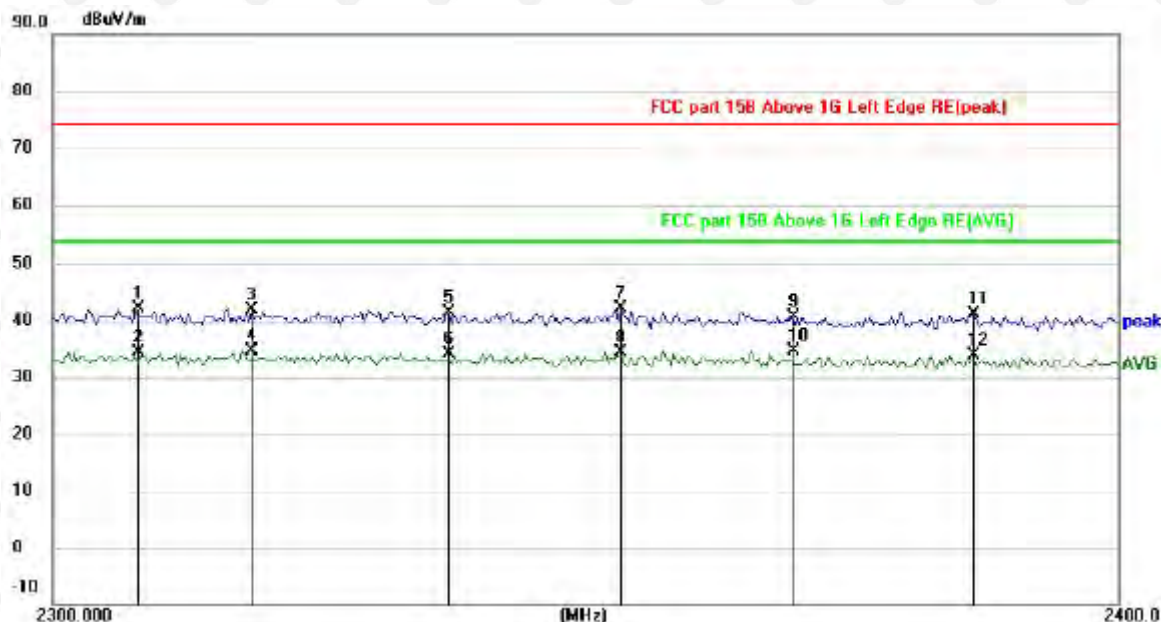

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		2307.599	40.96	1.25	42.21	74.00	-31.79	peak
2		2307.599	33.21	1.25	34.46	54.00	-19.54	AVG
3		2318.427	40.75	1.19	41.94	74.00	-32.06	peak
4	*	2318.427	33.55	1.19	34.74	54.00	-19.26	AVG
5		2336.505	40.36	1.09	41.45	74.00	-32.55	peak
6		2336.505	32.98	1.09	34.07	54.00	-19.93	AVG
7		2352.720	41.04	1.01	42.05	74.00	-31.95	peak
8		2352.720	33.32	1.01	34.33	54.00	-19.67	AVG
9		2368.796	39.76	0.92	40.68	74.00	-33.32	peak
10		2368.796	33.81	0.92	34.73	54.00	-19.27	AVG
11		2386.250	40.28	0.83	41.11	74.00	-32.89	peak
12		2386.250	32.99	0.83	33.82	54.00	-20.18	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

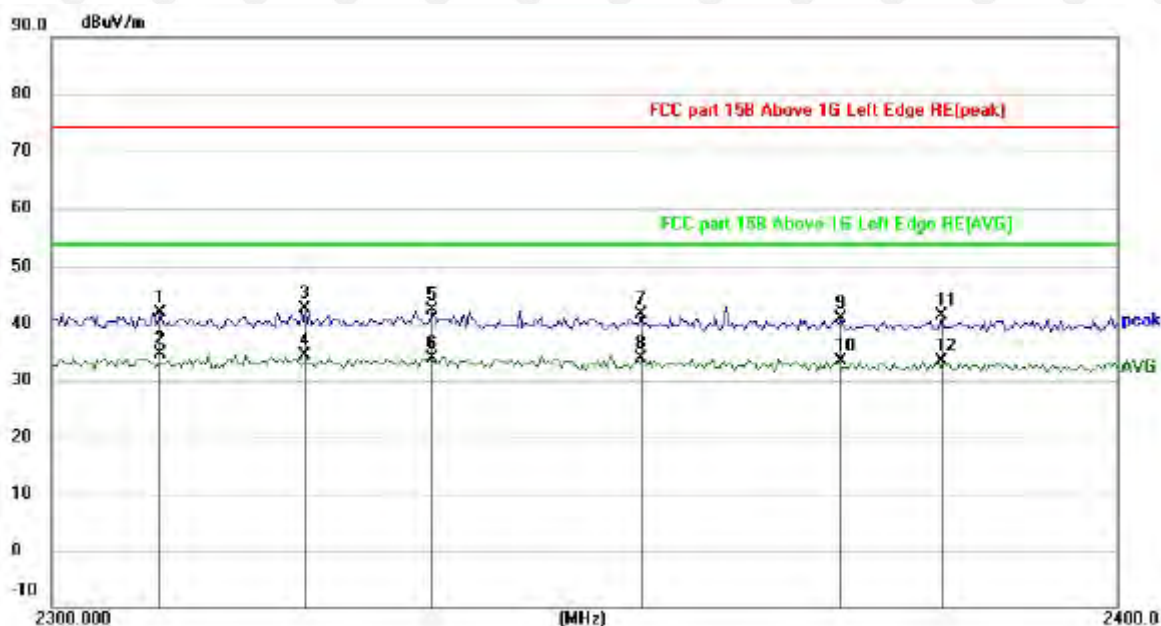


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2310.055	40.71	1.23	41.94	74.00	-32.06	peak
2	*	2310.055	33.49	1.23	34.72	54.00	-19.28	AVG
3		2323.119	41.57	1.16	42.73	74.00	-31.27	peak
4		2323.119	33.32	1.16	34.48	54.00	-19.52	AVG
5		2335.262	41.17	1.10	42.27	74.00	-31.73	peak
6		2335.262	32.82	1.10	33.92	54.00	-20.08	AVG
7		2354.723	40.56	1.00	41.56	74.00	-32.44	peak
8		2354.723	32.89	1.00	33.89	54.00	-20.11	AVG
9		2373.589	39.86	0.90	40.76	74.00	-33.24	peak
10		2373.589	32.59	0.90	33.49	54.00	-20.51	AVG
11		2383.205	40.46	0.85	41.31	74.00	-32.69	peak
12		2383.205	32.48	0.85	33.33	54.00	-20.67	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)


Horizontal

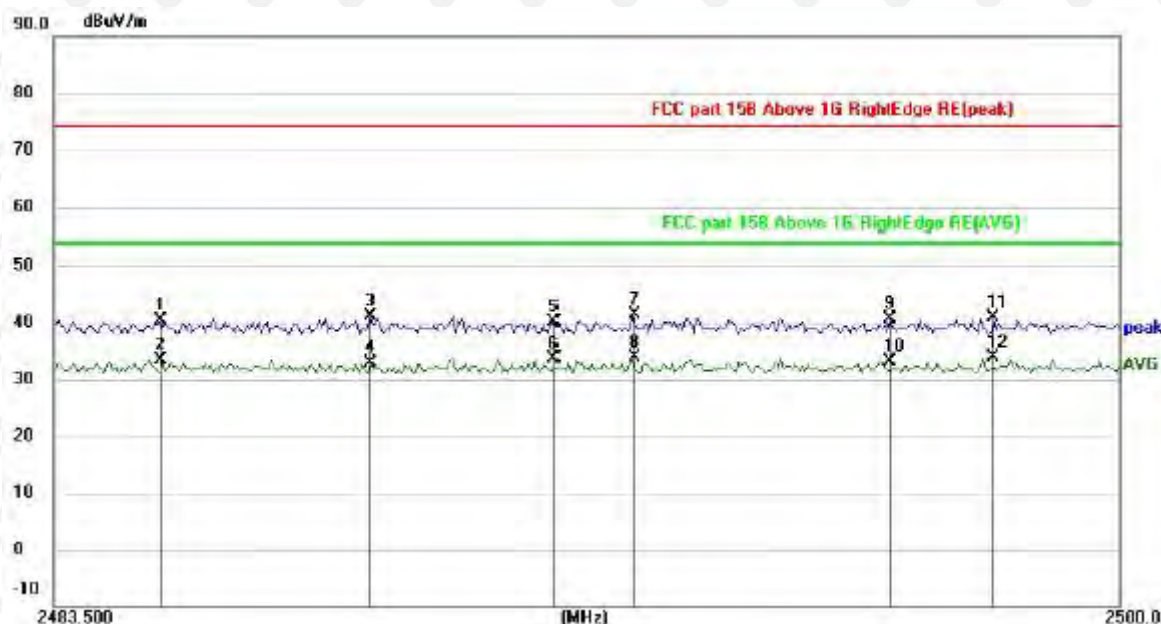

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2485.145	39.96	0.31	40.27	74.00	-33.73	peak
2		2485.145	32.95	0.31	33.26	54.00	-20.74	AVG
3		2488.397	40.77	0.29	41.06	74.00	-32.94	peak
4		2488.397	32.70	0.29	32.99	54.00	-21.01	AVG
5		2491.241	39.97	0.28	40.25	74.00	-33.75	peak
6		2491.241	33.23	0.28	33.51	54.00	-20.49	AVG
7		2492.438	41.20	0.27	41.47	74.00	-32.53	peak
8		2492.438	33.50	0.27	33.77	54.00	-20.23	AVG
9		2496.443	40.29	0.25	40.54	74.00	-33.46	peak
10		2496.443	32.82	0.25	33.07	54.00	-20.93	AVG
11		2498.055	40.75	0.24	40.99	74.00	-33.01	peak
12	*	2498.055	33.75	0.24	33.99	54.00	-20.01	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Vertical:

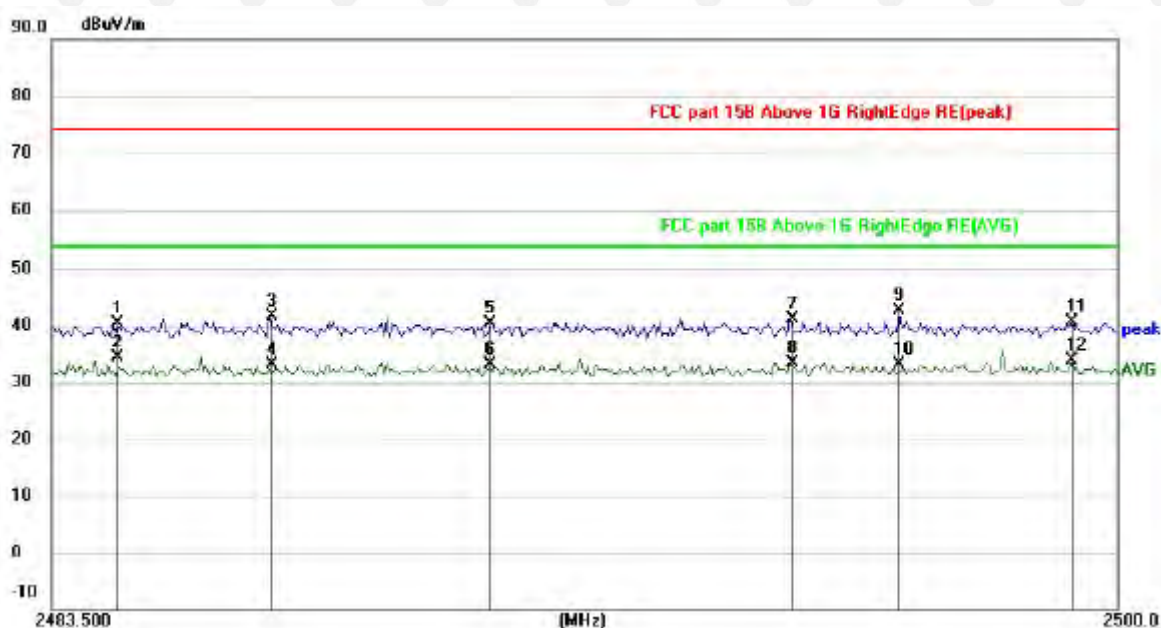


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		2484.528	40.17	0.31	40.48	74.00	-33.52	peak
2	*	2484.528	33.96	0.31	34.27	54.00	-19.73	AVG
3		2486.874	41.34	0.30	41.64	74.00	-32.36	peak
4		2486.874	32.89	0.30	33.19	54.00	-20.81	AVG
5		2490.293	40.21	0.28	40.49	74.00	-33.51	peak
6		2490.293	32.90	0.28	33.18	54.00	-20.82	AVG
7		2494.915	40.81	0.26	41.07	74.00	-32.93	peak
8		2494.915	33.09	0.26	33.35	54.00	-20.65	AVG
9		2496.608	42.45	0.25	42.70	74.00	-31.30	peak
10		2496.608	32.90	0.25	33.15	54.00	-20.85	AVG
11		2499.296	40.37	0.23	40.60	74.00	-33.40	peak
12		2499.296	33.55	0.23	33.78	54.00	-20.22	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

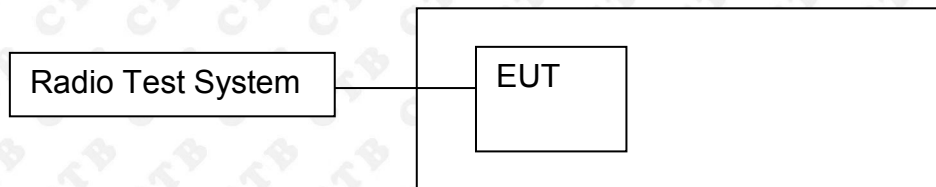

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:




BAND EDGE Graphs

802.11g/LCH

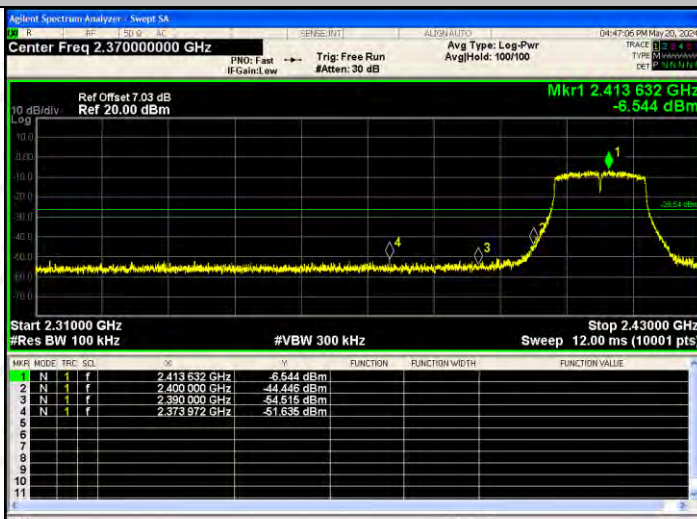


802.11g/HCH

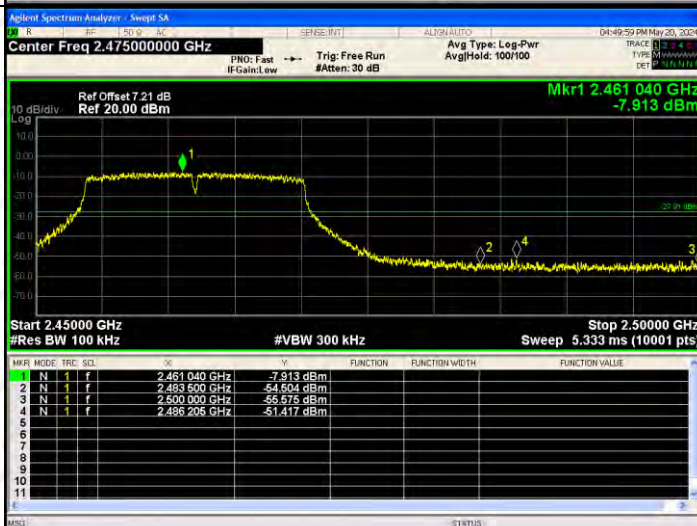


BAND EDGE Graphs

802.11n(HT20)/L
CH

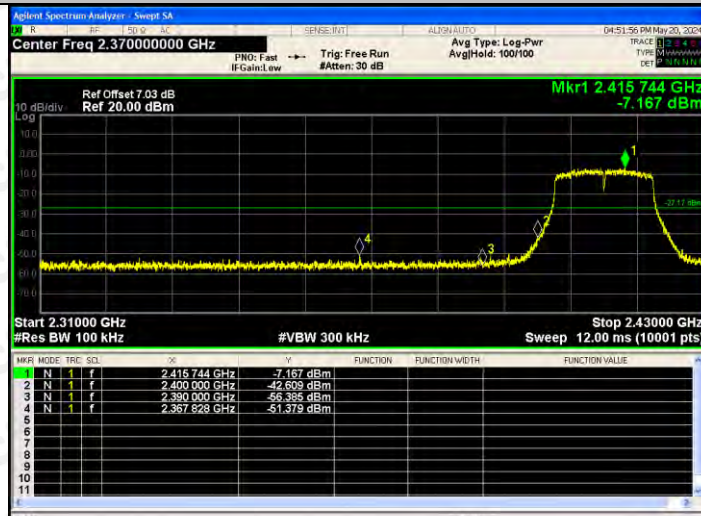


802.11n(HT20)/H
CH

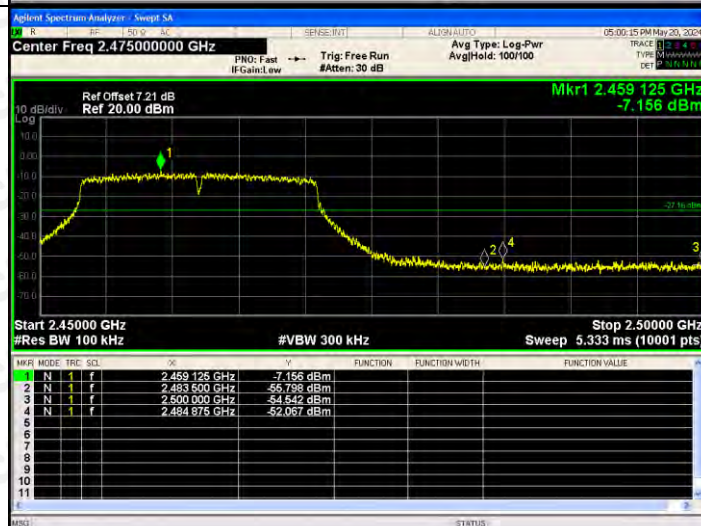

BAND EDGE Graphs


802.11n(HT40)/L
CH

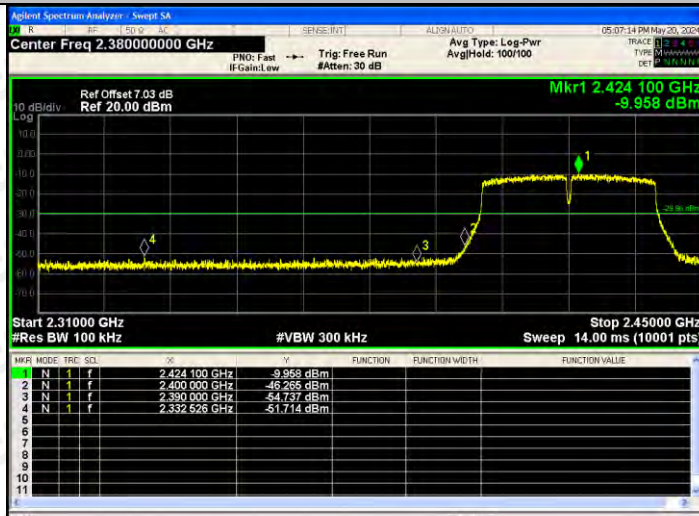




802.11n(HT40)/H
CH



RF Conducted Spurious Emissions Graphs

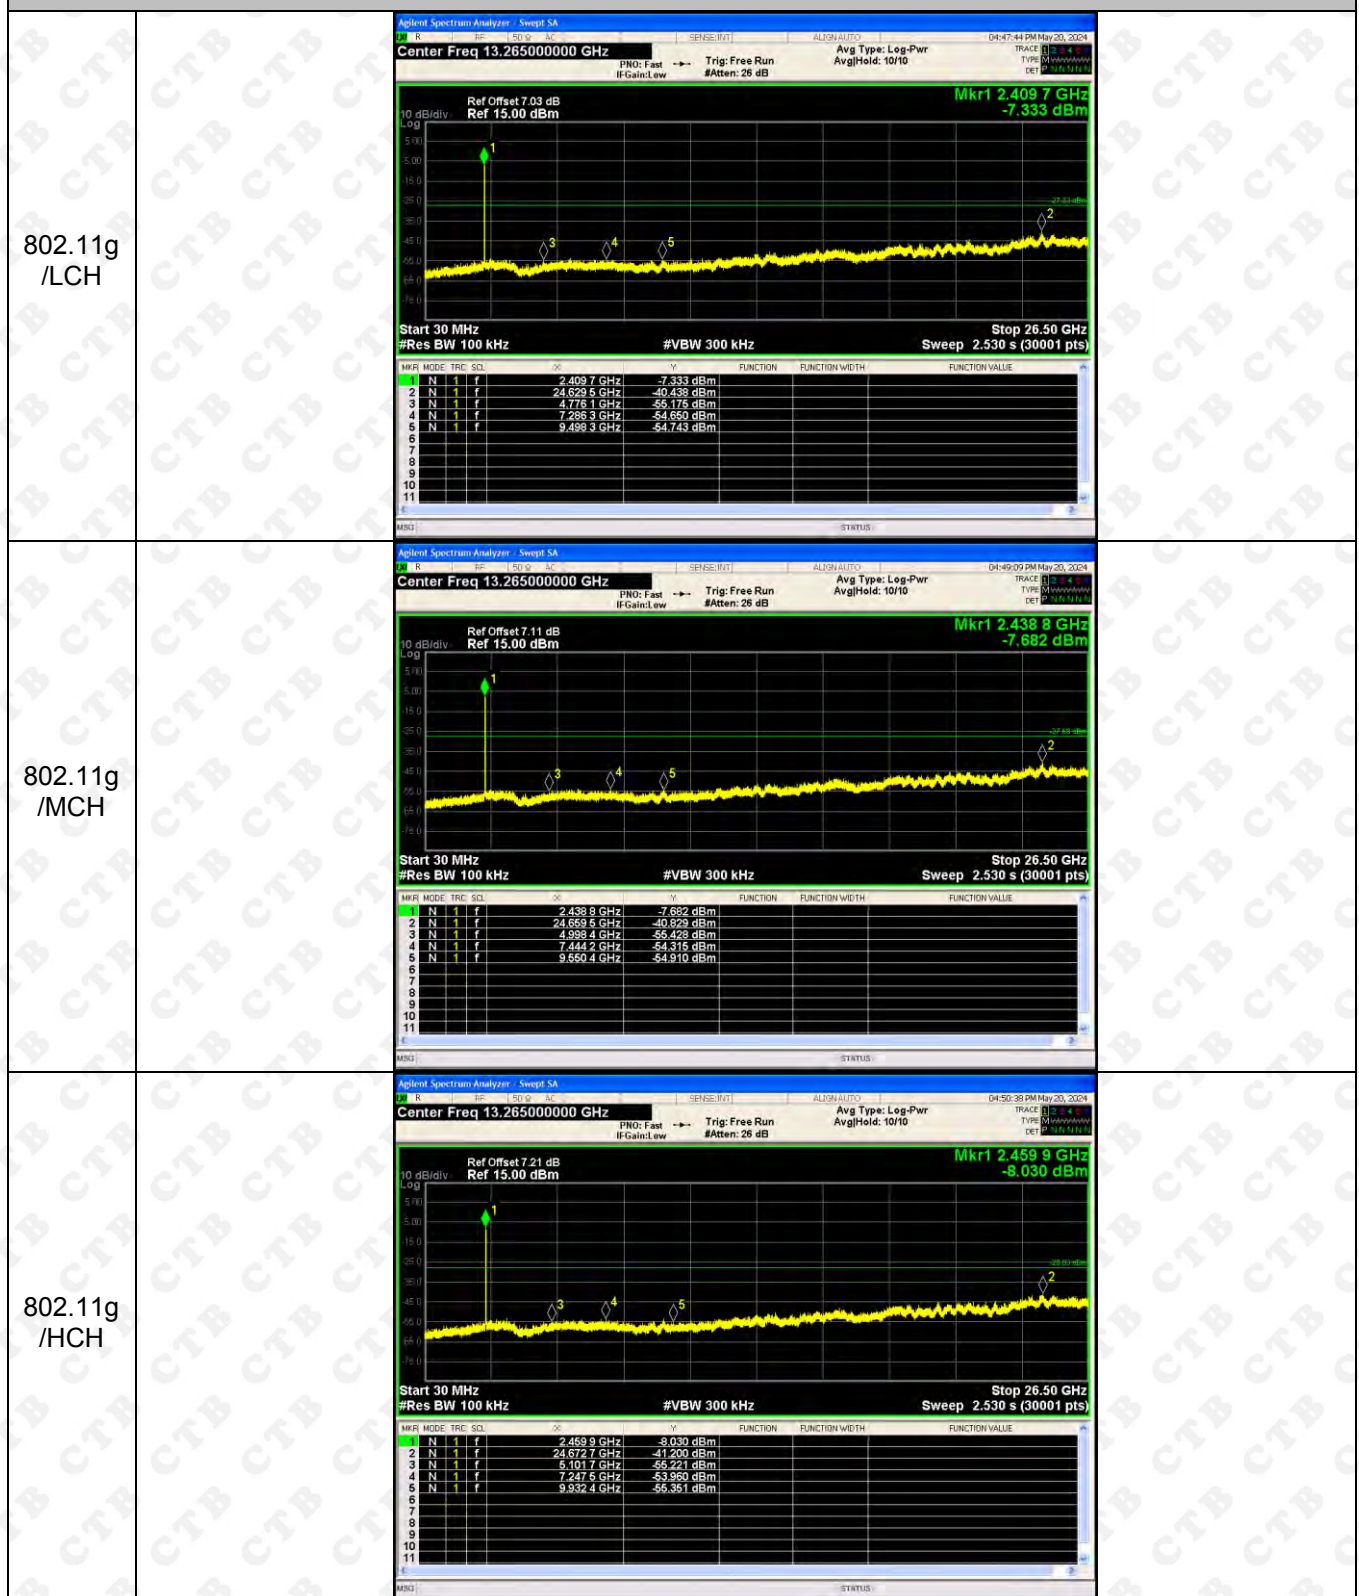

RF Conducted Spurious Emissions Graphs

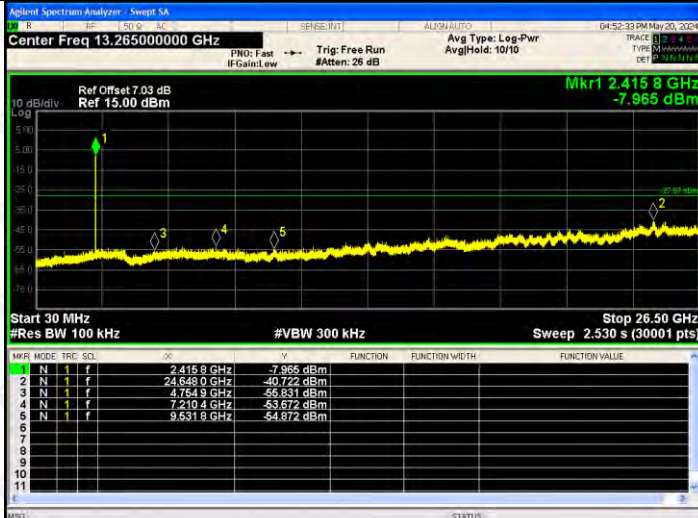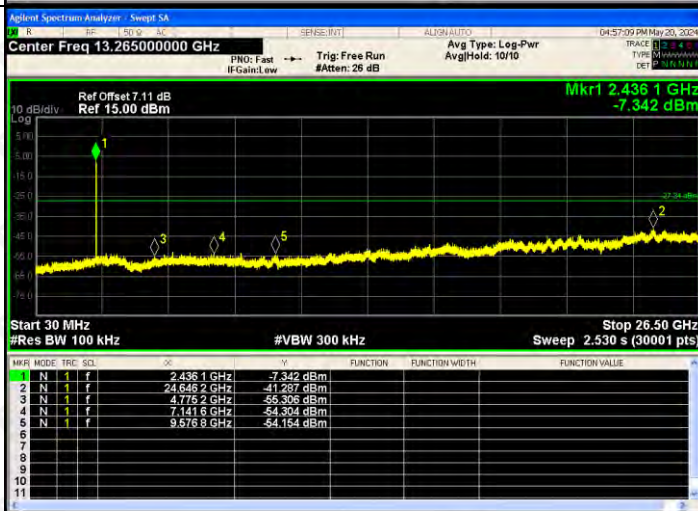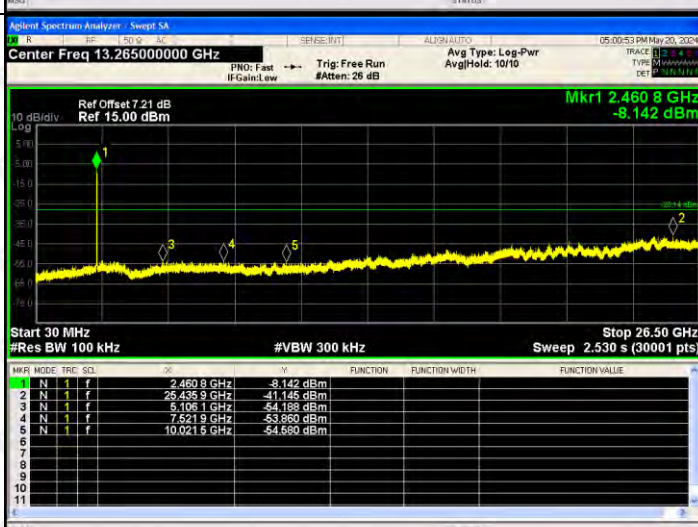802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4158 GHz</td><td>-7.965 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.648 GHz</td><td>-40.722 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7549 GHz</td><td>-55.831 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2104 GHz</td><td>-53.672 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5318 GHz</td><td>-54.872 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4158 GHz	-7.965 dBm				2	N	1	f	24.648 GHz	-40.722 dBm				3	N	1	f	4.7549 GHz	-55.831 dBm				4	N	1	f	7.2104 GHz	-53.672 dBm				5	N	1	f	9.5318 GHz	-54.872 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4158 GHz	-7.965 dBm																																																			
2	N	1	f	24.648 GHz	-40.722 dBm																																																			
3	N	1	f	4.7549 GHz	-55.831 dBm																																																			
4	N	1	f	7.2104 GHz	-53.672 dBm																																																			
5	N	1	f	9.5318 GHz	-54.872 dBm																																																			
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4361 GHz</td><td>-7.342 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.648 GHz</td><td>-41.287 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7752 GHz</td><td>-55.306 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1416 GHz</td><td>-54.304 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5788 GHz</td><td>-54.154 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4361 GHz	-7.342 dBm				2	N	1	f	24.648 GHz	-41.287 dBm				3	N	1	f	4.7752 GHz	-55.306 dBm				4	N	1	f	7.1416 GHz	-54.304 dBm				5	N	1	f	9.5788 GHz	-54.154 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4361 GHz	-7.342 dBm																																																			
2	N	1	f	24.648 GHz	-41.287 dBm																																																			
3	N	1	f	4.7752 GHz	-55.306 dBm																																																			
4	N	1	f	7.1416 GHz	-54.304 dBm																																																			
5	N	1	f	9.5788 GHz	-54.154 dBm																																																			
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4608 GHz</td><td>-8.142 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.438 GHz</td><td>-41.146 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.1081 GHz</td><td>-54.188 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5219 GHz</td><td>-53.880 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>10.0215 GHz</td><td>-54.500 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4608 GHz	-8.142 dBm				2	N	1	f	25.438 GHz	-41.146 dBm				3	N	1	f	5.1081 GHz	-54.188 dBm				4	N	1	f	7.5219 GHz	-53.880 dBm				5	N	1	f	10.0215 GHz	-54.500 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4608 GHz	-8.142 dBm																																																			
2	N	1	f	25.438 GHz	-41.146 dBm																																																			
3	N	1	f	5.1081 GHz	-54.188 dBm																																																			
4	N	1	f	7.5219 GHz	-53.880 dBm																																																			
5	N	1	f	10.0215 GHz	-54.500 dBm																																																			


802.11n (HT40)/ LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.417 6 GHz -10.035 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>dBm</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.417 6 GHz</td><td>-10.035 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.685 9 GHz</td><td>-41.511 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.758 1 GHz</td><td>-55.626 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.076 3 GHz</td><td>-54.575 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.533 6 GHz</td><td>-53.891 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.417 6 GHz	-10.035 dBm				2	N	1	f	24.685 9 GHz	-41.511 dBm				3	N	1	f	4.758 1 GHz	-55.626 dBm				4	N	1	f	7.076 3 GHz	-54.575 dBm				5	N	1	f	9.533 6 GHz	-53.891 dBm			
MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.417 6 GHz	-10.035 dBm																																																		
2	N	1	f	24.685 9 GHz	-41.511 dBm																																																		
3	N	1	f	4.758 1 GHz	-55.626 dBm																																																		
4	N	1	f	7.076 3 GHz	-54.575 dBm																																																		
5	N	1	f	9.533 6 GHz	-53.891 dBm																																																		
802.11 n(HT40) /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.439 7 GHz -10.494 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>dBm</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 7 GHz</td><td>-10.494 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.077 7 GHz</td><td>-39.741 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.009 0 GHz</td><td>-54.792 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.403 7 GHz</td><td>-53.679 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.561 0 GHz</td><td>-54.694 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 7 GHz	-10.494 dBm				2	N	1	f	25.077 7 GHz	-39.741 dBm				3	N	1	f	5.009 0 GHz	-54.792 dBm				4	N	1	f	7.403 7 GHz	-53.679 dBm				5	N	1	f	9.561 0 GHz	-54.694 dBm			
MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 7 GHz	-10.494 dBm																																																		
2	N	1	f	25.077 7 GHz	-39.741 dBm																																																		
3	N	1	f	5.009 0 GHz	-54.792 dBm																																																		
4	N	1	f	7.403 7 GHz	-53.679 dBm																																																		
5	N	1	f	9.561 0 GHz	-54.694 dBm																																																		
802.11 n(HT40) /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.456 4 GHz -10.922 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>dBm</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.456 4 GHz</td><td>-10.922 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.640 9 GHz</td><td>-41.159 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.059 3 GHz</td><td>-55.134 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.350 7 GHz</td><td>-54.713 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.619 2 GHz</td><td>-54.953 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.456 4 GHz	-10.922 dBm				2	N	1	f	24.640 9 GHz	-41.159 dBm				3	N	1	f	5.059 3 GHz	-55.134 dBm				4	N	1	f	7.350 7 GHz	-54.713 dBm				5	N	1	f	9.619 2 GHz	-54.953 dBm			
MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.456 4 GHz	-10.922 dBm																																																		
2	N	1	f	24.640 9 GHz	-41.159 dBm																																																		
3	N	1	f	5.059 3 GHz	-55.134 dBm																																																		
4	N	1	f	7.350 7 GHz	-54.713 dBm																																																		
5	N	1	f	9.619 2 GHz	-54.953 dBm																																																		

ANT2:




BAND EDGE Graphs

802.11g/LCH

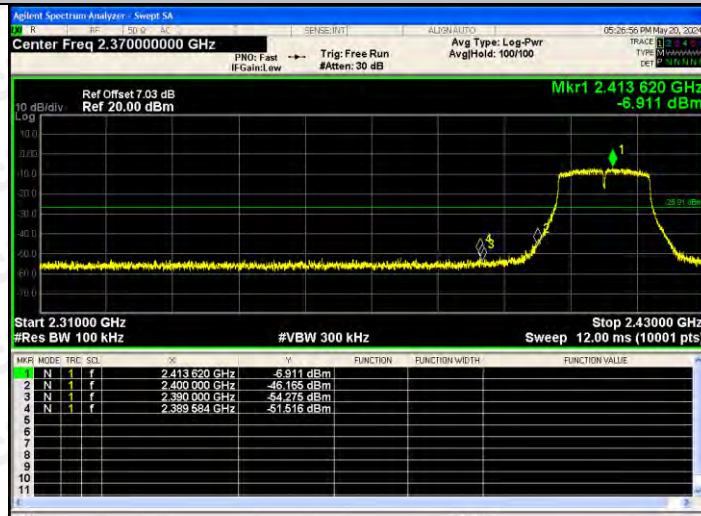


802.11g/HCH

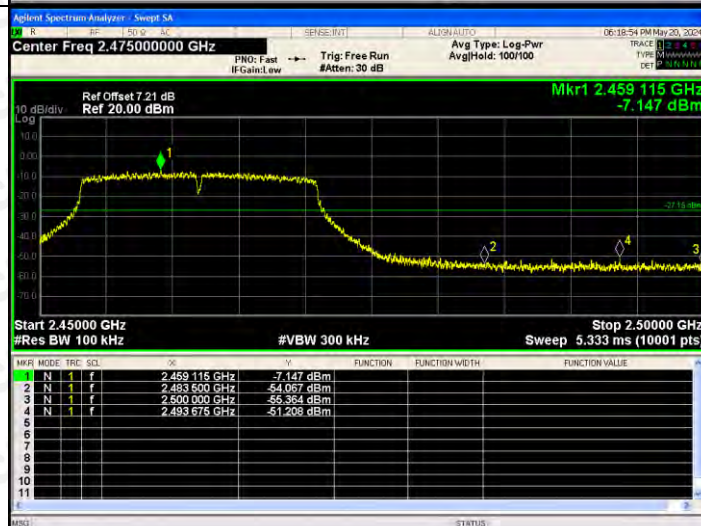

BAND EDGE Graphs

802.11n(HT20)/L
CH

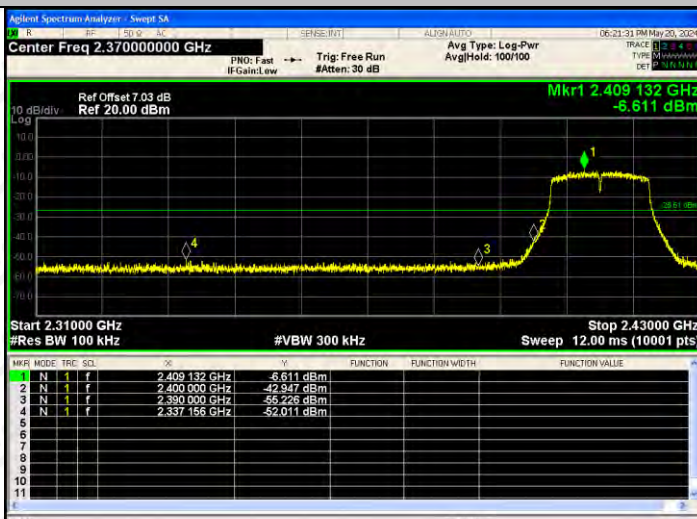


802.11n(HT20)/H
CH



BAND EDGE Graphs

802.11n(HT40)/L
CH

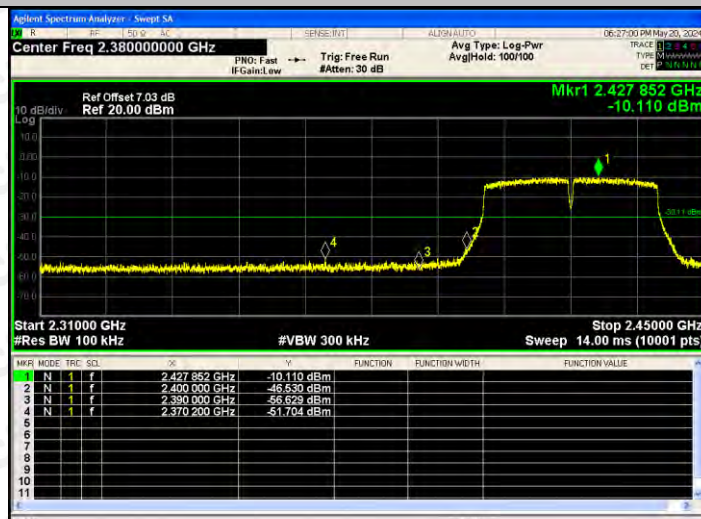




802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

802.11b /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.410 5 GHz -1.296 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) MFR MODE TRC SQZ F FZ FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 2.410 5 GHz -1.296 dBm 2 N 1 f 24.628 6 GHz -40.726 dBm 3 N 1 f 5.004 6 GHz -53.837 dBm 4 N 1 f 7.124 0 GHz -54.106 dBm 5 N 1 f 9.540 7 GHz -54.146 dBm	
802.11b /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.436 1 GHz -2.286 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) MFR MODE TRC SQZ F FZ FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 2.436 1 GHz -2.286 dBm 2 N 1 f 25.099 7 GHz -40.420 dBm 3 N 1 f 4.904 9 GHz -54.940 dBm 4 N 1 f 7.136 3 GHz -53.959 dBm 5 N 1 f 9.581 3 GHz -52.703 dBm	
802.11b /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.460 8 GHz -2.967 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) MFR MODE TRC SQZ F FZ FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 2.460 8 GHz -2.967 dBm 2 N 1 f 24.628 6 GHz -40.458 dBm 3 N 1 f 4.814 9 GHz -56.398 dBm 4 N 1 f 7.204 3 GHz -54.951 dBm 5 N 1 f 9.767 4 GHz -53.669 dBm	




RF Conducted Spurious Emissions Graphs

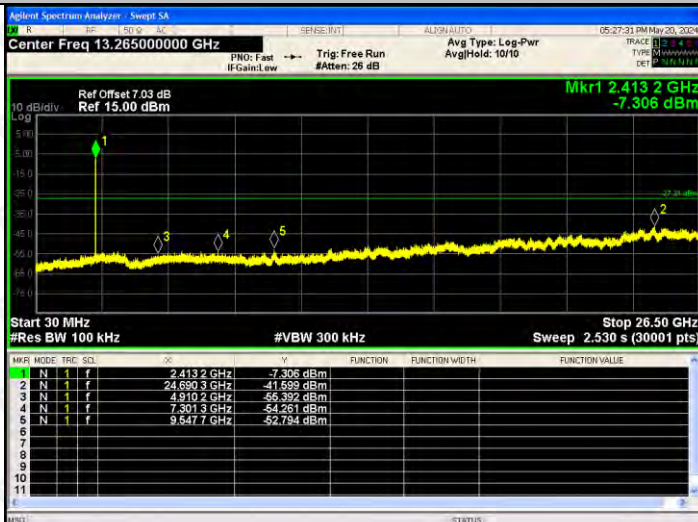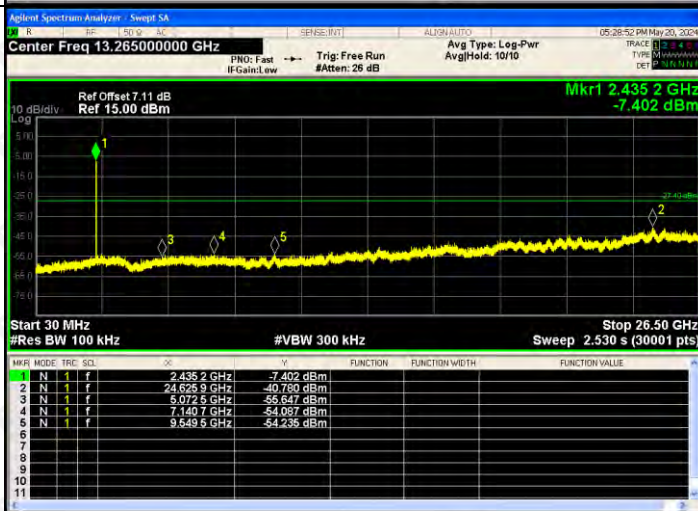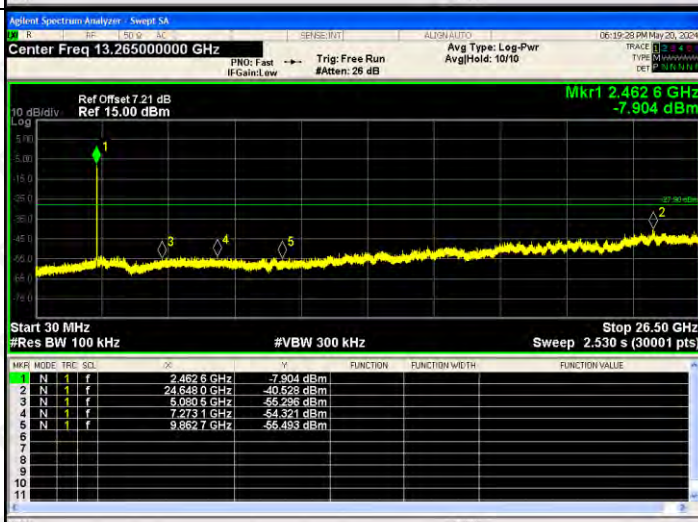802.11g /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4132 GHz</td><td>-7.306 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6903 GHz</td><td>-41.699 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9102 GHz</td><td>-55.392 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5013 GHz</td><td>-54.261 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5417 GHz</td><td>-52.734 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4132 GHz	-7.306 dBm				2	N	1	f	24.6903 GHz	-41.699 dBm				3	N	1	f	4.9102 GHz	-55.392 dBm				4	N	1	f	7.5013 GHz	-54.261 dBm				5	N	1	f	9.5417 GHz	-52.734 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4132 GHz	-7.306 dBm																																																			
2	N	1	f	24.6903 GHz	-41.699 dBm																																																			
3	N	1	f	4.9102 GHz	-55.392 dBm																																																			
4	N	1	f	7.5013 GHz	-54.261 dBm																																																			
5	N	1	f	9.5417 GHz	-52.734 dBm																																																			
802.11g /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4352 GHz</td><td>-7.402 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6269 GHz</td><td>-40.790 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0725 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1407 GHz</td><td>-54.087 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5495 GHz</td><td>-54.239 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4352 GHz	-7.402 dBm				2	N	1	f	24.6269 GHz	-40.790 dBm				3	N	1	f	5.0725 GHz	-55.647 dBm				4	N	1	f	7.1407 GHz	-54.087 dBm				5	N	1	f	9.5495 GHz	-54.239 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4352 GHz	-7.402 dBm																																																			
2	N	1	f	24.6269 GHz	-40.790 dBm																																																			
3	N	1	f	5.0725 GHz	-55.647 dBm																																																			
4	N	1	f	7.1407 GHz	-54.087 dBm																																																			
5	N	1	f	9.5495 GHz	-54.239 dBm																																																			
802.11g /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4626 GHz</td><td>-7.904 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6480 GHz</td><td>-40.528 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0805 GHz</td><td>-55.236 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2731 GHz</td><td>-54.321 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6627 GHz</td><td>-55.493 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4626 GHz	-7.904 dBm				2	N	1	f	24.6480 GHz	-40.528 dBm				3	N	1	f	5.0805 GHz	-55.236 dBm				4	N	1	f	7.2731 GHz	-54.321 dBm				5	N	1	f	9.6627 GHz	-55.493 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4626 GHz	-7.904 dBm																																																			
2	N	1	f	24.6480 GHz	-40.528 dBm																																																			
3	N	1	f	5.0805 GHz	-55.236 dBm																																																			
4	N	1	f	7.2731 GHz	-54.321 dBm																																																			
5	N	1	f	9.6627 GHz	-55.493 dBm																																																			

RF Conducted Spurious Emissions Graphs

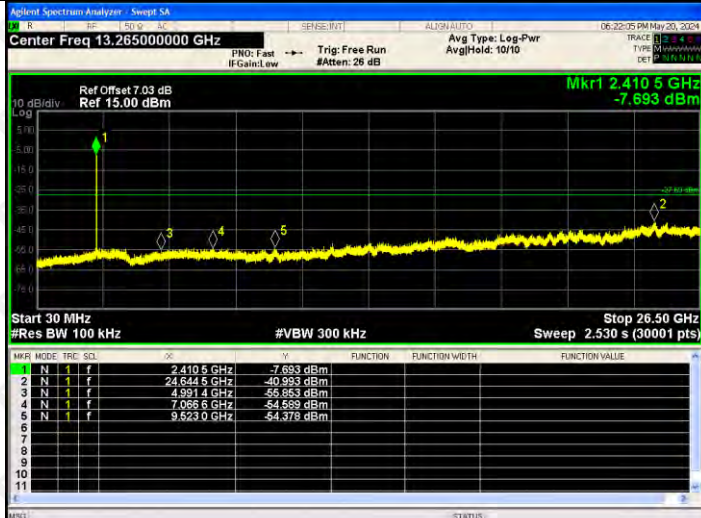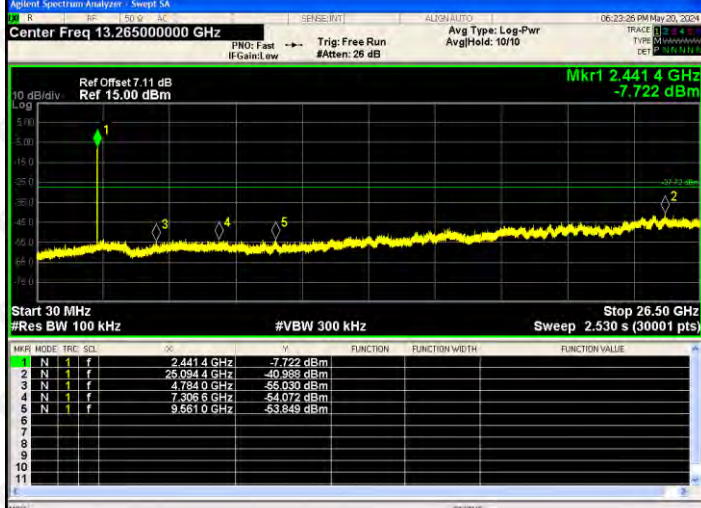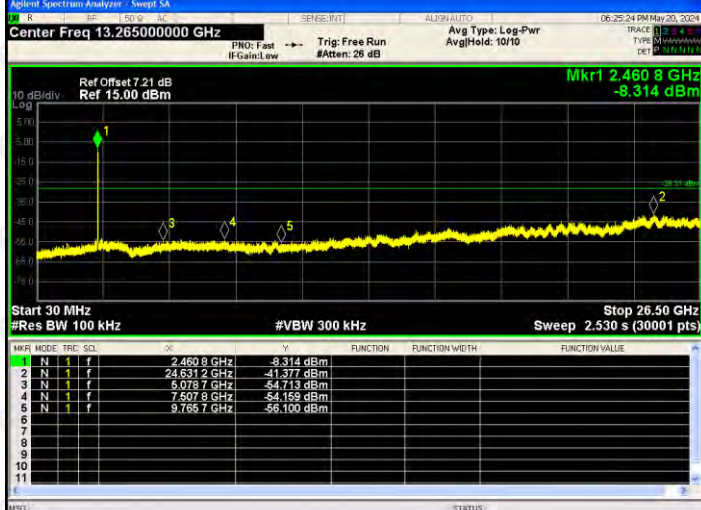802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4105 GHz</td><td>-7.693 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6445 GHz</td><td>-40.993 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9914 GHz</td><td>-55.853 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.0655 GHz</td><td>-54.359 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5230 GHz</td><td>-54.379 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4105 GHz	-7.693 dBm				2	N	1	f	24.6445 GHz	-40.993 dBm				3	N	1	f	4.9914 GHz	-55.853 dBm				4	N	1	f	7.0655 GHz	-54.359 dBm				5	N	1	f	9.5230 GHz	-54.379 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4105 GHz	-7.693 dBm																																																			
2	N	1	f	24.6445 GHz	-40.993 dBm																																																			
3	N	1	f	4.9914 GHz	-55.853 dBm																																																			
4	N	1	f	7.0655 GHz	-54.359 dBm																																																			
5	N	1	f	9.5230 GHz	-54.379 dBm																																																			
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4414 GHz</td><td>-7.722 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0944 GHz</td><td>-40.998 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7840 GHz</td><td>-55.030 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.3056 GHz</td><td>-54.072 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5610 GHz</td><td>-53.849 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-7.722 dBm				2	N	1	f	25.0944 GHz	-40.998 dBm				3	N	1	f	4.7840 GHz	-55.030 dBm				4	N	1	f	7.3056 GHz	-54.072 dBm				5	N	1	f	9.5610 GHz	-53.849 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4414 GHz	-7.722 dBm																																																			
2	N	1	f	25.0944 GHz	-40.998 dBm																																																			
3	N	1	f	4.7840 GHz	-55.030 dBm																																																			
4	N	1	f	7.3056 GHz	-54.072 dBm																																																			
5	N	1	f	9.5610 GHz	-53.849 dBm																																																			
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4608 GHz</td><td>-8.314 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6312 GHz</td><td>-41.377 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0787 GHz</td><td>-54.713 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5078 GHz</td><td>-54.159 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.7657 GHz</td><td>-56.100 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4608 GHz	-8.314 dBm				2	N	1	f	24.6312 GHz	-41.377 dBm				3	N	1	f	5.0787 GHz	-54.713 dBm				4	N	1	f	7.5078 GHz	-54.159 dBm				5	N	1	f	9.7657 GHz	-56.100 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4608 GHz	-8.314 dBm																																																			
2	N	1	f	24.6312 GHz	-41.377 dBm																																																			
3	N	1	f	5.0787 GHz	-54.713 dBm																																																			
4	N	1	f	7.5078 GHz	-54.159 dBm																																																			
5	N	1	f	9.7657 GHz	-56.100 dBm																																																			

RF Conducted Spurious Emissions Graphs

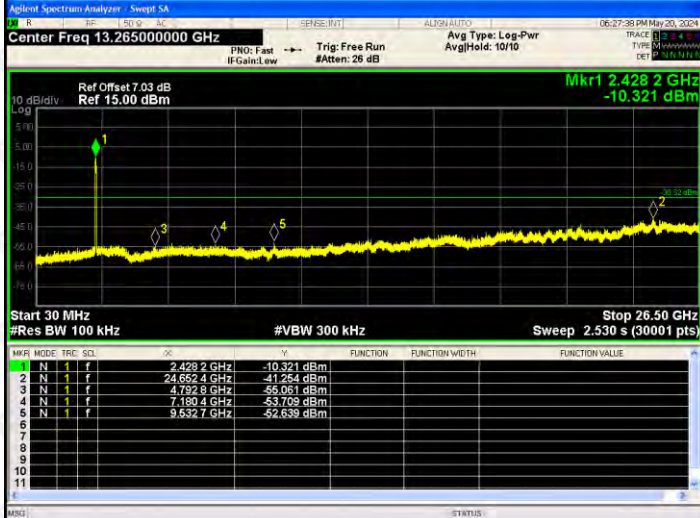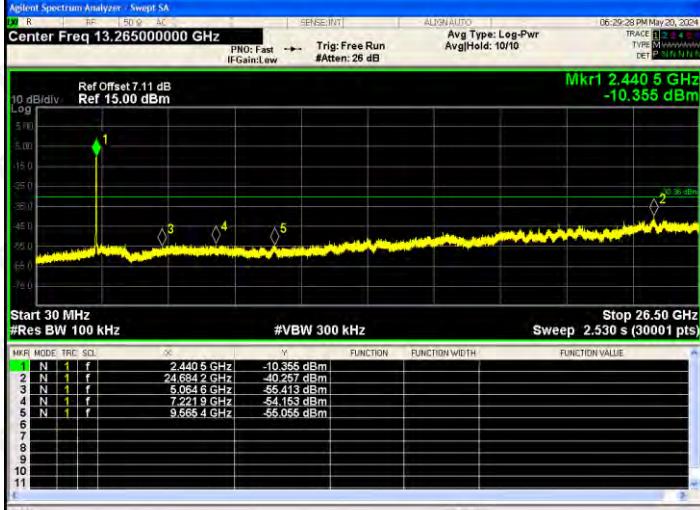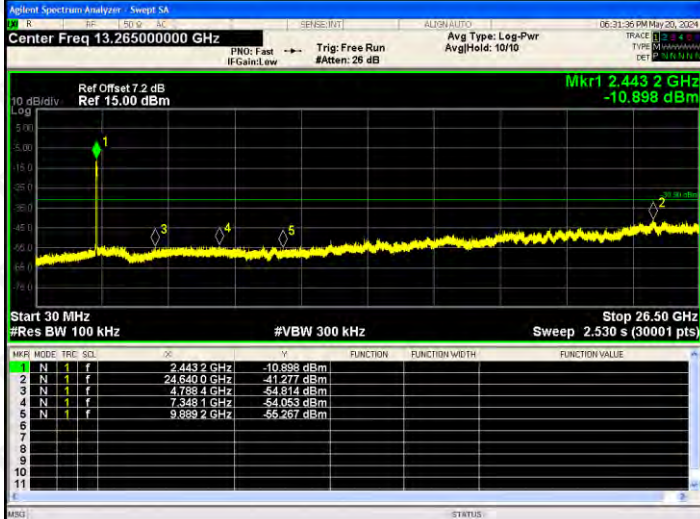802.11 n(HT40) /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.428 2 GHz</td><td>-10.321 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.652 4 GHz</td><td>-41.264 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.792 8 GHz</td><td>-55.051 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.180 4 GHz</td><td>-53.709 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.532 7 GHz</td><td>-52.639 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.428 2 GHz	-10.321 dBm				2	N	1	f	24.652 4 GHz	-41.264 dBm				3	N	1	f	4.792 8 GHz	-55.051 dBm				4	N	1	f	7.180 4 GHz	-53.709 dBm				5	N	1	f	9.532 7 GHz	-52.639 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.428 2 GHz	-10.321 dBm																																																		
2	N	1	f	24.652 4 GHz	-41.264 dBm																																																		
3	N	1	f	4.792 8 GHz	-55.051 dBm																																																		
4	N	1	f	7.180 4 GHz	-53.709 dBm																																																		
5	N	1	f	9.532 7 GHz	-52.639 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 5 GHz</td><td>-10.355 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.684 2 GHz</td><td>-40.267 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.064 6 GHz</td><td>-56.413 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.221 9 GHz</td><td>-54.153 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.555 4 GHz</td><td>-55.055 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-10.355 dBm				2	N	1	f	24.684 2 GHz	-40.267 dBm				3	N	1	f	5.064 6 GHz	-56.413 dBm				4	N	1	f	7.221 9 GHz	-54.153 dBm				5	N	1	f	9.555 4 GHz	-55.055 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 5 GHz	-10.355 dBm																																																		
2	N	1	f	24.684 2 GHz	-40.267 dBm																																																		
3	N	1	f	5.064 6 GHz	-56.413 dBm																																																		
4	N	1	f	7.221 9 GHz	-54.153 dBm																																																		
5	N	1	f	9.555 4 GHz	-55.055 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.443 2 GHz</td><td>-10.898 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.640 0 GHz</td><td>-41.277 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.788 4 GHz</td><td>-54.814 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.348 1 GHz</td><td>-54.053 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 2 GHz</td><td>-55.207 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.443 2 GHz	-10.898 dBm				2	N	1	f	24.640 0 GHz	-41.277 dBm				3	N	1	f	4.788 4 GHz	-54.814 dBm				4	N	1	f	7.348 1 GHz	-54.053 dBm				5	N	1	f	9.599 2 GHz	-55.207 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.443 2 GHz	-10.898 dBm																																																		
2	N	1	f	24.640 0 GHz	-41.277 dBm																																																		
3	N	1	f	4.788 4 GHz	-54.814 dBm																																																		
4	N	1	f	7.348 1 GHz	-54.053 dBm																																																		
5	N	1	f	9.599 2 GHz	-55.207 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.516	14.209	/	30
	MCH	14.247	14.127	/	30
	HCH	14.207	13.928	/	30
802.11g	LCH	14.406	14.328	/	30
	MCH	14.141	14.117	/	30
	HCH	13.514	13.704	/	30
802.11n(HT20)	LCH	14.551	14.630	17.601	30
	MCH	14.535	13.513	17.064	30
	HCH	13.514	13.700	16.618	30
802.11n(HT40)	LCH	14.451	14.526	17.499	30
	MCH	14.130	14.116	17.133	30
	HCH	13.894	13.901	16.908	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

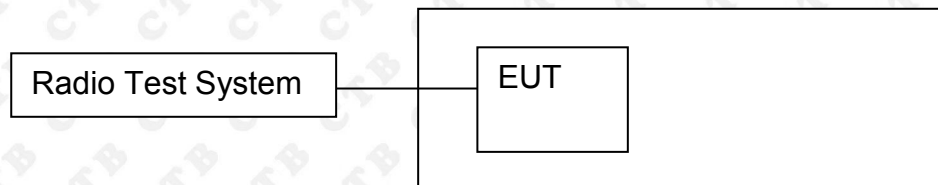

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.218	500	PASS
	MCH	10.211	500	PASS
	HCH	10.186	500	PASS
802.11g	LCH	16.434	500	PASS
	MCH	16.423	500	PASS
	HCH	16.448	500	PASS
802.11n(HT20)	LCH	17.632	500	PASS
	MCH	17.633	500	PASS
	HCH	17.619	500	PASS
802.11n(HT40)	LCH	36.437	500	PASS
	MCH	36.427	500	PASS
	HCH	36.400	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.200	500	PASS
	MCH	10.201	500	PASS
	HCH	10.199	500	PASS
802.11g	LCH	16.427	500	PASS
	MCH	16.441	500	PASS
	HCH	17.623	500	PASS
802.11n(HT20)	LCH	17.644	500	PASS
	MCH	17.637	500	PASS
	HCH	17.609	500	PASS
802.11n(HT40)	LCH	36.432	500	PASS
	MCH	36.404	500	PASS
	HCH	36.413	500	PASS

ANT1:


Test Graph:




802.11g/LCH

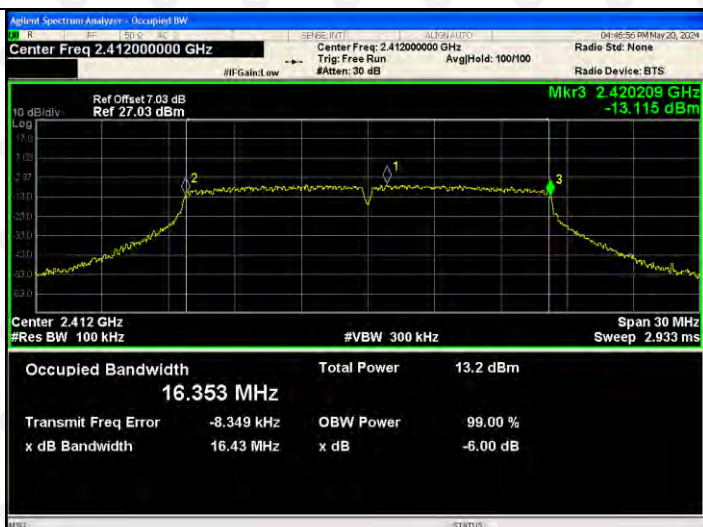




802.11g/MCH

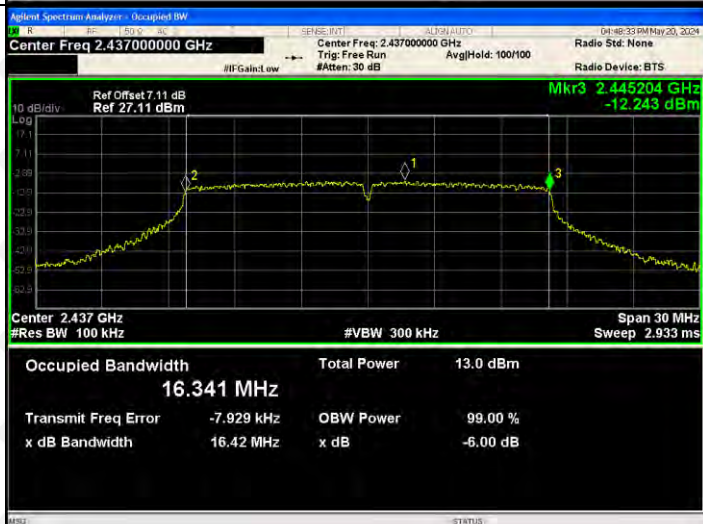

802.11g/HCH

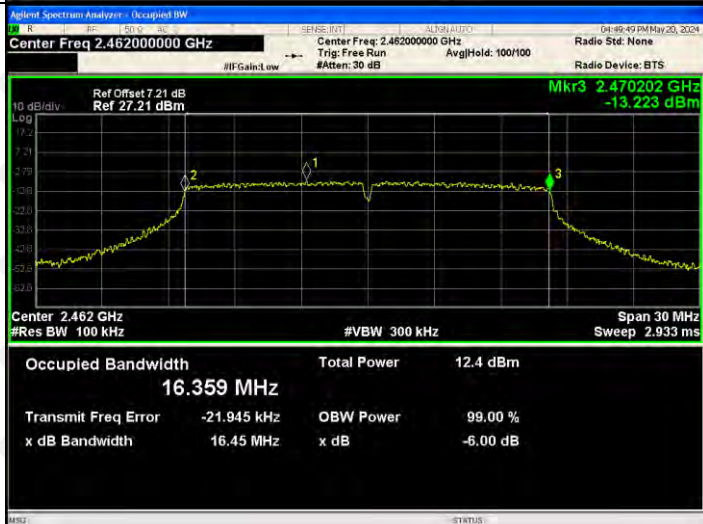

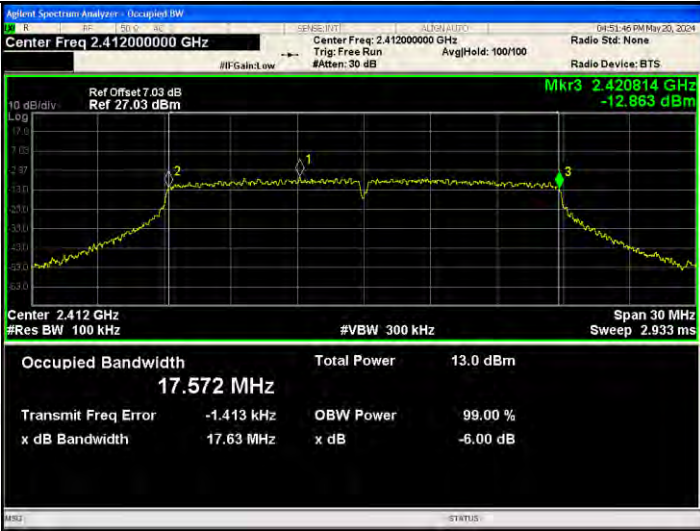802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420814 GHz -12.863 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.572 MHz Total Power 13.0 dBm Transmit Freq Error -1.413 kHz OBW Power 99.00 % x dB Bandwidth 17.63 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.445822 GHz -12.554 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.560 MHz Total Power 13.0 dBm Transmit Freq Error 5.491 kHz OBW Power 99.00 % x dB Bandwidth 17.63 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470793 GHz -13.138 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.579 MHz Total Power 12.0 dBm Transmit Freq Error -16.620 kHz OBW Power 99.00 % x dB Bandwidth 17.62 MHz x dB -6.00 dB

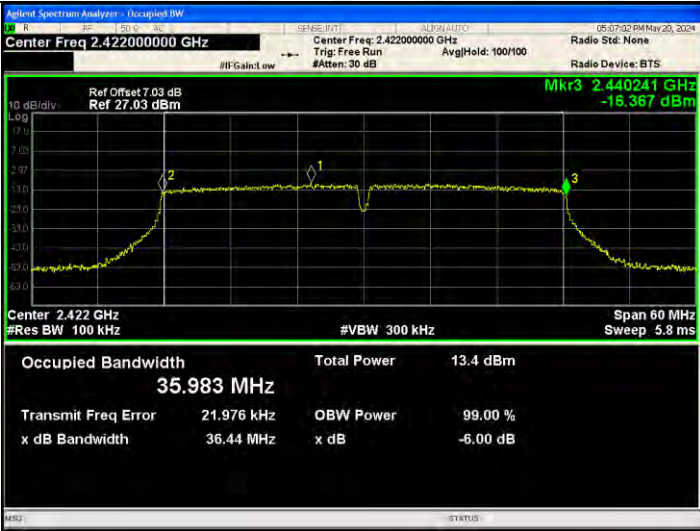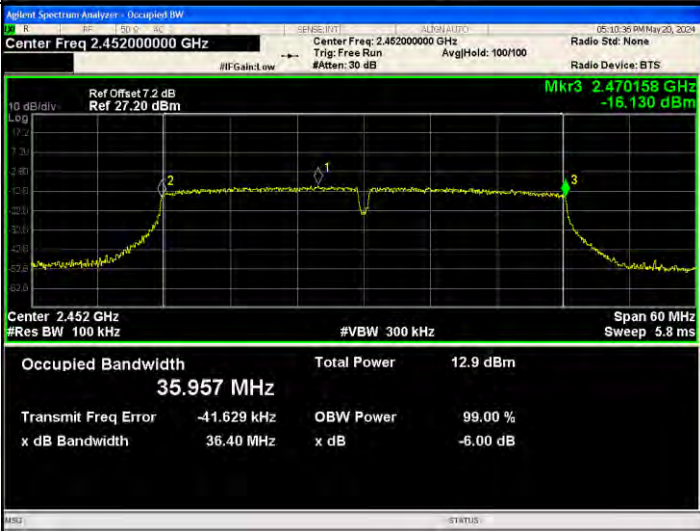
802.11n(HT40)/LC H		
802.11n(HT40)/MC H		
802.11n(HT40)/HC H		

ANT2:


Test Graph:



802.11g/LCH


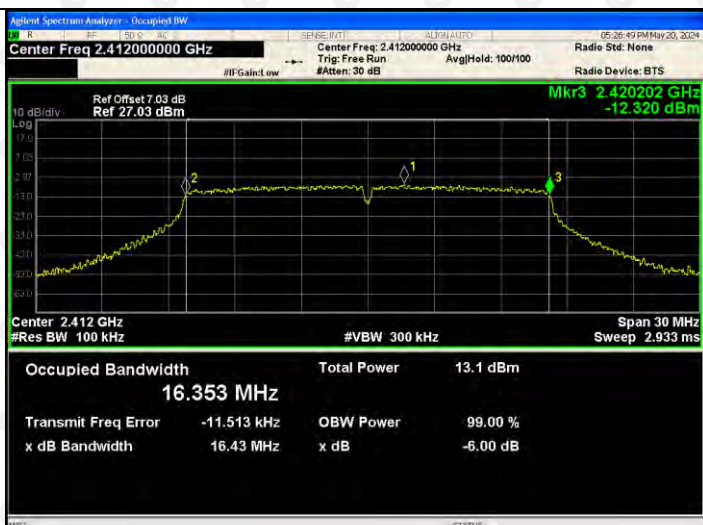




802.11g/MCH

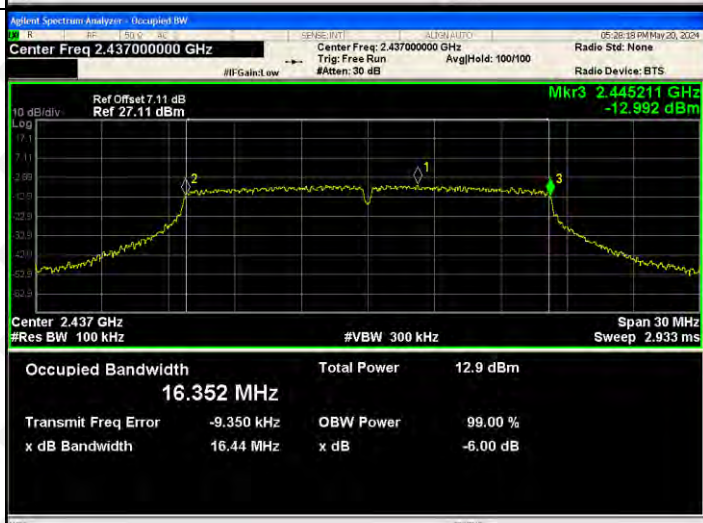

802.11g/HCH

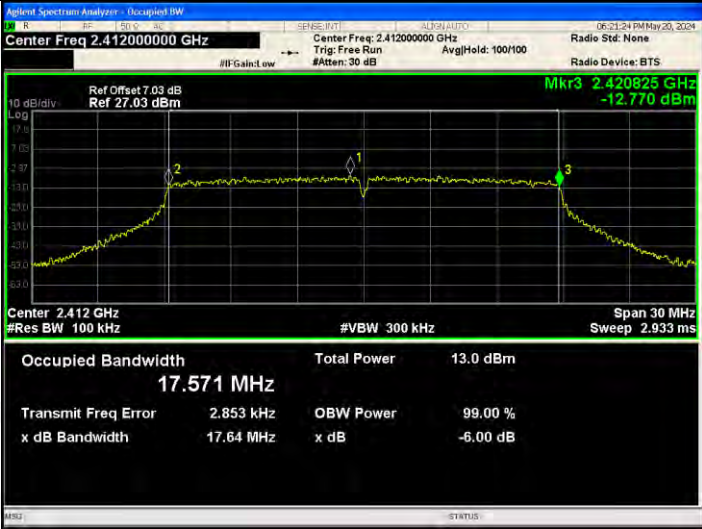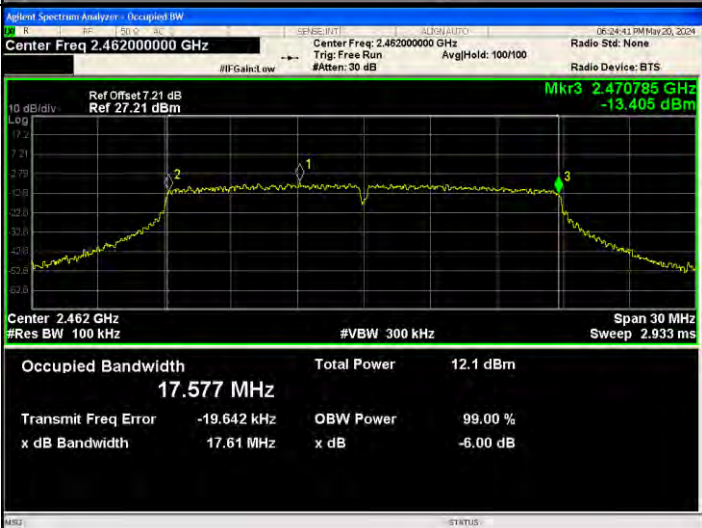


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420825 GHz -12.770 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.571 MHz Total Power 13.0 dBm Transmit Freq Error 2.853 kHz OBW Power 99.00 % x dB Bandwidth 17.64 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.450807 GHz -12.376 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.557 MHz Total Power 12.8 dBm Transmit Freq Error 4.9881 MHz OBW Power 99.00 % x dB Bandwidth 17.64 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470785 GHz -13.405 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.577 MHz Total Power 12.1 dBm Transmit Freq Error -19.642 kHz OBW Power 99.00 % x dB Bandwidth 17.61 MHz x dB -6.00 dB

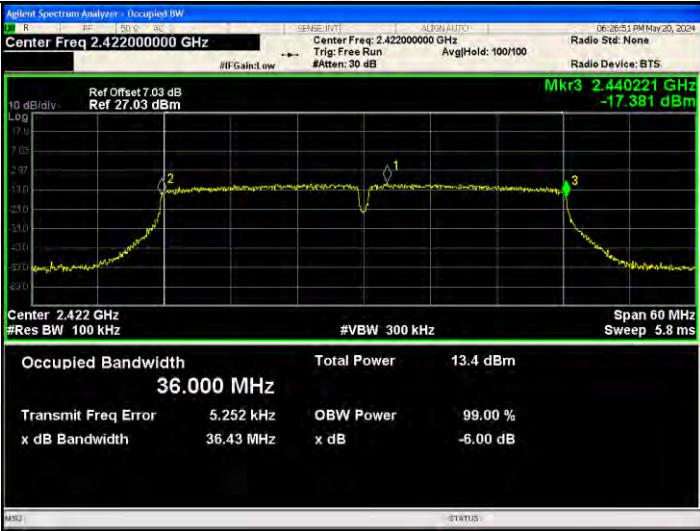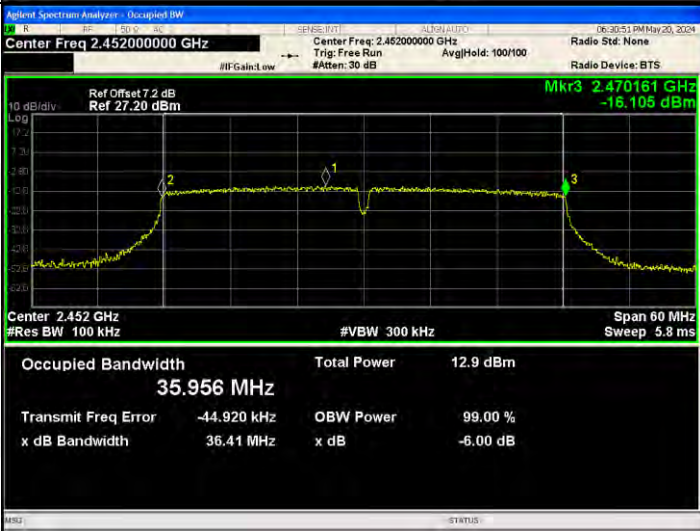802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Center 2.422 GHz #Res BW 100 kHz Occupied Bandwidth 36.000 MHz Total Power 13.4 dBm Transmit Freq Error 5.252 kHz OBW Power 99.00 % x dB Bandwidth 36.43 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Center 2.437 GHz #Res BW 100 kHz Occupied Bandwidth 35.940 MHz Total Power 13.1 dBm Transmit Freq Error -18.298 kHz OBW Power 99.00 % x dB Bandwidth 36.40 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Center 2.452 GHz #Res BW 100 kHz Occupied Bandwidth 35.956 MHz Total Power 12.9 dBm Transmit Freq Error -44.920 kHz OBW Power 99.00 % x dB Bandwidth 36.41 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

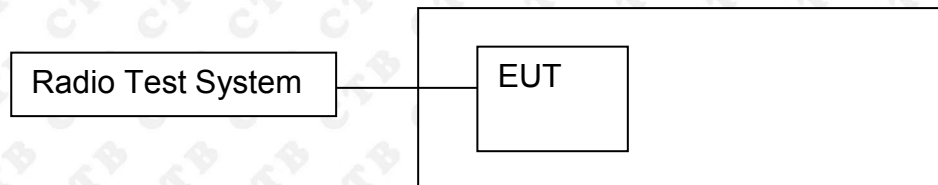

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result


Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-14.731	-14.817	/	8
	MCH	-15.030	-14.872	/	8
	HCH	-15.277	-15.118	/	8
802.11g	LCH	-17.143	-20.901	/	8
	MCH	-17.875	-21.101	/	8
	HCH	-19.288	-21.652	/	8
802.11n(H T20)	LCH	-17.520	-21.098	-15.940	8
	MCH	-18.567	-21.582	-16.808	8
	HCH	-19.338	-21.719	-17.357	8
802.11n(H T40)	LCH	-20.418	-22.877	-18.465	8
	MCH	-18.854	-23.085	-17.463	8
	HCH	-18.663	-22.540	-17.172	8

ANT1: Test Graph

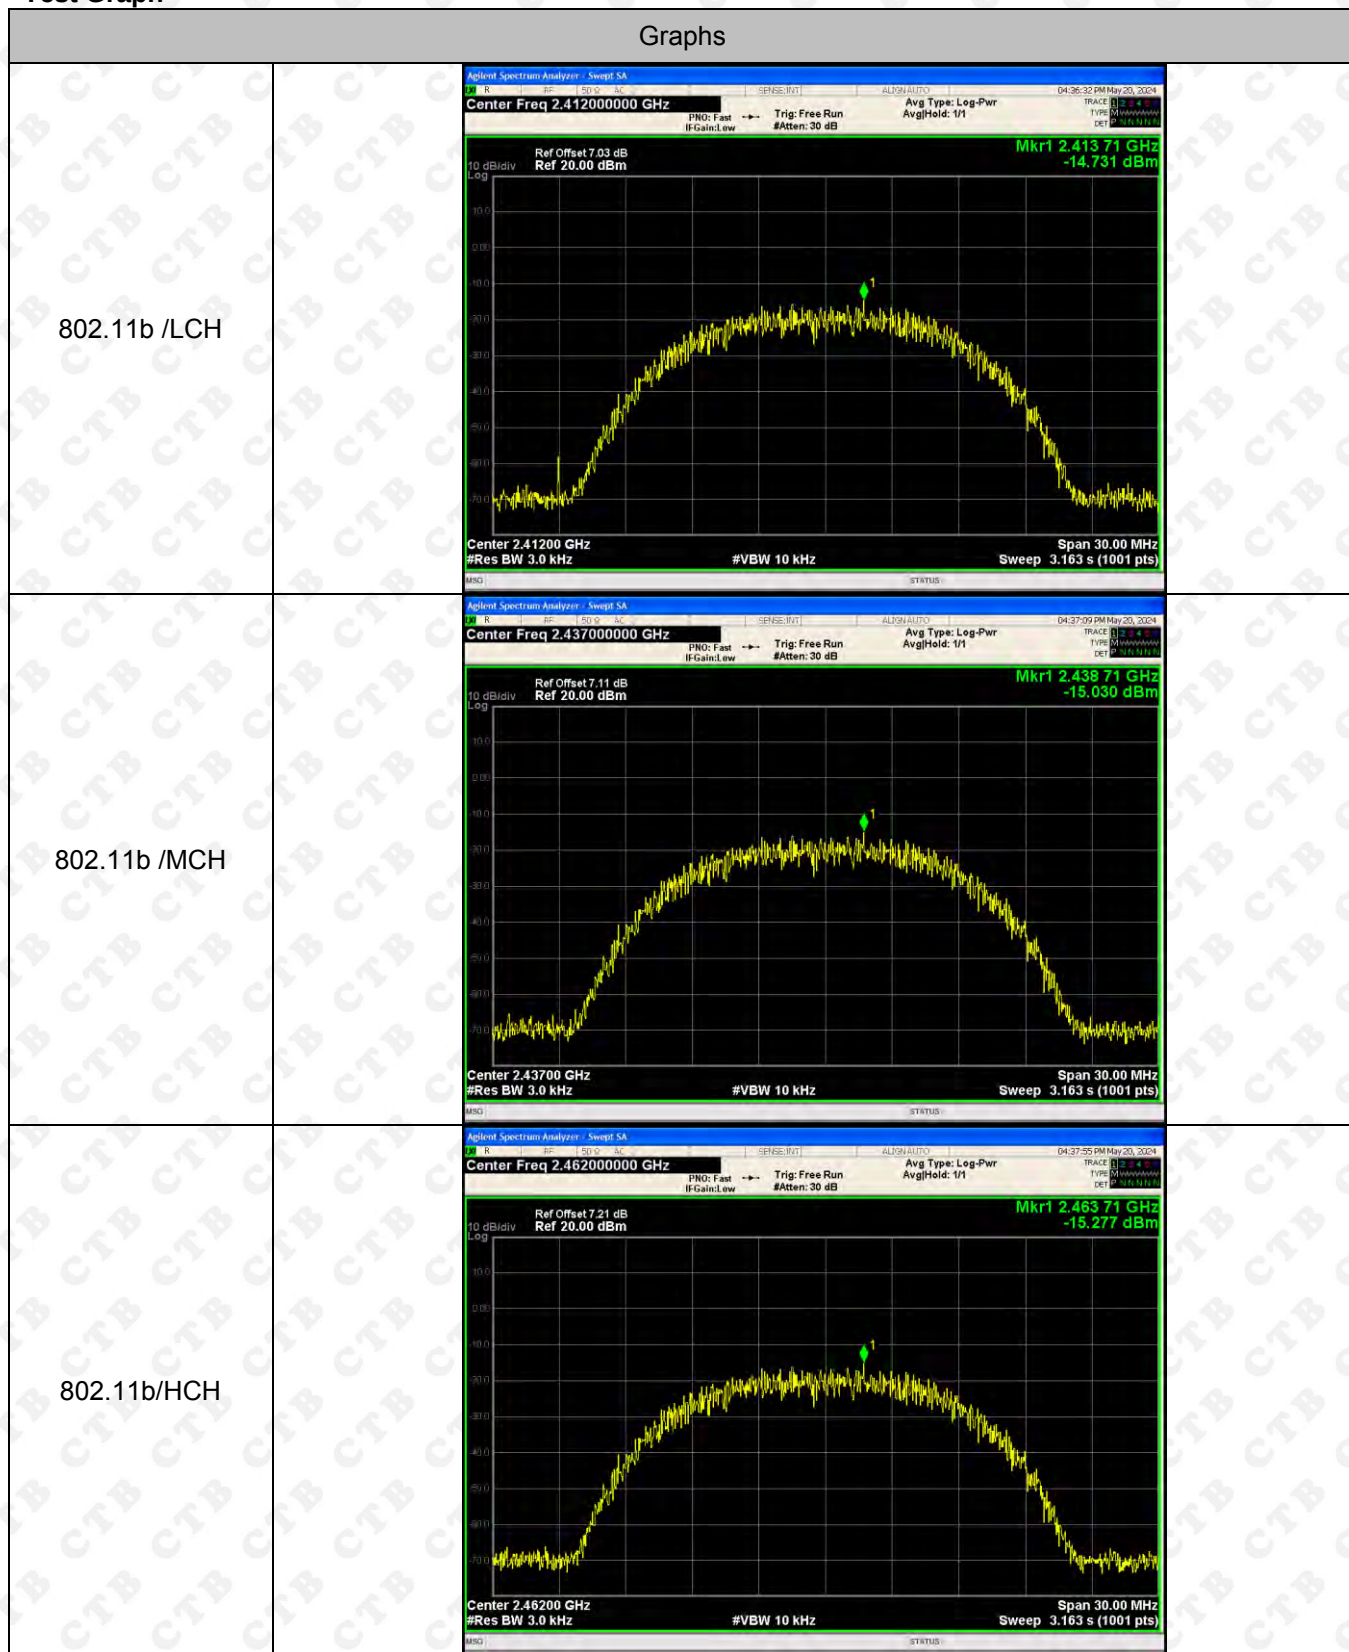


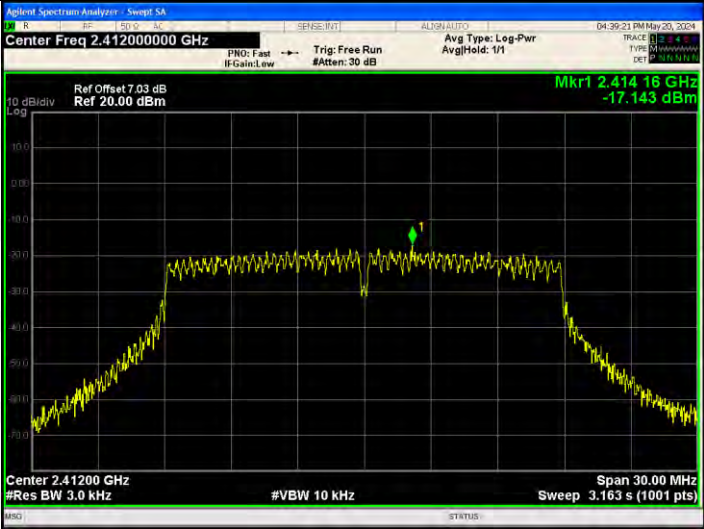
802.11g/LCH	
802.11g/MCH	
802.11g/HCH	



802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	


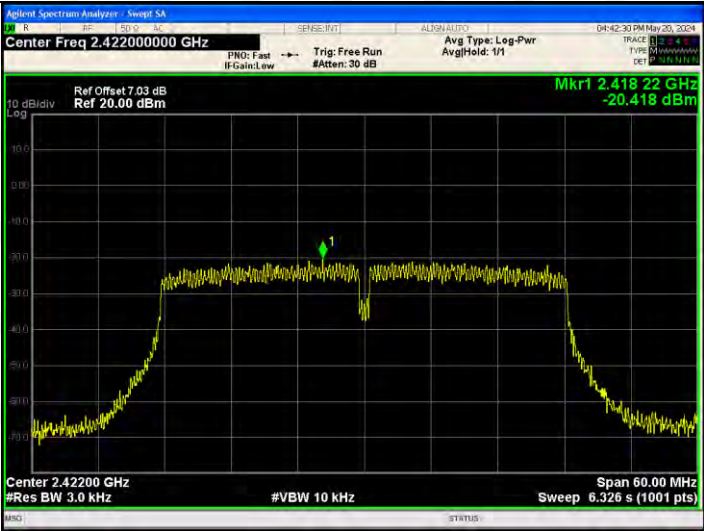
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.418 22 GHz -20.418 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.433 58 GHz -18.854 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.448 58 GHz -18.663 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

ANT 2: Test Graph

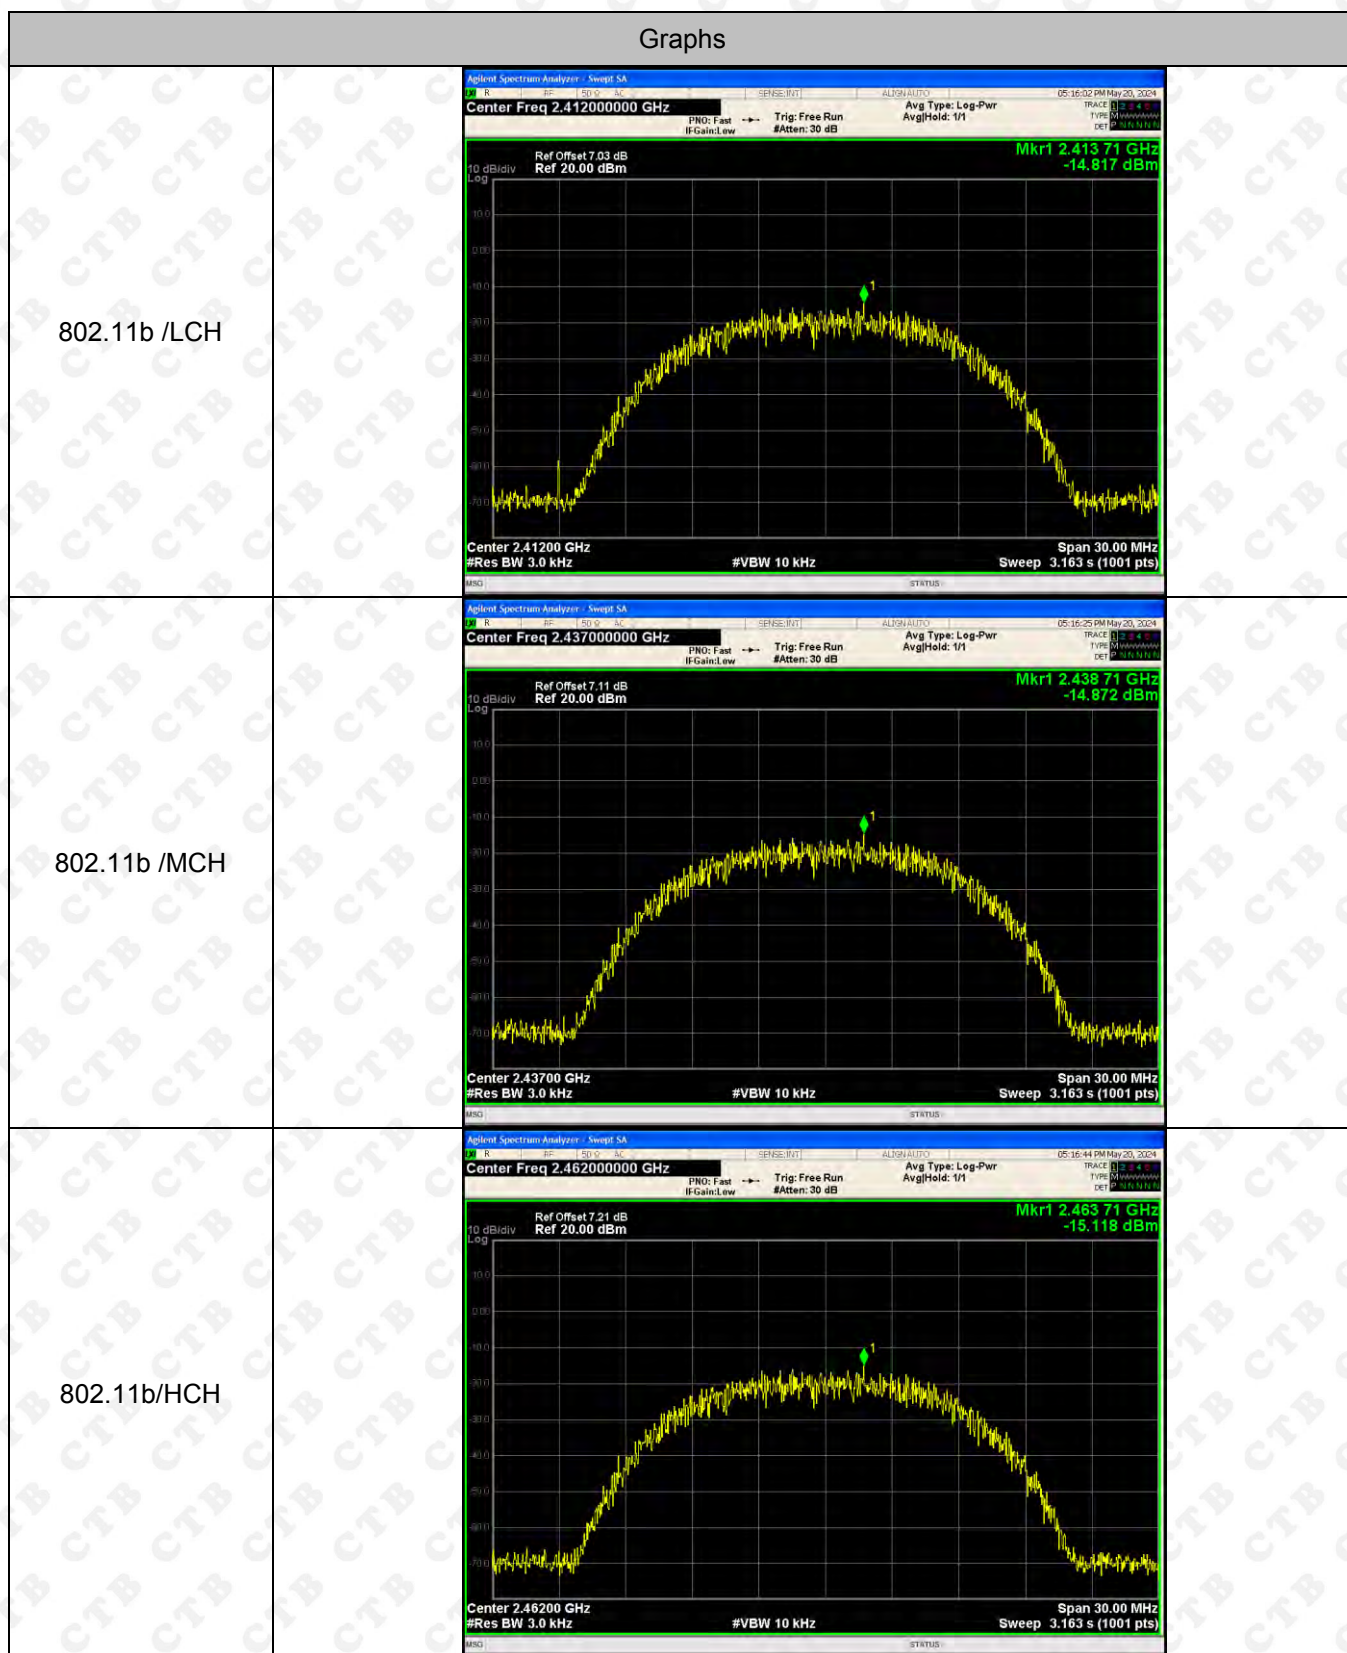

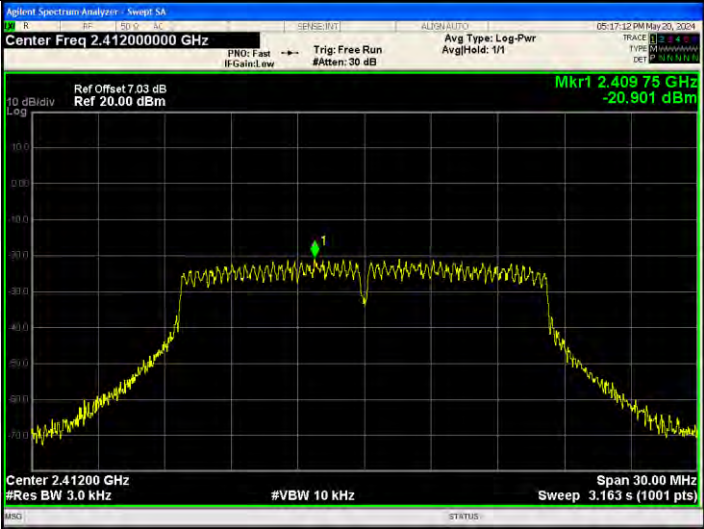802.11g/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40975 GHz -20.901 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43475 GHz -21.101 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.46104 GHz -21.652 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

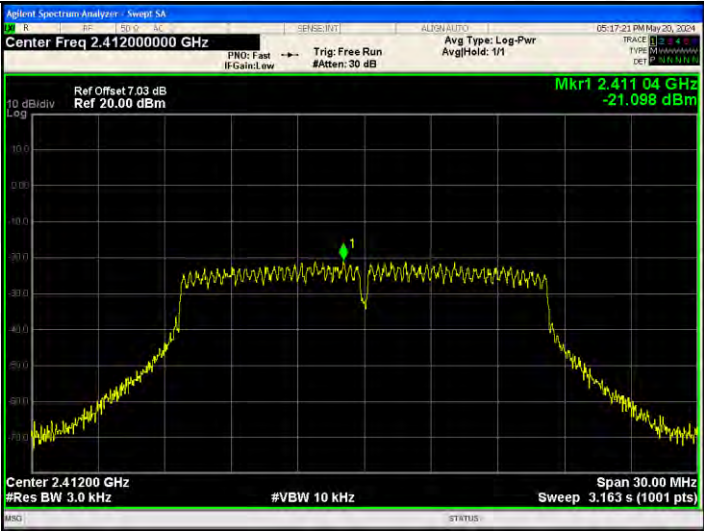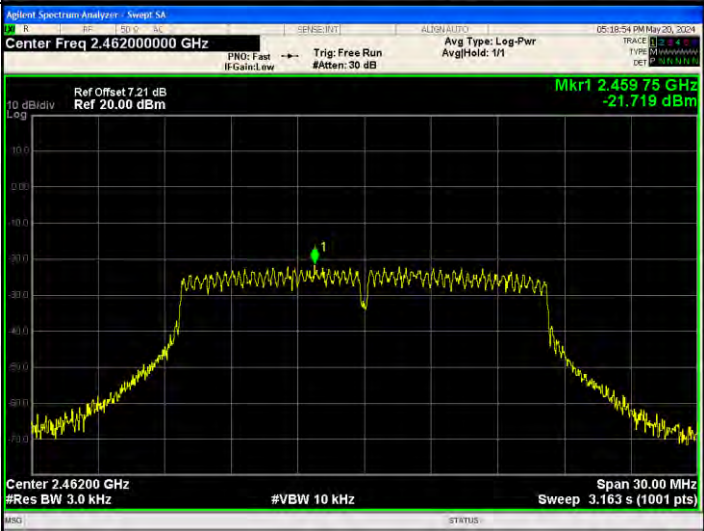802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

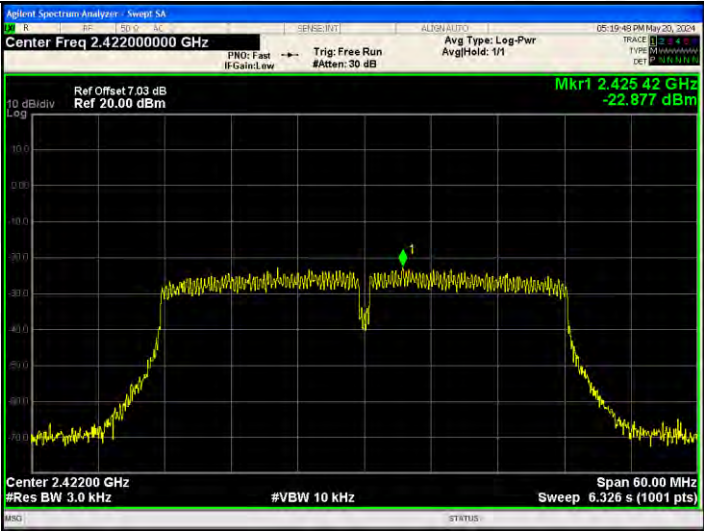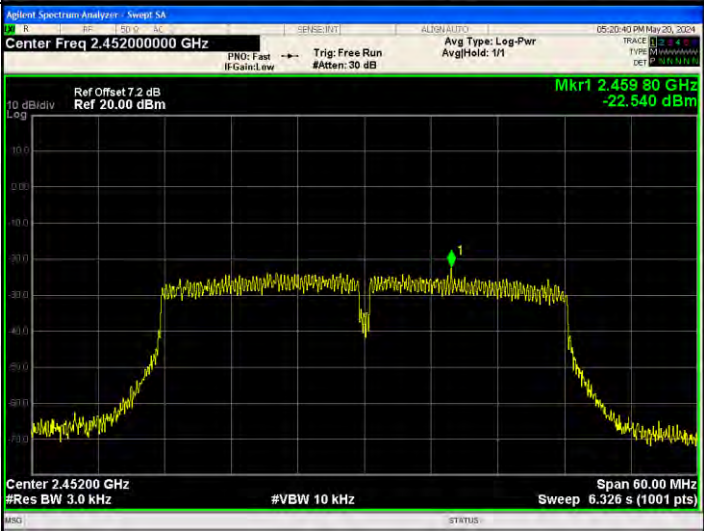802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.42542 GHz -22.877 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43322 GHz -23.085 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.45980 GHz -22.540 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Built-in antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 2.31dBi, Ant2: 2.31dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G

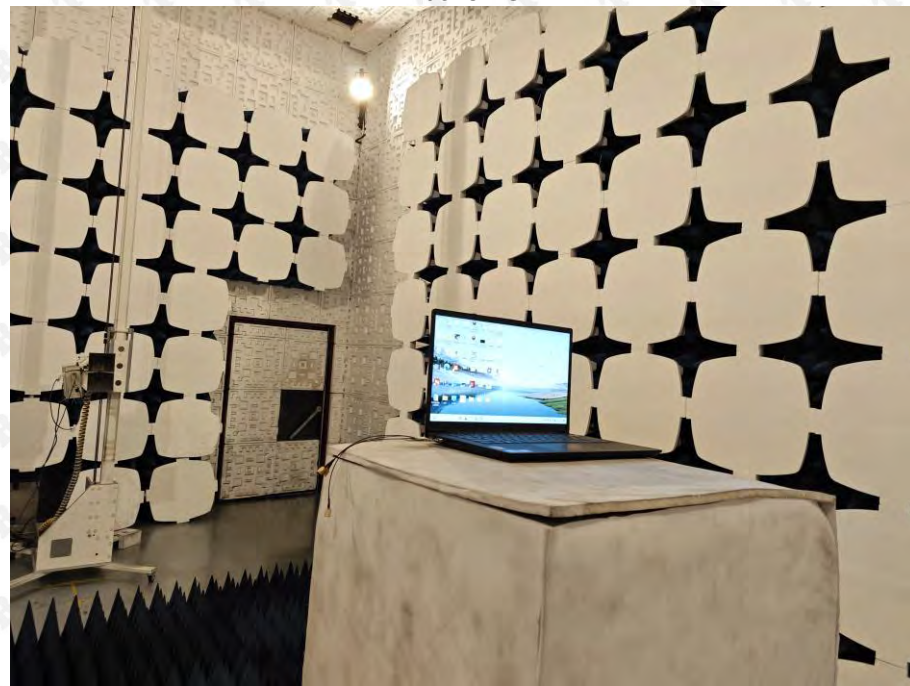

Conducted Emission

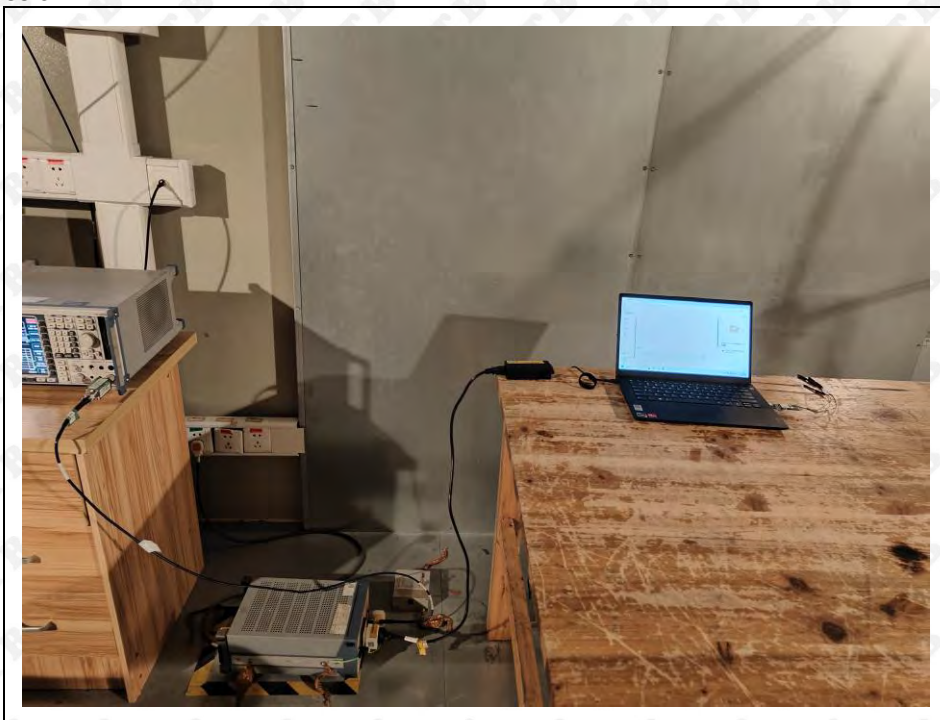

***** END OF REPORT *****