



# TEST REPORT

**Product Name** : projector  
**Brand Name** : Blackview  
**Model** : HY300  
**Series Model** : CY200,CY301,CY303,CY400,CY401,CY402,CY500,CY600,CY800  
                  ,CY900,S2,S4,X10,H5,N1,HY300mini,M1,V8,X5,HY320,S6,D5,V1  
**FCC ID** : 2BH6K-HY300  
**Applicant** : Shenzhen Dimao Technology Co., LTD  
                  603 Conrui Times Square, Keyuan Business Building, No. 39,  
**Address** : Huarong Road, Gaofeng Community, Dalang Street, Longhua  
                  District, Shenzhen  
**Manufacturer** : Shenzhen Dimao Technology Co., LTD  
                  603 Conrui Times Square, Keyuan Business Building, No. 39,  
**Address** : Huarong Road, Gaofeng Community, Dalang Street, Longhua  
                  District, Shenzhen  
**Standard(s)** : FCC CFR Title 47 Part 15 Subpart C Section 15.247  
**Date of Receipt** : June 25, 2024  
**Date of Test** : June 25, 2024~ July 12, 2024  
**Issued Date** : July 12, 2024

**Issued By:** **Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86 0755-230967639      Fax.: +86 0755-230967639

**Reviewed by:**

Jeon Yi

Leon.yi

**Approved by:**

Sean She

Sean She



Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited. If there is a need to alter or revise this document, the right belongs to Guangdong Asia Hongke Test Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.

**Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen,  
Guangdong, China.

**Report Revise Record**

Report Version	Issued Date	Notes
M1	July 12, 2024	Initial Release

## Contents

<b>1 TEST SUMMARY .....</b>	<b>4</b>
1.1 TEST STANDARDS.....	4
1.2 TEST SUMMARY .....	4
1.3 TEST FACILITY .....	5
1.4 MEASUREMENT UNCERTAINTY .....	5
<b>2 GENGGENERAL INFORMATION .....</b>	<b>6</b>
2.1 ENVIRONMENTAL CONDITIONS.....	6
2.2 GENERAL DESCRIPTION OF EUT .....	6
2.3 DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4 SPECIAL ACCESSORIES .....	8
2.5 EQUIPMENT LIST FOR THE TEST .....	8
<b>3 TEST CONDITIONS AND RESULTS .....</b>	<b>10</b>
3.1 CONDUCTED EMISSIONS TEST.....	10
3.2 RADIATED EMISSIONS AND BAND EDGE .....	13
3.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	20
3.4 POWER SPECTRAL DENSITY .....	21
3.5 6dB BANDWIDTH.....	22
3.6 OUT-OF-BAND EMISSIONS .....	23
3.7 ANTENNA REQUIREMENT.....	24
<b>4 TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>25</b>
<b>5 EXTERNAL PHOTOGRAPHS OF EUT .....</b>	<b>25</b>
<b>6 INTERNAL PHOTOGRAPHS OF EUT.....</b>	<b>25</b>

# 1 TEST SUMMARY

## 1.1 Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spreda Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules

## 1.2 Test Summary

Test Item	Section in RSS-47	Result
Antenna requirement	§15.203	Pass
On Time and Duty Cycle	/	/
AC Power Line Conducted Emission	§ 15.207(a)	Pass
Maximum Conducted Peak Output Power	§15.247 (b)(3)	Pass
-6dB Bandwidth	§15.247 (a)(2)	Pass
Power Spectral Density	§15.247 (e)	Pass
Transmitter Radiated Spurious Emission	§15.205/15.209	Pass
Restricted Bands	§15.205/15.209	PASS
Conducted Unwanted emissions and Bandedge	§15.205, §15.247(d)	Pass

## 1.3 Test Facility

### Test Laboratory:

**Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

**FCC-Registration No.: 251906 Designation Number: CN1376**

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**IC —Registration No.: 31737 CAB identifier: CN0165**

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

**A2LA-Lab Cert. No.: 7133.01**

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## 1.4 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Guangdong Asia Hongke Test Technology Limited's quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Asia Hongke laboratory is reported:

Test	Measurement Uncertainty	Notes
Power Line Conducted Emission	150KHz~30MHz $\pm 1.20$ dB	(1)
Radiated Emission	9KHz~30Hz $\pm 3.10$ dB	(1)
Radiated Emission	9KHz~1GHz $\pm 3.75$ dB	(1)
Radiated Emission	1GHz~18GHz $\pm 3.88$ dB	(1)
Radiated Emission	18GHz~40GHz $\pm 3.88$ dB	(1)
RF power, conducted	30MHz~6GHz $\pm 0.16$ dB	(1)
RF power density, conducted	$\pm 0.24$ dB	(1)
Spurious emissions, conducted	$\pm 0.21$ dB	(1)
Temperature	$\pm 1$ °C	(1)
Humidity	$\pm 3$ %	(1)
DC and low frequency voltages	$\pm 1.5$ %	(1)
Time	$\pm 2$ %	(1)
Duty cycle	$\pm 2$ %	(1)

The report uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty Multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately 95%

## 2 GENERAL INFORMATION

### 2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2 General Description of EUT

Product Name:	projector
Model/Type reference:	HY300
Power Supply:	AC 100-260V
Hardware version.:	N/A
Software version.:	N/A
Sample(s) Status:	AITSZ-240705004-1 (Normal sample) AITSZ-240705004-2 (Engineer sample)

#### 2.4G WIFI:

Supported type:	802.11b/802.11g /802.11n(HT20)/802.11n(HT40)
Modulation:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	FPC antenna
Antenna gain:	1.65 dBi

#### Remark:

The above DUT's information was declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.3 Description of Test Modes and Test Frequency

There are 11 channels provided to the EUT for 20MHz protocol and 7 channels for 40 MHz protocol. Channel 01/06/11 were selected for 20MHz protocol mode test and channel 03/06/09 were selected for 40MHz protocol mode test.

### Operation Frequency List:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>1</b>	<b>2412</b>	8	2447
2	2417	<b>9</b>	<b>2452</b>
<b>3</b>	<b>2422</b>	10	2457
4	2427	<b>11</b>	<b>2462</b>
5	2432		
<b>6</b>	<b>2437</b>		
7	2442		

Note: The line display in grey were the channel selected for testing

Exploratory testing was performed under each mode combination test channel; only the final measurement of the worst combination was made and recorded in this report.

Test case	Exploratory measurement			Final measurement Recorded In Report		
	Mode	Date rate	Channel	Mode	Date rate	Channel
Maximum output power	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1Mbps 6Mbps MCS0 MCS0	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest
Power spectral density	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1Mbps 6Mbps MCS0 MCS0	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest
-6dB bandwidth	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1Mbps 6Mbps MCS0 MCS0	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest
Conducted Spurious Emissions	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	1Mbps 6Mbps MCS0 MCS0	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest
Conducted Band edge	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	1Mbps 6Mbps MCS0 MCS0	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest
Radiated Band edge	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	80.211n(HT40)	MCS0	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest
Radiated Emissions Above 1GHz	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	80.211b	1Mbps	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest
Radiated Emissions Below 1GHz	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	80.211b	1Mbps	<input checked="" type="checkbox"/> Middle
Conducted Emissions 9KHz-30 MHz	80.211b 80.211g 80.211n(HT20) 80.211n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	80.211b	1Mbps	<input checked="" type="checkbox"/> Middle

### Power setting during the test:

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters:

Test Software Version	CMD command		
Frequency	2412/2422MHz	2437MHz	2452/2462MHz
802.11b	Default	Default	Default
802.11g	Default	Default	Default
802.11n(HT20)	Default	Default	Default
802.11n(HT40)	Default	Default	Default

## 2.4 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Serial No.	Provided by	Other
/	/	/	/	/	/
/	/	/	/	/	/

## 2.5 Equipment List for the Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2023.09.08	2024.09.07
2	Spectrum Analyzer	Keysight	N9020A	MY51280643	2023.09.08	2024.09.07
3	EMI Measuring Receiver	R&S	ESR	101660	2023.09.08	2024.09.07
4	Low Noise Pre-Amplifier	HP	HP8447E	1937A01855	2023.09.08	2024.09.07
5	Low Noise Pre-Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2023.09.08	2024.09.07
6	Passive Loop	ETS	6512	00165355	2022.09.04	2024.09.03
7	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2021.08.29	2024.08.28
8	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2021.08.29	2024.08.28
9	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2021.08.29	2024.08.28
10	EMI Measuring Receiver	R&S	ESR	101160	2023.09.13	2024.09.12
11	LISN	SCHWARZBECK	NNLK 8129	8130179	2023.10.29	2024.10.28
12	Pulse Limiter	R&S	ESH3-Z2	102789	2023.09.13	2024.09.12
13	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2023.09.08	2024.09.07
14	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
15	Signal Generator	Agilent	N5182A	MY50143009	2023.09.08	2024.09.07
16	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2023.09.08	2024.09.07

17	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
18	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
19	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
20	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
21	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
22	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 3 TEST CONDITIONS AND RESULTS


#### 3.1 Conducted Emissions Test

##### LIMIT

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

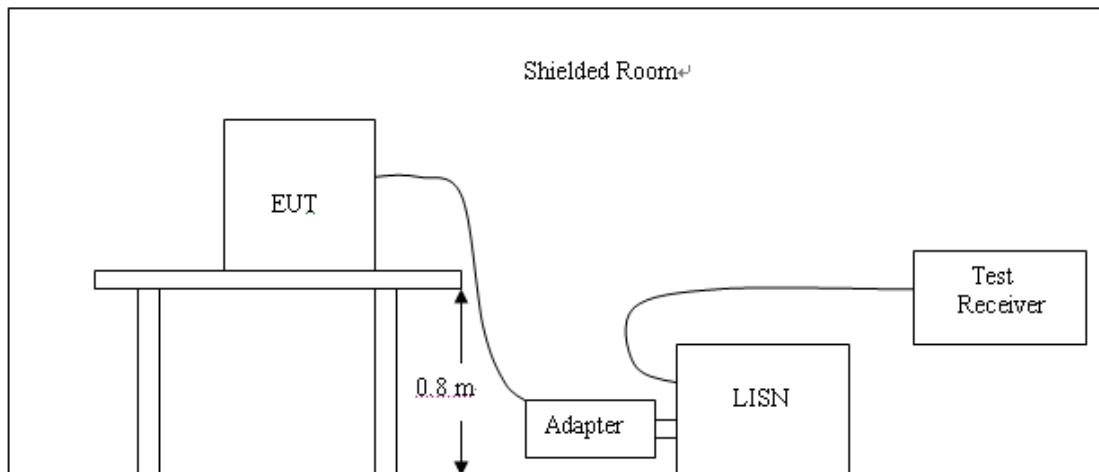


##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

## TEST RESULTS

Remark: Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

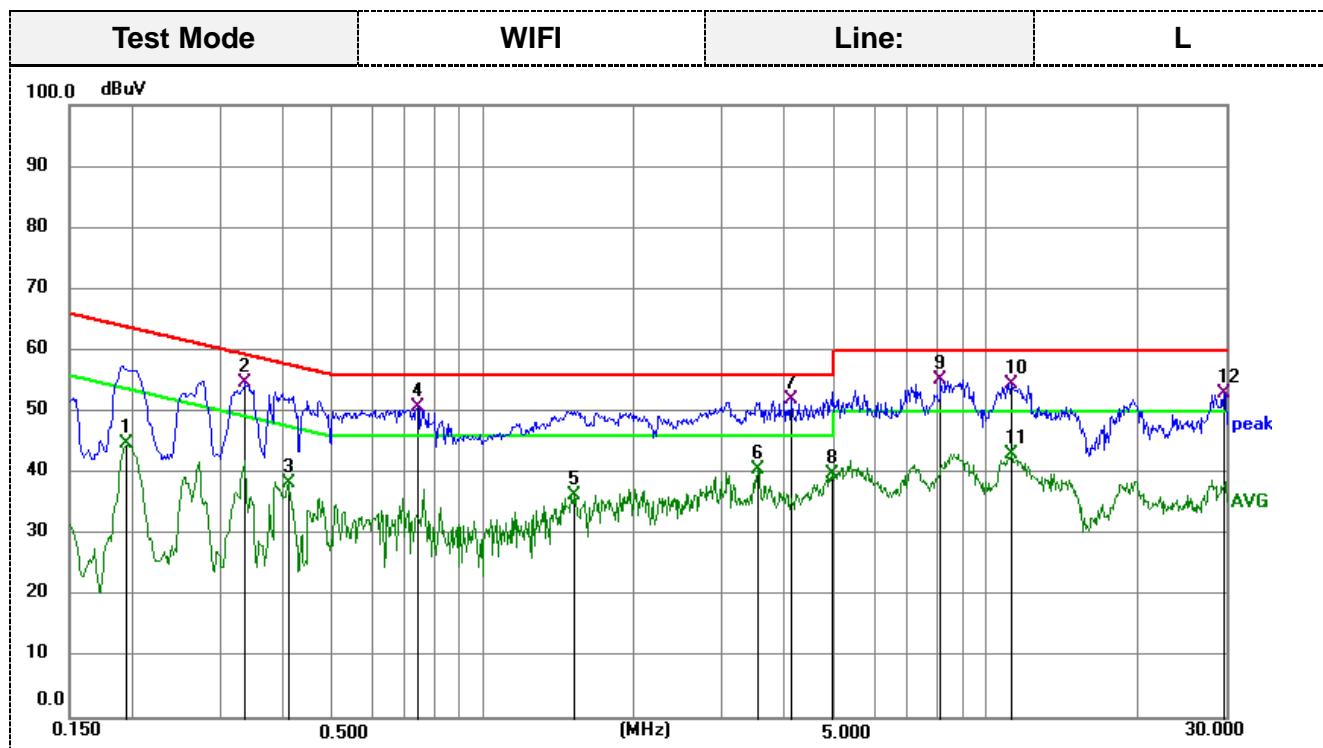


Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;

Measurement Result = Reading Level +Correct Factor;

Margin = Measurement Result- Limit

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
							AVG
1	0.1949	34.12	10.70	44.82	53.83	-9.01	AVG
2	0.3345	43.94	10.70	54.64	59.34	-4.70	QP
3	0.4062	27.62	10.69	38.31	47.73	-9.42	AVG
4	0.7395	39.99	10.67	50.66	56.00	-5.34	QP
5	1.5180	25.75	10.71	36.46	46.00	-9.54	AVG
6	3.5250	29.64	10.98	40.62	46.00	-5.38	AVG
7	4.0964	41.08	11.00	52.08	56.00	-3.92	QP
8	4.9290	28.73	11.02	39.75	46.00	-6.25	AVG
9	8.1420	44.27	11.06	55.33	60.00	-4.67	QP
10	11.2560	43.26	11.21	54.47	60.00	-5.53	QP
11	11.2560	31.91	11.21	43.12	50.00	-6.88	AVG
12	29.8275	41.18	11.74	52.92	60.00	-7.08	QP

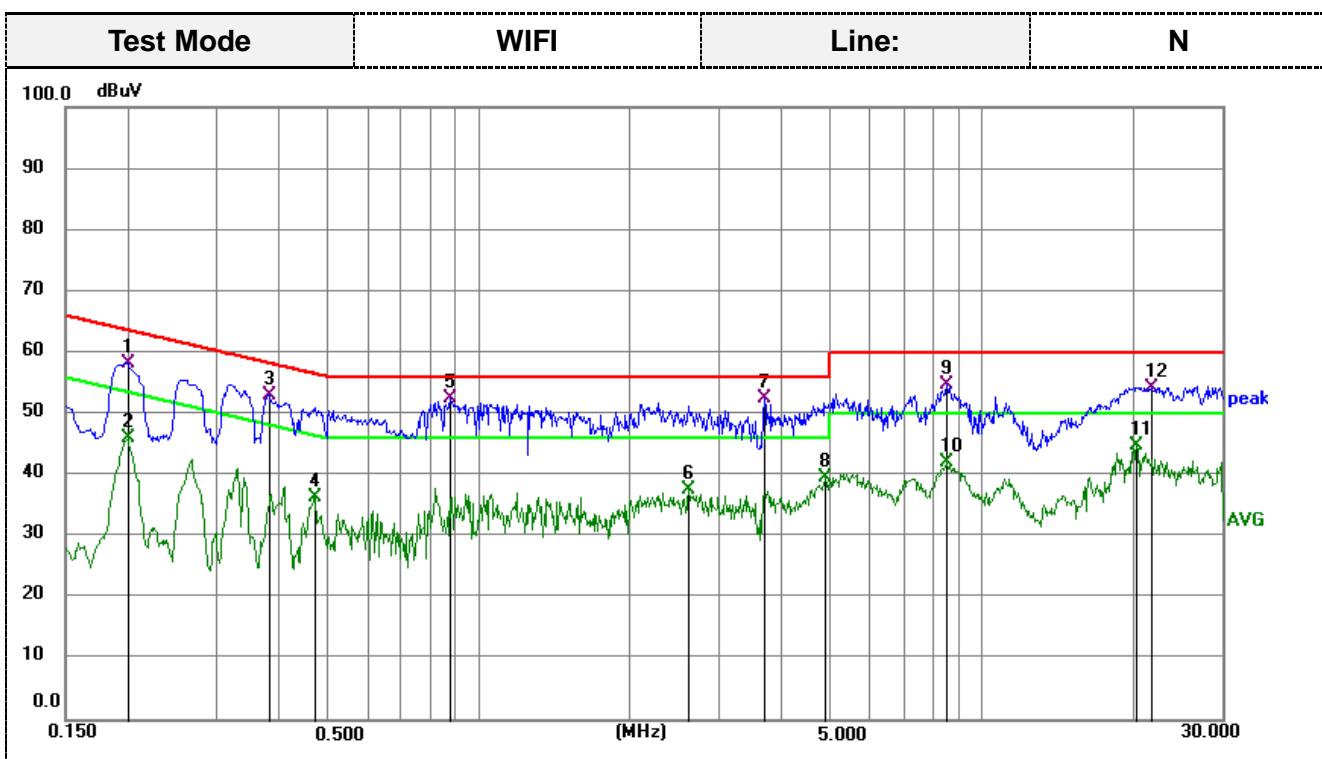

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;

Measurement Result = Reading Level +Correct Factor;

Margin = Measurement Result- Limit

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1995	47.43	10.69	58.12	63.63	-5.51	QP
2	0.1995	35.24	10.69	45.93	53.63	-7.70	AVG
3	0.3795	42.30	10.69	52.99	58.29	-5.30	QP
4	0.4692	25.77	10.69	36.46	46.53	-10.07	AVG
5	0.8790	41.71	10.65	52.36	56.00	-3.64	QP
6	2.6114	26.86	10.79	37.65	46.00	-8.35	AVG
7	3.6960	41.55	10.98	52.53	56.00	-3.47	QP
8	4.8840	28.51	11.01	39.52	46.00	-6.48	AVG
9	8.5335	43.71	11.04	54.75	60.00	-5.25	QP
10	8.5335	31.04	11.04	42.08	50.00	-7.92	AVG
11	20.3730	33.10	11.67	44.77	50.00	-5.23	AVG
12	21.8262	42.62	11.67	54.29	60.00	-5.71	QP

## 3.2 Radiated Emissions and Band Edge

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

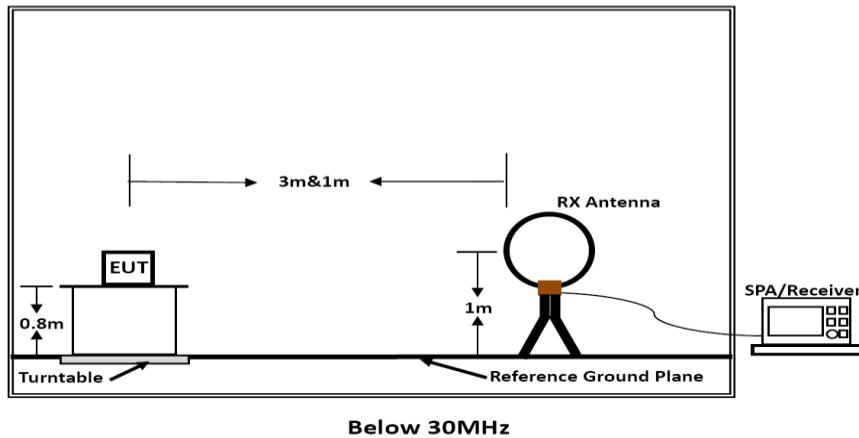

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

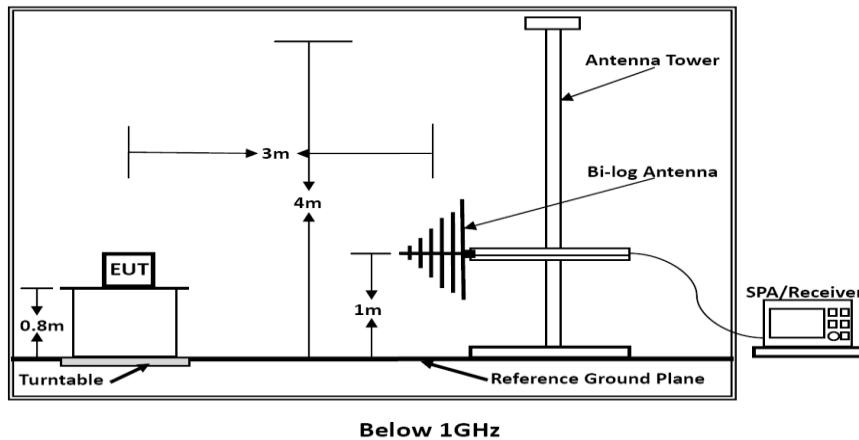

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

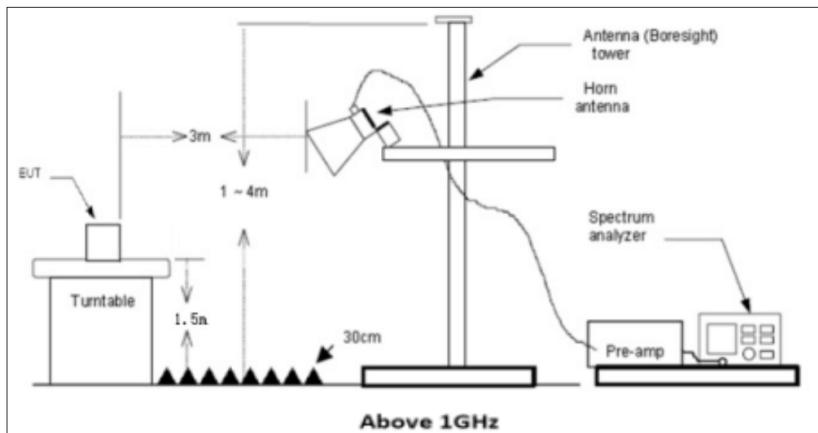

### Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1


7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

### TEST RESULTS

Remark: Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and The emission levels from 9kHz to 30MHz are attenuated 20dB below the limit and not recorded in report.

## For 30MHz-1GHz

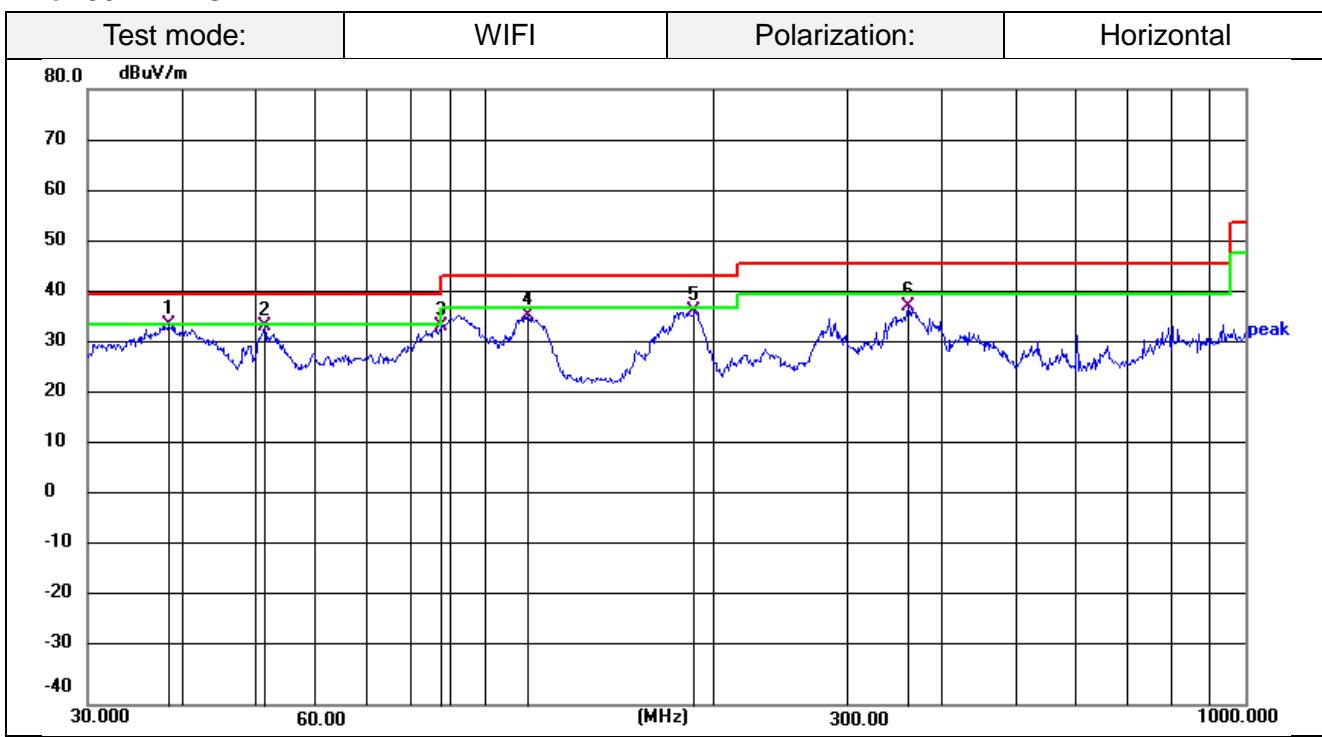


## Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	38.3462	50.90	-16.69	34.21	40.00	-5.79	QP
2	51.3004	50.45	-16.71	33.74	40.00	-6.26	QP
3	87.7245	54.76	-20.98	33.78	40.00	-6.22	QP
4	113.7142	54.86	-19.07	35.79	43.50	-7.71	QP
5	188.4123	55.96	-19.28	36.68	43.50	-6.82	QP
6	360.4476	53.26	-15.48	37.78	46.00	-8.22	QP

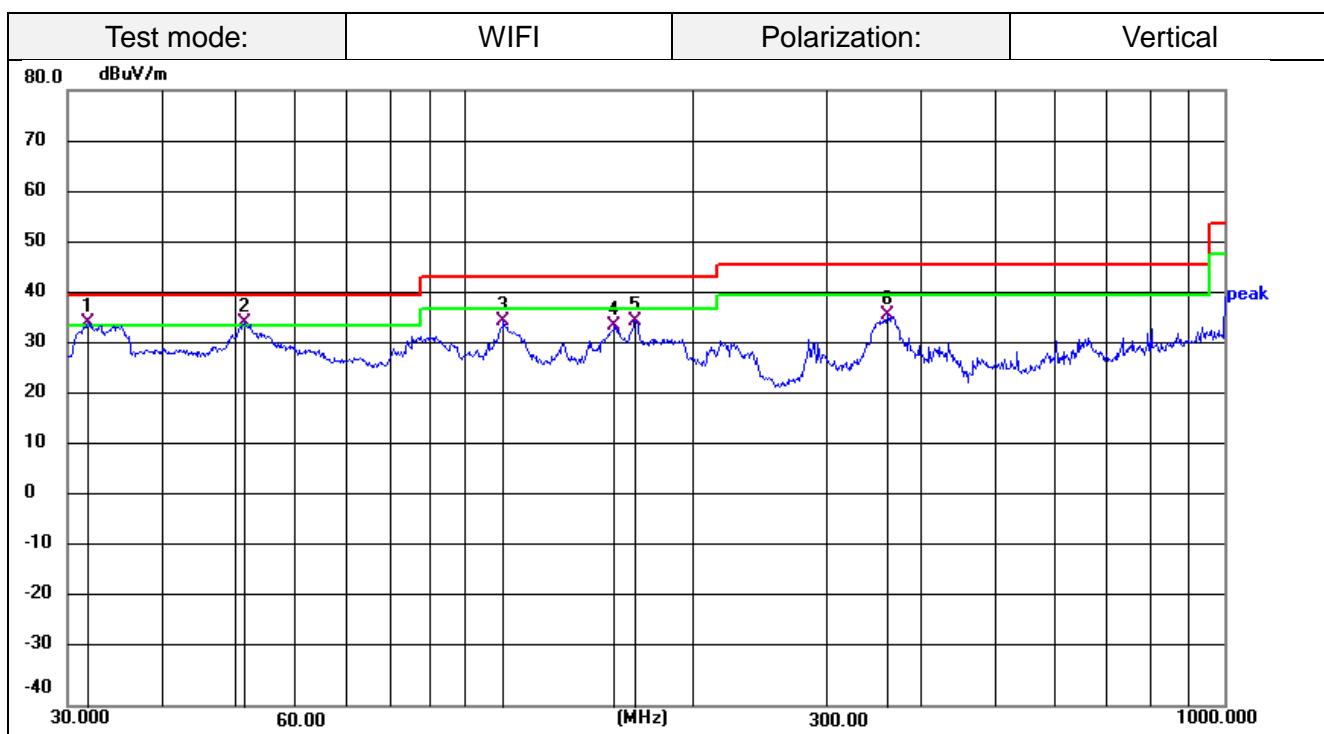
**Remark:**

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	31.9543	52.11	-17.43	34.68	40.00	-5.32	QP
2	51.3004	51.34	-16.71	34.63	40.00	-5.37	QP
3	112.5241	54.07	-19.21	34.86	43.50	-8.64	QP
4	157.5586	50.78	-16.54	34.24	43.50	-9.26	QP
5	167.8240	51.87	-16.77	35.10	43.50	-8.40	QP
6	360.4476	51.71	-15.48	36.23	46.00	-9.77	QP

**For 1GHz to 25GHz**
**802.11b GFSK (above 1GHz)**

Frequency(MHz):		2412		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	47.11	5.08	52.19	74	-21.81	PEAK
4824	36.16	5.08	41.24	54	-12.76	AVG
7236	45.32	7.55	52.87	74	-21.13	PEAK
7236	32.74	7.55	40.29	54	-13.71	AVG

Frequency(MHz):		2412		Polarity:	VERTICAL	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	47.51	5.08	52.59	74	-21.41	PEAK
4824	35.99	5.08	41.07	54	-12.93	AVG
7236	46.51	7.55	54.06	74	-19.94	PEAK
7236	30.06	7.55	37.61	54	-16.39	AVG

Frequency(MHz):		2437		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	46.67	5.13	51.80	74	-22.20	PEAK
4874	36.44	5.13	41.57	54	-12.43	AVG
7311	45.41	7.49	52.90	74	-21.10	PEAK
7311	30.89	7.49	38.38	54	-15.62	AVG

Frequency(MHz):		2437		Polarity:	VERTICAL	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	46.68	5.13	51.81	74	-22.19	PEAK
4874	36.35	5.13	41.48	54	-12.52	AVG
7311	44.15	7.49	51.64	74	-22.36	PEAK
7311	30.84	7.49	38.33	54	-15.67	AVG

Frequency(MHz):		2462		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	45.72	5.18	50.90	74	-23.10	PEAK
4924	36.21	5.18	41.39	54	-12.61	AVG
7386	45.53	7.82	53.35	74	-20.65	PEAK
7386	31.03	7.82	38.85	54	-15.15	AVG

Frequency(MHz):		2462		Polarity:	VERTICAL	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	47.03	5.18	52.21	74	-21.79	PEAK
4924	36.49	5.18	41.67	54	-12.33	AVG
7386	45.11	7.82	52.93	74	-21.07	PEAK
7386	31.60	7.82	39.42	54	-14.58	AVG

**REMARKS:**

1. Emission level (dB $\mu$ V/m) = Reading (dB $\mu$ V)+ Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Emission level- Limit value.
4. -- Mean the PK detector measured value is below average limit.
5. Other emission levels are attenuated 20dB below the limit and not recorded in report.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

**Radiation Restricted band**
**802.11n(HT40)**

Frequency(MHz):		2422		Polarity:	Horizontal	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB/m)	Emission Level (dB $\mu$ V/m)	Limits	Margin (dB)	Detector Type
2386.11	41.97	-5.52	36.45	74	-37.55	peak
2390	40.71	-5.72	34.99	74	-39.01	peak
2400	40.44	-5.61	34.83	74	-39.17	peak

Frequency(MHz):		2422		Polarity:	Vertical	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB/m)	Emission Level (dB $\mu$ V/m)	Limits	Margin (dB)	Detector Type
2385.85	41.95	-5.98	35.97	74	-38.03	peak
2390	39.72	-5.94	33.78	74	-40.22	peak
2400	40.15	-5.65	34.5	74	-39.5	peak

Frequency(MHz):		2462		Polarity:	Horizontal	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB/m)	Emission Level (dB $\mu$ V/m)	Limits	Margin (dB)	Detector Type
2483.5	37.42	-5.29	32.13	74	-41.87	peak
2485.96	37.87	-4.8	33.07	74	-40.93	peak

Frequency(MHz):		2462		Polarity:	Vertical	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB/m)	Emission Level (dB $\mu$ V/m)	Limits	Margin (dB)	Detector Type
2483.5	36.08	-5.29	30.79	74	-43.21	peak
2486.18	37.56	-4.91	32.65	74	-41.35	peak

**REMARKS:**

1. Emission level (dB $\mu$ V/m) = Reading (dB $\mu$ V)+ Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Emission level- Limit value.
4. Other emission levels are attenuated 20dB below the limit and not recorded in report.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 3.3 Maximum Peak Conducted Output Power

#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power Meter.

#### Test Configuration



#### Test Results

Pass       Not Applicable

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

## 3.4 Power Spectral Density


### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq$  3 kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

### Test Configuration

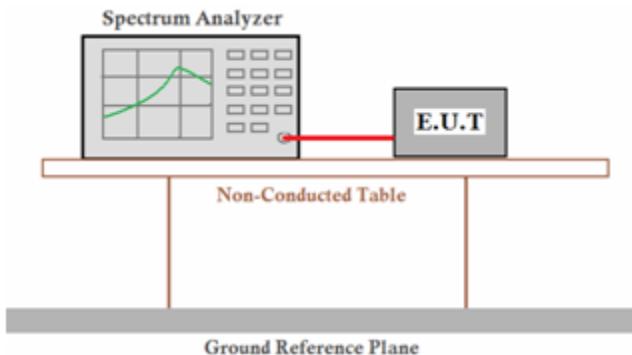

### Test Results

Pass       Not Applicable

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

### 3.5 6dB Bandwidth


#### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. Measured the 6dB bandwidth by related function of the spectrum analyzer.

#### Test Configuration

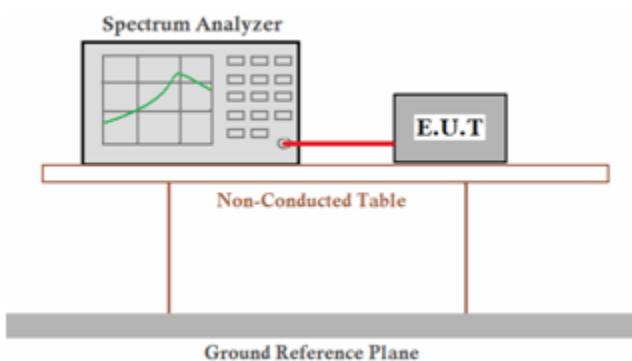

#### Test Results

Pass       Not Applicable

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

## 3.6 Out-of-band Emissions


### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

### Test Configuration

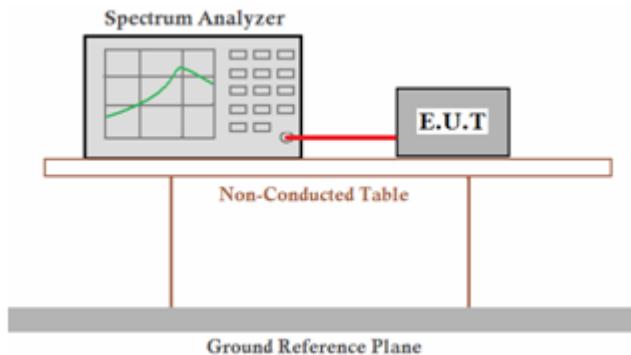

### Test Results

**Pass**       **Not Applicable**

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

### 3.7 Antenna Requirement

#### Standard Applicable

##### **For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4):**

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Test Result

The maximum gain of antenna was 1.65dBi with impedance  $50\Omega$ .

## 4 Test Setup Photographs of EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 5 External Photographs of EUT

Please refer to separated files for External Photos of the EUT.

## 6 Internal Photographs of EUT

Please refer to separated files for Internal Photos of the EUT.

\*\*\*\*\* End of Report \*\*\*\*\*