

**tapo**

# Quick Start Guide

## Tapo Smart Water Leak Sensor

Images may differ from actual products.  
7106509948 REV1.0.0

### Appearance

① Control Button  
② LED  
③ Sensor Probe  
④ Buzzer  
⑤ Battery Compartment

③ Sensor Probe

③ Sensor Probe

⑤ Battery Compartment

### 1 Power Up Your Sensor

**① Control Button**  
Single press: Silence alarm;  
Blinking: Test connection with the hub.  
Double press: Adjust alarm volume. The volume level cycles through High, Normal, Low, and Mute.  
Press and hold for 5s: Pair with hub.

### 2 Check Your Sensor

**② LED Indicator**

|                |                                       |
|----------------|---------------------------------------|
| Blinking       | Enter pairing mode                    |
| Blinks once    | Adjusted alarm volume level to Mute   |
| Blinks twice   | Adjusted alarm volume level to Low    |
| Blinks 3 times | Adjusted alarm volume level to Normal |
| Blinks 4 times | Adjusted alarm volume level to High   |

### 3 Set Up Your Sensor on the Tapo App

A Tapo Hub is required. Make sure your Tapo Hub's firmware is updated to the latest version and successfully setup via the Tapo app.



Open the Tapo app and tap the button. Select **Sensors** and then your model. Follow the app instructions to complete setup.

Tapo App

Download on the App Store  
OR  
Get it on Google Play

## 4 Test Your Sensor


After setup, single press the control button on your sensor and check if the hub sounds an alarm.

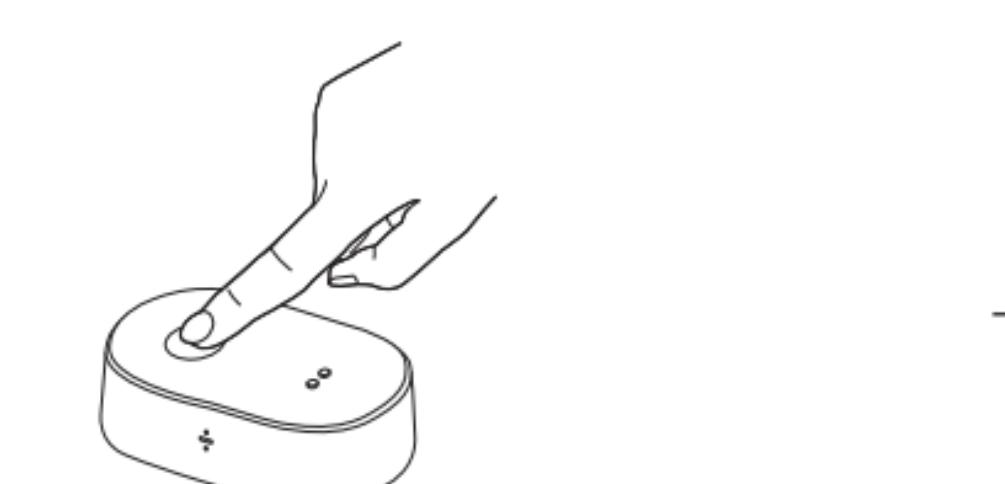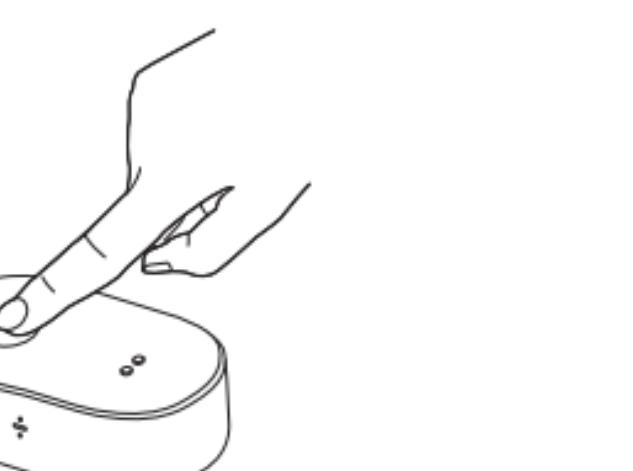

Operating Temperature: 0°C (32°F) - 40°C (105°F)

## 5 Place Your Sensor

Lay the sensor flat to monitor water leaks.

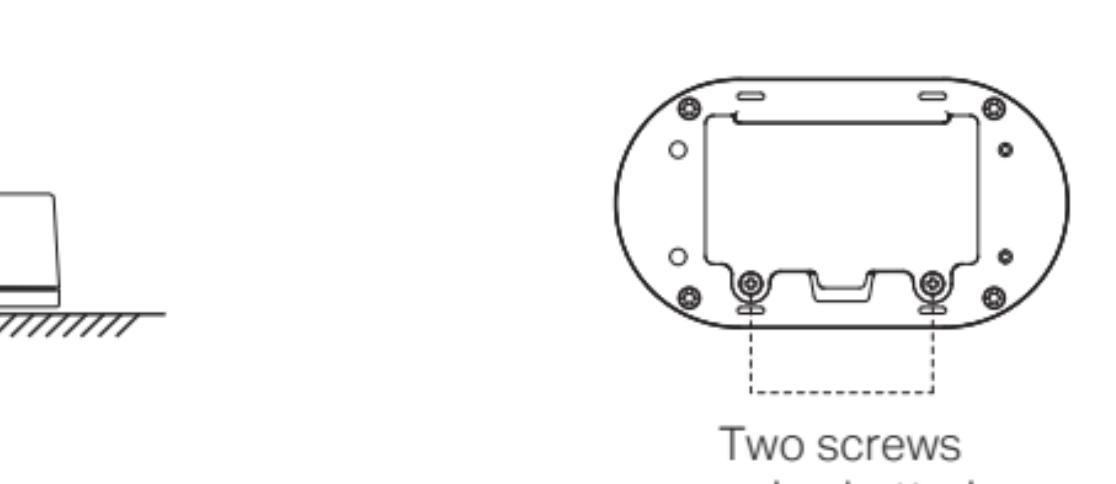


Operating Temperature: 0°C (32°F) - 40°C (105°F)

## How to Replace Battery


**Warning**  
Risk of explosion if the battery is replaced by an incorrect type.

a. Remove the two screws securing the batteries and remove the back cover.

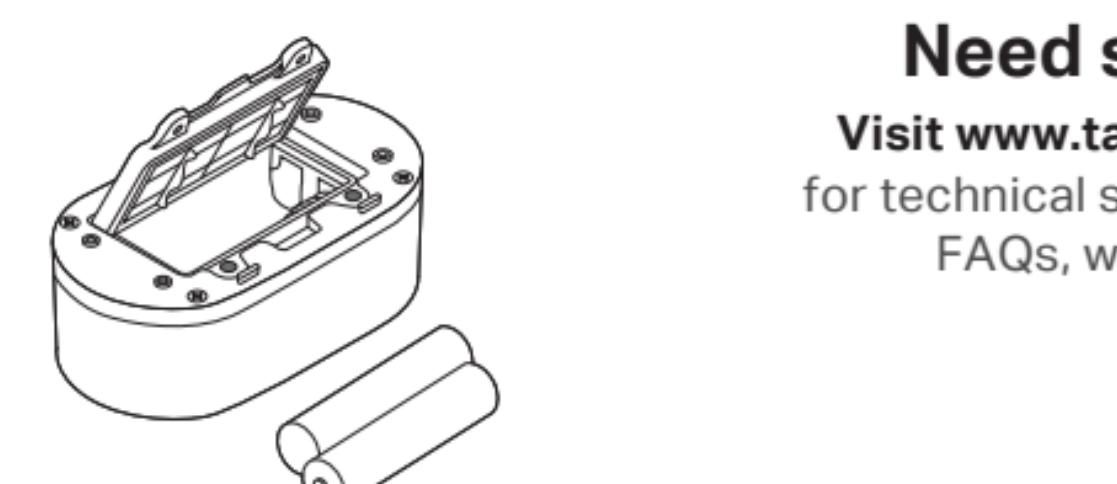

Two screws securing batteries

b. Replace with the new batteries (AAA/LR03).

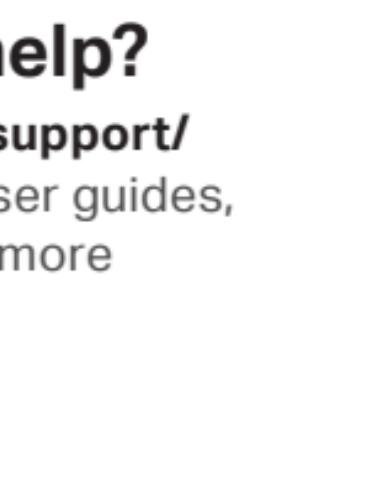

Operating Temperature: 0°C (32°F) - 40°C (105°F)



**Need some help?**  
Visit [www.tapo.com/support/](https://www.tapo.com/support/) for technical support, user guides, FAQs, warranty & more

**Warning**  
Risk of explosion if the battery is replaced by an incorrect type.

Keep the device away from fire or hot environments. Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us. Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

Avoid replacement of a battery with an incorrect type that can defeat a safeguard. Avoid disposal of a battery into fire or hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Do not leave a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; Do not leave a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

The original UK Declaration of Conformity may be found at <https://www.tapo.com/support/ukca/>

**For EU/UK Region:**  
Operating Frequency / Nominal Operating Frequency / Max Output Power:  
863~865MHz / 863.35MHz / 25mW(e.r.p.)  
863~865MHz / 864.35MHz / 25mW(e.r.p.)  
868~868.6MHz / 868.35MHz / 25mW(e.r.p.)

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU) 2015/834. The original EU Declaration of Conformity may be found at <https://www.tapo.com/support/ce/>

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.



©2023 TP-Link

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

Caution! Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

(1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur. Cet

Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

CAN ICES-003 (B)/NMB-003(B)