
RF Exposure Evaluation

FCC ID:2BH7V-BK24

Product Name:	Car mounted phone holder
Product Model No.:	BK24
Test Auxiliary:	Power Adapter, Phone
Test Auxiliary Model No.:	GA-0502000V, iPhone 13
Operation Frequency:	115kHz~205kHz
Modulation type:	ASK
Antenna Type:	ANT: Loop Coil Antenna
Antenna gain:	ANT: 0dBi
Power supply:	Input: 5V $\pm$ 2A, 9V $\pm$ 1.67A Output: 15W, 10W, 7.5W, 5W The battery of 3.7V is used to power the motor alone
Transmitting mode	Keep the EUT in continuously wireless charging mode

EUT all test mode as follows:

Power:	Test Modes:	Test Coil	Description:
15W	Mode 1	ANT	AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 2		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 3		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: >98%)

Power:	Test Modes:	Test Coil	Description:
10W	Mode 4	ANT	AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 5		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 6		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: >98%)

Power:	Test Modes:	Test Coil	Description:
7.5W	Mode 7	ANT	AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 8		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 9		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: >98%)

Power:	Test Modes:	Test Coil	Description:
5W	Mode 10	ANT	AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 11		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 12		AC/DC Adapter(9V/1.67A) + EUT + Phone (Battery Status: >98%)

Power:	Test Modes:	Test Coil	Description:
10W	Mode 13	ANT	AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: <1%)
	Mode 14		AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: 50%)
	Mode 15		AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: >98%)

Power:	Test Modes:	Test Coil	Description:
7.5W	Mode 16	ANT	AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: <1%)
	Mode 17		AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: 50%)
	Mode 18		AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: >98%)

Power:	Test Modes:	Test Coil	Description:
5W	Mode 19	ANT	AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: <1%)
	Mode 20		AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: 50%)
	Mode 21		AC/DC Adapter(5V/2A) + EUT + Phone (Battery Status: >98%)

1 Measuring Standard

1.1 According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB 680106 D01 Wireless Power Transfer v04.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainly
1	H-filed	$\pm 0.93\text{dB}$
2	E-filed	$\pm 0.51\text{dB}$

2.1 Requirements

The EUT does comply with item 5.2 of KDB 680106 D01 V04:

a) The power transfer frequency is below 1 MHz.

Yes. The device operates in the frequency from ANT1 is 115kHz to 205kHz

b) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

Yes, The maximum output power of the primary coil is 15watts.

c) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact).

Yes. Client device is placed directly in contact with the transmitter.

d) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

Yes, the EUT is a mobile condition wireless charger

e) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes.

The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures

Yes. The EUT coil is evaluated at maximum output power and the test results are less than 50% of the limit.

f) For systems with more than one radiating structure, the conditions specified in (e) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. .

Yes, the EUT only one coil, all test modes met the conditions specified in (e).

2.2 Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

2.3 Test Setup

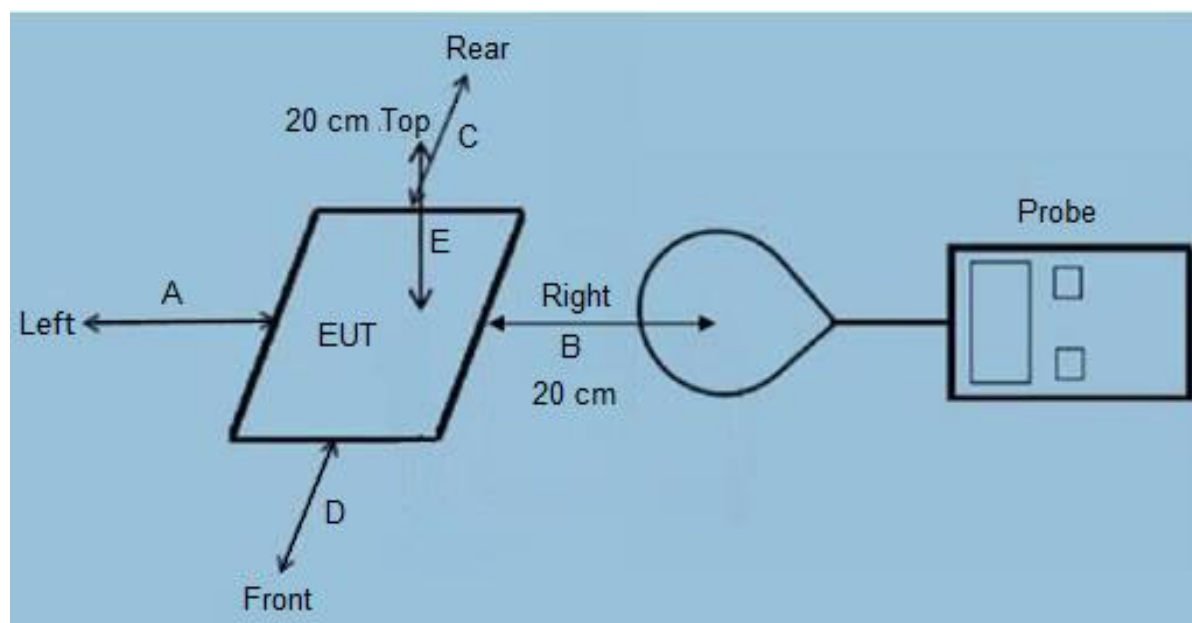

3 Test Procedure

- 1) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm and above from all sides and Top) which is between the edge of the charger and the geometric centre of probe.
- 3) The turn table was rotated 360d degree to search of highest strength.
- 4) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 5) The EUT were measured according to the dictates of KDB 680106 D01 V04.

4 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	180ZX10220	Sep. 29, 2024	Sep. 28, 2025
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	Sep. 29, 2024	Sep. 28, 2025

5 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Time:	Mar. 24, 2025
Test Mode:	15W Mode 1~3(The worst)		

Test Mode 1~3:

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m):

Battery Level:	Frequency Range (MHz)	Test Position Left (uT)	Test Position Right (uT)	Test Position Rear (uT)	Test Position Front (uT)	Test Position Top (uT)
<1% Battery	0.115-0.205	0.26	0.29	0.31	0.3	0.31
50% Battery	0.115-0.205	0.27	0.26	0.24	0.23	0.26
>98% Battery	0.115-0.205	0.24	0.23	0.22	0.21	0.24

Battery Level:	Frequency Range (MHz)	Test Position Left (A/m)	Test Position Right(A/m)	Test Position Rear(A/m)	Test Position Front(A/m)	Test Position Top(A/m)	Limits 50% (A/m)	Limits (A/m)
<1% Battery	0.115-0.205	0.21	0.23	0.25	0.24	0.25	0.815	1.63
50% Battery	0.115-0.205	0.22	0.21	0.19	0.18	0.21	0.815	1.63
>98% Battery	0.115-0.205	0.19	0.18	0.18	0.17	0.19	0.815	1.63

Remark: A/m = uT/1.25

6 Test Set-up Photo

Probe	Length	Width	Radius
	11cm	11cm	5.5cm

