



FCC RF Test Report

(GSM)

Report No.: ReportId

Applicant: APLEX TECHNOLOGY INC.

Address of Applicant: 15F-1, No.186, JIAN YI ROAD, ZHONGHE DIST., NEW TAIPEI CITY, 235 TAIWAN.

Equipment Under Test (EUT)

Product Name: Tablet

Model No.: ART-610, APC-38247A

Trade Mark: N/A

FCC ID: 2BH8A-ART610

Applicable Standards: FCC CFR Title 47 Part 2, 22H, 24E

Date of Sample Receipt: 20 Jul., 2022

Date of Test: 21 Jul., to 24 Aug., 2022

Date of Report Issued: 07 Aug., 2024

Test Result: PASS

□ T □

Tested by: _____ **Date:** 07 Aug., 2024

STAMP MARK

Reviewed by: _____ **Date:** 07 Aug., 2024

Approved by: _____ | APPROVED | **Date:** 07 Aug., 2024
Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	07 Aug., 2024	<i>Original</i>

2 Contents

	Page
Cover Page	1
1 Version.....	2
2 Contents.....	3
3 General Information	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions from the Method.....	5
3.7 Laboratory Facility	5
3.8 Laboratory Location.....	5
3.9 Test Instruments List	5
4 Measurement Setup and Procedure	6
4.1 Test Channel.....	6
4.2 Test Setup	6
4.3 Test Procedure.....	8
5 Test Results.....	9
5.1 Summary	9
5.1.1 Clause and Data Summary.....	9
5.1.2 Test Limit.....	10
6 Test Setup Photo	10

3 General Information

3.1 Client Information

Applicant:	APLEX TECHNOLOGY INC.
Address:	15F-1, No.186, JIAN YI ROAD, ZHONGHE DIST., NEW TAIPEI CITY, 235 TAIWAN.
Manufacturer:	APLEX TECHNOLOGY INC.
Address:	15F, No.150, JIAN YI ROAD, ZHONGHE DIST., NEW TAIPEI CITY, 235 TAIWAN.
Factory:	APLEX TECHNOLOGY INC.
Address:	15F, No.150, JIAN YI ROAD, ZHONGHE DIST., NEW TAIPEI CITY, 235 TAIWAN.

3.2 General Description of E.U.T.

Product Name:	Tablet				
Model No.:	ART-610, APC-38247A				
Operation Frequency Range:	GSM850:	824.2 MHz - 848.8 MHz			
	PCS1900:	1850.2 MHz - 1909.8 MHz			
Modulation Type:	<input checked="" type="checkbox"/> Voice(GMSK) <input checked="" type="checkbox"/> GPRS(GMSK) <input checked="" type="checkbox"/> EGPRS(GMSK, 8PSK)				
Antenna Type:	Internal Antenna				
Antenna Gain:	GSM 850:	-1.93 dBi (declare by Applicant)			
	PCS1900:	0.43 dBi (declare by Applicant)			
Power Supply:	Rechargeable Li-Polymer Battery DC3.85V, 20000mAh				
AC Adapter:	Model: HJ-PD33W-US Input: AC100-240V, 50/60Hz, 0.8A Output: DC 5.0V== 3.0A, 9.0V == 3.0V, 12.0V== 2.75A				
Remark:	Model No.: ART-610, APC-38247A were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.				
Test Sample Condition:	The test samples were provided in good working order with no visible defects.				

3.3 Test Mode and Environment

Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.

3.4 Description of Test Auxiliary Equipment

Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.

3.5 Measurement Uncertainty

Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.

4 Measurement Setup and Procedure

4.1 Test Channel

According to ANSI C63.26-2015 chapter 5.1.2.1 Table 2 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:


GSM850					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
128	824.2	190	836.6	251	848.8

PCS1900					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
512	1850.2	661	1880.0	810	1909.8


4.2 Test Setup

1) Radiated emission measurement:


Below 1GHz (3m SAC)

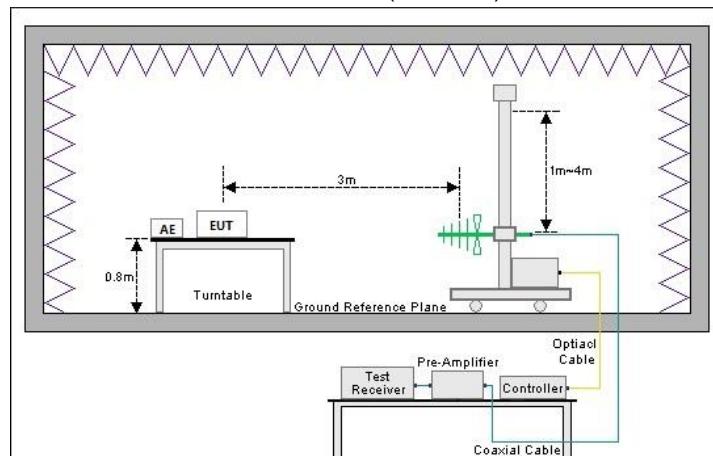

Above 1GHz (3m SAC)

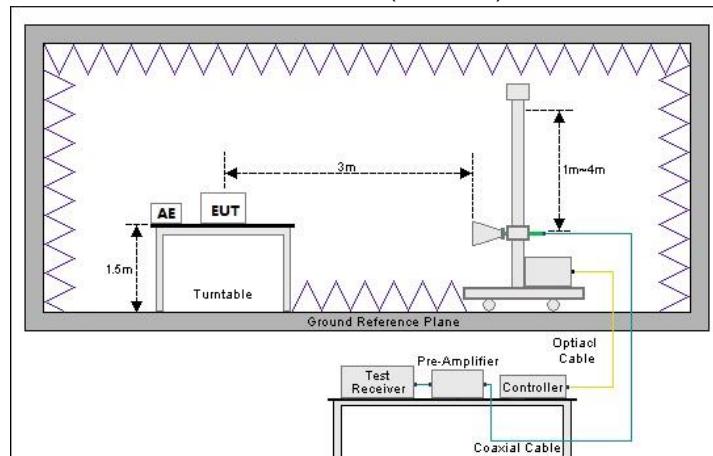

2) Conducted test method

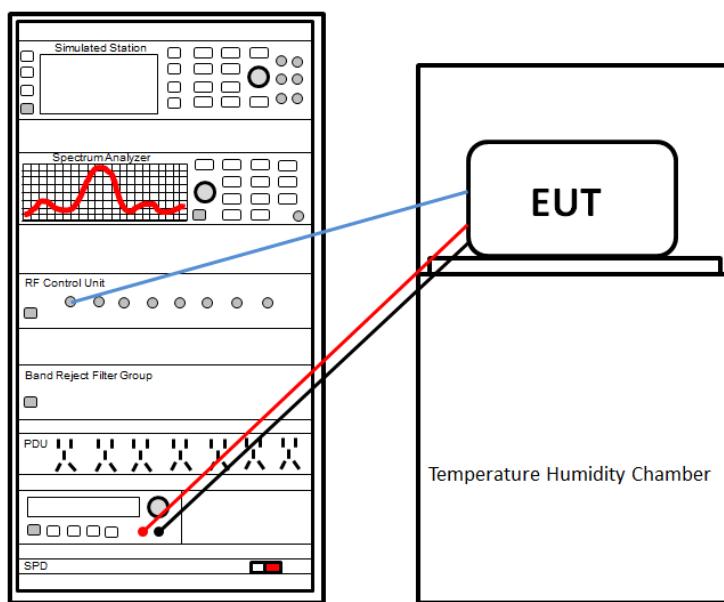

4.3 Test Procedure

Test method	Test step
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none"> 1. The GSM antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

This report is revised according to FCC ID: 2ANMU-RT6SPU, report No.: JYTSZ-R12-2300241 issued by JianYan Testing Group Shenzhen Co., Ltd, follow the Change ID allow change principle. Differences: Update addresses of applicant and applicant, and update addresses of manufacturer and manufacturer. Update model, FCC ID. Remove the logo and add the factory and factory address. Update product back photos, so no need to retest.

Test items	Standard clause	Test data	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c)	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Peak-to-Average Power Ratio	Part 24.232 (d)	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Modulation Characteristics	Part 2.1047	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
26dB Emission Bandwidth 99% Occupied Bandwidth	Part 2.1049	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Out of Band Emission at Antenna Terminals	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Frequency Stability vs. Temperature	Part 22.355 Part 24.235 Part 2.1055(a)(1)(b)	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Frequency Stability vs. Voltage	Part 22.355 Part 24.235 Part 2.1055(d)(2)	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.	Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.
Remark:			
1. Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU issue by JianYan Testing Group Shenzhen Co., Ltd.			
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26-2015		

5.1.2 Test Limit

Items	Limit																																
RF Output Power	GSM850: 7W ERP PCS1900: 2W EIRP																																
Peak-to-Average Power Ratio	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB																																
Modulation Characteristics	N/A																																
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A																																
Out of Band Emission at Antenna Terminals	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.																																
Field Strength of Spurious Radiation	GSM850: Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section. TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES <table border="1" data-bbox="674 915 1429 1111"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile >3 watts (ppm)</th> <th>Mobile ≤3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20.0</td> <td>20.0</td> <td>50.0</td> </tr> <tr> <td>50 to 450</td> <td>5.0</td> <td>5.0</td> <td>50.0</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5.0</td> <td>5.0</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 929</td> <td>5.0</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>929 to 960</td> <td>1.5</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>2110 to 2220</td> <td>10.0</td> <td>n/a</td> <td>n/a</td> </tr> </tbody> </table> PCS1900: The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.	Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5.0	821 to 896	1.5	2.5	2.5	928 to 929	5.0	n/a	n/a	929 to 960	1.5	n/a	n/a	2110 to 2220	10.0	n/a	n/a
Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)																														
25 to 50	20.0	20.0	50.0																														
50 to 450	5.0	5.0	50.0																														
450 to 512	2.5	5.0	5.0																														
821 to 896	1.5	2.5	2.5																														
928 to 929	5.0	n/a	n/a																														
929 to 960	1.5	n/a	n/a																														
2110 to 2220	10.0	n/a	n/a																														
Frequency Stability vs. Temperature																																	
Frequency Stability vs. Voltage																																	

6 Test Setup Photo

Please refer to report JYTSZ-R12-2300241, FCC ID: 2ANMU-RT6SPU.

-----End of report-----