



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

12/5/2024

AMC Schweiz Alfa Metalcraft Corp. AG
Buonaserstrasse 30
6343 Rotkreuz
Schweiz

Dear Alex Baenninger,

Enclosed is the EMC Wireless test report for compliance testing of the AMC Schweiz Alfa Metalcraft Corp. AG Audiotherm A0024 as tested to the requirements of FCC Part 15.247 for Intentional Radiators. This test report pertains specifically to the Bluetooth Low Energy (BLE) transmitter onboard which operates in the 2400-2483.5MHz band.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque
Documentation Department

Reference: WIRA132133-FCC-BLE

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs.

The Nation's First Licensed Nationally Recognized Testing Laboratory

Maryland | California | Texas
www.metlabs.com

Bluetooth Low Energy Test Report

for the

AMC Schweiz Alfa Metalcraft Corp. AG
Audiotherm A0024

Tested under
FCC Part 15.247
For Intentional Radiators



Bryan Taylor, Wireless Team Lead
Electromagnetic Compatibility Lab



Nancy LaBrecque
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa
EMC Manager, Austin Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	12/5/2024	Initial Issue.

Table of Contents

I.	Executive Summary	8
	A. Purpose of Test	9
	B. Executive Summary	9
II.	Equipment Configuration	10
	A. Overview.....	11
	B. References.....	12
	C. Test Site	13
	D. Measurement Uncertainty	13
	E. Description of Test Sample.....	13
	F. Equipment Configuration.....	14
	G. Mode of Operation.....	15
	H. Method of Monitoring EUT Operation.....	15
	I. Modifications	15
	a) Modifications to EUT	15
	b) Modifications to Test Standard.....	15
	J. Disposition of EUT	15
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	16
	§ 15.203 Antenna Requirement	17
	§ 15.247(a)(a) 6 dB and 99% Bandwidth	18
	§ 15.247(b) Peak Power Output	21
	§ 15.247(e) Peak Power Spectral Density	24
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	26
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	32
IV.	Test Equipment	42

List of Tables

Table 1. Executive Summary	9
Table 2. EUT Summary Table.....	11
Table 3. References	12
Table 4. Uncertainty Calculations Summary.....	13
Table 5. Support Equipment.....	14
Table 6. Ports and Cabling Information	14
Table 7. Test Channels Utilized	15
Table 8. 99% and 6 dB Occupied Bandwidth, Test Results	18
Table 9. Output Power Requirements from §15.247(b)	21
Table 10. Peak Power Output, Test Results	22
Table 11. Peak Power Spectral Density, Test Results	24
Table 12. Restricted Bands of Operation.....	32
Table 13. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	33
Table 14. Test Equipment List	43

List of Figures

Figure 1. Block Diagram of Test Configuration.....	14
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	18
Figure 3. Peak Power Output Test Setup.....	22
Figure 4. Block Diagram, Peak Power Spectral Density Test Setup.....	24
Figure 7. Analyzer Settings During Measurement	26
Figure 5. Block Diagram, Conducted Spurious Emissions Test Setup.....	26
Figure 6. -20dB Down Spurious Emissions (Low Channel, 1Mbps)	27
Figure 7. -20dB Down Spurious Emissions (Mid Channel, 1Mbps).....	27
Figure 8. -20dB Down Spurious Emissions (High Channel, 1Mbps).....	28
Figure 9. -20dB Down Spurious Emissions (Low Channel, 2Mbps)	28
Figure 10. -20dB Down Spurious Emissions (Mid Channel, 2Mbps).....	29
Figure 11. -20dB Down Spurious Emissions (High Channel, 2Mbps).....	29
Figure 12. Restricted Band Edge Spurious Emissions (Low Band Edge, 1Mbps)	37
Figure 13. Restricted Band Edge Spurious Emissions (Low Band Edge, 2Mbps)	37
Figure 14. Restricted Band Edge Spurious Emissions (High Band Edge, 1Mbps)	38
Figure 15. Restricted Band Edge Spurious Emissions (High Band Edge, 2Mbps)	38
Figure 16. Worst Case Cabinet Radiation, 9kHz - 30MHz	39
Figure 17. Worst Case Cabinet Radiation, 30MHz - 1GHz	39
Figure 18. Worst Case Cabinet Radiation, Above 1GHz	39

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Audiotherm A0024, with the requirements of FCC Part 15.247. AMC Schweiz Alfa Metalcraft Corp. AG should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Audiotherm A0024, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15.247, in accordance with AMC Schweiz Alfa Metalcraft Corp. AG purchase order number 4500921562. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Not Applicable ¹
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Compliant

Table 1. Executive Summary

¹ This test was not applicable since the Audiotherm A0024 is exclusively battery powered with no connections to AC mains.

II. Equipment Configuration

A. Overview

Eurofins MET Labs was contracted by AMC Schweiz Alfa Metalcraft Corp. AG to perform testing on the Audiotherm A0024, under AMC Schweiz Alfa Metalcraft Corp. AG's purchase order number 4500921562.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Audiotherm A0024.

The results obtained relate only to the item(s) tested.

Product Name:	Audiotherm A0024	
Model(s) Tested:	Audiotherm A0024	
FCCID:	2BHIHA0024	
EUT Specifications:	Primary Power: 1.8 – 3.0VDC	
	Type of Modulations:	GFSK
	Equipment Code:	DTS
	Peak RF Output Power:	2.05dBm
	EUT Frequency Ranges:	2402MHz – 2480MHz
	Antenna Gain ² :	-2.6dBi
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Bryan Taylor, Sergio Gutierrez	
Report Date(s):	6/25/2024 through 6/29/2024	

Table 2. EUT Summary Table

² The antenna gain information was provided by AMC Schweiz Alfa Metalcraft Corp. AG and may affect compliance.

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at Eurofins MET Labs, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

FCC Lab Info:

Designation Number: US1127

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
Occupied Bandwidth Measurements	±4.52 Hz	2	95%
Conducted Power Measurements	±2.74 dB	2	95%
Power Spectral Density Measurements	±2.74 dB	2	95%
Conducted Spurious Emissions	±2.80 dB	2	95%
Conducted Emissions (Mains)	±2.97 dB	2	95%
Radiated Spurious Emissions (9kHz – 1GHz)	±2.95 dB	2	95%
Radiated Spurious Emissions (1GHz - 40GHz)	±3.54 dB	2	95%

Table 4. Uncertainty Calculations Summary

E. Description of Test Sample

The Audiotherm is mounted on a pan lid reading the themperatur from the pan and alarm acousticly the cook, when temperature has to be changed or cooking time is gone. In addition it can control the cooking plate via BLE. With an App you can load recepies on the Audiotherm.



Figure 1. Block Diagram of Test Configuration

F. Equipment Configuration

The EUT was set up as outlined in Figure 1 above. The laptop computer was used to send test commands to force the transmitters to operate in the appropriate test mode.

G. Support Equipment

Ref. ID	Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
None	Laptop Computer	Lenovo	ThinkPad	None

Table 5. Support Equipment

H. Ports and Cabling Information

Ref. Id	Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
---	Serial Port to USB Debug Cable	Serial Port to USB Debug Cable	1	1m	---	No	Laptop Computer

Table 6. Ports and Cabling Information

I. Mode of Operation

The Nordic nRF Connect software was used to interface with the test sample and force it to transmit on low, mid, and high channels at maximum output power.

Transmit Band	Modulation	Channel Frequencies Tested	Test Tool Power Setting
2400 – 2483.5MHz	BLE (GFSK)	2402MHz / 2440MHz / 2480MHz	8

Table 7. Test Channels Utilized

J. Method of Monitoring EUT Operation

A spectrum analyzer was used to confirm proper transmitter operation.

K. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to AMC Schweiz Alfa Metalcraft Corp. AG upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The TX antenna is permanently attached to the unit and is not accessible by the end user.

Test Engineer(s): Bryan Taylor

Test Date(s): 6/25/2024

Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB Bandwidth

Test Requirements: **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, and the VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Bryan Taylor

Test Date(s): 6/26/2024


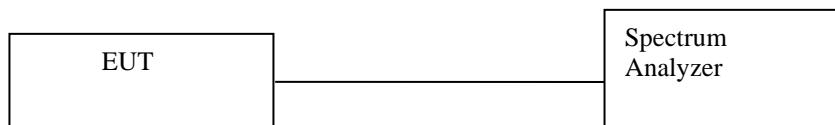



Figure 2. Block Diagram, Occupied Bandwidth Test Setup

Data Rate	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	99% Bandwidth (MHz)	Result
1Mbps	Low	2402MHz	0.68	0.5	1.04	Pass
	Middle	2440MHz	0.69	0.5	1.05	Pass
	High	2480MHz	0.69	0.5	1.05	Pass
2Mbps	Low	2402MHz	1.12	0.5	2.06	Pass
	Middle	2440MHz	1.14	0.5	2.06	Pass
	High	2480MHz	1.14	0.5	2.06	Pass

Table 8. 99% and 6 dB Occupied Bandwidth, Test Results

Occupied Bandwidth Test Results

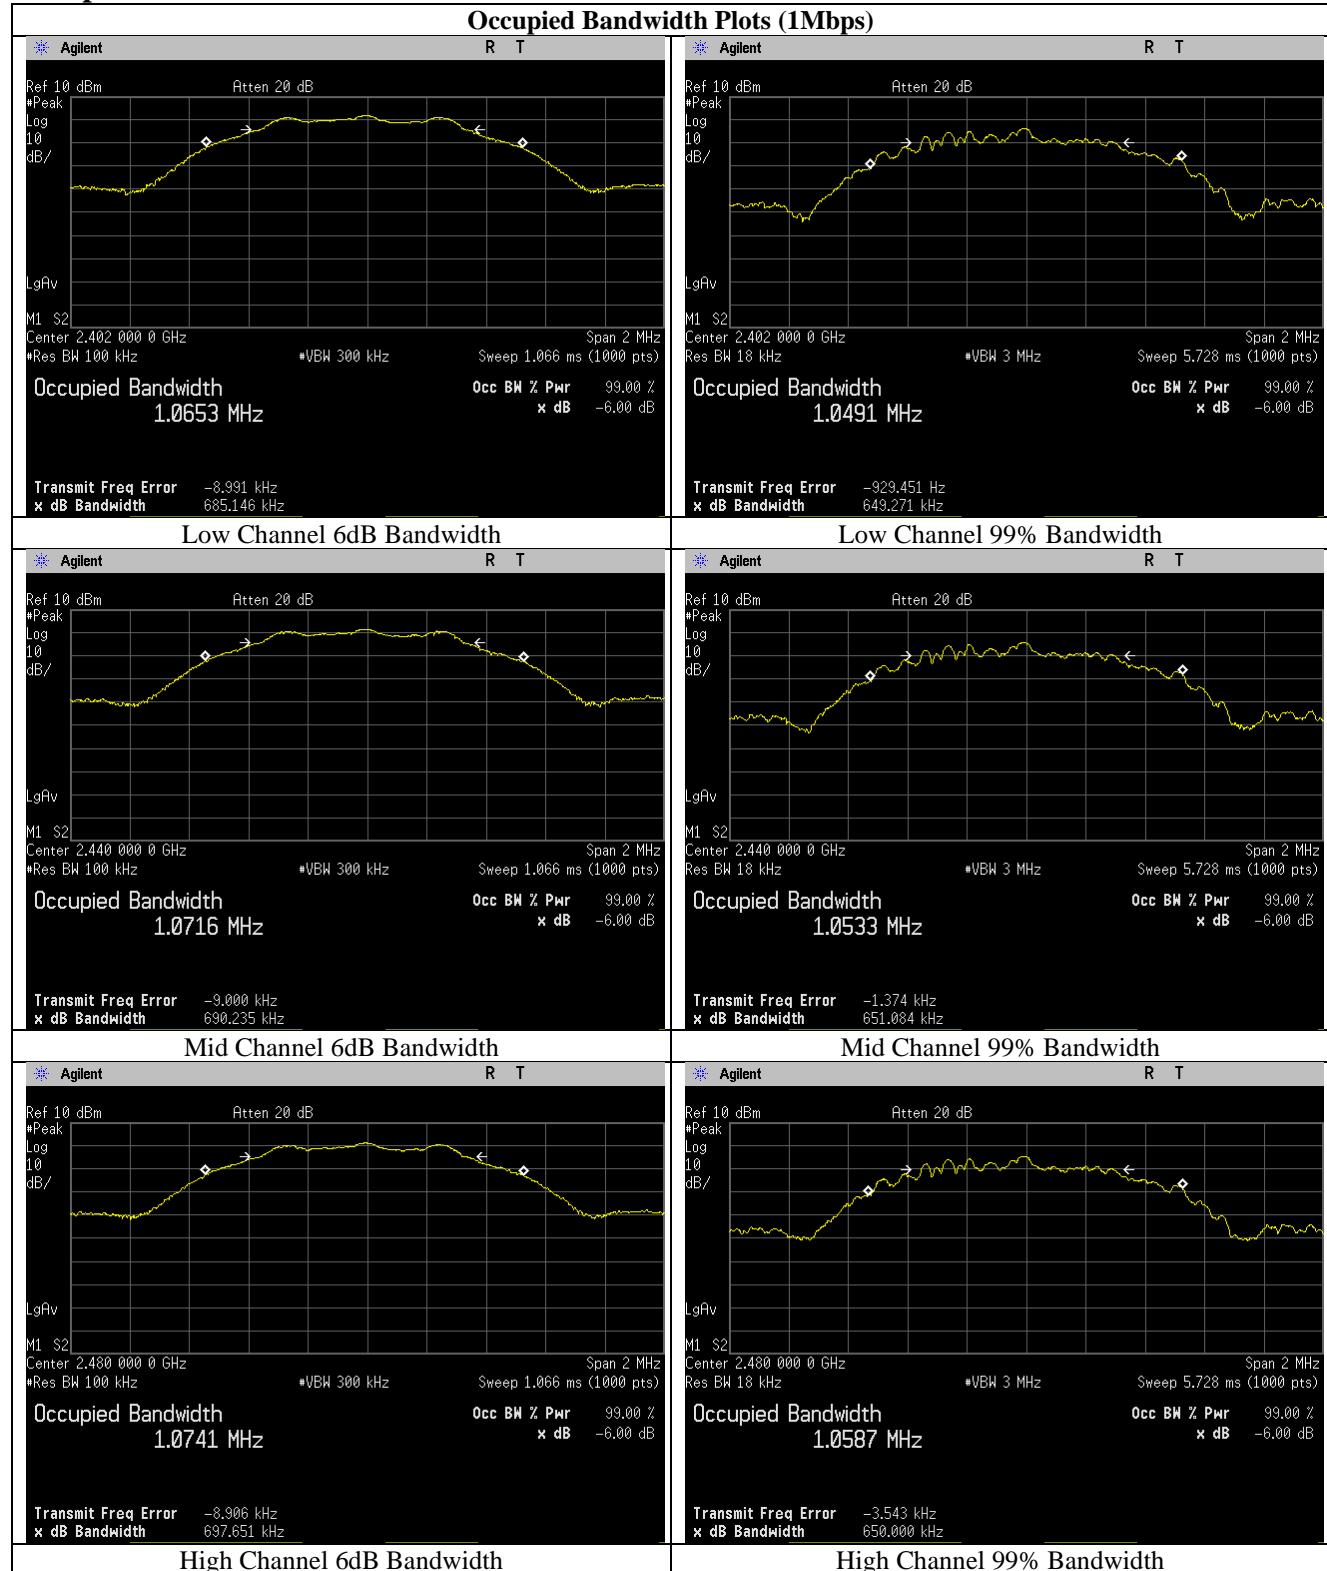

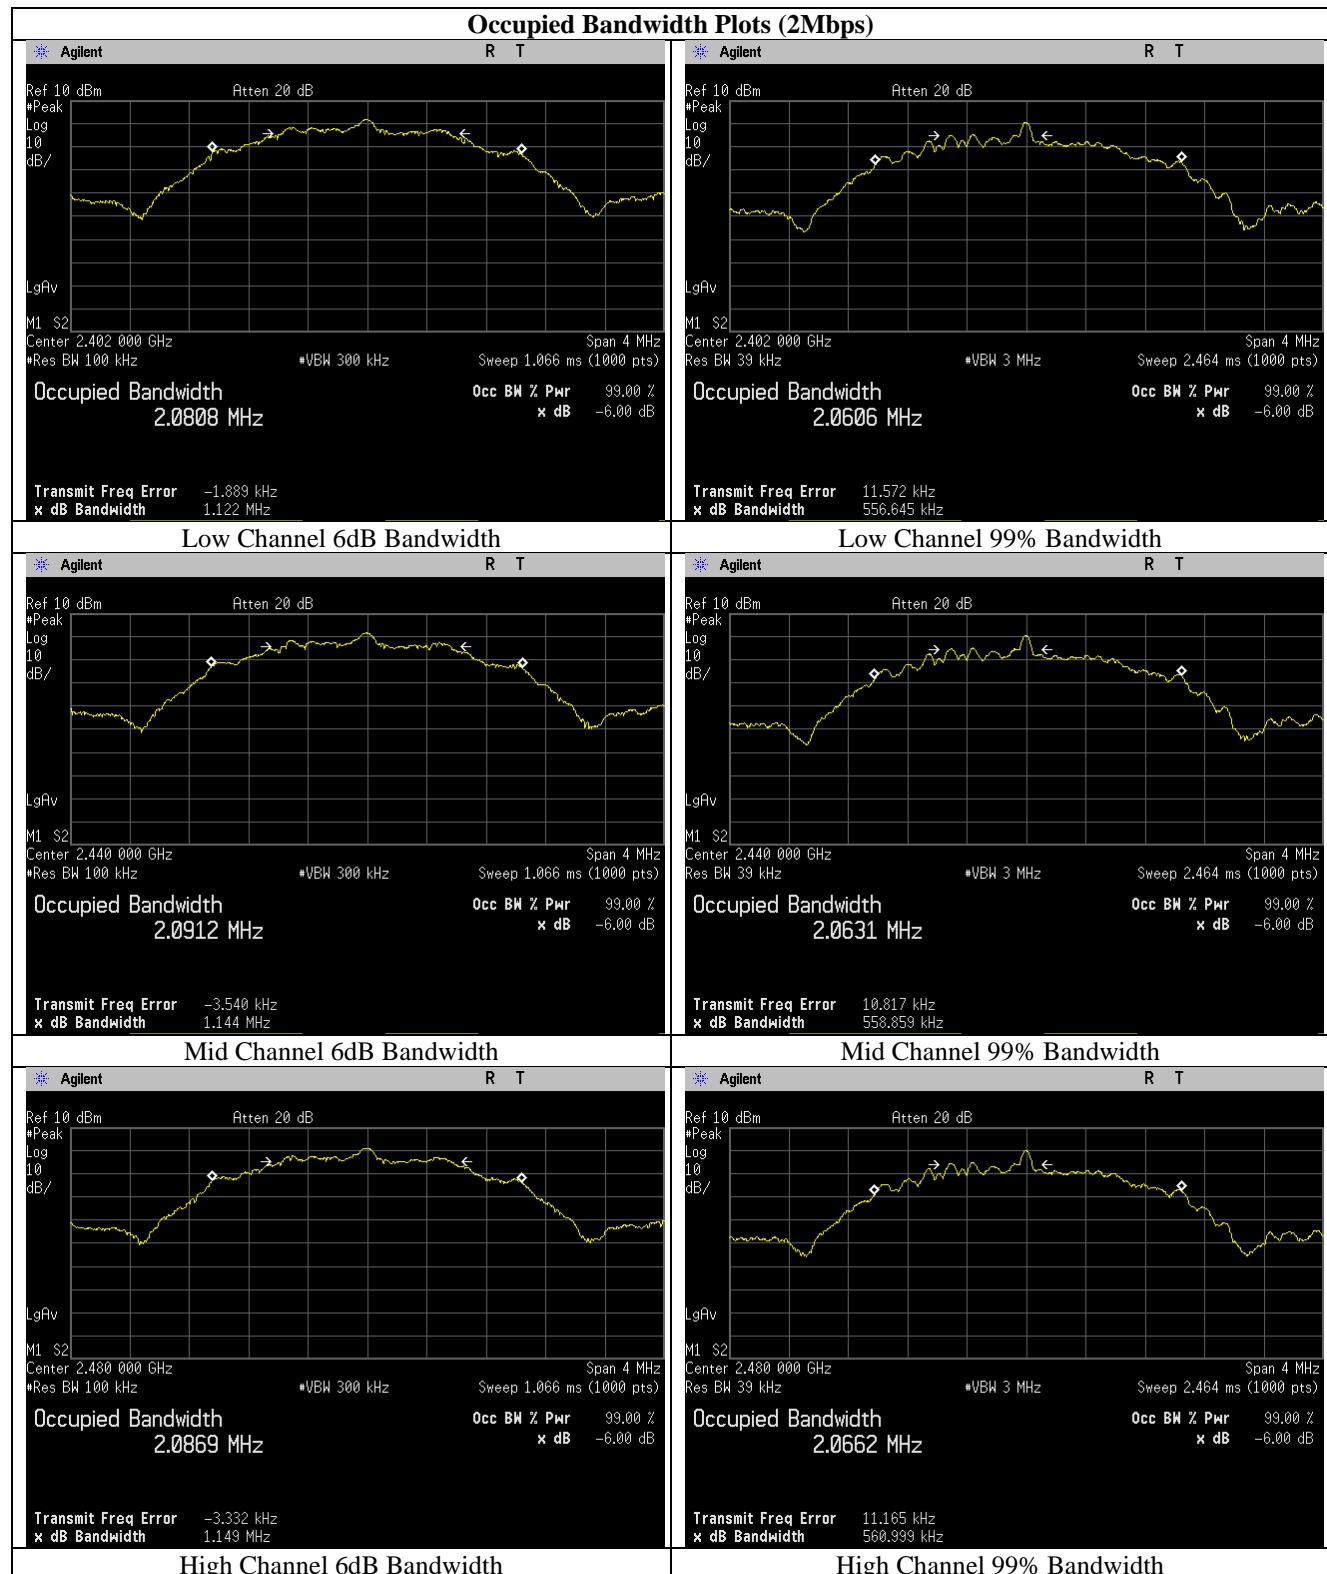

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 9. Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 9, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The analyzer reference level was offset by cable loss connecting to the test sample. The peak power was measured at the low, mid and high channels of each band at the maximum power level.

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b).

Test Engineer(s): Bryan Taylor

Test Date(s): 6/26/2024





Figure 3. Peak Power Output Test Setup

Peak Power Output Test Results

Data Rate	Channel	Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Result
1Mbps	Low	2402MHz	1.98	30	Pass
	Middle	2440MHz	1.71	30	Pass
	High	2480MHz	1.25	30	Pass
2Mbps	Low	2402MHz	2.05	30	Pass
	Middle	2440MHz	1.81	30	Pass
	High	2480MHz	1.33	30	Pass

Table 10. Peak Power Output, Test Results

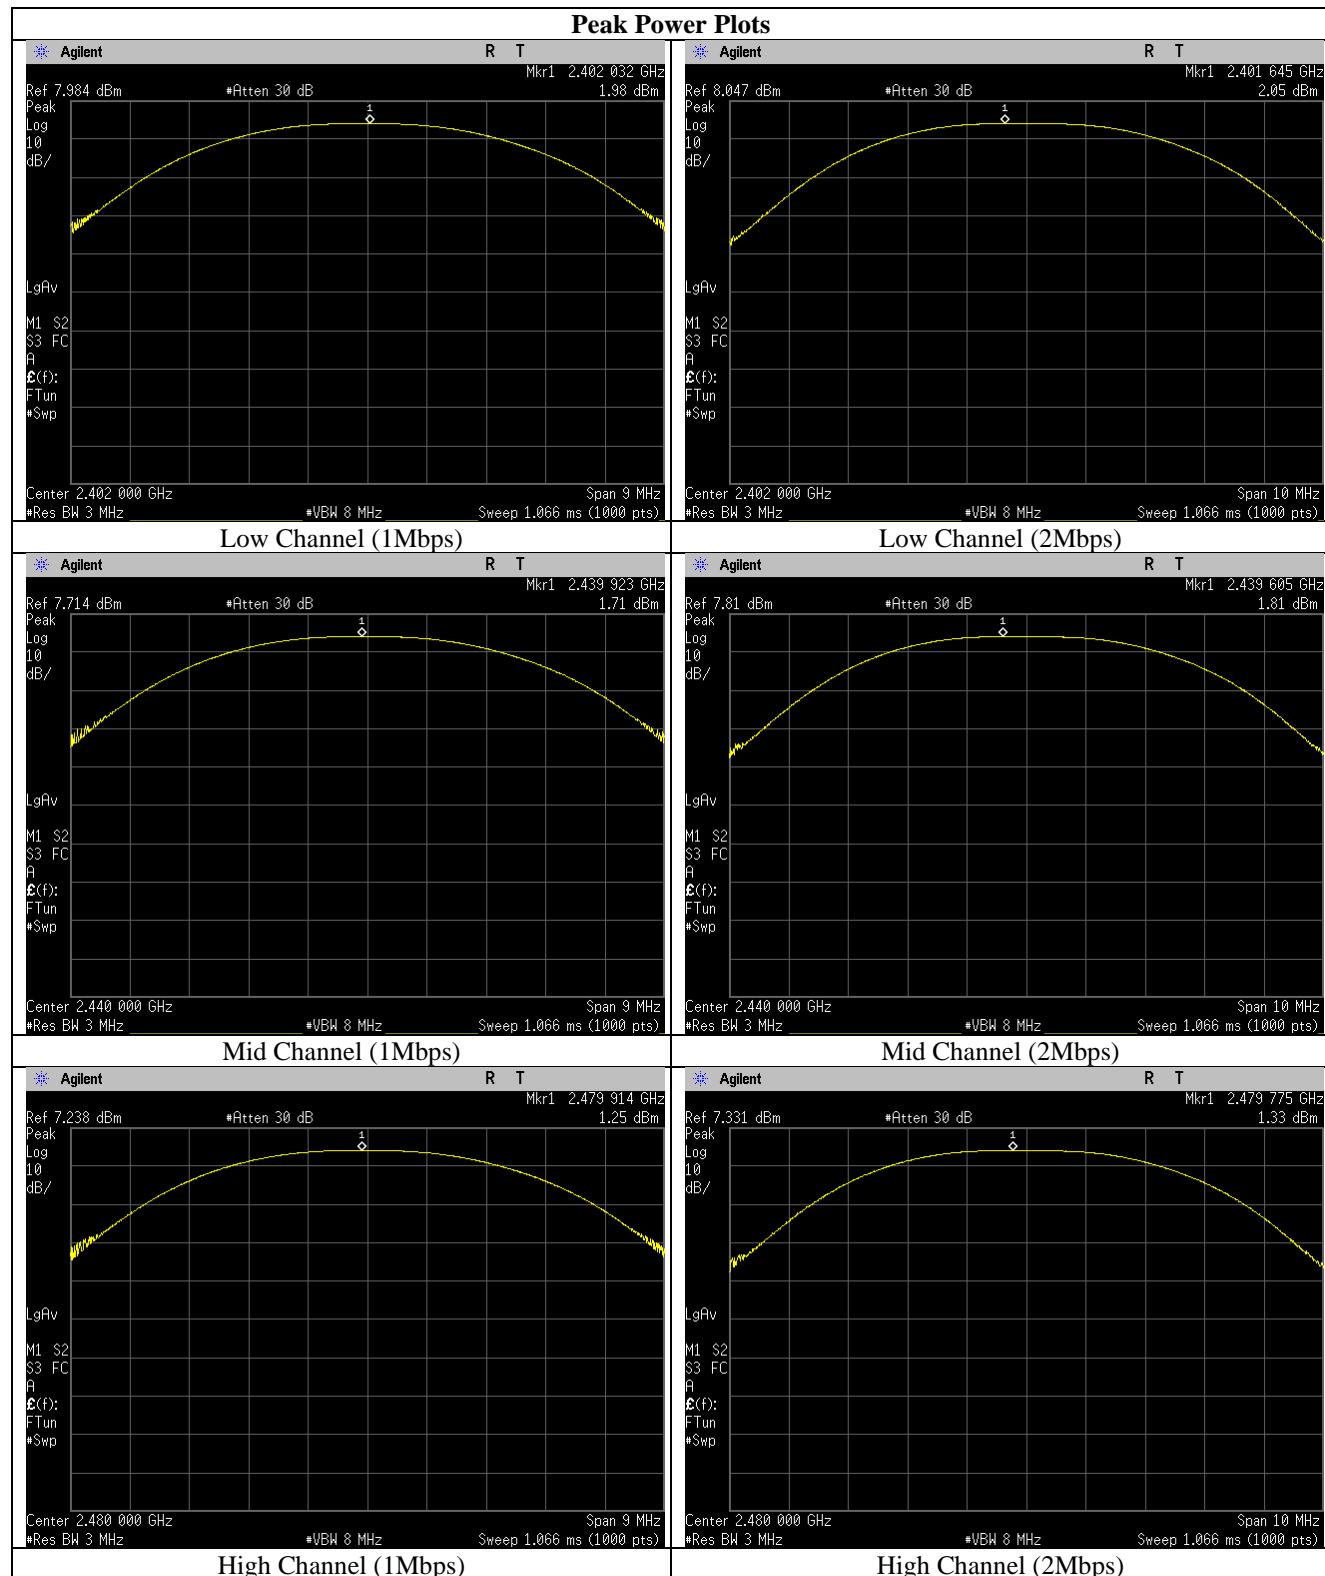

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer. The power level was set to the maximum level. The RBW was set between 3kHz and 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of **§ 15.247 (e)**.

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Bryan Taylor

Test Date: 6/26/2024


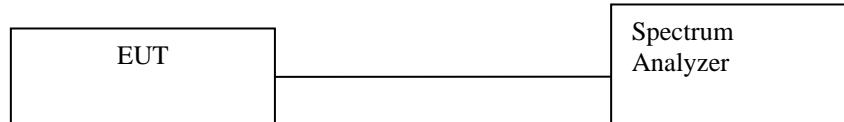


Figure 4. Block Diagram, Peak Power Spectral Density Test Setup

Data Rate	Channel	Frequency (MHz)	Peak Power Spectral Density (dBm / 10kHz)	10log(3kHz/10kHz)	Peak Power Spectral Density (dBm / 3kHz)	Peak Power Spectral Density Limit (dBm / 3kHz)	Result
1Mbps	Low	2402MHz	-7.79	-5.2	-12.99	8	Pass
	Middle	2440MHz	-8.08	-5.2	-13.28	8	Pass
	High	2480MHz	-8.51	-5.2	-13.71	8	Pass
2Mbps	Low	2402MHz	-8.10	-5.2	-13.30	8	Pass
	Middle	2440MHz	-8.43	-5.2	-13.63	8	Pass
	High	2480MHz	-8.95	-5.2	-14.15	8	Pass

Table 11. Peak Power Spectral Density, Test Results

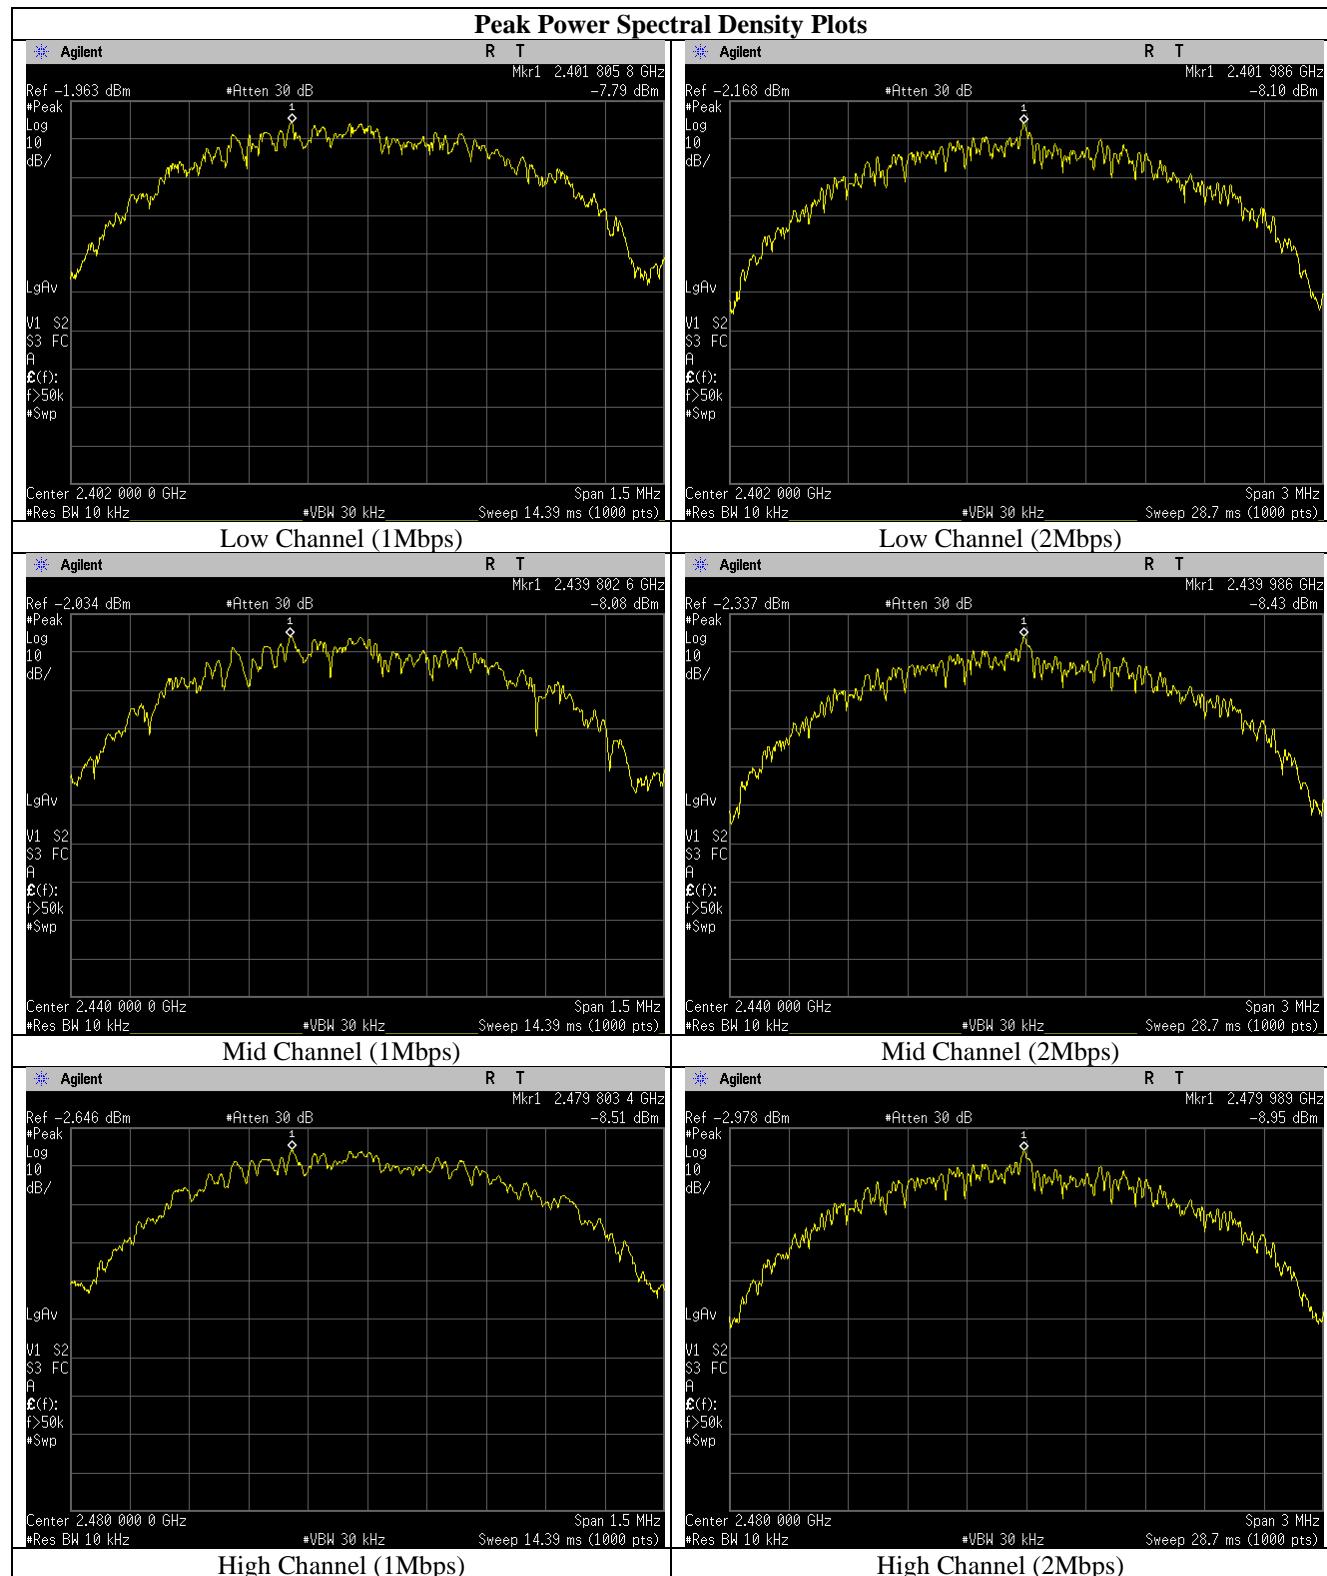

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The transmitter was connected directly to a Spectrum Analyzer. The power level was set to the maximum level. The RBW was set to 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

See following pages for detailed test results with RF Conducted Spurious Emissions.

The analyzer settings are shown in the following table:

RBW:	100kHz	Detector:	Peak	Reference Level:	30dBm
VBW:	300kHz	Sweep Time:	Auto	Internal Attenuation:	30dB

Figure 5. Analyzer Settings During Measurement

Test Software: TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) was utilized to perform these measurements.

Test Results: The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.

Test Engineer(s): Bryan Taylor

Test Date(s): 6/27/2024

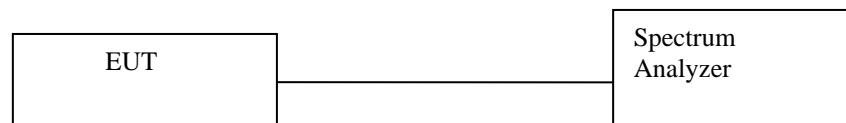


Figure 6. Block Diagram, Conducted Spurious Emissions Test Setup

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2397.914	-56.23	-21.17	35.06	Pass
2399.011	-53.03	-21.17	31.86	Pass
2274.037	-46.34	-21.17	25.17	Pass
2318.925	-47.26	-21.17	26.09	Pass
2338.162	-41.97	-21.17	20.8	Pass
2356.725	-48.19	-21.17	27.02	Pass
2484.975	-47.36	-21.17	26.19	Pass
2493.075	-48.4	-21.17	27.23	Pass
2529.863	-47.4	-21.17	26.23	Pass

Fundamental Emission Level = -1.17dBm

Figure 7. -20dB Down Spurious Emissions (Low Channel, 1Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2311.838	-47.14	-21.14	26	Pass
2330.738	-47.14	-21.14	26	Pass
2357.063	-44.64	-21.14	23.5	Pass
2375.963	-39.95	-21.14	18.81	Pass
2394.525	-45.67	-21.14	24.53	Pass
2503.875	-41.92	-21.14	20.78	Pass
2522.775	-45.23	-21.14	24.09	Pass
2548.762	-46.96	-21.14	25.82	Pass
2568	-47.12	-21.14	25.98	Pass

Fundamental Emission Level = -1.14dBm

Figure 8. -20dB Down Spurious Emissions (Mid Channel, 1Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2483.665	-57.4	-20.41	37	Pass
2484.621	-58	-20.41	37.59	Pass
2485.739	-59.19	-20.41	38.78	Pass
2488.524	-59.21	-20.41	38.8	Pass
2352	-45.02	-20.41	24.62	Pass
2389.125	-45.02	-20.41	24.61	Pass
2396.887	-45.98	-20.41	25.58	Pass
2544.037	-40.12	-20.41	19.72	Pass
2562.6	-44.68	-20.41	24.27	Pass
2589.262	-46.44	-20.41	26.04	Pass
2607.825	-45.48	-20.41	25.07	Pass

Fundamental Emission Level = -0.41dBm

Figure 9. -20dB Down Spurious Emissions (High Channel, 1Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2396.151	-57.73	-22.63	35.1	Pass
2399.012	-52.38	-22.63	29.75	Pass
2399.959	-33.45	-22.63	10.82	Pass
2274.037	-47.59	-22.63	24.96	Pass
2318.925	-45.71	-22.63	23.08	Pass
2326.35	-48.15	-22.63	25.52	Pass
2338.162	-42.85	-22.63	20.22	Pass
2484.975	-46.39	-22.63	23.76	Pass
2493.075	-46.77	-22.63	24.14	Pass
2530.2	-47.73	-22.63	25.1	Pass

Fundamental Emission Level = -2.63dBm

Figure 10. -20dB Down Spurious Emissions (Low Channel, 2Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2348.287	-48.17	-25.22	22.95	Pass
2357.063	-45.77	-25.22	20.55	Pass
2375.963	-41.38	-25.22	16.16	Pass
2394.863	-47.02	-25.22	21.8	Pass
2485.313	-48.5	-25.22	23.28	Pass
2503.875	-44.99	-25.22	19.77	Pass
2515.688	-46.96	-25.22	21.74	Pass
2531.213	-46.75	-25.22	21.53	Pass
2568.338	-48.69	-25.22	23.47	Pass


Fundamental Emission Level = -5.22dBm


Figure 11. -20dB Down Spurious Emissions (Mid Channel, 2Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
2483.936	-58.19	-20.41	37.78	Pass
2485.872	-58.22	-20.41	37.82	Pass
2487.045	-58.44	-20.41	38.04	Pass
2488.589	-58.18	-20.41	37.77	Pass
2352	-47.58	-20.41	27.17	Pass
2370.9	-46.65	-20.41	26.25	Pass
2389.125	-46.51	-20.41	26.11	Pass
2397.225	-46.21	-20.41	25.8	Pass
2544.037	-41.51	-20.41	21.11	Pass
2571.037	-46.34	-20.41	25.94	Pass
2608.162	-46.12	-20.41	25.71	Pass

Fundamental Emission Level = -0.41dBm

Figure 12. -20dB Down Spurious Emissions (High Channel, 2Mbps)

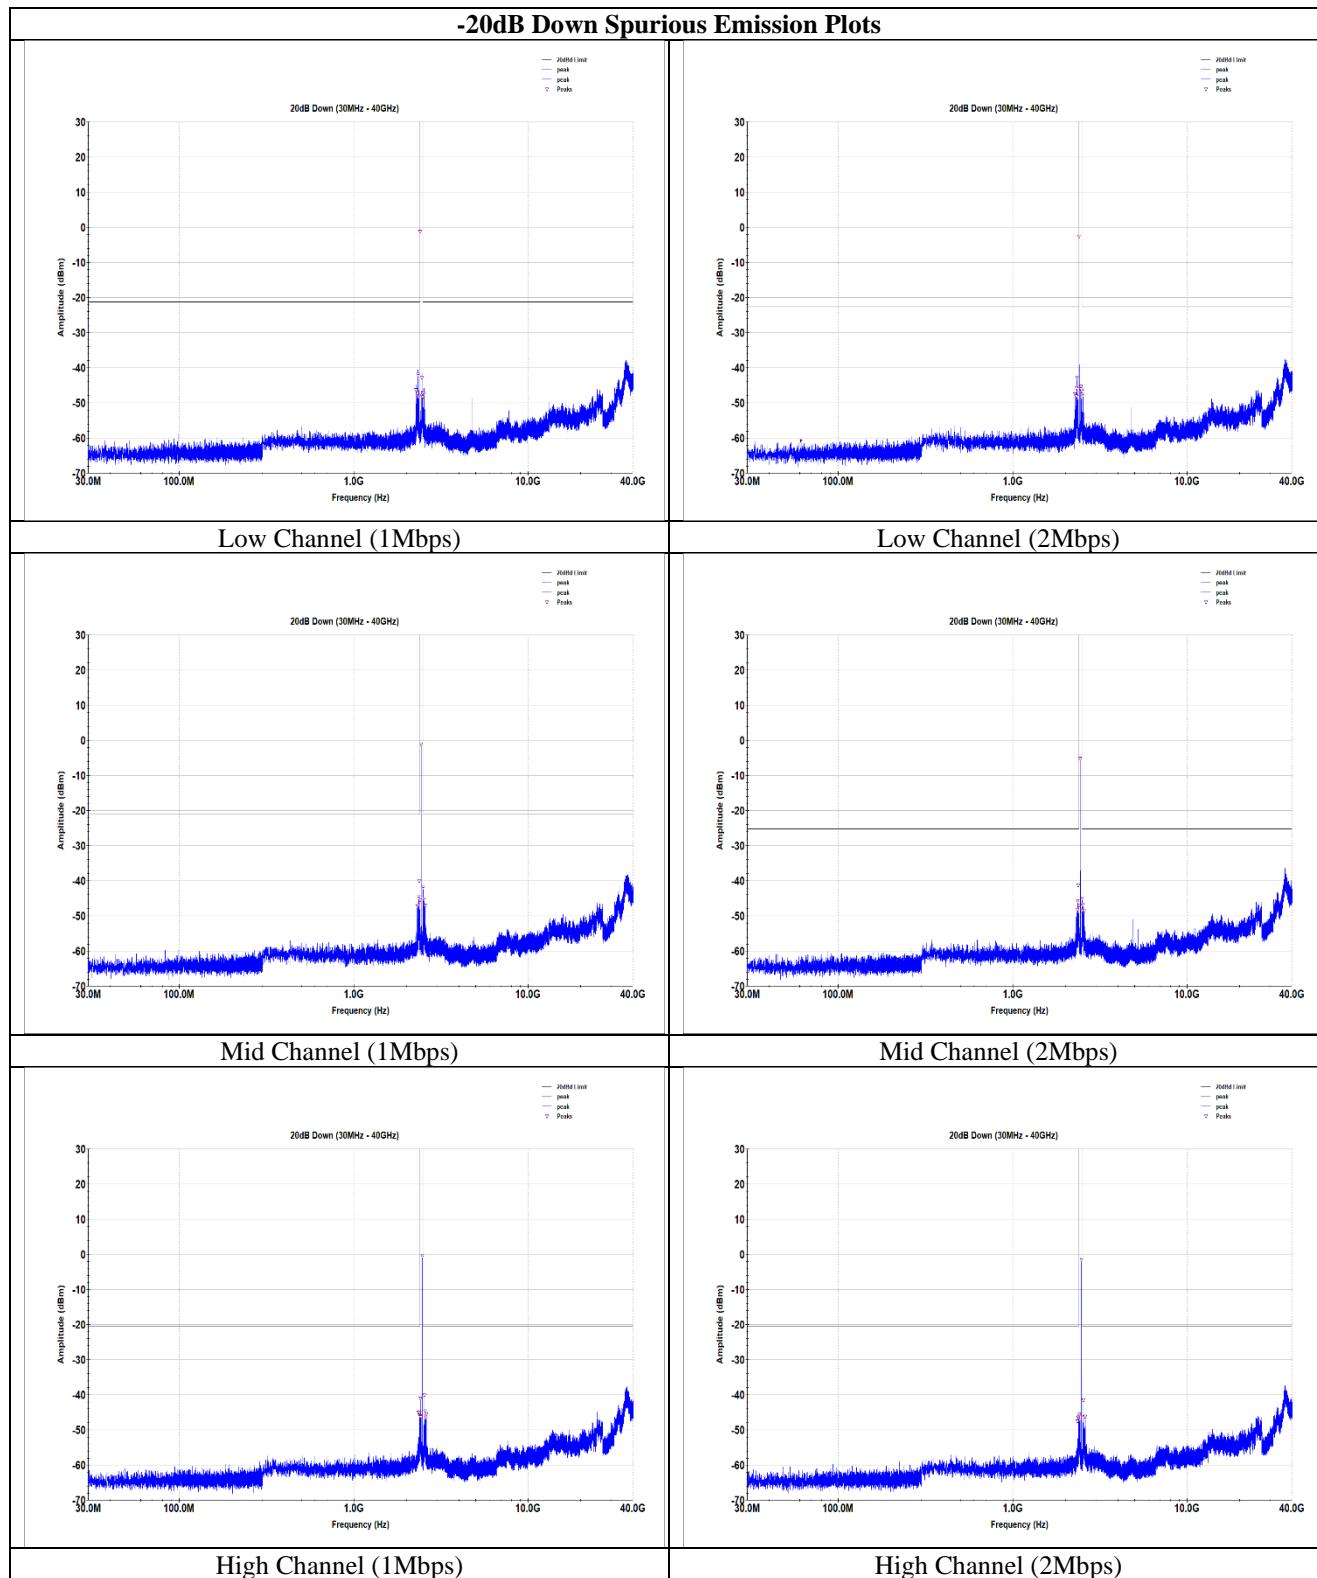

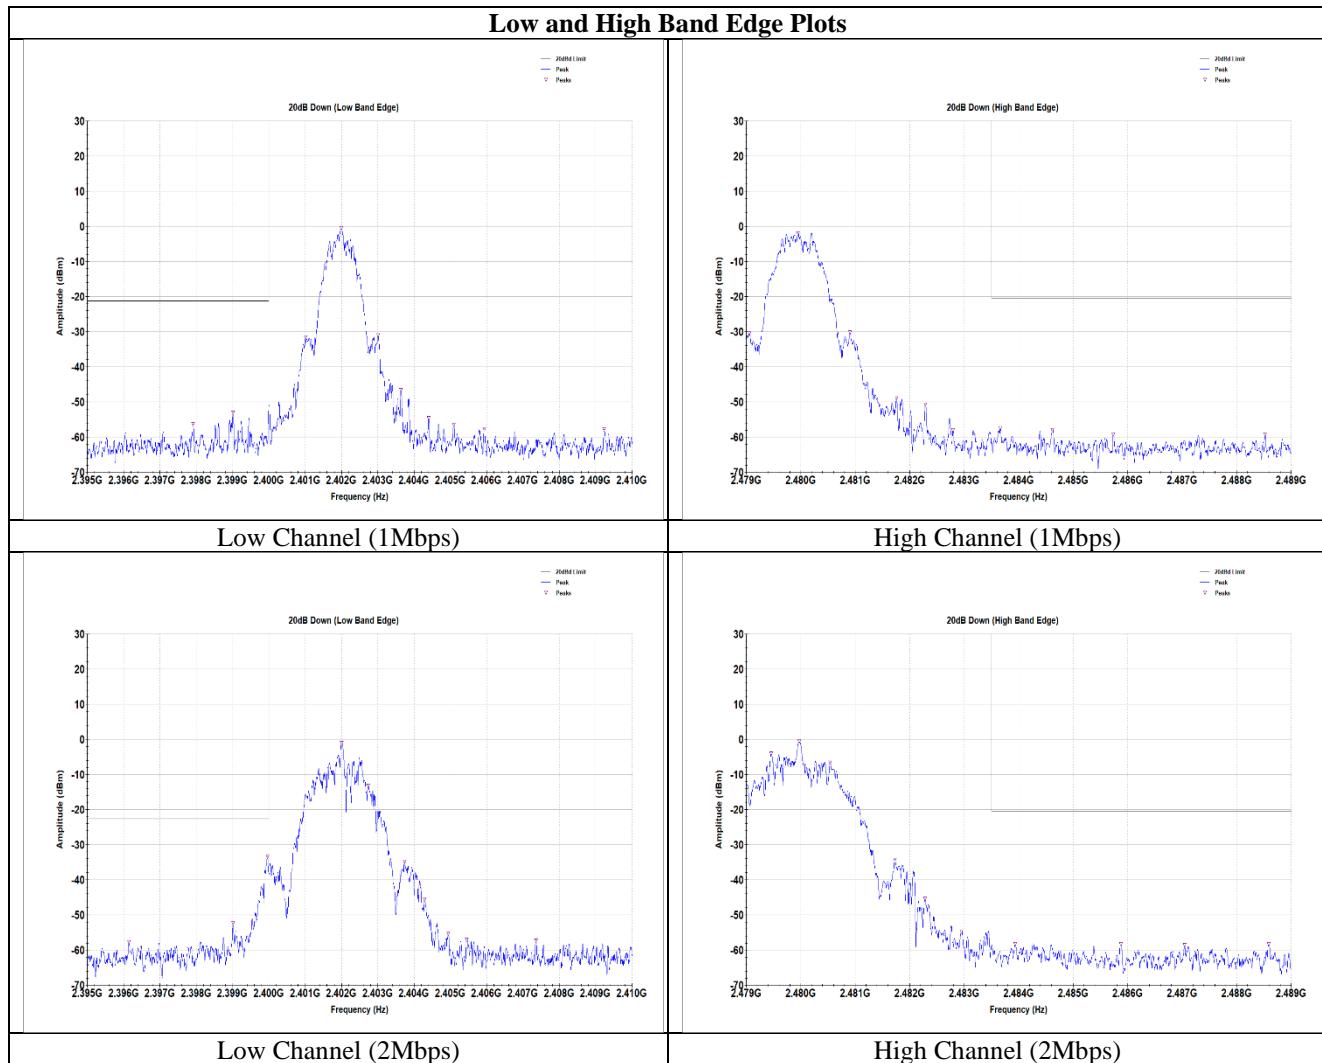

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 12. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 13.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 13. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The radiated methodology referenced in ANSI C63.10: 2013 Section 11.12.1 was utilized in order to assess the unwanted emissions in the restricted bands.

A radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes if multiple mounting orientations are supported. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.


Radiated measurements below 30MHz were performed in a semi-anechoic chamber that has been correlated to an open area site.


Test Software: TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) and ELEKTRA Version 4.61 (Manufactured by Rohde&Schwarz) was utilized to perform these measurements.


Test Results: The EUT was compliant with the Radiated Spurious Emission limits of **§ 15.247(d)**.

Test Engineer(s): Bryan Taylor, Sergio Gutierrez

Test Date(s): 6/25/2024 - 6/29/2024

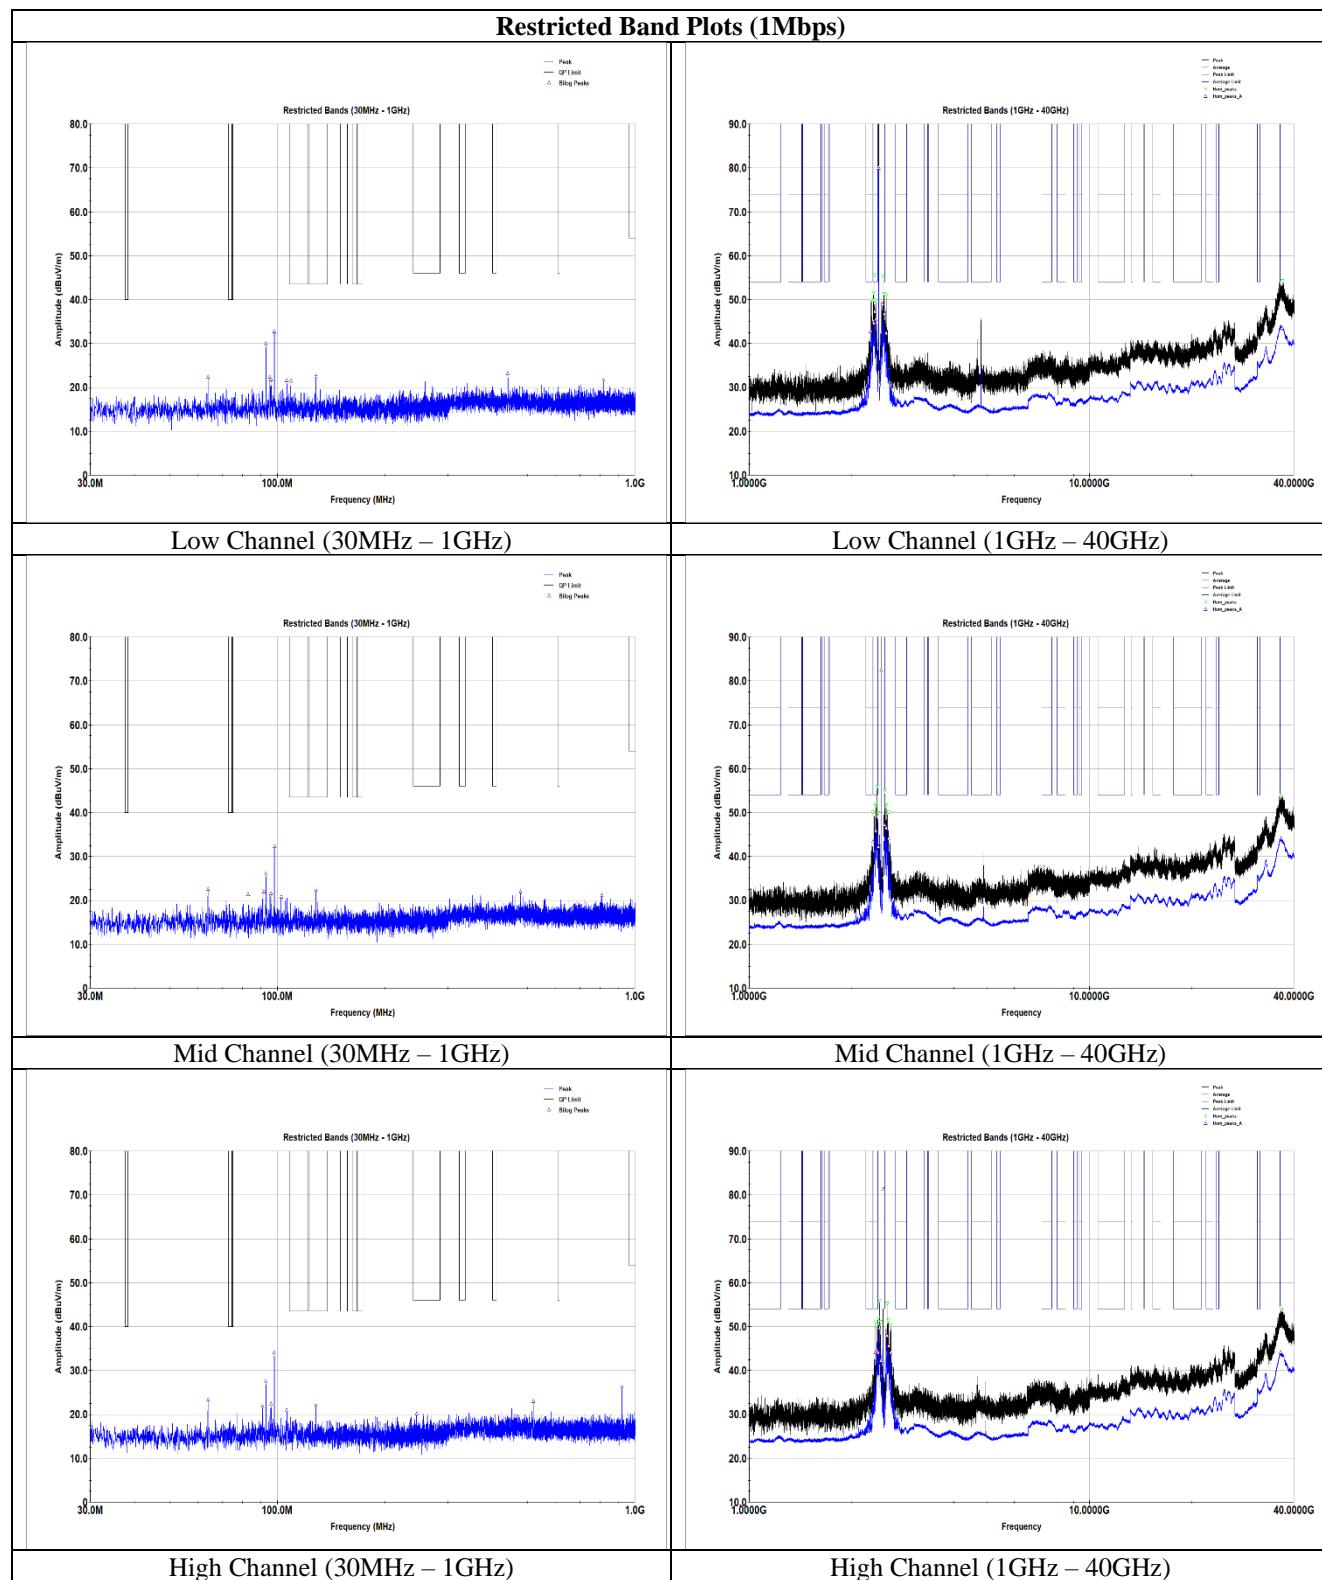

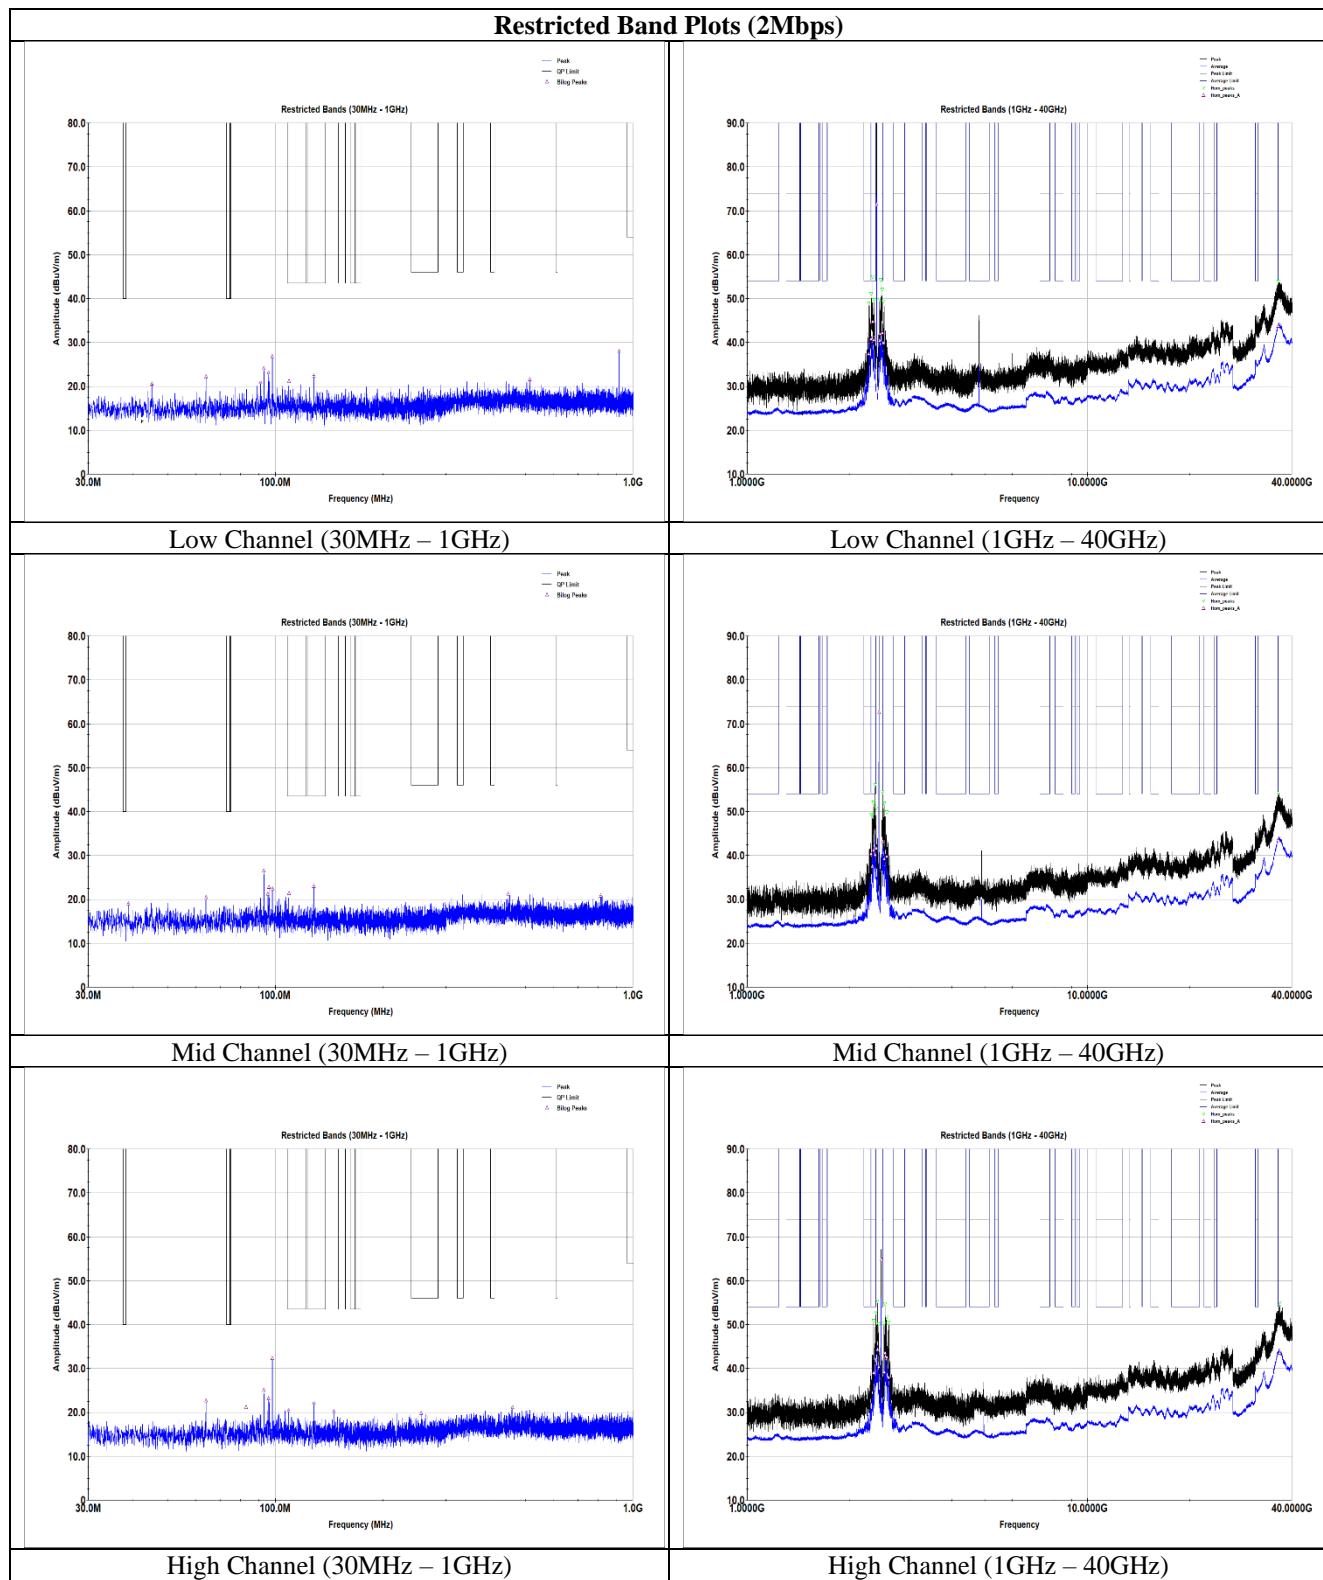

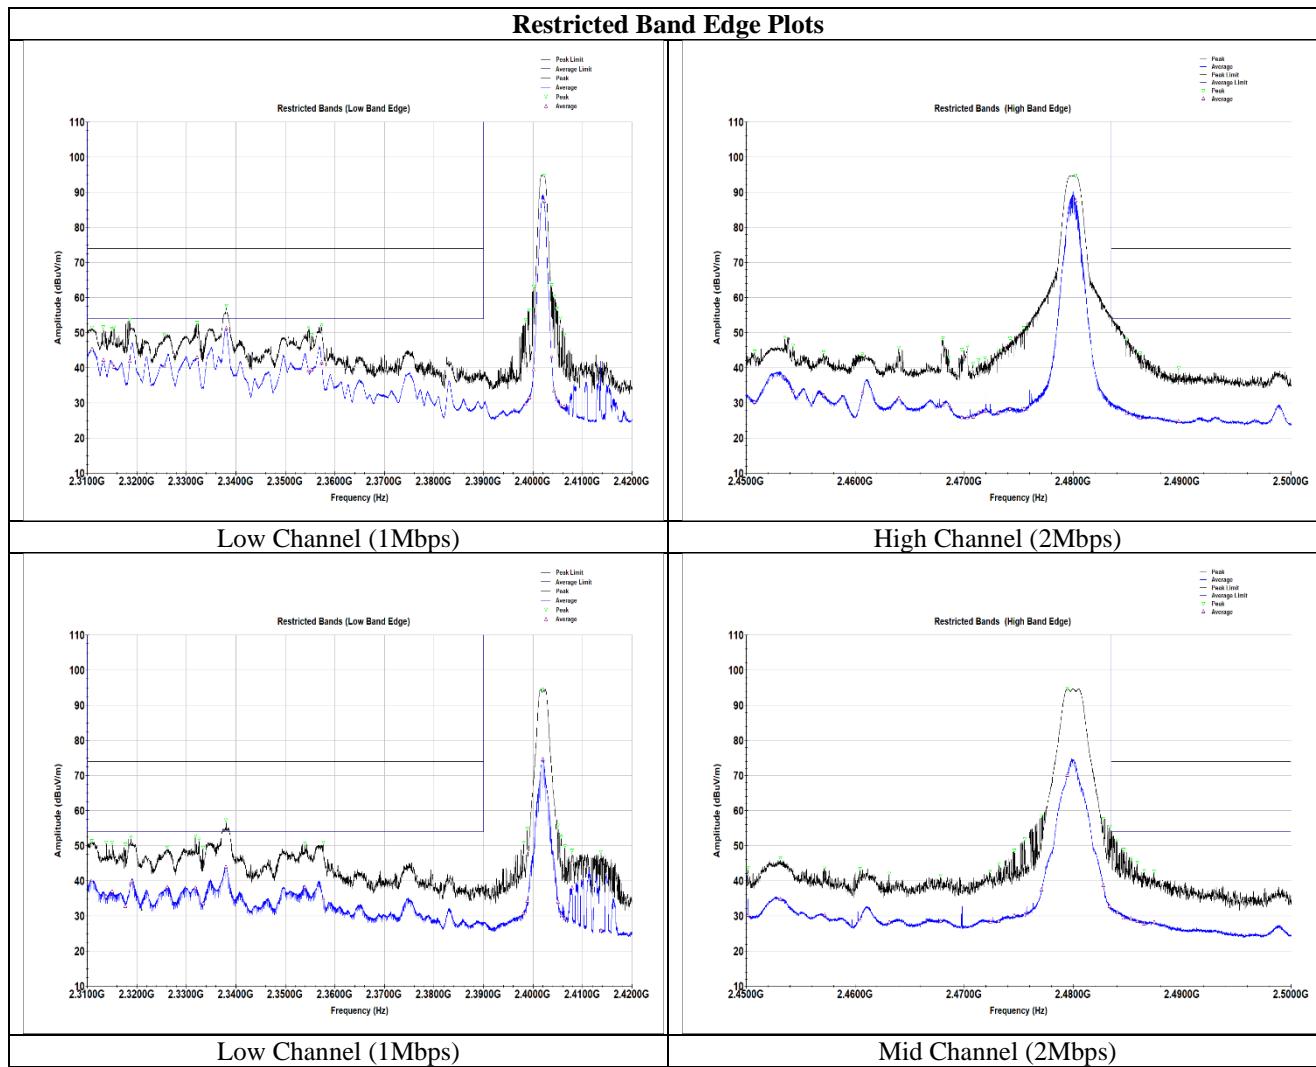

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2310.962	51.55	74	22.45	45.12	54	8.88	Pass
2313.245	51.68	74	22.32	42.15	54	11.85	Pass
2314.936	51.14	74	22.86	41.94	54	12.06	Pass
2315.445	51.48	74	22.52	41.15	54	12.85	Pass
2318.580	53.75	74	20.25	46.64	54	7.36	Pass
2325.565	49.46	74	24.54	40.66	54	13.34	Pass
2338.064	57.70	74	16.3	51.32	54	2.68	Pass
2354.619	51.51	74	22.49	39.58	54	14.42	Pass
2354.880	51.14	74	22.86	39.12	54	14.88	Pass
2357.314	52.18	74	21.82	45.57	54	8.43	Pass
2390.000	38.88	74	35.12	30.49	54	23.51	Pass

Figure 13. Restricted Band Edge Spurious Emissions (Low Band Edge, 1Mbps)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2310.935	51.4	74	22.6	39.88	54	14.12	Pass
2313.836	50.94	74	23.06	35.59	54	18.41	Pass
2315.019	50.94	74	23.06	36.98	54	17.02	Pass
2317.686	50.47	74	23.53	32.69	54	21.31	Pass
2318.786	52.4	74	21.6	39.39	54	14.61	Pass
2326.074	49.44	74	24.56	38.23	54	15.77	Pass
2331.821	52.78	74	21.22	37.9	54	16.1	Pass
2332.605	51.8	74	22.2	35.59	54	18.41	Pass
2333.347	49.38	74	24.62	33.49	54	20.51	Pass
2337.995	57.28	74	16.72	43.96	54	10.04	Pass
2353.904	50.66	74	23.34	38.22	54	15.78	Pass
2357.644	50.98	74	23.02	34.92	54	19.08	Pass
2390.000	39.05	74	34.95	28.77	54	25.23	Pass

Figure 14. Restricted Band Edge Spurious Emissions (Low Band Edge, 2Mbps)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2484.894	48.26	74	25.74	27.13	54	26.87	Pass
2486.194	44.1	74	29.9	25.71	54	28.29	Pass
2489.669	39.92	74	34.08	24.72	54	29.28	Pass
2483.500	54.16	74	19.84	30.23	54	23.77	Pass

Figure 15. Restricted Band Edge Spurious Emissions (High Band Edge, 1Mbps)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2484.031	51.53	74	22.47	30.96	54	23.04	Pass
2484.637	48.92	74	25.08	29.43	54	24.57	Pass
2485.287	46.27	74	27.73	29.34	54	24.66	Pass
2485.869	45.2	74	28.8	28.43	54	25.57	Pass
2486.512	42.97	74	31.03	27.74	54	26.26	Pass
2487.419	42.64	74	31.36	28.20	54	25.80	Pass
2483.531	53.80	74	20.20	32.99	54	21.01	Pass

Figure 16. Restricted Band Edge Spurious Emissions (High Band Edge, 2Mbps)

Worst Case Cabinet Spurious Emissions

Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.100	37.32	107.60	70.28	11.26	V	259.5	1	0.200	Pass
0.104	40.38	107.25	66.86	11.31	H	87.9	1	0.200	Pass
0.501	45.75	73.69	27.94	11.27	H	170.8	1	9.000	Pass
0.506	46.80	73.62	26.82	11.31	V	41.4	1	9.000	Pass
2.175	31.09	69.54	38.45	11.69	V	144.5	1	9.000	Pass
8.381	20.90	69.54	48.64	10.84	H	111.2	1	9.000	Pass


Figure 17. Worst Case Cabinet Radiation, 9kHz - 30MHz


Frequency [MHz]	QPK Level [dB μ V/m]	QPK Limit [dB μ V/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
123.810	6.71	43.52	36.81	-6.26	H	5.9	3.92	120.000	Pass
125.100	6.46	43.52	37.06	-6.17	V	179.8	1.63	120.000	Pass
267.570	6.75	46.02	39.27	-6.16	V	43.7	1.11	120.000	Pass
283.890	13.65	46.02	32.37	-5.93	H	358.7	3.5	120.000	Pass

Figure 18. Worst Case Cabinet Radiation, 30MHz - 1GHz

Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,879.500	49.68	74.00	24.32	38.69	54.00	15.31	-3.35	V	244	3.45	Pass
4,880.000	53.69	74.00	20.31	43.10	54.00	10.90	-3.35	H	180.8	2.13	Pass
7,319.500	45.83	74.00	28.17	33.24	54.00	20.76	-2.79	H	222.8	1.5	Pass
7,319.500	44.72	74.00	29.28	31.64	54.00	22.36	-2.79	V	124	2.37	Pass
12,273.000	45.12	74.00	28.88	32.50	54.00	21.50	-2.09	V	212.3	1.49	Pass
12,273.500	46.03	74.00	27.97	32.57	54.00	21.43	-2.09	H	170	3.44	Pass
17,808.000	49.18	74.00	24.82	36.53	54.00	17.47	1.61	H	165.3	1.08	Pass
17,831.000	49.38	74.00	24.62	36.33	54.00	17.67	1.58	V	48.7	1.18	Pass
19,520.125	51.57	74.00	22.43	40.59	54.00	13.41	12.35	H	179.7	2.49	Pass
19,520.813	52.06	74.00	21.94	40.29	54.00	13.71	12.35	V	340.8	2.39	Pass
20,518.313	50.54	74.00	23.46	39.06	54.00	14.94	12.19	H	90.5	2.5	Pass
20,853.125	51.16	74.00	22.84	39.62	54.00	14.38	12.47	V	189.6	3.49	Pass
31,437.188	54.48	74.00	19.52	43.12	54.00	10.88	16.65	H	184.6	1	Pass
36,462.813	53.27	74.00	20.73	42.35	54.00	11.65	15.85	V	360.3	2.69	Pass

Figure 19. Worst Case Cabinet Radiation, Above 1GHz

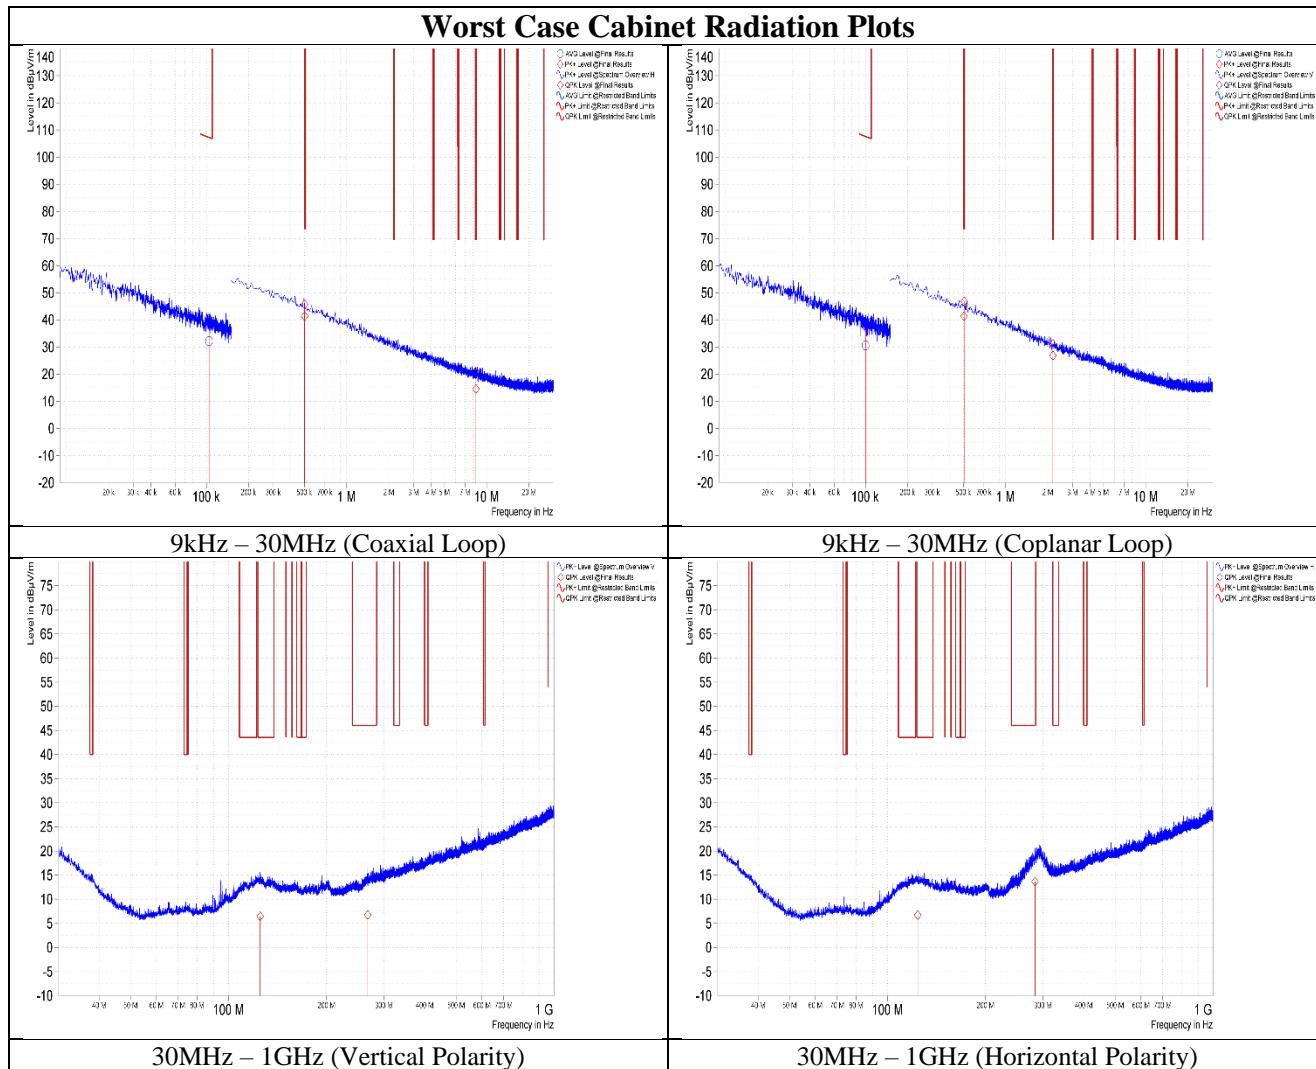

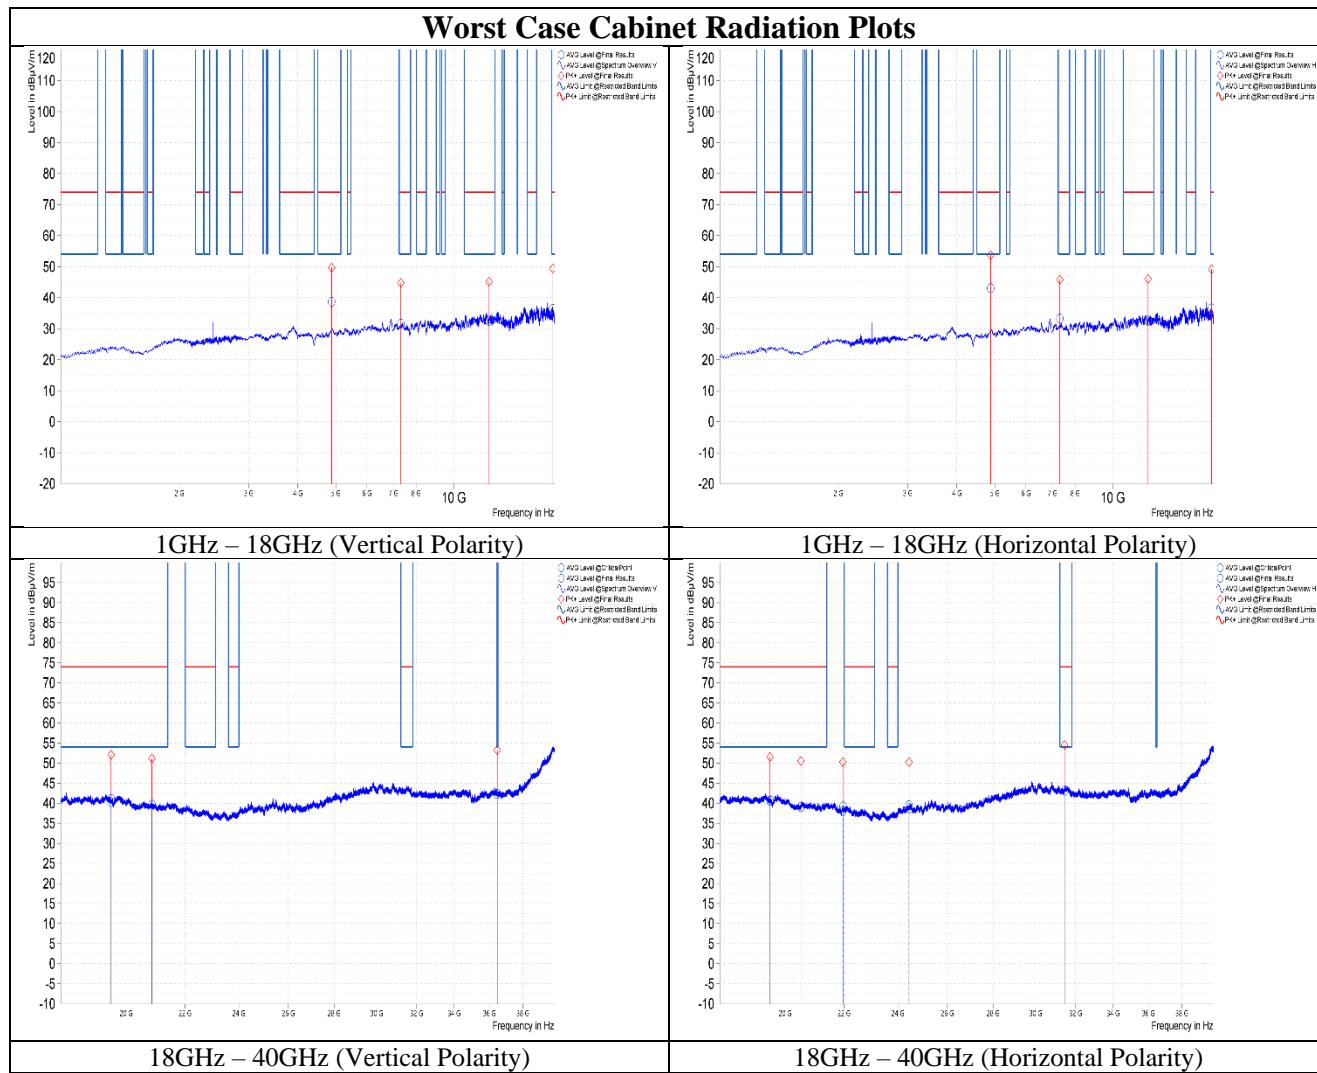

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Description	Manufacturer	Model	Last Cal Date	Cal Due Date
MY46180897	Spectrum Analyzer	Keysight	E4448A	7/27/2023	7/27/2024
1A1083	Receiver	Rohde & Schwarz	ESU40	11/20/2023	11/20/2024
1A1176	Active Loop Antenna (9KHz-30MHz)	ETS-Lindgren	6502	7/13/2023	7/13/2024
1A1147	Bi-Log Antenna	Suno Sciences Corp	JB3	04/06/2023	04/06/2025
1A1047	Horn Antenna	ETS - Lindgren	3117	06/16/2022	06/16/2024
1A1161	Horn Antenna (18GHz – 40GHz)	ETS Lindgren	3116C	7/11/2023	7/11/2024
1A1099	Generator	Com-Power	CGO-51000	See Note	
1A1088	Preamplifier	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	Com-Power	CG-520	See Note	
1A1073	Multi Device Controller	ETS	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi-Device	ETS	2090	See Note	
1A1180	Preamplifier	Miteq	AMF-7D-01001800-22-10P	See Note	

Table 14. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

End of Report