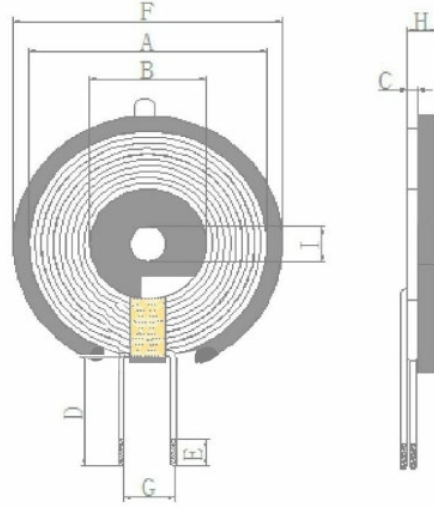



Shenzhen Wandenglai Technology Co., Ltd.			Version	SPECIFICATION						
			A/0	CUST	Tianjiulong					
product specification		Φ20.5*39*0.08*24P*2G-40MM-42.5LOC		CUST P/N	3.3.4.045					
				IN P/N	WDL-A11-010					
一、 DIMENSION:(mm) 				A	39±0.8					
				B	20.5±0.5					
				C	0.62±0.3					
				D	40±2					
				E	3±2					
				F	42.5±0.5					
				G	10 Max					
				H	1.4±0.3					
								Explanation: 1. Cross-over line 2. Magnetic sheet: Ferrite Magnetic sheet size: Φ42.5 * 5.3 * 0.8mm 3. Adhere 42 pieces of white self-adhesive tape. 4. Wire: 0.08*24P*2G insulated wire		
				二、 SCHEMATIC DIAGRAM:						
										
三、 Winding Specification:										
NO.		TERMINAL		WIRE	Turns	Winding Direction				
1		S	F	Silk bag with money: 0.08 * 24P * 2G	10TS	CCW				
四、 ELECTRICAL CHARACTERISTIC: :										
TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%										
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS					
1	IND.	S-F	3.9uH ± 10% Independent coil	100KHz/1.0V	LCZ METER 1062B					
2	IND.	S-F	6.5 microhenries ± 10% with magnetic plate	100KHz/1.0V	LCZ METER 1062B					
3	DCR	S-F	100mΩ Max		LCZ METER 502B					
Production Date	Li Jianhui 2023/11/20		date of approval	Li shuang 2023/11/20	date of approval	Ma Lingquan 2023/11/20				

Add: Huanghua Community, Pinghu Sub-district, Longgang District, Shenzhen City. Phase II of Huaxi International Leather and Leather Goods Raw Materials and Components Logistics Zone, Huaxi Development Center, Room 1110.