

LABEL AND LOCATION

122

4-R3

Model: **SP5000**

FCC ID: 2BK4Q-SP5000

Name: PORTABLE POWER STATION

AC Output (Single Phase, L1-N/L2-N)

Max AC Power (W)	2500
Surge Power (W)	4500
Rating Voltage (Vac)	120
Max Output Current (A)	21
Rating Frequency (Hz)	60

AC Output (Split Phase, L1-N-L2/L1-L2)

Max AC Power (W)	5000
Surge Power (W)	9000
Rating Voltage (Vac)	240
Max Output Current (A)	21
Rating Frequency (Hz)	60

DC Output

XT60(x1)	12V/30A, 24V/20A, 36V/20A
USB-TypeC(x2)	5V/3A, 9V/3A, 12V/3A, 20V/5A
USB-A(QC)(x2)	5V/3A, 9V/2A, 12V/1.5A
Car Charging(x1)	13V/10A

AC Charging (Single Phase, L1-N/L2-N)

Max Charging Power (W)	1800
Voltage Range (Vac)	90 ~ 130
Frequency Range (Hz)	55.5 ~ 64.5
Max Input Current (A)	16

AC Charging (Split Phase, L1-N-L2/L1-L2)


Max Charging Power (W)	3450
Voltage Range (Vac)	180 ~ 260
Frequency Range (Hz)	55.5 ~ 64.5
Max Input Current (A)	16

DC Input (XT60)

Max Input Power (W)	1000
Input Voltage Range (Vdc)	12 ~ 80
Max Input Current (A)	16

Operation Temperature Range(°C)	0~40°C (Charging), -20~40°C (Discharging)
---------------------------------	--

(Size: L: 122mm x W: 95mm)

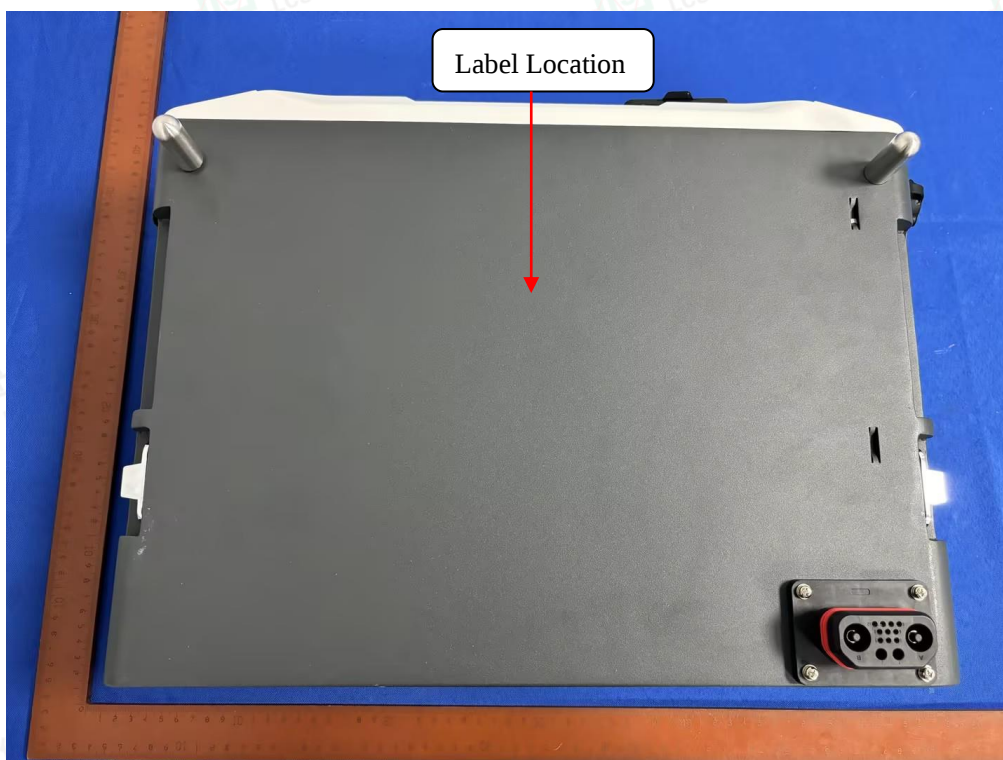

Shenzhen LCS Compliance Testing Laboratory Ltd.

Shenzhen EES Compliance Testing Laboratory Ltd.
Add: 101, 201 Building A and 301 Building C, Juji Industrial Park, Yabianxueziwei Shajing Street, Baoan District,
Shenzhen, 518000, P.R.C.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity