

FCC Part 15C TEST REPORT

FCC ID: 2BKB3-A312A51

IC:33206-A312A51

Product : AT-S024Y-5, AT-S312Y
Model Name : A51, A312
Brand : Hiwill
Report No. : NCT24052598

Prepared for

Hiwill Intelligent Technology (Dongguan) Co., Ltd
603, No. 5 Lucheng West Road, Qingxi Town, Dongguan City, Guangdong Province,
China.

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.
A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Hiwill Intelligent Technology (Dongguan) Co., Ltd

Address : 603, No. 5 Lucheng West Road, Qingxi Town, Dongguan City, Guangdong Province, China.

Manufacture's name : Hiwill Intelligent Technology (Dongguan) Co., Ltd

Address : 603, No. 5 Lucheng West Road, Qingxi Town, Dongguan City, Guangdong Province, China.

Product name : AT-S024Y-5, AT-S312Y

Model name : A51, A312

Additional model : N/A

Standards : FCC CFR47 Part 15 Section 15.247
RSS-247 Issue 3: August 2023

Test procedure : ANSI C63.10:2013
RSS-GEN Issue5, Amendment 2, February,2021

Test Date : Nov. 28, 2024 to Dec. 25, 2024

Date of Issue : Dec. 26, 2024

Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Keven Wu

Keven Wu / Engineer

Technical Manager:

Henry Wang

Henry Wang / Manager



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 TEST FACILITY	6
4 GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF E.U.T.	7
4.2 CHANNEL LIST	8
4.3 TEST SETUP CONFIGURATION	9
4.4 TEST MODE	9
5 EQUIPMENT DURING TEST	10
5.1 EQUIPMENTS LIST	10
5.2 MEASUREMENT UNCERTAINTY	12
5.3 DESCRIPTION OF SUPPORT UNITS	12
6 CONDUCTED EMISSION	13
6.1 E.U.T. OPERATION	13
6.2 EUT SETUP	13
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.4 MEASUREMENT PROCEDURE:	14
6.5 CONDUCTED EMISSION LIMIT	14
6.6 MEASUREMENT DESCRIPTION	14
6.7 CONDUCTED EMISSION TEST RESULT	14
7 RADIATED SPURIOUS EMISSIONS	19
7.1 EUT OPERATION	19
7.2 TEST SETUP	20
7.3 SPECTRUM ANALYZER SETUP	21
7.4 TEST PROCEDURE	22
7.5 SUMMARY OF TEST RESULTS	23
8 MAXIMUM PEAK OUTPUT POWER TEST	32
8.1 TEST STANDARD AND LIMIT	32
8.2 TEST SETUP	32

8.3 TEST PROCEDURE	32
8.4 TEST DATA	33
9 20DB OCCUPY BANDWIDTH & 99% OCB TEST	36
9.1 TEST STANDARD	36
9.2 TEST SETUP	36
9.3 TEST PROCEDURE	36
9.4 TEST DATA	36
10 CARRIER FREQUENCY SEPARATION TEST	39
10.1 TEST STANDARD AND LIMIT	39
10.2 TEST SETUP	39
10.3 TEST PROCEDURE	39
10.4 TEST DATA	39
11 NUMBER OF HOPPING CHANNEL TEST	41
11.1 TEST STANDARD AND LIMIT	41
11.2 TEST SETUP	41
11.3 TEST PROCEDURE	41
11.4 TEST DATA	42
12 DWELL TIME TEST	44
12.1 TEST STANDARD AND LIMIT	44
12.2 TEST SETUP	44
12.3 TEST PROCEDURE	44
12.4 TEST DATA	45
13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	49
13.1 TEST STANDARD AND LIMIT	49
13.2 TEST SETUP	49
13.3 TEST PROCEDURE	49
13.4 TEST DATA	50
14 ANTENNA REQUIREMENT	55
14.1 TEST STANDARD AND REQUIREMENT	55
14.2 ANTENNA CONNECTED CONSTRUCTION	56
15 APPENDIX I -- TEST SETUP PHOTOGRAPH	57
16 APPENDIX II -- EUT PHOTOGRAPH	58

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions and Restricted Bandedge	15.205(a) 15.209 15.247(d) RSS-Gen.6.13 RSS-Gen.8.10	PASS
Conducted Unwanted emissions and Band edge	15.247(d) 15.205(a) RSS-247 5.5	PASS
Conduct Emission	15.207 RSS-Gen 8.8	PASS
20dB Bandwidth & 99% OCB	15.247(a)(1) RSS-247.5.1(2) RSS-Gen.6.7	PASS
Maximum Peak Output Power	15.247(b)(1) RSS-247.5.4(4)	PASS
Frequency Separation	15.247(a)(1) RSS-247.5.1(4)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii) RSS-247.5.1(4)	PASS
Dwell time	15.247(a)(1)(iii) RSS-247.5.1(5)	PASS
Antenna Requirement	15.203 RSS-Gen 6.8	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

4 General Information

4.1 General Description of E.U.T.

Product Name	:	AT-S024Y-5, AT-S312Y
Model Name	:	A51, A312
Sample ID	:	A51:241203077 A312:241209195
Sample(s) Status:	:	Engineer sample
Additional model	:	N/A
Model difference	:	All the models are electrical identical including the same (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) and antenna location, components on PCB.), The difference are that the model name, product enclosure are different, and the A51 has one more RCA output ports than the A312.
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	79 channels
Antenna Type	:	PCB Antenna
Antenna Gain	:	-0.58dBi
Type of Modulation	:	GFSK, π /4DQPSK, 8DPSK
Power supply	:	AC 100-240V ~ 50/60Hz
Hardware Version	:	A51_SPA300_V06, A312_SPA300_V06
Software Version	:	A51_SPA300_V06, A312_SPA300_V06
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.


Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-


Channel	Frequency(MHz)
0	2402
39	2441
78	2480

4.3 Test Setup Configuration

Conducted Emission



Radiated Emission



Conducted Spurious



4.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	FrequencyTool_v0.3.0.exe
Power level setup	0dBm

5 Equipment During Test

5.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNARZBECK	2024/6/17	2025/6/16
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNARZBECK	2024/6/17	2025/6/16
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Preamplifier (15GHz-40GHz)	BBV 9718D	0024	SCHNARZBECK	2024/6/17	2025/6/16
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNARZBECK	2024/6/20	2025/6/19

Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHNARZBECK	2024/6/18	2025/6/17
MXG Signal Analyzer	N9020A	101178	RS	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	00374	SCHWARZBECK	2024/6/17	2025/6/16
Power Sensor	TR1029-2	00473	SCHNARZBECK	2024/6/17	2025/6/16
RF Swith	TR1029-1	02622	SCHNARZBECK	2024/6/17	2025/6/16
Cable	DA800- 4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800- 11000MM	NA	DA	2024/6/17	2025/6/16

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AT-S024Y-5, AT-S312Y	Hiwill	A51, A312	N/A	EUT
E-2	Notebook	lenovo	B40-80	MP07F6JD	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207 & RSS-Gen [8.8]
Test Method: : ANSI C63.10:2013
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :

Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.12 kPa
Test Voltage : AC 120V/60Hz


6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

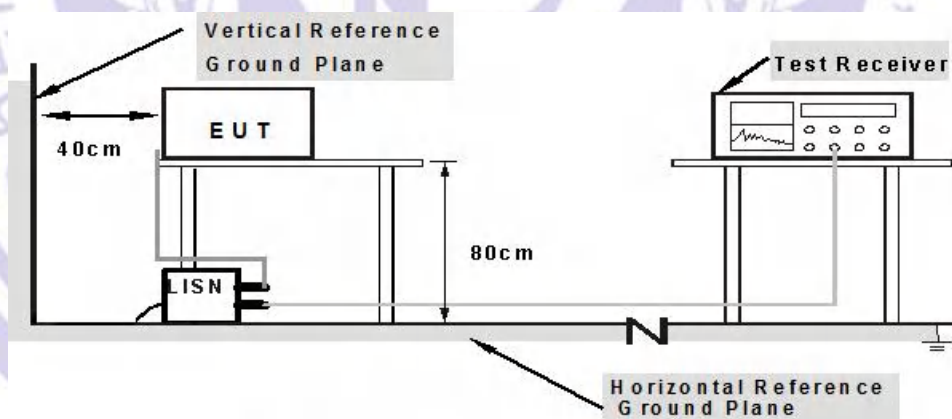

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

6.3 Test SET-UP (Block Diagram of Configuration)

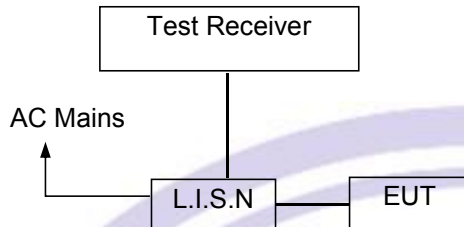

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Low	Phase :	L
Model:	A51		

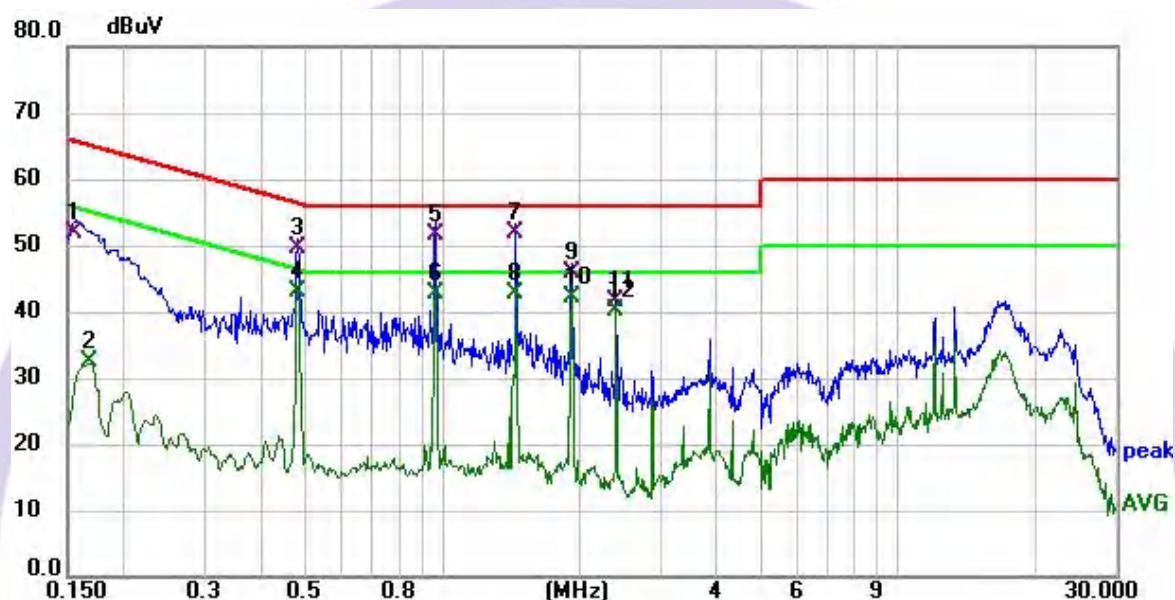

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.156	41.06	10.90	51.96	65.67	-13.71	QP	P
2	0.168	21.43	10.91	32.34	55.06	-22.72	AVG	P
3	0.480	39.03	10.65	49.68	56.34	-6.66	QP	P
4	0.480	32.30	10.65	42.95	46.34	-3.39	AVG	P
5	0.964	40.57	11.06	51.63	56.00	-4.37	QP	P
6 *	0.964	31.73	11.06	42.79	46.00	-3.21	AVG	P
7	1.441	40.76	11.08	51.84	56.00	-4.16	QP	P
8	1.441	31.51	11.08	42.59	46.00	-3.41	AVG	P
9	1.927	34.95	11.01	45.96	56.00	-10.04	QP	P
10	1.927	31.06	11.01	42.07	46.00	-3.93	AVG	P
11	2.404	30.51	11.02	41.53	56.00	-14.47	QP	P
12	2.404	29.09	11.02	40.11	46.00	-5.89	AVG	P

Channel:	High	Phase :	N
Model:	A51		

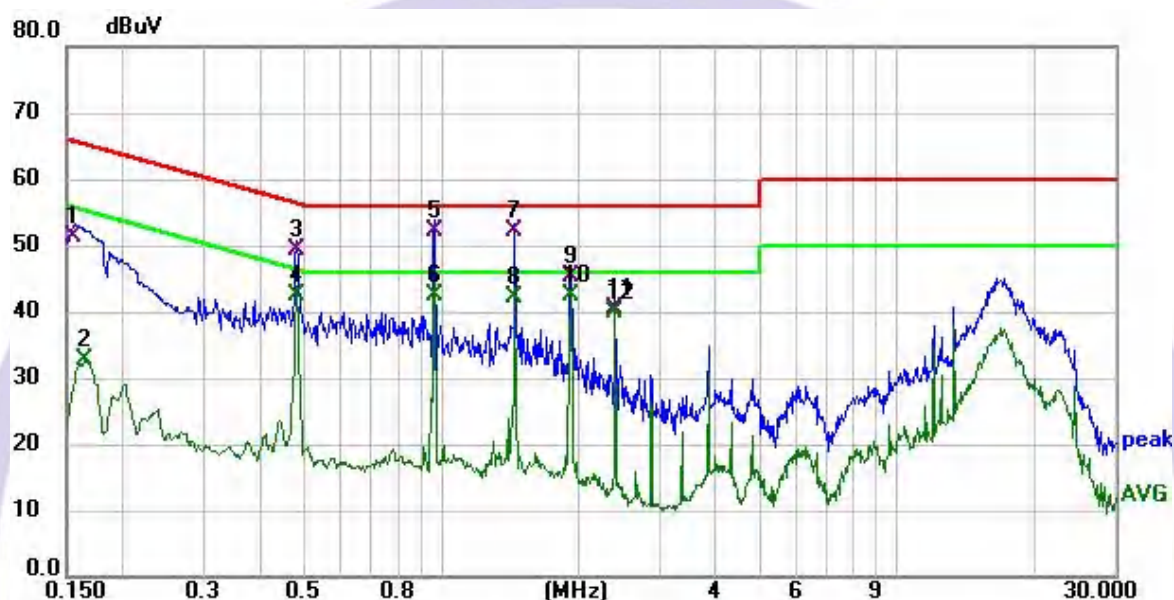


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.156	40.49	10.87	51.36	65.67	-14.31	QP	P
2	0.165	21.71	10.87	32.58	55.21	-22.63	AVG	P
3	0.480	38.55	10.68	49.23	56.34	-7.11	QP	P
4	0.480	31.85	10.68	42.53	46.34	-3.81	AVG	P
5	0.964	40.98	11.05	52.03	56.00	-3.97	QP	P
6 *	0.964	31.31	11.05	42.36	46.00	-3.64	AVG	P
7	1.441	41.07	11.09	52.16	56.00	-3.84	QP	P
8	1.441	31.07	11.09	42.16	46.00	-3.84	AVG	P
9	1.927	34.29	11.03	45.32	56.00	-10.68	QP	P
10	1.927	31.31	11.03	42.34	46.00	-3.66	AVG	P
11	2.404	29.32	11.03	40.35	56.00	-15.65	QP	P
12	2.404	28.86	11.03	39.89	46.00	-6.11	AVG	P

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Channel:	Low	Phase :	L
Model:	A312		

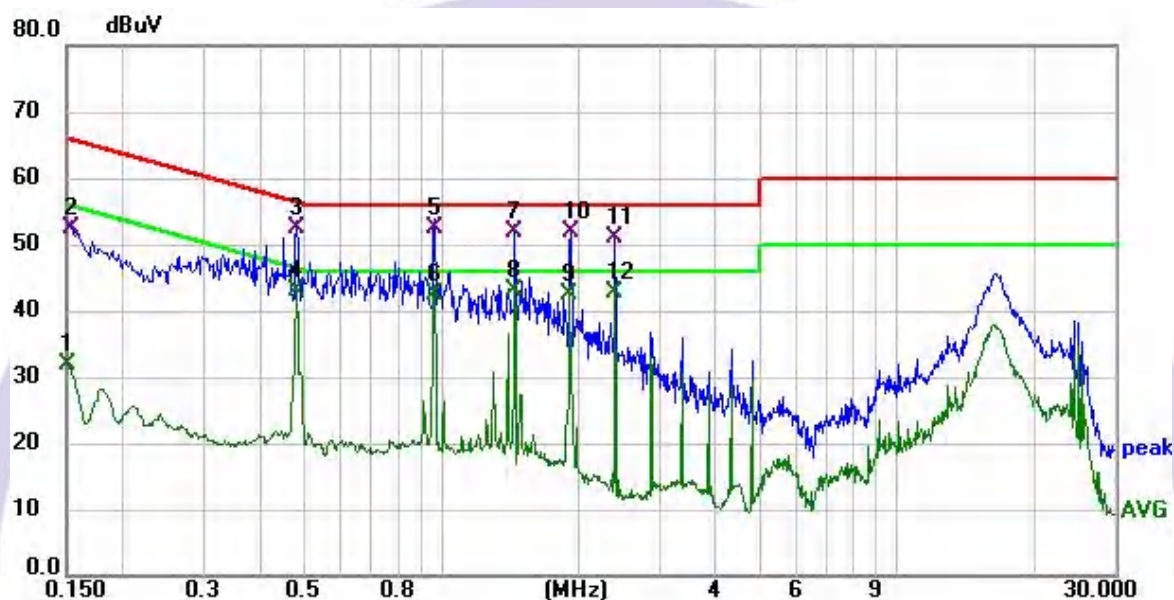

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.150	21.01	10.90	31.91	56.00	-24.09	AVG	P
2	0.153	41.41	10.90	52.31	65.84	-13.53	QP	P
3	0.480	41.71	10.65	52.36	56.34	-3.98	QP	P
4	0.480	32.38	10.65	43.03	46.34	-3.31	AVG	P
5	0.964	41.41	11.06	52.47	56.00	-3.53	QP	P
6	0.964	31.49	11.06	42.55	46.00	-3.45	AVG	P
7	1.441	40.78	11.08	51.86	56.00	-4.14	QP	P
8 *	1.441	31.85	11.08	42.93	46.00	-3.07	AVG	P
9	1.918	31.30	11.01	42.31	46.00	-3.69	AVG	P
10	1.927	40.73	11.01	51.74	56.00	-4.26	QP	P
11	2.404	39.94	11.02	50.96	56.00	-5.04	QP	P
12	2.404	31.79	11.02	42.81	46.00	-3.19	AVG	P

Channel:	Low	Phase :	N
Model:	A312		

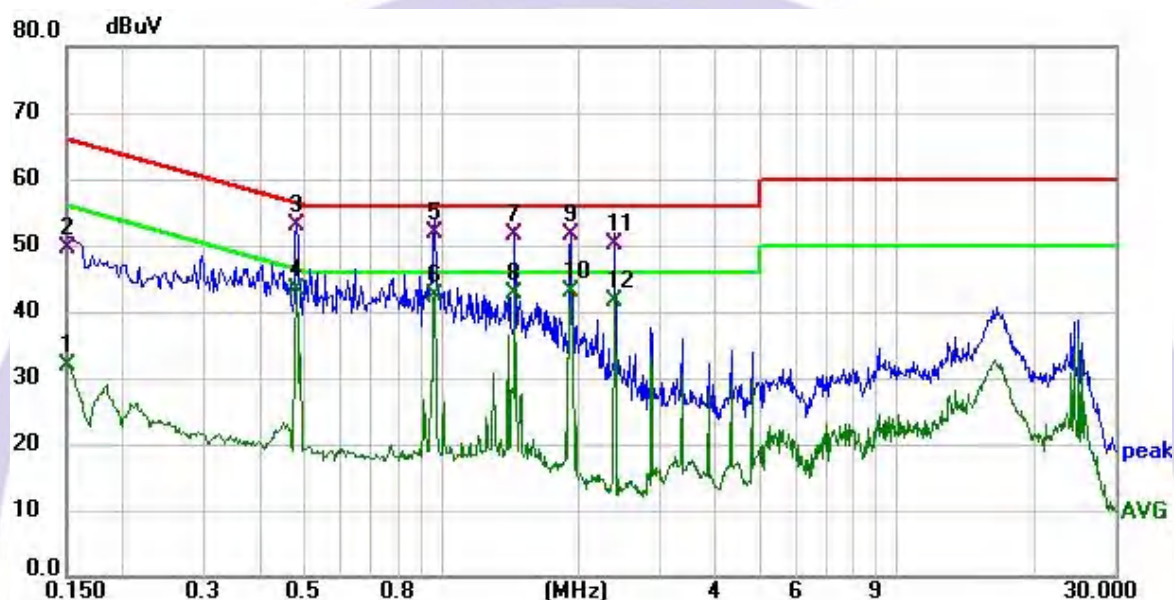

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.150	21.12	10.88	32.00	56.00	-24.00	AVG	P
2	0.151	38.78	10.88	49.66	65.94	-16.28	QP	P
3	0.480	42.21	10.68	52.89	56.34	-3.45	QP	P
4	0.480	32.59	10.68	43.27	46.34	-3.07	AVG	P
5	0.964	40.91	11.05	51.96	56.00	-4.04	QP	P
6	0.964	31.31	11.05	42.36	46.00	-3.64	AVG	P
7	1.441	40.38	11.09	51.47	56.00	-4.53	QP	P
8	1.441	31.69	11.09	42.78	46.00	-3.22	AVG	P
9	1.927	40.60	11.03	51.63	56.00	-4.37	QP	P
10 *	1.927	31.93	11.03	42.96	46.00	-3.04	AVG	P
11	2.404	39.00	11.03	50.03	56.00	-5.97	QP	P
12	2.404	30.59	11.03	41.62	46.00	-4.38	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247 & RSS-247 [5.5]
Test Method : ANSI C63.10:2013
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

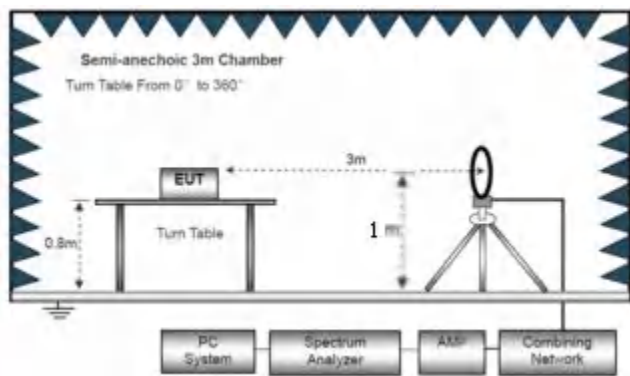

The test setup for emission measurement from 30 MHz to 1 GHz.

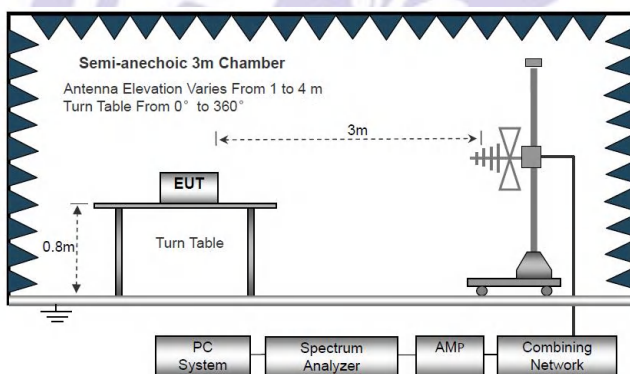

The test setup for emission measurement above 1 GHz.

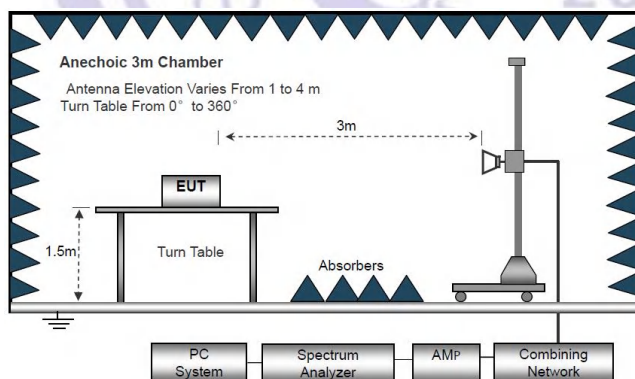

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);


Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel (2402MHz) Worst case GFSK for record:

Model:	A51
--------	-----

Test plot for Horizontal

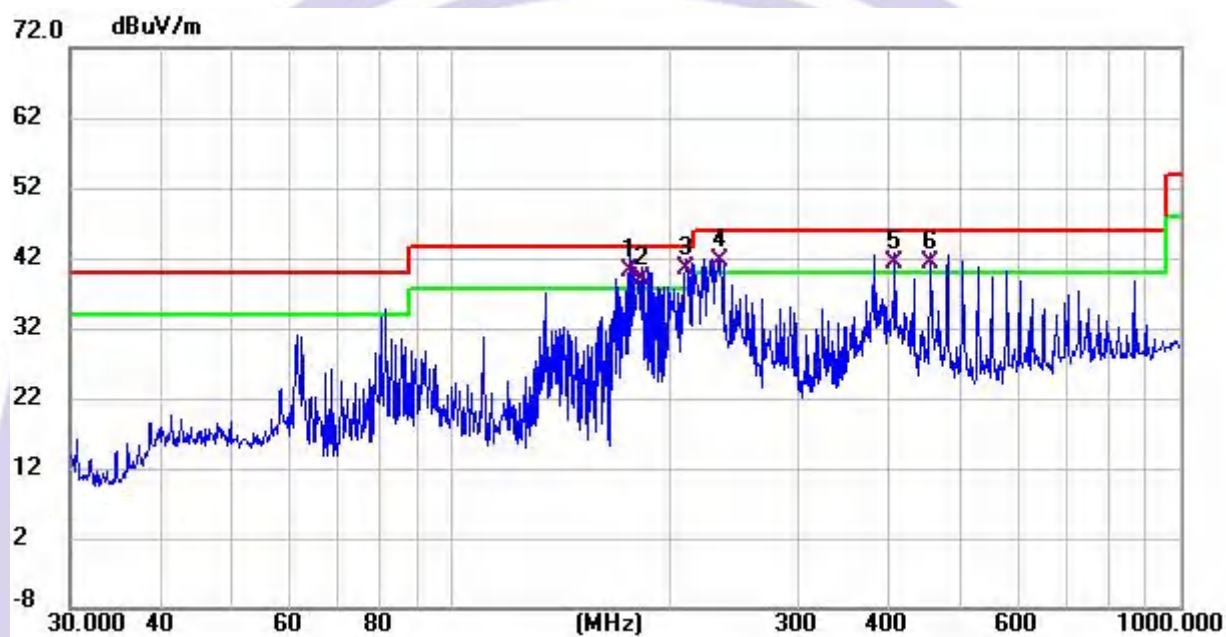


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	176.269	30.64	9.61	40.25	43.50	-3.25	QP
2 !	183.201	28.96	10.00	38.96	43.50	-4.54	QP
3 *	210.048	28.93	11.38	40.31	43.50	-3.19	QP
4 !	233.349	29.19	12.34	41.53	46.00	-4.47	QP
5 !	406.088	24.55	16.81	41.36	46.00	-4.64	QP
6 !	455.906	23.62	17.73	41.35	46.00	-4.65	QP

Remark: Emission Level = Reading + Factor

Model:	A51
--------	-----

Test plot for Vertical

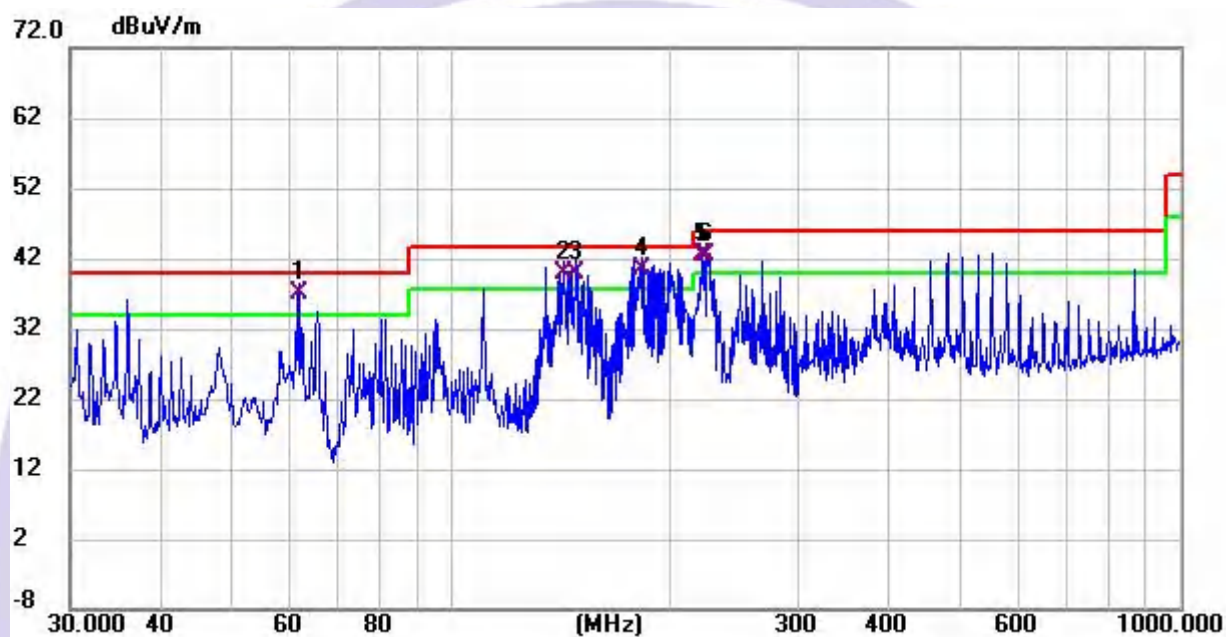

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	61.995	25.85	11.06	36.91	40.00	-3.09	QP
2 !	142.824	31.92	7.94	39.86	43.50	-3.64	QP
3 !	148.441	31.80	8.06	39.86	43.50	-3.64	QP
4 !	183.201	30.39	10.00	40.39	43.50	-3.11	QP
5 !	221.392	30.51	11.85	42.36	46.00	-3.64	QP
6 !	224.519	30.58	11.98	42.56	46.00	-3.44	QP

Remark: Emission Level = Reading + Factor

Model:	A312
--------	------

Test plot for Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	83.230	27.60	8.95	36.55	40.00	-3.45	QP
2 !	104.170	27.24	12.55	39.79	43.50	-3.71	QP
3 !	105.641	27.59	12.28	39.87	43.50	-3.63	QP
4 !	200.688	28.86	11.00	39.86	43.50	-3.64	QP
5 !	212.269	28.18	11.47	39.65	43.50	-3.85	QP
6 *	222.950	30.93	11.92	42.85	46.00	-3.15	QP

Remark: Emission Level = Reading + Factor

Model:	A312
--------	------

Test plot for Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	95.093	27.33	12.51	39.84	43.50	-3.66	QP
2 *	104.170	27.59	12.84	40.43	43.50	-3.07	QP
3 !	105.641	27.82	12.50	40.32	43.50	-3.18	QP
4 !	186.441	29.59	10.19	39.78	43.50	-3.72	QP
5 !	191.745	29.38	10.49	39.87	43.50	-3.63	QP
6	222.950	27.73	11.92	39.65	46.00	-6.35	QP

Remark:Emission Level=Reading+Factor

Test Frequency 1GHz-25GHz

Bluetooth (GFSK, π /4DQPSK, 8DPSK) mode have been tested, and the worst result (GFSK) was report as below

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804	49.75	34.12	5.03	32.39	53.05	74	-20.95	Pk
V	4804	40.63	34.12	5.03	32.39	43.93	54	-10.07	AV
V	7206	43.03	32.54	6.29	35.86	52.64	74	-21.36	Pk
V	7206	33.54	32.54	6.29	35.86	43.15	54	-10.85	AV
V	9608	42.38	32.98	7.55	38.4	55.35	74	-18.65	Pk
V	9608	30.46	32.98	7.55	38.4	43.43	54	-10.57	AV
V	12010	37.76	32.09	8.93	39	53.60	74	-20.40	Pk
V	12010	29.02	32.09	8.93	39	44.86	54	-9.14	AV
H	4804	52.75	34.12	5.03	32.39	56.05	74	-17.95	Pk
H	4804	39.70	34.12	5.03	32.39	43.00	54	-11.00	AV
H	7206	42.64	32.54	6.29	35.86	52.25	74	-21.75	Pk
H	7206	34.24	32.54	6.29	35.86	43.85	54	-10.15	AV
H	9608	41.22	32.98	7.55	38.4	54.19	74	-19.81	Pk
H	9608	31.46	32.98	7.55	38.4	44.43	54	-9.57	AV
H	12010	39.38	32.09	8.93	39	55.22	74	-18.78	Pk
H	12010	30.06	32.09	8.93	39	45.90	54	-8.10	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	49.35	34.07	5.09	32.59	52.96	74	-21.04	Pk
V	4882	40.93	34.07	5.09	32.59	44.54	54	-9.46	AV
V	7323	39.81	32.63	6.34	35.96	49.48	74	-24.52	Pk
V	7323	33.09	32.63	6.34	35.96	42.76	54	-11.24	AV
V	9764	41.49	32.92	7.59	38.4	54.56	74	-19.44	Pk
V	9764	32.65	32.92	7.59	38.4	45.72	54	-8.28	AV
V	12205	40.15	31.96	8.88	39.04	56.11	74	-17.89	Pk
V	12205	31.34	31.96	8.88	39.04	47.30	54	-6.70	AV
H	4882	50.87	34.07	5.09	32.59	54.48	74	-19.52	Pk
H	4882	40.57	34.07	5.09	32.59	44.18	54	-9.82	AV
H	7323	42.58	32.63	6.34	35.96	52.25	74	-21.75	Pk
H	7323	34.72	32.63	6.34	35.96	44.39	54	-9.61	AV
H	9764	41.10	32.92	7.59	38.4	54.17	74	-19.83	Pk
H	9764	30.64	32.92	7.59	38.4	43.71	54	-10.29	AV
H	12205	40.01	31.96	8.88	39.04	55.97	74	-18.03	Pk
H	12205	28.79	31.96	8.88	39.04	44.75	54	-9.25	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960	51.80	34.02	5.15	32.8	55.73	74	-18.27	Pk
V	4960	39.79	34.02	5.15	32.8	43.72	54	-10.28	AV
V	7440	42.82	32.71	6.4	36.05	52.56	74	-21.44	Pk
V	7440	31.27	32.71	6.4	36.05	41.01	54	-12.99	AV
V	9920	41.97	32.86	7.62	38.4	55.13	74	-18.87	Pk
V	9920	29.18	32.86	7.62	38.4	42.34	54	-11.66	AV
V	12400	39.18	31.82	8.84	39.08	55.28	74	-18.72	Pk
V	12400	30.35	31.82	8.84	39.08	46.45	54	-7.55	AV
H	4960	50.20	34.02	5.15	32.8	54.13	74	-19.87	Pk
H	4960	41.55	34.02	5.15	32.8	45.48	54	-8.52	AV
H	7440	44.13	32.71	6.4	36.05	53.87	74	-20.13	Pk
H	7440	33.89	32.71	6.4	36.05	43.63	54	-10.37	AV
H	9920	40.55	32.86	7.62	38.4	53.71	74	-20.29	Pk
H	9920	30.98	32.86	7.62	38.4	44.14	54	-9.86	AV
H	12400	39.07	31.82	8.84	39.08	55.17	74	-18.83	Pk
H	12400	28.19	31.82	8.84	39.08	44.29	54	-9.71	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, $\pi/4$ DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
GFSK	Low Channel: 2402MHz										
	H	2390.00	55.87	35.17	3.48	27.49	51.67	74	-22.33	PK	PASS
	H	2390.00	45.70	35.17	3.48	27.49	41.50	54	-12.5	AV	PASS
	H	2400.00	56.31	35.16	3.49	27.52	52.16	74	-21.84	PK	PASS
	H	2400.00	45.37	35.16	3.49	27.52	41.22	54	-12.78	AV	PASS
	V	2390.00	56.32	35.17	3.48	27.49	52.12	74	-21.88	PK	PASS
	V	2390.00	48.56	35.17	3.48	27.49	44.36	54	-9.64	AV	PASS
	V	2400.00	57.71	35.16	3.49	27.52	53.56	74	-20.44	PK	PASS
	V	2400.00	46.50	35.16	3.49	27.52	42.35	54	-11.65	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	55.40	35.11	3.56	27.75	51.60	74	-22.4	PK	PASS
	H	2483.50	46.75	35.11	3.56	27.75	42.95	54	-11.05	AV	PASS
	H	2500.00	56.39	35.1	3.57	27.8	52.66	74	-21.34	PK	PASS
	H	2500.00	46.43	35.1	3.57	27.8	42.70	54	-11.3	AV	PASS
	V	2483.50	56.82	35.11	3.56	27.75	53.02	74	-20.98	PK	PASS
	V	2483.50	47.23	35.11	3.56	27.75	43.43	54	-10.57	AV	PASS
	V	2500.00	55.20	35.1	3.57	27.8	51.47	74	-22.53	PK	PASS
	V	2500.00	46.46	35.1	3.57	27.8	42.73	54	-11.27	AV	PASS

Remark:


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

8 Maximum Peak Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1) & RSS-247.5.4(4)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

8.2 Test Setup



8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold


8.4 Test Data


Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH1	0	-4.15	0.38	None	30	PASS
		39	-4.85	0.33	None		PASS
		78	-5.45	0.29	None		PASS
$\pi/4$ DQPSK	2-DH1	0	-4.22	0.38	None	20.97	PASS
		39	-4.90	0.32	None		PASS
		78	-5.49	0.28	None		PASS
8DPSK	3-DH1	0	-6.42	0.23	None		PASS
		39	-6.99	0.20	None		PASS
		78	-5.39	0.29	None		PASS

Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Power Limit (dBm)	ISED EIRP (dBm)	ISED EIRP Limit (dBm)	Max. Avg. Power (dBm)	Result
GFSK	DH1	0	-4.15	≤ 30	-4.73	≤ 36.02	None	PASS
		39	-4.85	≤ 30	-5.43	≤ 36.02	None	PASS
		78	-5.45	≤ 30	-6.03	≤ 36.02	None	PASS
$\pi/4$ DQPSK	2-DH1	0	-4.22	≤ 20.97	-4.80	≤ 36.02	None	PASS
		39	-4.90	≤ 20.97	-5.48	≤ 36.02	None	PASS
		78	-5.49	≤ 20.97	-6.07	≤ 36.02	None	PASS
8DPSK	3-DH1	0	-6.42	≤ 20.97	-7.00	≤ 36.02	None	PASS
		39	-6.99	≤ 20.97	-7.57	≤ 36.02	None	PASS
		78	-5.39	≤ 20.97	-5.97	≤ 36.02	None	PASS


EIRP=Output Power+Antenna Gain

Test plots

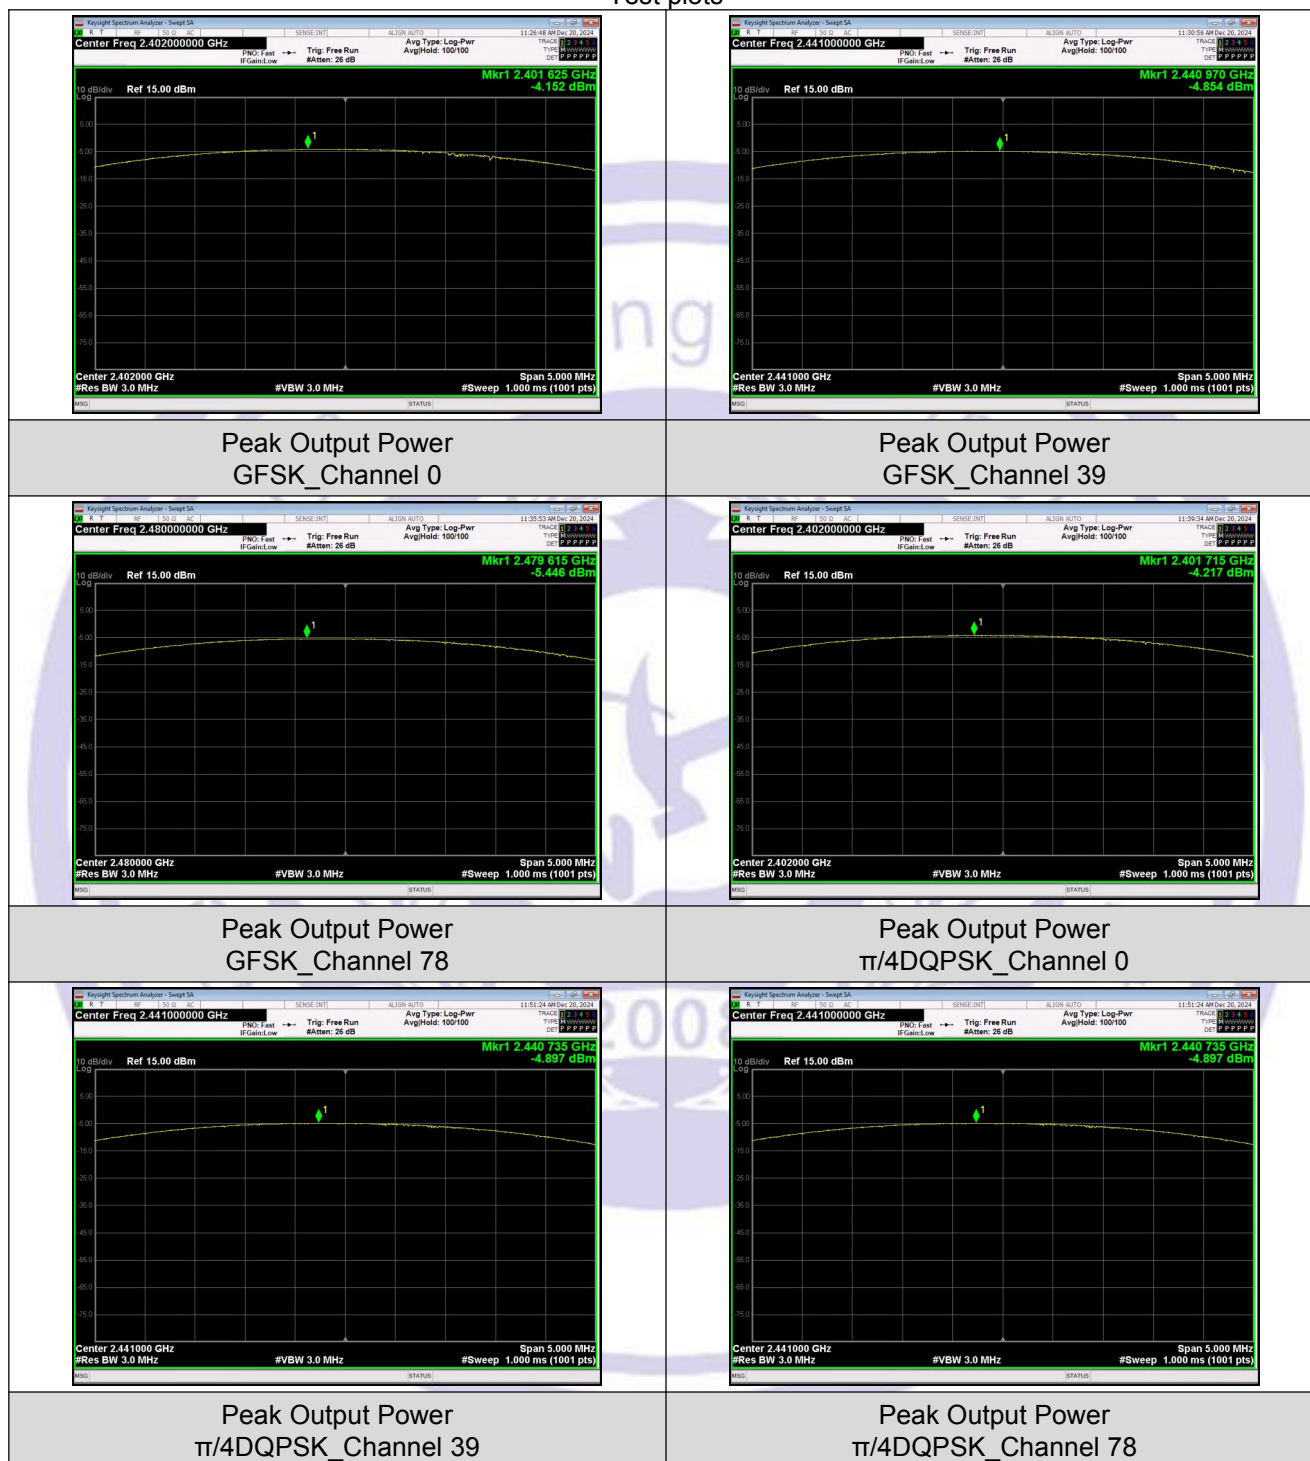


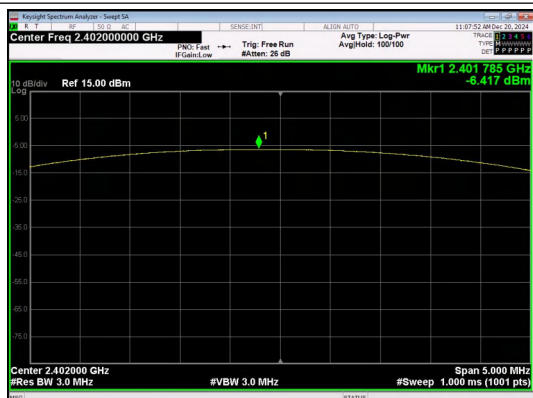

Peak Output Power
8DPSK_Channel 0

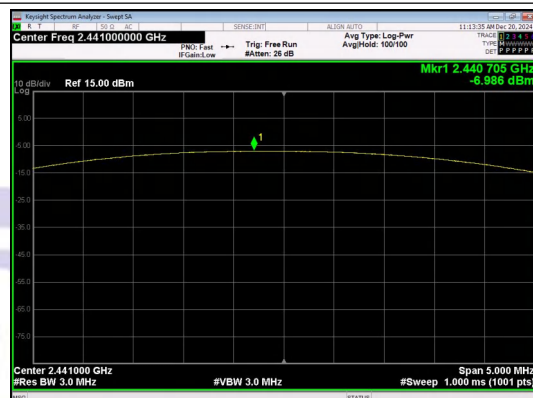

Peak Output Power
8DPSK_Channel 39

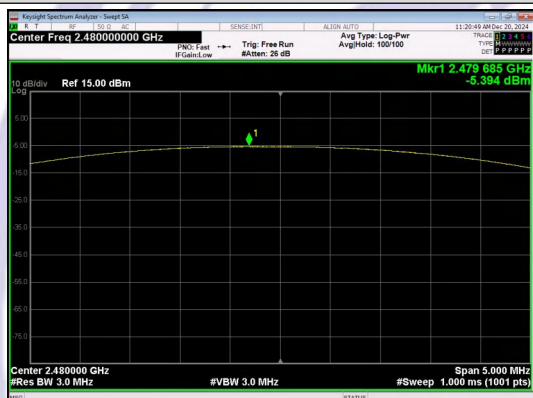


Peak Output Power
8DPSK_Channel 78

9 20DB Occupy Bandwidth & 99% OCB Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(2) RSS-Gen 6.7
---------------	---

9.2 Test Setup



9.3 Test Procedure


Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 91 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data


Mode	Test channel	20dB Emission Bandwidth (MHz)	99% Bandwidth (MHz)	Result
GFSK	Lowest	0.9892	0.90980	Pass
	Middle	0.9761	0.90766	
	Highest	0.9666	0.90863	
π /4DQPSK	Lowest	1.275	1.1782	Pass
	Middle	1.280	1.1791	
	Highest	1.281	1.1833	
8-DPSK	Lowest	1.266	1.1749	Pass
	Middle	1.262	1.1701	
	Highest	1.265	1.1734	

Test plots

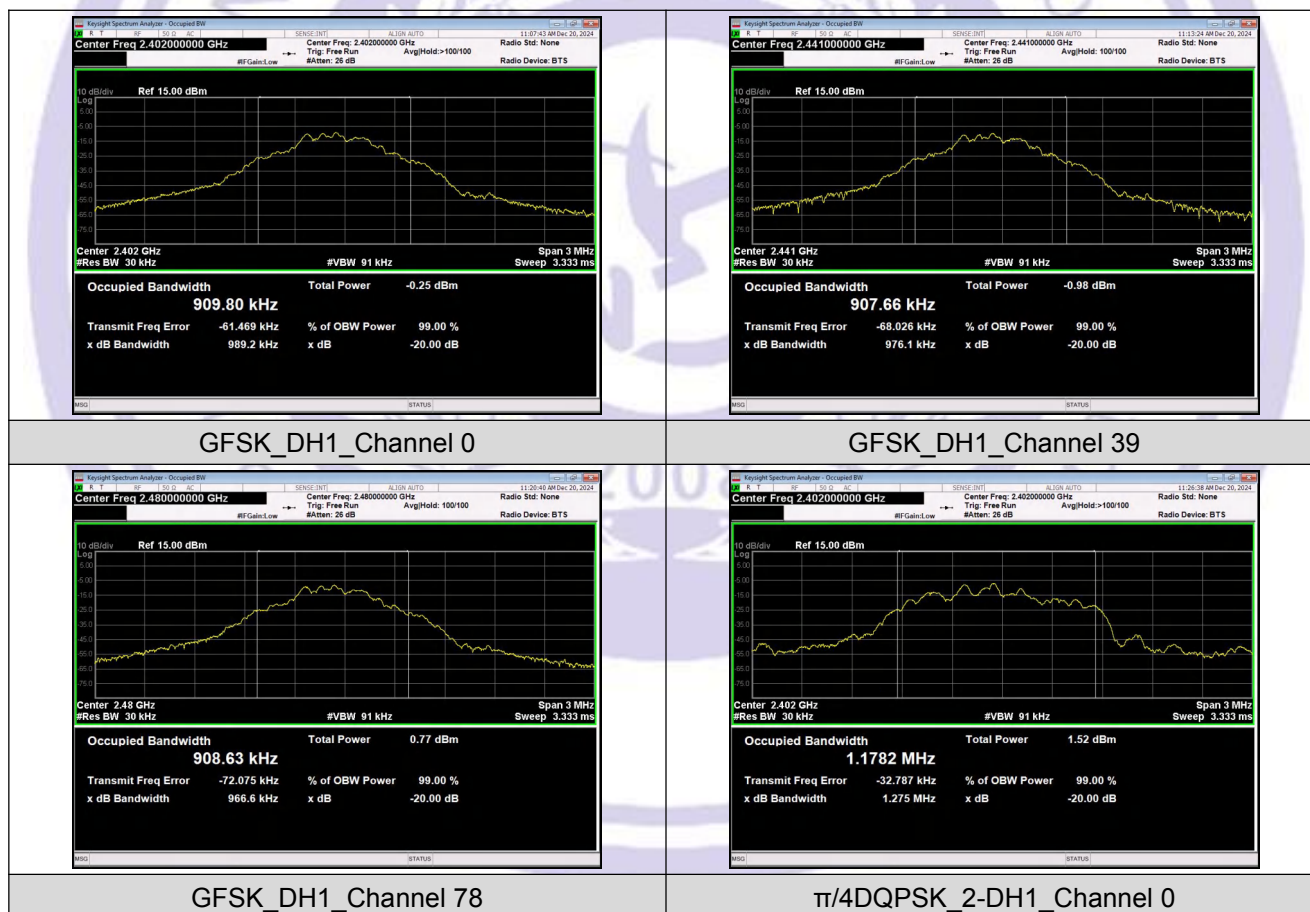


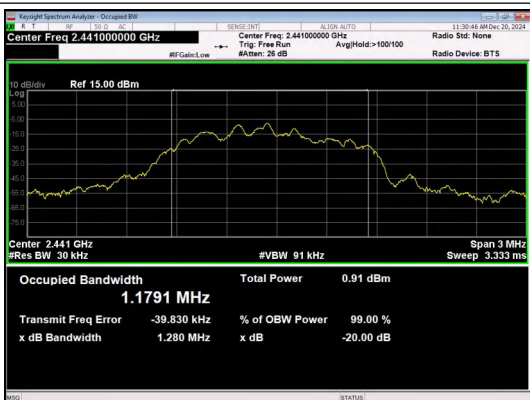


$\pi/4$ DQPSK_2-DH1_Channel 39

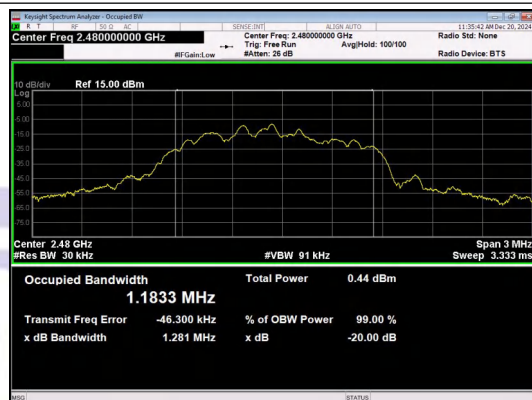


$\pi/4$ DQPSK_2-DH1_Channel 78

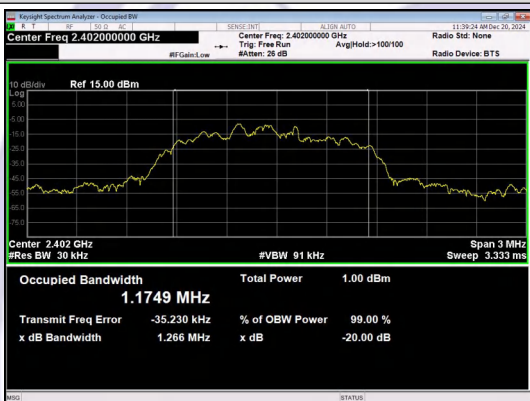

8DPSK_3-DH1_Channel 0

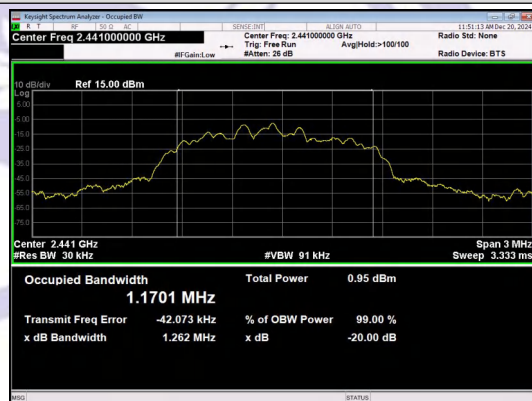

8DPSK_3-DH1_Channel 39

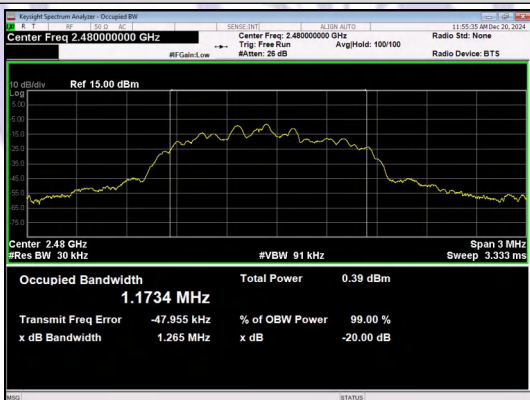


8DPSK_3-DH1_Channel 78

10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	GFSK: 20dB bandwidth π /4DQPSK & 8DPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

10.2 Test Setup




10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Modulation	Separation (MHz)	Limit(MHz)	Result
GFSK	0.9991	0.989	PASS
π /4DQPSK	0.9967	0.854	PASS
8-DPSK	1.0060	0.844	PASS

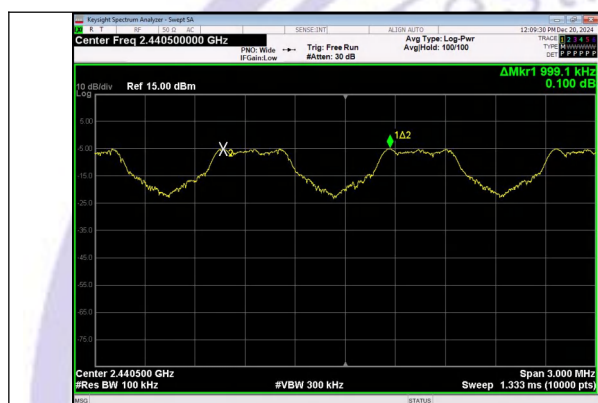

GFSK



π /4DQPSK



8DPSK


Void

11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	≥15 channels

11.2 Test Setup




11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

11.4 Test Data


Mode	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
GFSK	HOPP	DH1	79	>=15	Pass
Pi/4DQPSK	HOPP	2DH1	79	>=15	Pass
8DPSK	HOPP	3DH1	79	>=15	Pass

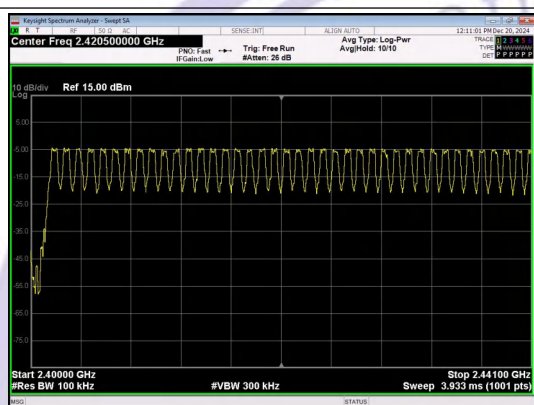


Low End Spectrum Channel Hopping Plot
GFSK

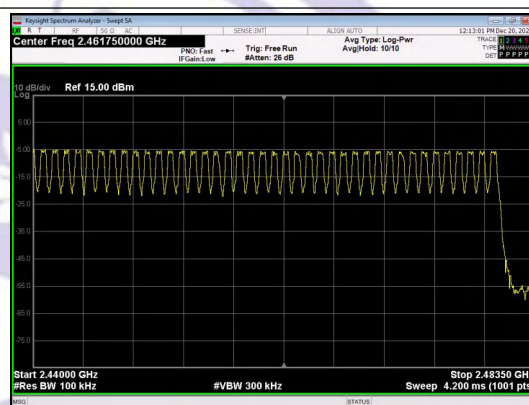


High End Spectrum Channel Hopping Plot
GFSK

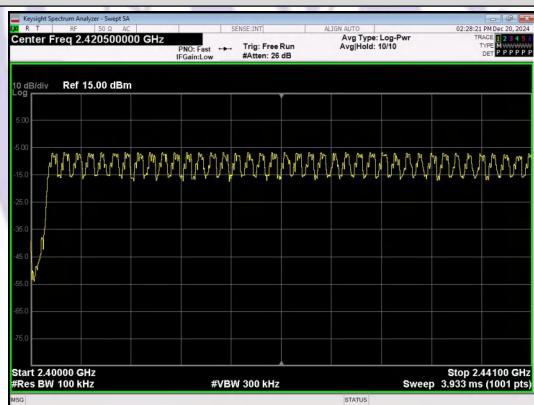


Low End Spectrum Channel Hopping Plot
 $\pi/4$ DQPSK

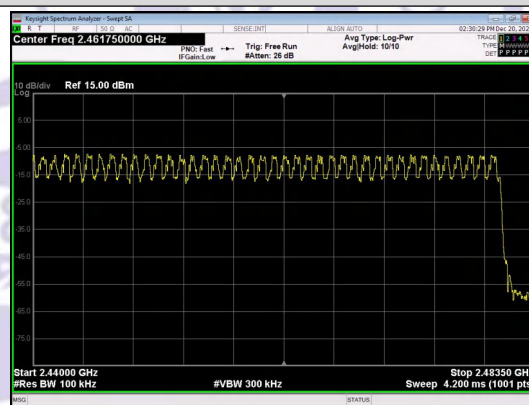

High End Spectrum Channel Hopping Plot
 $\pi/4$ DQPSK

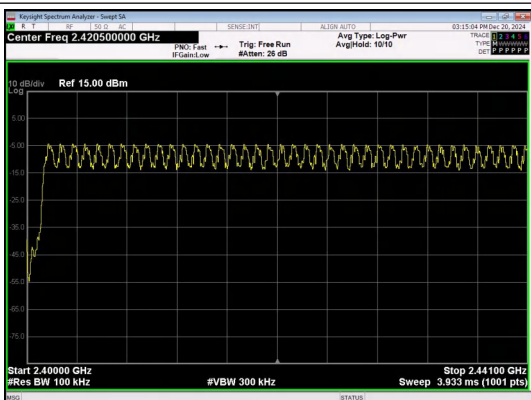

Low End Spectrum Channel Hopping Plot
8DPSK

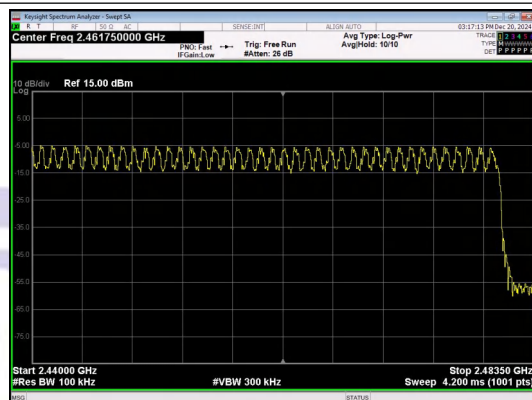

High End Spectrum Channel Hopping Plot
8DPSK




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1) & RSS-247.5.1(4)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure


The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:


1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = clear write.
6. Trace mode = normal.
7. Allow trace to fully stabilize.


12.4 Test Data

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH5	CH0 (2402MHz)	2.896	104	301.18	< 400	PASS
	DH5	CH39 (2441MHz)	2.880	105	302.4		PASS
	DH5	CH78 (2480MHz)	2.880	106	305.28		PASS
$\pi/4$ DQPSK	2-DH5	CH0 (2402MHz)	2.880	95	273.6		PASS
	2-DH5	CH39 (2441MHz)	2.880	101	290.88		PASS
	2-DH5	CH78 (2480MHz)	2.880	110	316.8		PASS
8DPSK	3-DH5	CH0 (2402MHz)	2.880	98	282.24		PASS
	3-DH5	CH39 (2441MHz)	2.896	102	295.39		PASS
	3-DH5	CH78 (2480MHz)	2.880	98	282.24		PASS

Test Plots

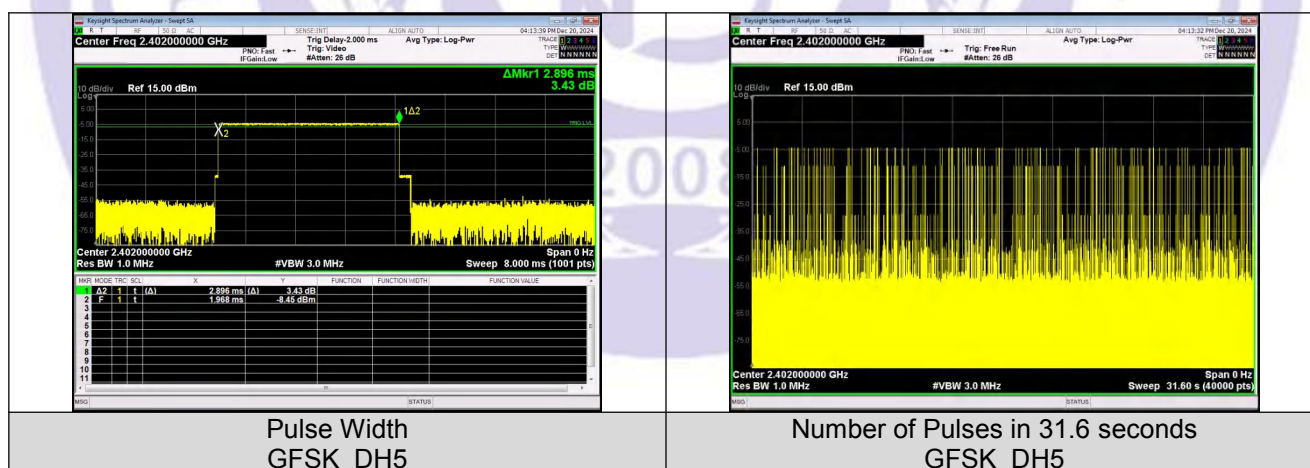


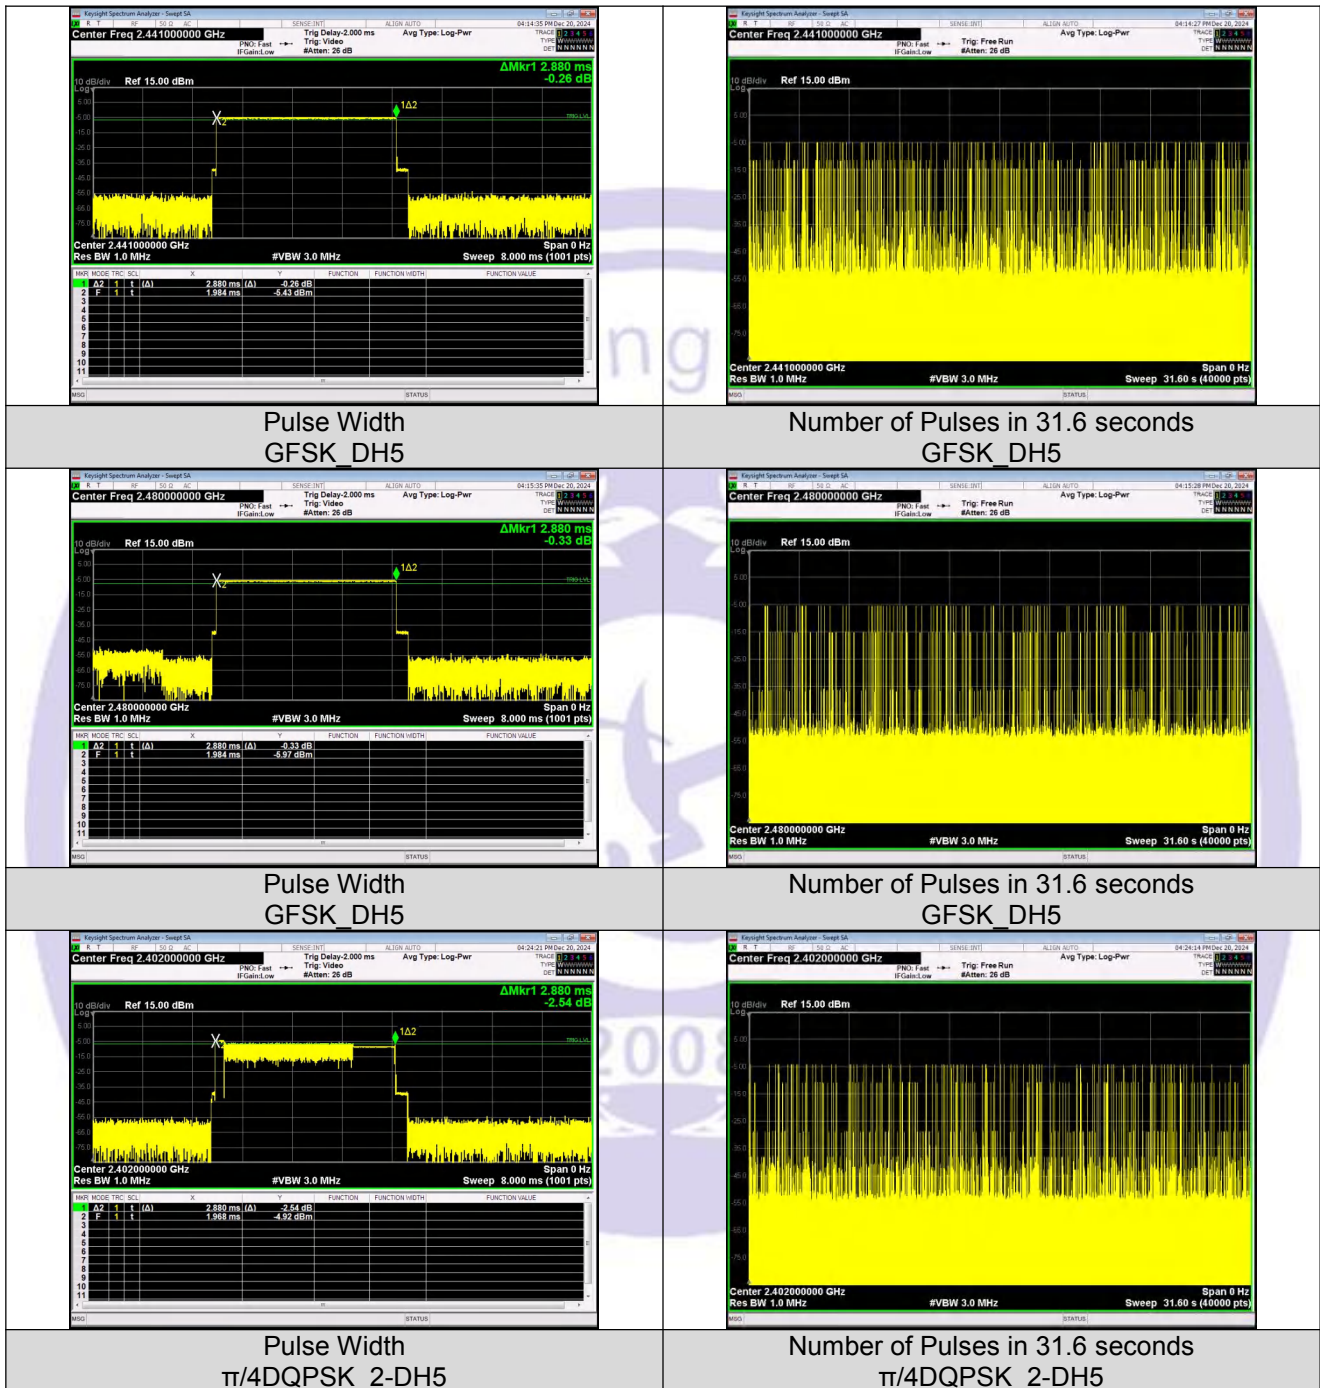

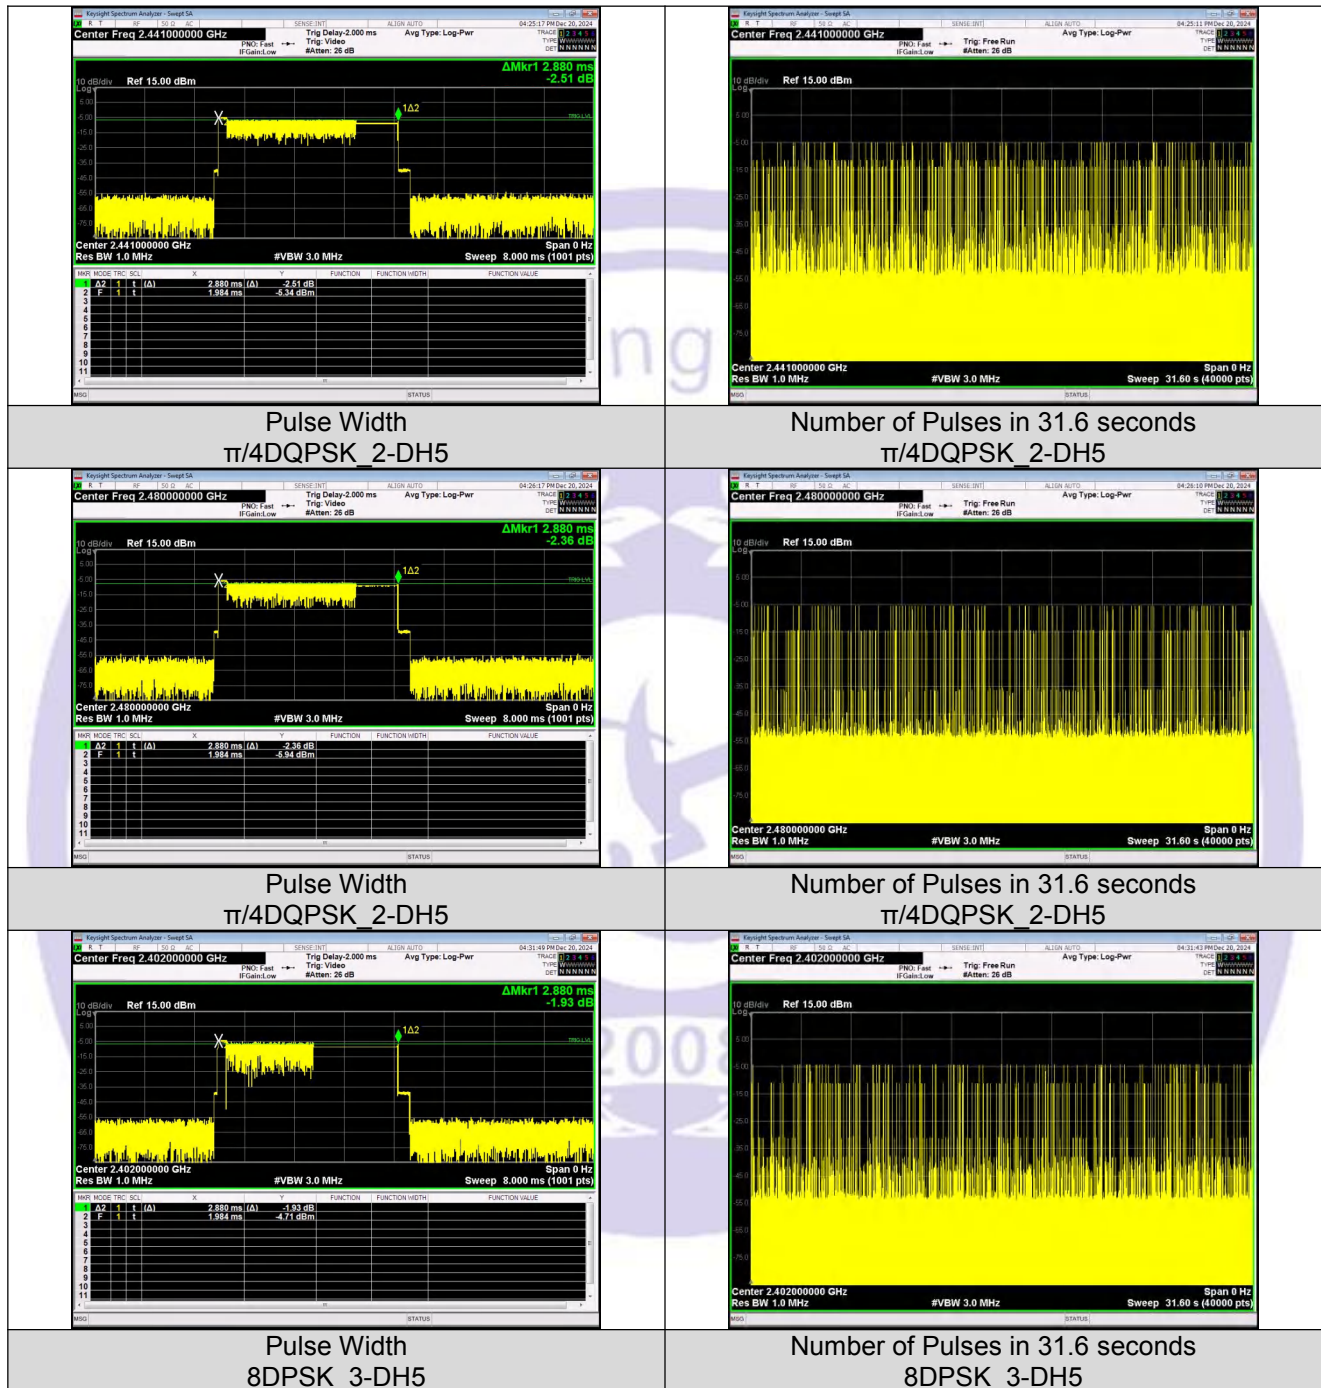




Pulse Width
8DPSK_3-DH5

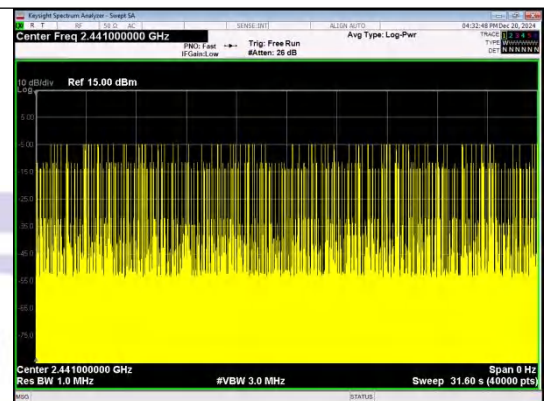

Number of Pulses in 31.6 seconds
8DPSK_3-DH5



Pulse Width
8DPSK_3-DH5

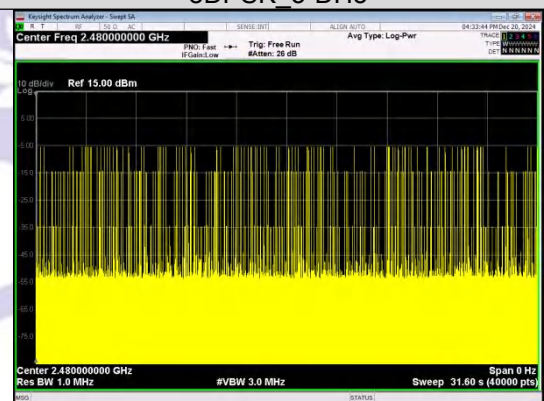


Number of Pulses in 31.6 seconds
8DPSK_3-DH5

13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d) & RSS-247 5.5
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

13.4 Test Data


Non-Hopping


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH1	0	2400.00	-41.794	-26.63	-15.164	PASS
			21567.8	-48.424	-26.63	-21.794	PASS
		39	21543.4	-48.999	-27.24	-21.759	PASS
		78	2483.50	-64.445	-25.58	-38.865	PASS
$\pi/4$ DQPSK	2-DH1	0	2400.00	-42.739	-24.38	-18.359	PASS
			21148.3	-48.642	-24.38	-24.262	PASS
		39	21160.1	-48.729	-25.04	-23.689	PASS
		78	2483.50	-63.676	-25.64	-38.036	PASS
8DPSK	3-DH1	0	2400.00	-42.577	-24.4	-18.177	PASS
			21117.1	-48.969	-24.4	-24.569	PASS
		39	21208.8	-48.476	-25.08	-23.396	PASS
		78	2483.50	-63.173	-25.66	-37.513	PASS
			21567.2	-47.732	-25.66	-22.072	PASS


Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH1	Hopping	2400.00	-42.238	-24.39	-17.848	PASS
			2483.50	-54.768	-25.39	-29.378	PASS
π/4DQPSK	2-DH1		2400.00	-39.736	-26.79	-12.946	PASS
			2483.50	-59.380	-27.58	-31.800	PASS
8DPSK	3-DH1		2400.00	-40.417	-24.38	-16.037	PASS
			2483.50	-57.132	-25.5	-31.632	PASS


Test Graphs

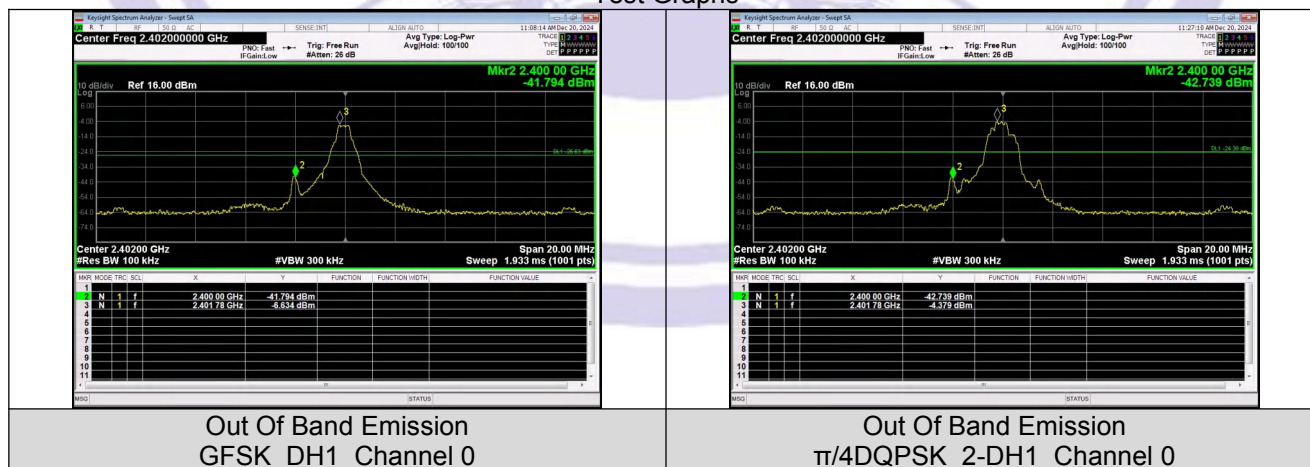

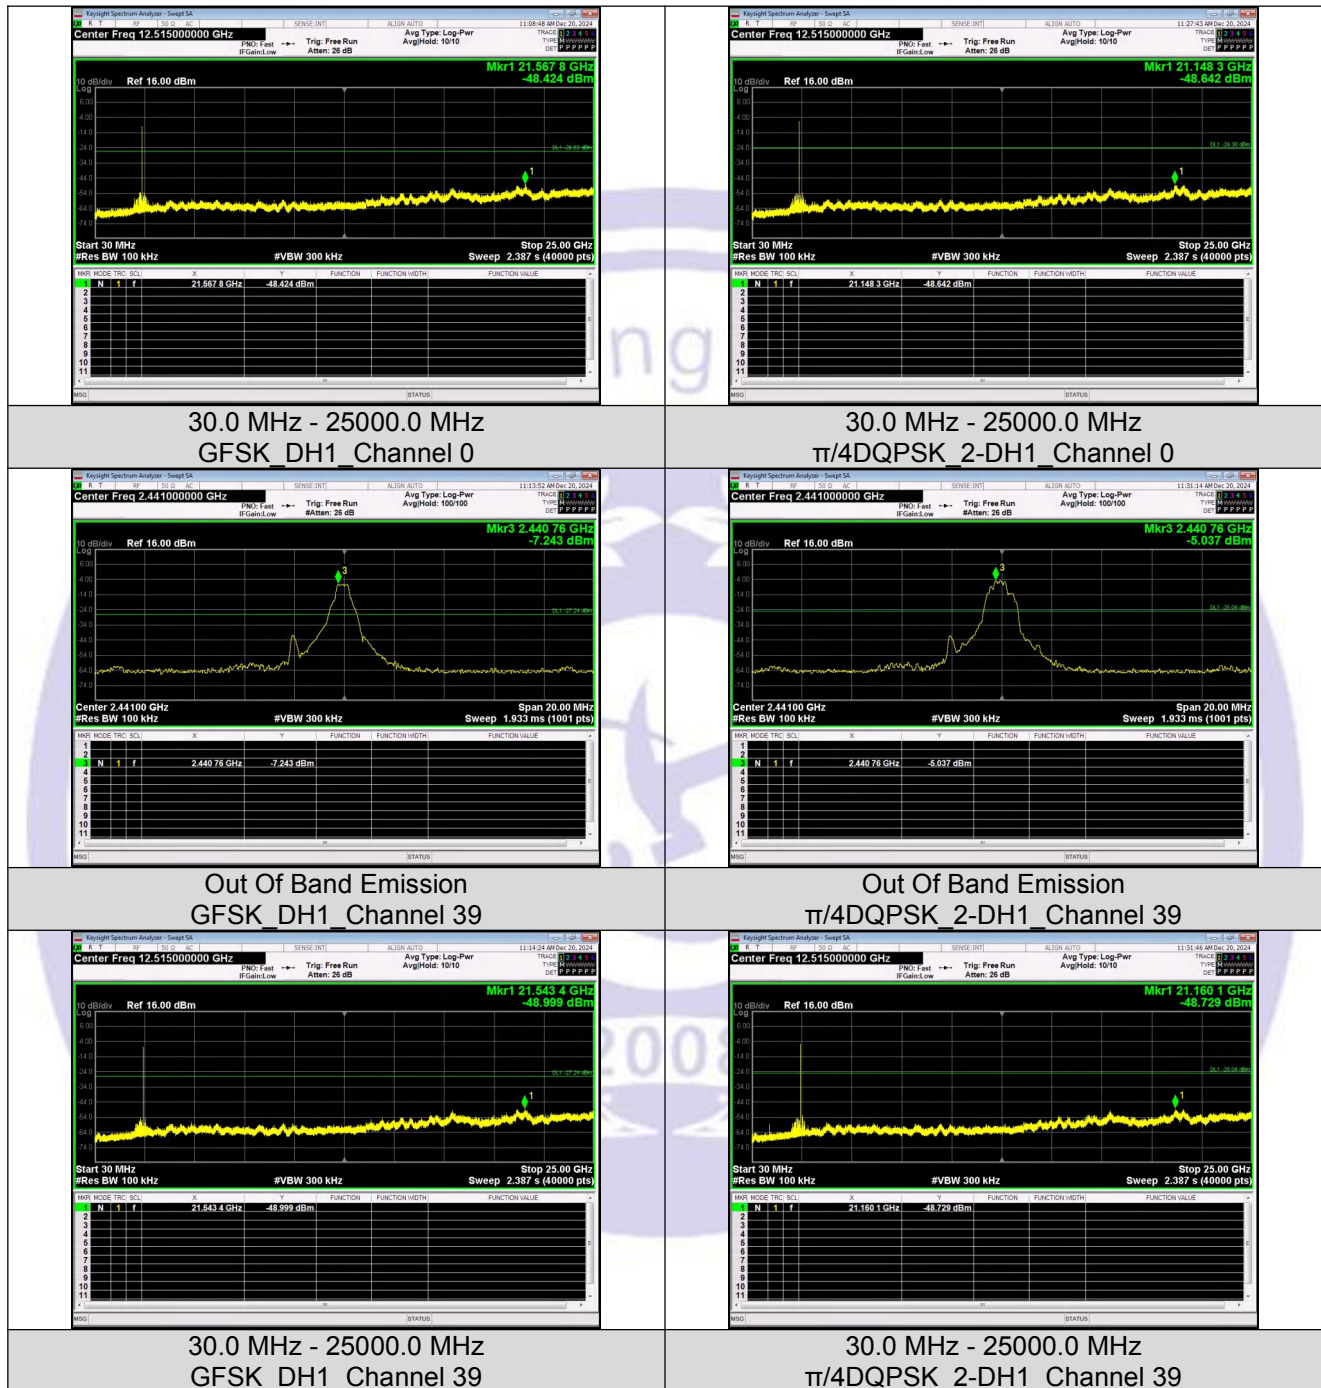


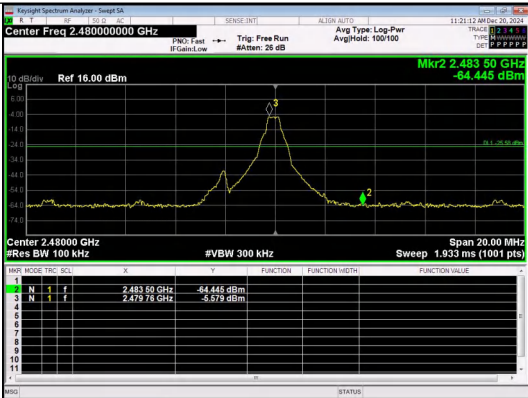


Out Of Band Emission
GFSK_DH1_Channel 78

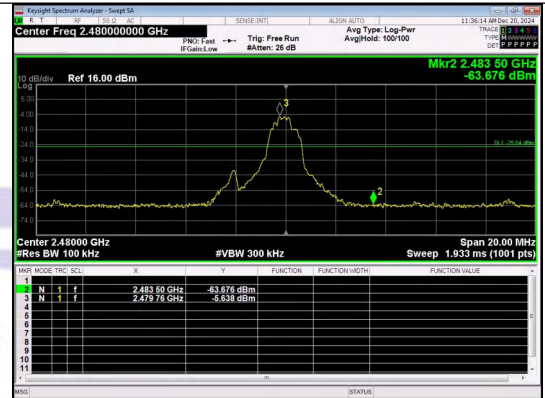


Out Of Band Emission
 $\pi/4$ DQPSK_2-DH1_Channel 78

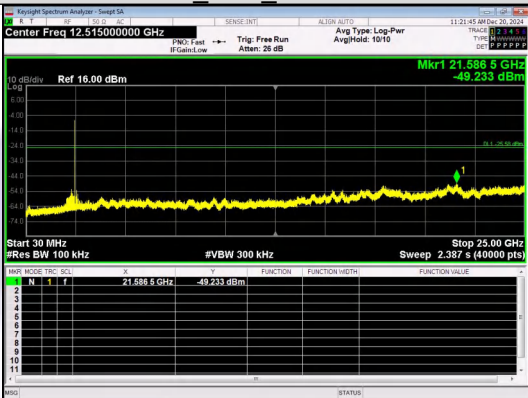


30.0 MHz - 25000.0 MHz
GFSK_DH1_Channel 78

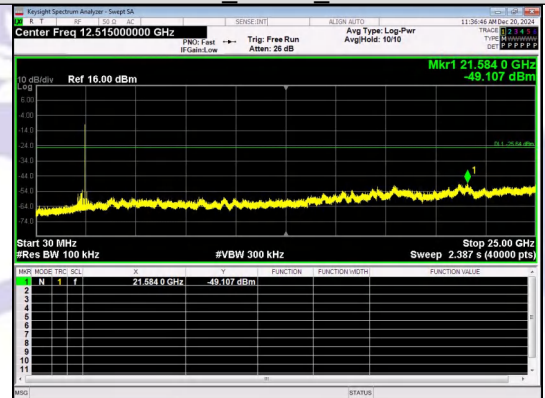


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH1_Channel 78

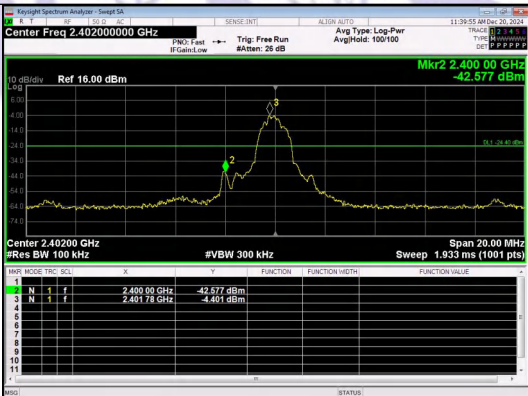


Out Of Band Emission
8DPSK_3-DH1_Channel 0

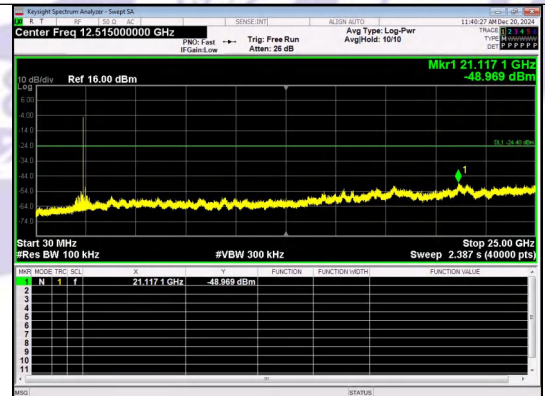


30.0 MHz - 25000.0 MHz
8DPSK_3-DH1_Channel 0

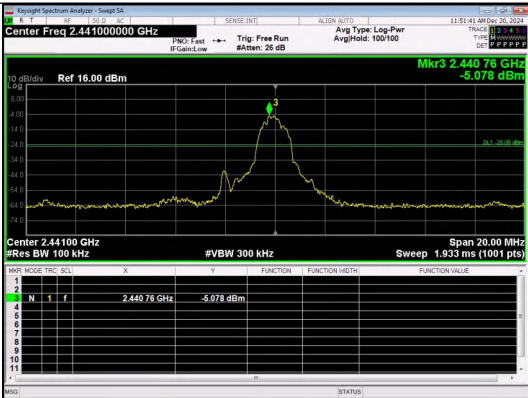


Out Of Band Emission
8DPSK_3-DH1_Channel 39

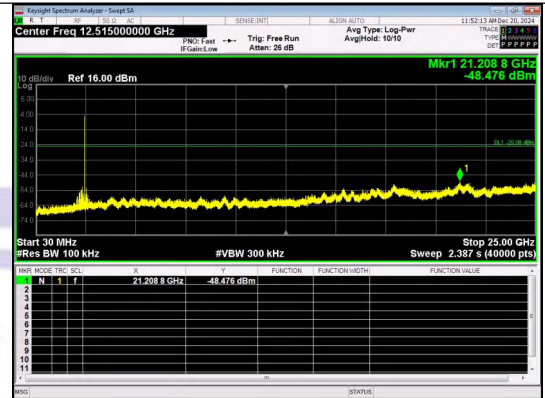


30.0 MHz - 25000.0 MHz
8DPSK_3-DH1_Channel 39

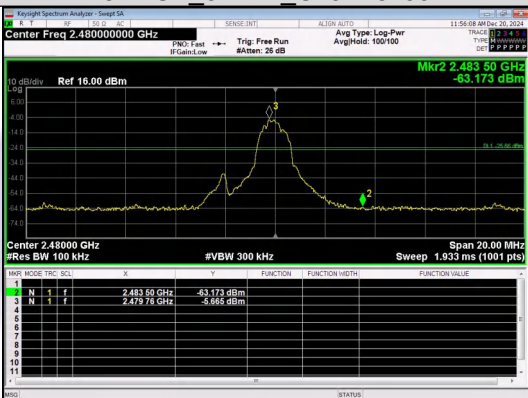


Out Of Band Emission
8DPSK_3-DH1_Channel 78

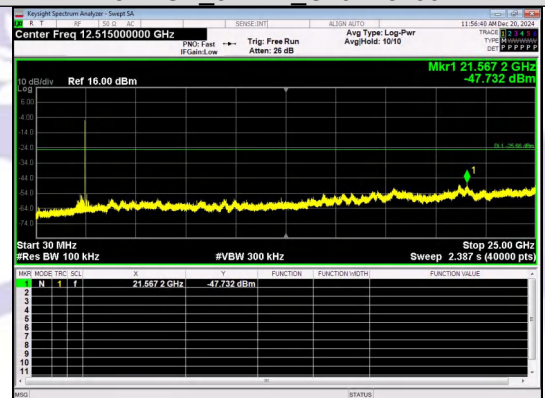


30.0 MHz - 25000.0 MHz
8DPSK_3-DH1_Channel 78

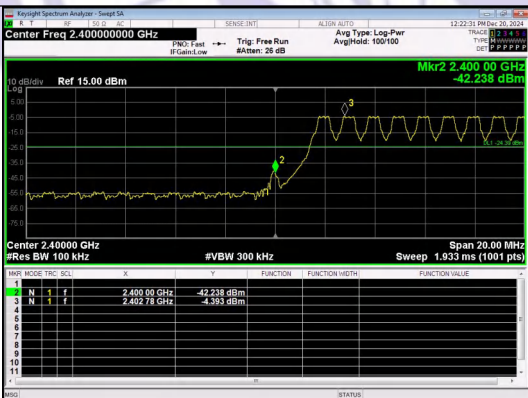


Out Of Band Emission(Left)
GFSK_DH1_Channel Hopping

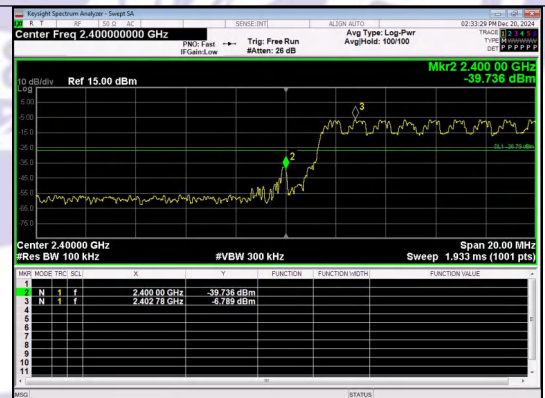


Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH1_Channel Hopping

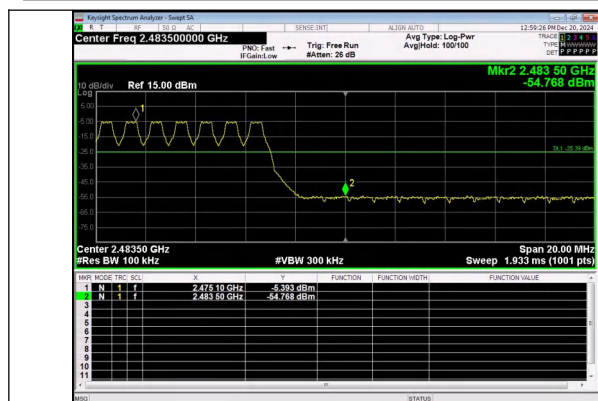


Out Of Band Emission(Right)
GFSK_DH1_Channel Hopping

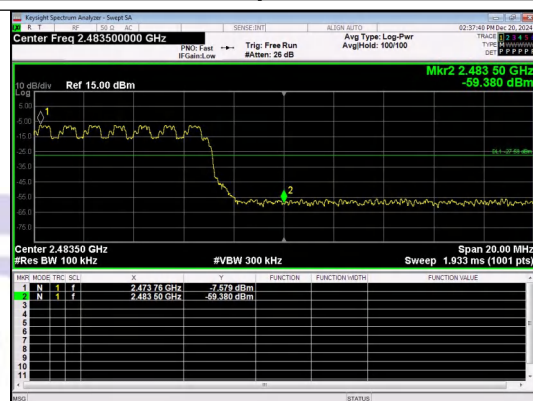

Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH1_Channel Hopping

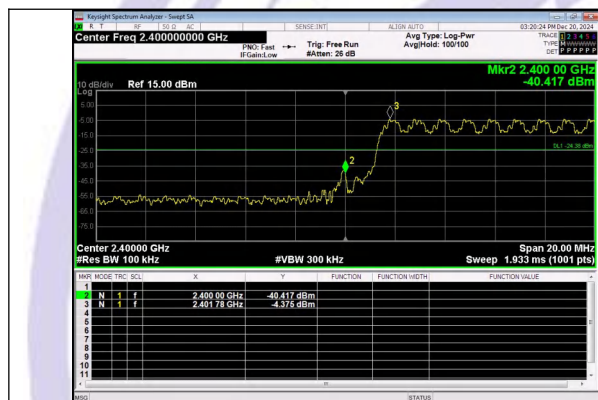

Out Of Band Emission(Left)
8DPSK_3-DH1_Channel Hopping

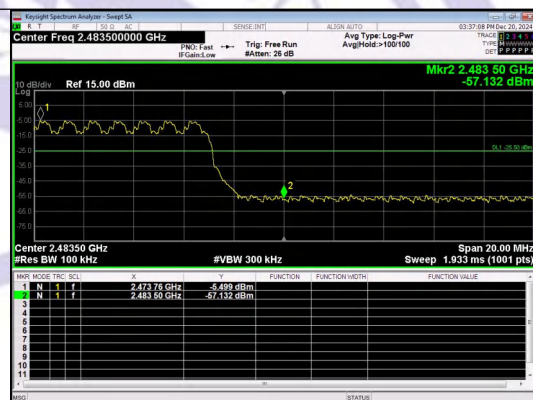

Out Of Band Emission(Right)
8DPSK_3-DH1_Channel Hopping

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c) & RSS-Gen 6.8
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. 3) According to RSS-GEN section 6.8 The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below). When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is -0.58dBi. It complies with the standard requirement.



15 APPENDIX I -- TEST SETUP PHOTOGRAPH

Please see the attachment for details.



16 APPENDIX II -- EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

