



TEST REPORT

Applicant: Guangdong Changing Technology Co.,Ltd.
Address of Applicant: 21 Yongsheng Road, Yonghe Street, Huangpu District, Guangzhou City, Guangdong Province, China
Manufacturer/Factory: Guangdong Changing Technology Co.,Ltd.
Address of Manufacturer: 21 Yongsheng Road, Yonghe Street, Huangpu District, Guangzhou City, Guangdong Province, China
Product Name: Smart Frame
Model No.: ZN-DF-F16S,ZN-DF-F10S,ZN-DF-F11S,ZN-DF-F12S,ZN-DF-F13S,ZN-DF-F14S,ZN-DF-F15S,ZN-DF-F17S,ZN-DF-F18S,ZN-DF-F22S,ZN-DF-F24S,ZN-DF-F27S,ZN-DF-F32S
Trade Mark: N/A
FCC ID: 2BKBA-FRAME
Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
Date of Test: Aug.01, 2024-Aug.23, 2024
Date of report issued: Aug.24, 2024

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Approved by:

Project Engineer

Project Manager

Authorized Signature



Report Revision History		
Report No.	Description	Issue Date
ET-24081078E03	Original	Aug.24, 2024



Contents

Page

1	TEST SUMMARY	4
1.1	MEASUREMENT UNCERTAINTY	4
2	GENERAL INFORMATION	5
2.1	GENERAL DESCRIPTION OF EUT	5
2.2	TEST MODE	7
2.3	DESCRIPTION OF SUPPORT UNITS	8
2.4	DEVIATION FROM STANDARDS	8
2.5	ABNORMALITIES FROM STANDARD CONDITIONS	8
2.6	TEST FACILITY	8
2.7	TEST LOCATION	8
2.8	ADDITIONAL INSTRUCTIONS	8
3	TEST INSTRUMENTS LIST	9
4	TEST RESULTS AND MEASUREMENT DATA	10
4.1	ANTENNA REQUIREMENT	10
4.2	CONDUCTED EMISSIONS	11
4.3	DUTY CYCLE	14
4.4	CONDUCTED OUTPUT POWER	18
4.5	BANDWIDTH 99% OCCUPY BANDWIDTH	20
4.6	POWER SPECTRAL DENSITY	31
4.7	BAND EDGE	39
4.7.1	Conducted test Method	39
4.8	SPURIOUS EMISSION	45
4.8.1	Radiated Emission Method	45
4.8.2	Conducted Emission Method	53
4.9	FREQUENCY STABILITY	60
5	TEST SETUP PHOTO	66
6	EUT CONSTRUCTIONAL DETAILS	66

1 Test Summary

Test Item	Section in CFR 47	Result	Test by
Antenna requirement	15.203	Pass	/
AC Power Line Conducted Emission	15.207	Pass	Carr Kang
Conducted Output Power	15.407 (a)(1)/(a)(3)	Pass	Yvan Fan
26dB Bandwidth and 99% Occupied Bandwidth	15.407 (a)(12)	Pass	Yvan Fan
6dB Bandwidth	15.407 (e)	Pass	Yvan Fan
Power Spectral Density	15.407(a)(1)/(a)(3)	Pass	Yvan Fan
Band Edge	15.407(b)(1)/(b)(4)	Pass	Yvan Fan
Spurious Emission	15.205/15.209 15.407(b)(1)/(b)(4)/(b)(8)	Pass	Carr Kang
Frequency Stability	15.407(g)	Pass	Yvan Fan

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013
3. Note: Compliance determination rules
 - 1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacturer. If measurement uncertainty is taken into account, the applicant/manufacturer will bear all possible risks of non-compliance.
 - 2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

1.1 Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±0.55%	(1)
RF output power, conducted	±0.99dB	(1)
Power Spectral Density, conducted	±0.61dB	(1)
Unwanted Emissions, conducted	±0.64dB	(1)
AC Power Line Conducted Emission	± 2.64 dB	(1)
Radiated emissions 9K-30MHz	±3.98dB	(1)
Radiated emissions 30M- 1GHz	±4.32dB	(1)
Radiated emissions 1GHz-18GHz	±4.56dB	(1)
Radiated emissions 18GHz-40GHz	±4.59 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2 General Information

2.1 General Description of EUT

Product Name:	Smart Frame
Model No.:	ZN-DF-F16S,ZN-DF-F10S,ZN-DF-F11S,ZN-DF-F12S,ZN-DF-F13S,ZN-DF-F14S,ZN-DF-F15S,ZN-DF-F17S,ZN-DF-F18S,ZN-DF-F22S,ZN-DF-F24S,ZN-DF-F27S,ZN-DF-F32S
Difference of model(s)	All the model are the same circuit and RF module, except the model names and colors
Test Model:	ZN-DF-F16S
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	Engineer sample
Operation Frequency:	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; ☒ 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11n(HT40)/ac40;
Channel numbers:	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ;
Channel bandwidth:	802.11a/802.11n(HT20)/ 802.11ac(HT20): 20MHz 802.11n(HT40)/ 802.11ac(HT40) : 40MHz
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT/20/40):NSS1, MCS0-MCS9
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM) with BPSK/QPSK/16QAM/64QAM
Antenna Type:	FPC Antenna
Antenna gain:	2.99 dBi(Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.)
Battery	DC 3.8V 4000mAh
Adapter Model:	Model: BSY01J3050200UU Input:100-250V 50/60Hz Output:DC 5V 2A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	40	5200MHz	42	/
44	5220MHz	46	5230MHz	48	5240MHz	/	/
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	/
157	5785MHz	159	5795MHz	161	5805MHz	/	/
165	5825MHz	/					

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a /n(HT20)/ac(HT20)	802.11 n(HT40)/ac(HT40)	802.11ac(HT80)
Lowest channel	5180	5190	/
Middle channel	5200	X	X
Highest channel	5240		

Test channel	Frequency (MHz)		
	802.11 a /n(HT20)/ac(HT20)	802.11 n(HT40)/ac(HT40)	802.11ac(HT80)
Lowest channel	5745	5755	/
Middle channel	5785	X	X
Highest channel	5825		

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode(or with a duty cycle $\geq 98\%$) EUT was test with maximum power control level.
<i>Remark: For battery operated equipment, the EUT was performed using a new DC 3.8V battery.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pretest Mode	Description
Mode 1	802.11a / n 20 CH36/ CH40/ CH 48 802.11a /n 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40 CH38/ CH 46 802.11n 40 CH 151 / CH 159
Mode 3	/
Mode 4	/
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20 CH36/ CH40/ CH 48 802.11a /n 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40 CH38/ CH 46 802.11n 40 CH 151 / CH 159
Mode 3	/
Mode 4	/

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

2.7 Test Location

All tests were performed at:

Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392

2.8 Additional Instructions

Test Software	ADB Special Command
Power level setup	Default

3 Test Instruments list

Conducted Emission

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI3	100605	2024.3.12	2025.3.11
2	Artificial power network	schwarabeck	NSLK8127	8127483	2024.3.12	2025.3.11
3	Artificial power network	ETS	3186/2NM	1132	2024.3.12	2025.3.11
4	10dB attenuator	HUBER+SUHNER	10dB	/	2024.3.12	2025.3.11
5	Cable 4	HUBER SUNNER	3M	/	2024.3.12	2025.3.11
6	Absorbing Clamp	schwarabeck	MDS21	D69250	2024.3.12	2025.3.11

Radiated Emission &RF Conducted test:

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101032	2024.3.12	2025.3.11
2	Broadband antenna	schwarabeck	VULB9168	1064	2024.3.19	2026.3.18
3	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2024.3.19	2026.3.18
4	Amplifier	EMtrace	RP01A	50117	2024.3.12	2025.3.11
5	Amplifier	Space-Dtronics	EWLAN0118G-P40	19113001	2024.3.12	2025.3.11
6	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2024.3.12	2025.3.11
7	Power detector meter	MWRFtest	MW100-PSB	MW201020JYT	2024.3.12	2025.3.11
8	Signal generator	Agilent	N5182A	MY49060455	2024.3.12	2025.3.11
9	Spectrum analyzer	Rohde&schwarz	FSU40	1166.1660K43	2024.3.12	2025.3.11
10	Amplifier	SKET	LNPA_1840-50	SK2019040302	2024.3.12	2025.3.11
11	Horn antenna	schwarabeck	BBHA 9170	946	2024.3.19	2026.3.18
12	Loop antenna	schwarabeck	FMZB 1519 B	1519	2024.3.19	2026.3.18
13	Cable 6	HUBER SUNNER	0.5M	/	2024.3.12	2025.3.11
14	Cable7	HUBER SUNNER	2.0M	/	2024.3.12	2025.3.11
15	Cable8	HUBER SUNNER	6.0M	/	2024.3.12	2025.3.11
16	Filter	Xin bo	XBLBQ-GTA29	210410-3-2	2024.3.12	2025.3.11
17	Power meter	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	2024.3.12	2025.3.11

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antennas are FPC Antenna, the best case gain of the antennas are 2.99 dBi, reference to the appendix II for details</i>	

4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	24.3°C	Humid.:	45%	Press.:	1012mbar	
Test voltage:	AC 120V						
Test results:	Pass						


Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.

2. All mode have been tested, the report only shows the worst mode (802.11ac 5180MHz)


Measurement Result

Line:

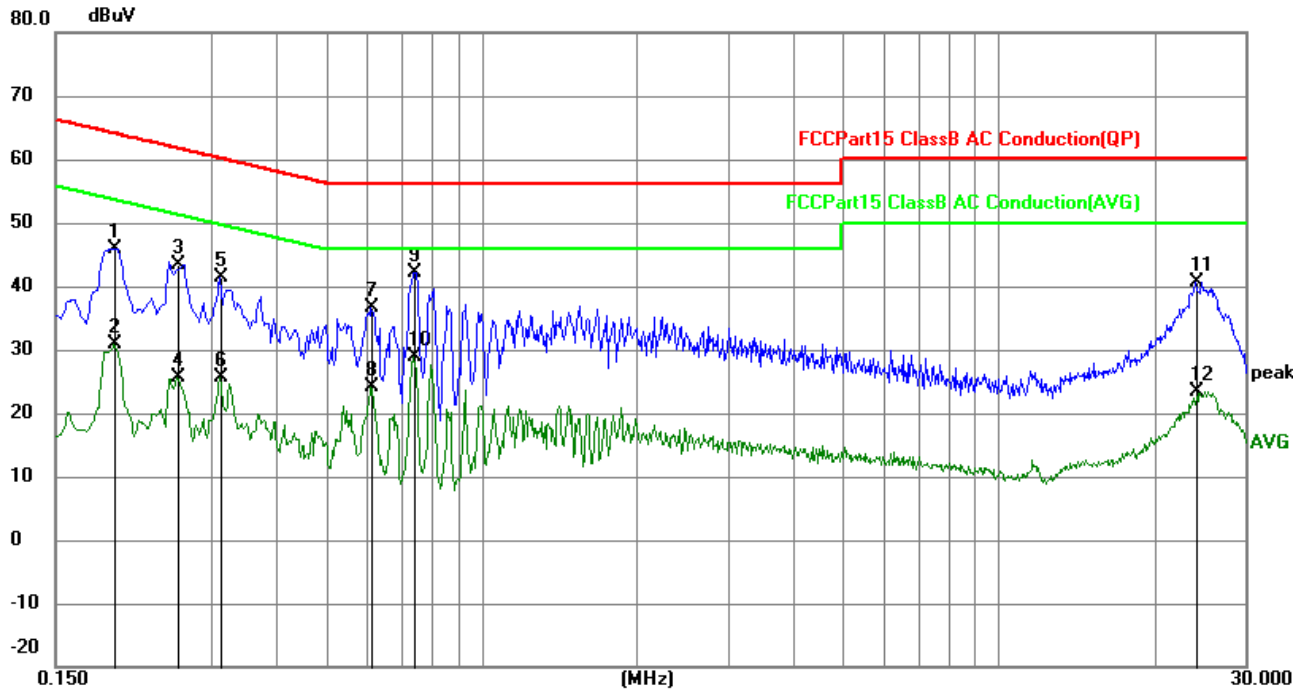

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1949	36.08	9.81	45.89	63.83	-17.94	QP
2	0.1949	21.04	9.81	30.85	53.83	-22.98	AVG
3	0.2580	33.61	9.83	43.44	61.50	-18.06	QP
4	0.2580	15.80	9.83	25.63	51.50	-25.87	AVG
5	0.3119	31.39	9.87	41.26	59.92	-18.66	QP
6	0.3119	15.88	9.87	25.75	49.92	-24.17	AVG
7	0.6132	26.66	9.94	36.60	56.00	-19.40	QP
8	0.6132	14.12	9.94	24.06	46.00	-21.94	AVG
9	0.7395	32.31	9.94	42.25	56.00	-13.75	QP
10	0.7395	19.01	9.94	28.95	46.00	-17.05	AVG
11	24.0630	31.10	9.60	40.70	60.00	-19.30	QP
12	24.0630	13.76	9.60	23.36	50.00	-26.64	AVG

Neutral:

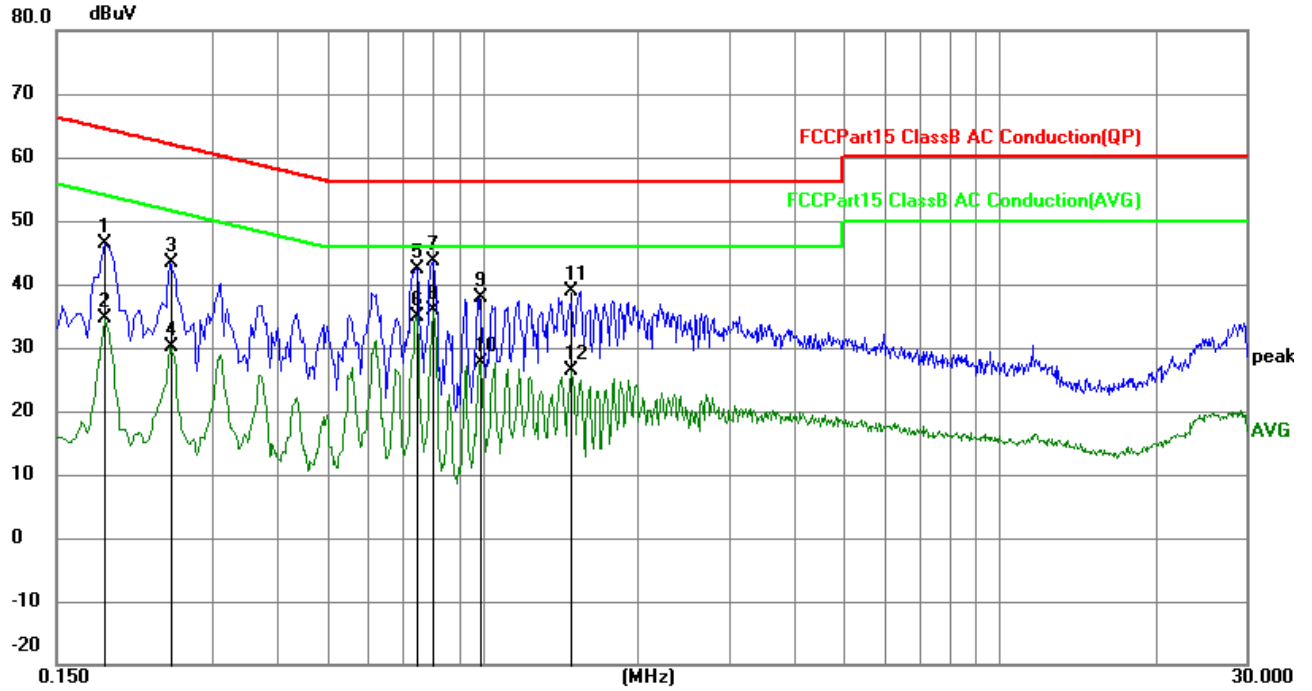


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1859	36.51	9.81	46.32	64.22	-17.90	QP
2	0.1859	24.83	9.81	34.64	54.22	-19.58	AVG
3	0.2489	33.62	9.83	43.45	61.79	-18.34	QP
4	0.2489	20.26	9.83	30.09	51.79	-21.70	AVG
5	0.7439	32.54	9.94	42.48	56.00	-13.52	QP
6	0.7439	24.96	9.94	34.90	46.00	-11.10	AVG
7	0.8025	33.69	9.96	43.65	56.00	-12.35	QP
8	0.8025	26.00	9.96	35.96	46.00	-10.04	AVG
9	0.9868	27.81	9.96	37.77	56.00	-18.23	QP
10	0.9868	17.75	9.96	27.71	46.00	-18.29	AVG
11	1.4862	29.01	9.90	38.91	56.00	-17.09	QP
12	1.4862	16.49	9.90	26.39	46.00	-19.61	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Duty cycle

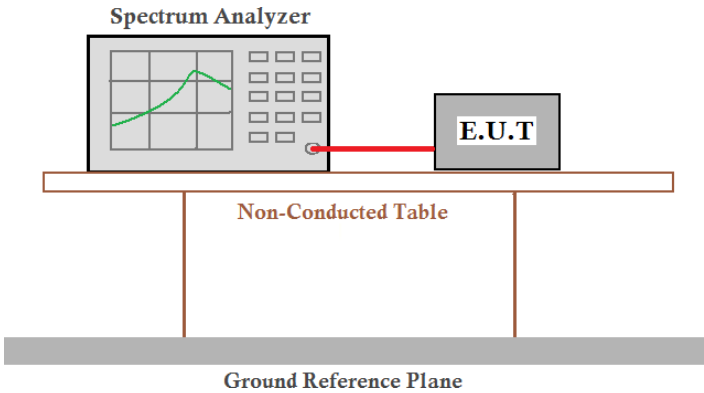Test Method :	ANSI C63.10:2013	
Limit:	/	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 22.2°C	Humid.: 52%RH
Test voltage:	DC 5V	
Test results:	Pass	

Measurement Result

5180-5240MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	97.9	0.09
TX 802.11n20 Mode	95.67	0.19
TX 802.11ac20 Mode	93.69	0.28
TX 802.11n40 Mode	88.45	0.53
TX 802.11a40 Mode	88.56	0.53


5745-5825 MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	97.85	0.09
TX 802.11n20 Mode	95.67	0.19
TX 802.11ac20 Mode	93.83	0.28
TX 802.11n40 Mode	88.19	0.55
TX 802.11a40 Mode	94.91	0.23


Test plot

5180-5240MHz


(802.11a) plot on channel 40

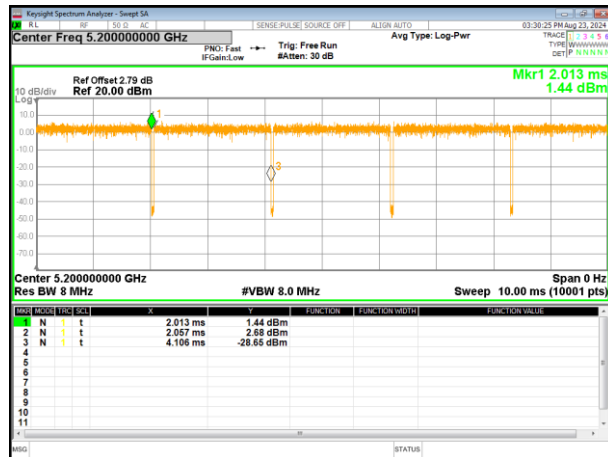


(802.11 n20) plot on channel 40

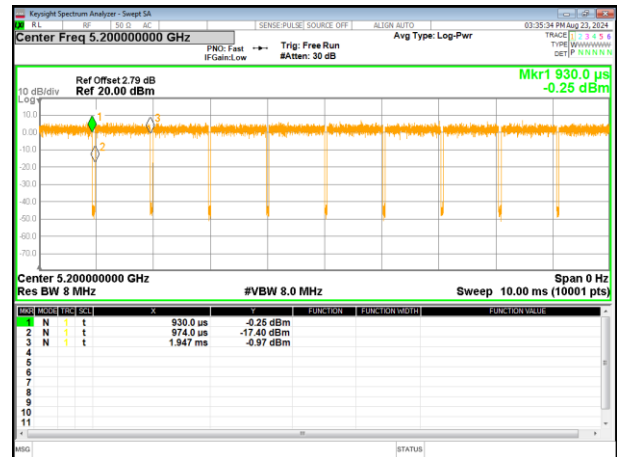


(802.11ac20) plot on channel 40

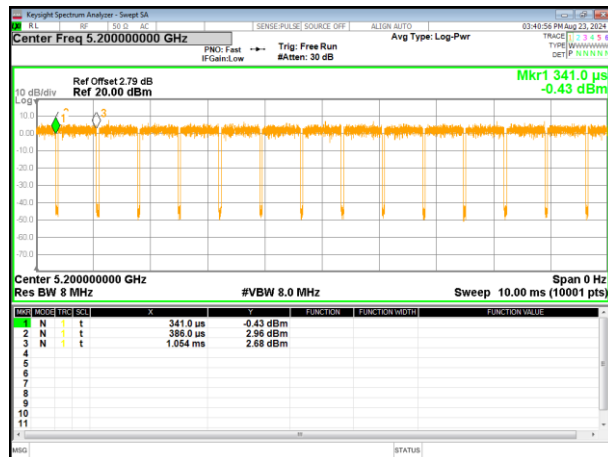

(802.11 n40) plot on channel 38

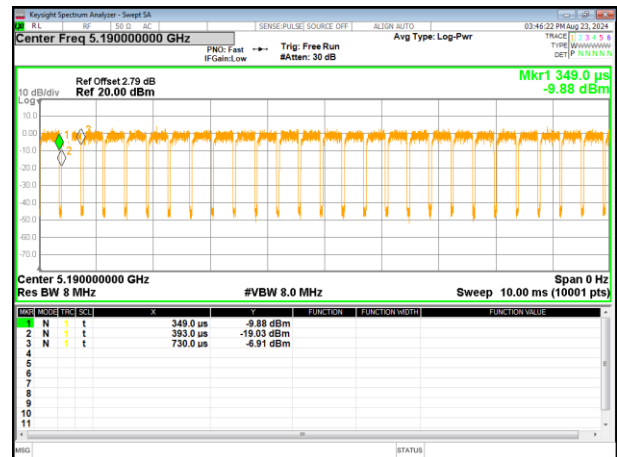


(802.11ac40) plot on channel 38

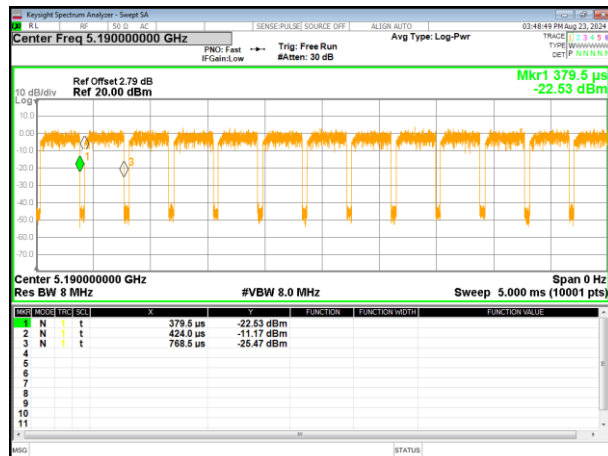


5745-5825 MHz


(802.11a) plot on channel 40

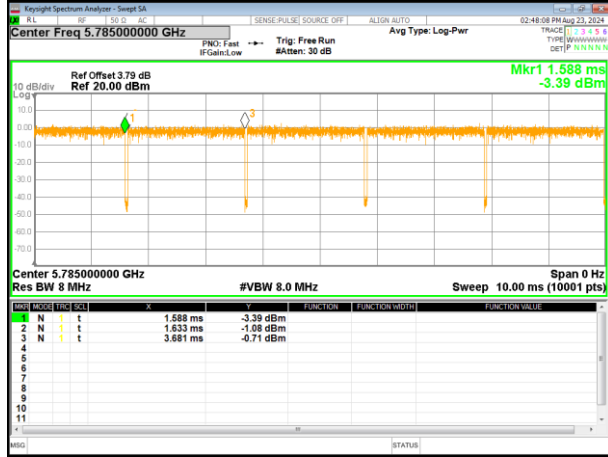


(802.11 n20) plot on channel 40

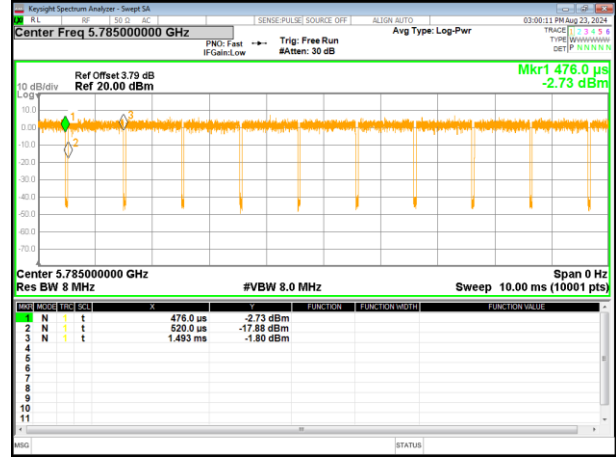


(802.11ac20) plot on channel 40

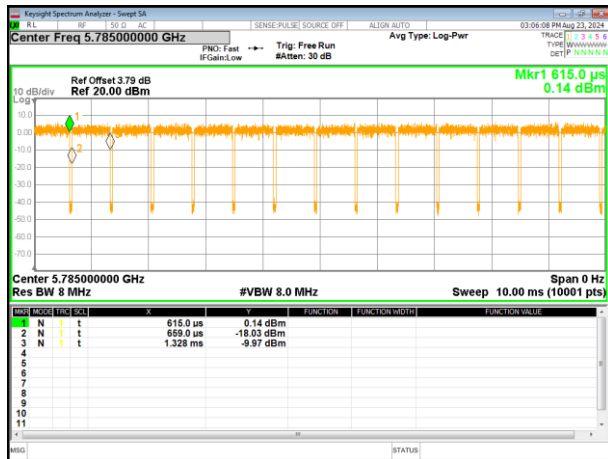


(802.11 n40) plot on channel 38

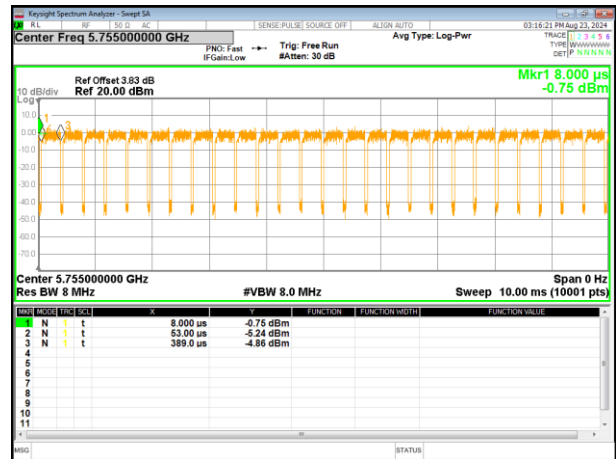

(802.11ac40) plot on channel 38

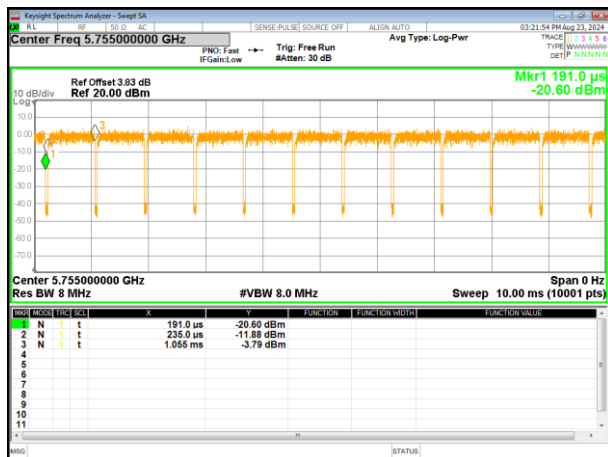

4.4 Conducted Output Power

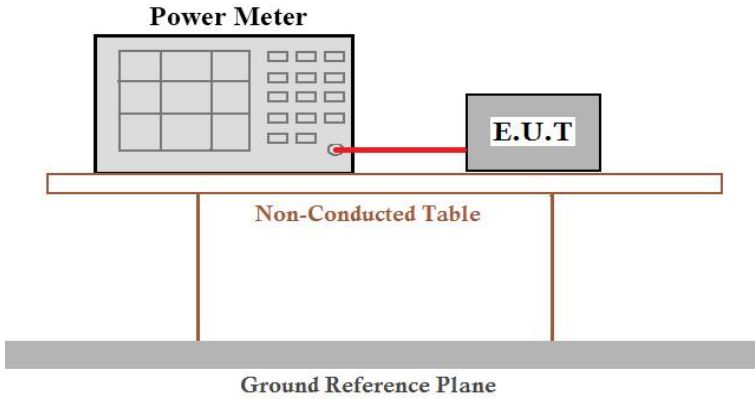Test Requirement:	FCC Part15 E Section 15.407 (a)(1)/(a)(3)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	5150-5250MHz : 250mW 5725~5850MHz : 1W	
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T.' (Equipment Under Test) by a red cable. Both components are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs. Below the table, a 'Ground Reference Plane' is indicated by a horizontal line.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 22.2°C	Humid.: 52%RH
Test voltage:	DC 5V	
Test results:	Pass	


**Measurement Result****5180-5240MHz**

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH36	5180	0.09	7.00	7.09	23.98	Pass
CH40	5200	0.09	6.75	6.84	23.98	Pass
CH48	5240	0.09	6.22	6.31	23.98	Pass
TX 802.11 n20 Mode						
CH36	5180	0.19	6.69	6.88	23.98	Pass
CH40	5200	0.19	6.49	6.68	23.98	Pass
CH48	5240	0.19	5.97	6.16	23.98	Pass
TX 802.11 ac20 Mode						
CH36	5180	0.28	6.85	7.13	23.98	Pass
CH40	5200	0.28	6.53	6.81	23.98	Pass
CH48	5240	0.28	5.95	6.23	23.98	Pass
TX 802.11 n40 Mode						
CH38	5190	0.53	5.69	6.22	23.98	Pass
CH46	5230	0.53	5.04	5.57	23.98	Pass
TX 802.11 ac40 Mode						
CH38	5190	0.53	5.62	6.15	23.98	Pass
CH46	5230	0.53	4.86	5.39	23.98	Pass

5745-5825 MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH149	5745	0.09	5.60	5.69	30	Pass
CH157	5785	0.09	5.15	5.24	30	Pass
CH165	5825	0.09	5.25	5.34	30	Pass
TX 802.11 n20 Mode						
CH149	5745	0.19	5.53	5.72	30	Pass
CH157	5785	0.19	5.07	5.26	30	Pass
CH165	5825	0.19	4.97	5.16	30	Pass
TX 802.11 ac20 Mode						
CH149	5745	0.28	5.64	5.92	30	Pass
CH157	5785	0.28	5.00	5.28	30	Pass
CH165	5825	0.28	5.02	5.30	30	Pass
TX 802.11 n40 Mode						
CH151	5755	0.55	5.25	5.80	30	Pass
CH159	5795	0.55	5.06	5.61	30	Pass
TX 802.11 ac40 Mode						
CH151	5755	0.23	5.19	5.42	30	Pass
CH159	5795	0.23	5.14	5.37	30	Pass

4.5 Bandwidth 99% Occupy Bandwidth

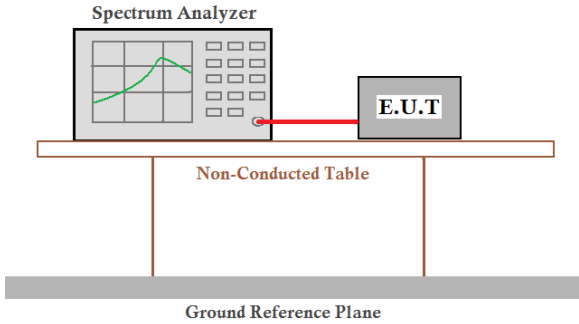Test Requirement:	FCC Part15 E Section 15.407(a)(12)&15.407(e)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 22.2°C	Humid.: 52%RH
Test voltage:	DC 5V	
Test results:	Pass	

Measurement Result


5180-5240MHz

Test CH	-26dB Channel Bandwidth (MHz)						Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)	
Lowest	23.58	22.54	21.92	42.06	42.11	--	Pass
Middle	23.92	23.00	23.13	--	--	/	
Highest	23.97	22.54	22.91	41.86	41.27	--	


Test CH	99% Occupy Bandwidth (MHz)						Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)	
Lowest	16.662	17.742	17.740	36.347	36.372	--	Pass
Middle	16.680	17.773	17.735	--	--	/	
Highest	16.686	17.743	17.745	36.369	36.343	--	

Test plot -26dB Channel Bandwidth


(802.11a) plot on channel 36

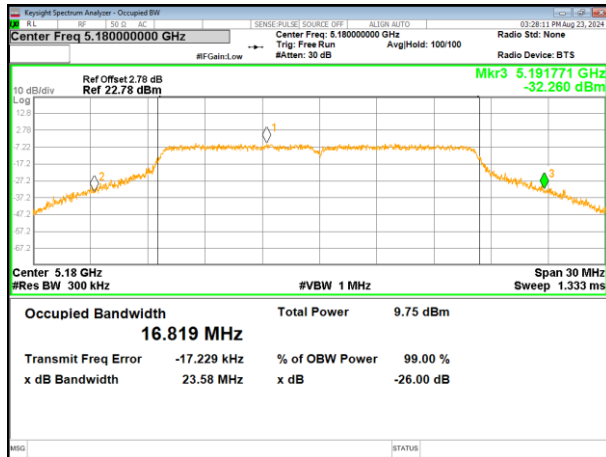


(802.11 n20) plot on channel 36

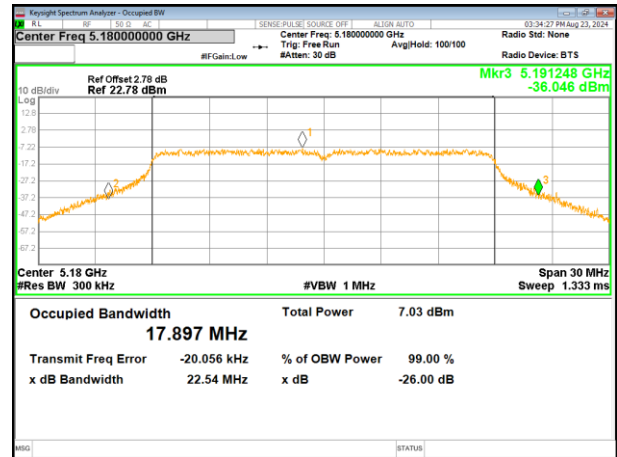


(802.11a) plot on channel 40

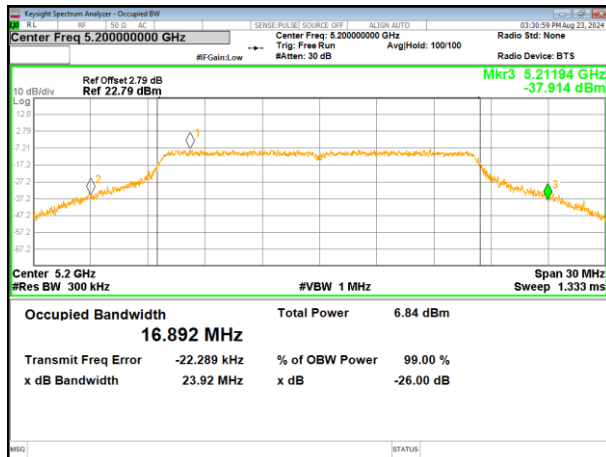


(802.11 n20) plot on channel 40

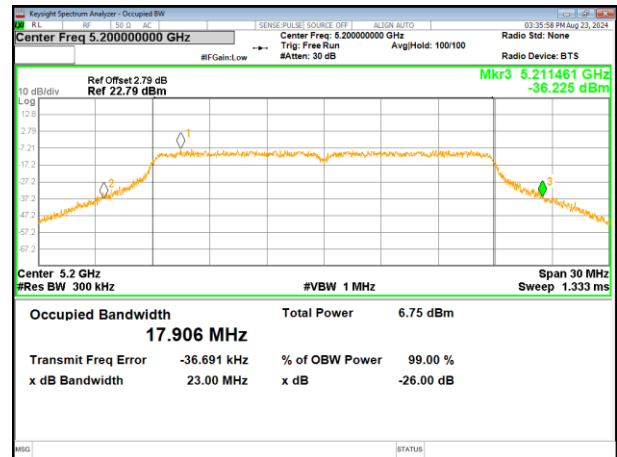

(802.11a) plot on channel 48

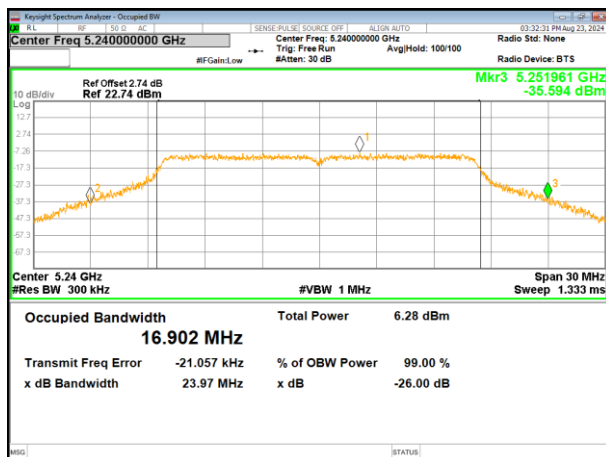


(802.11 n20) plot on channel 48

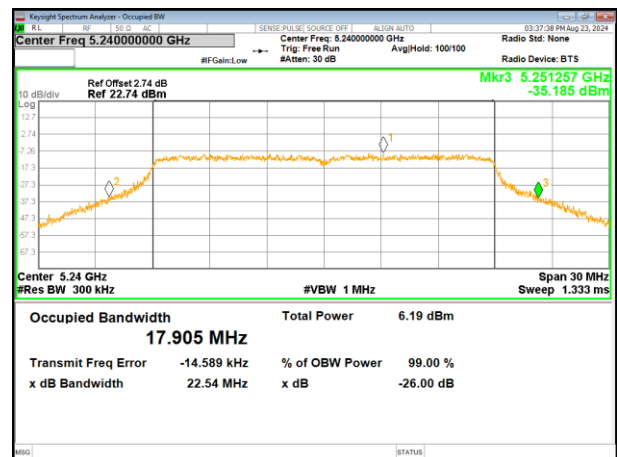


Test plot


(802.11ac20) plot on channel 36

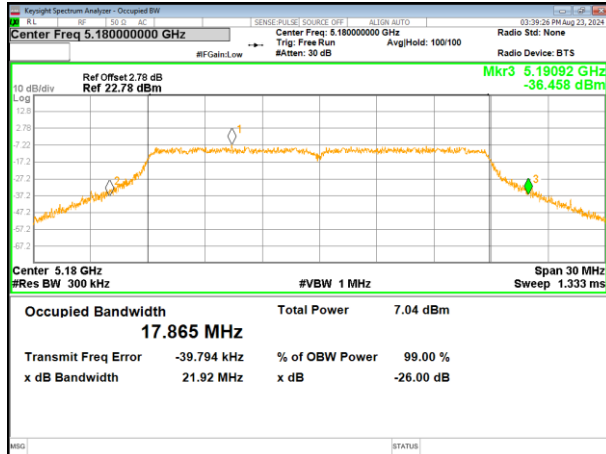


(802.11 n40) plot on channel 38

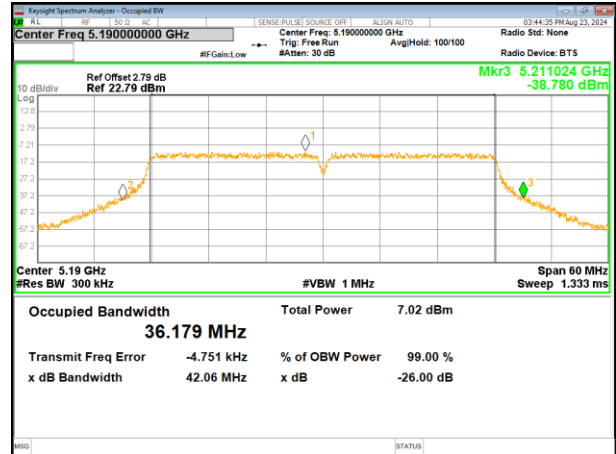


(802.11ac20) plot on channel 40

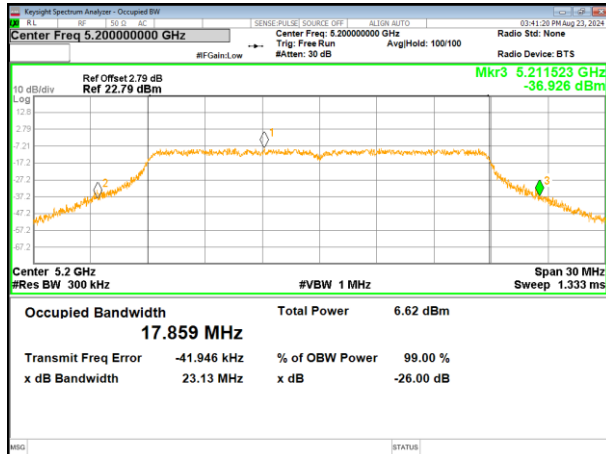

(802.11 n40) plot on channel 46

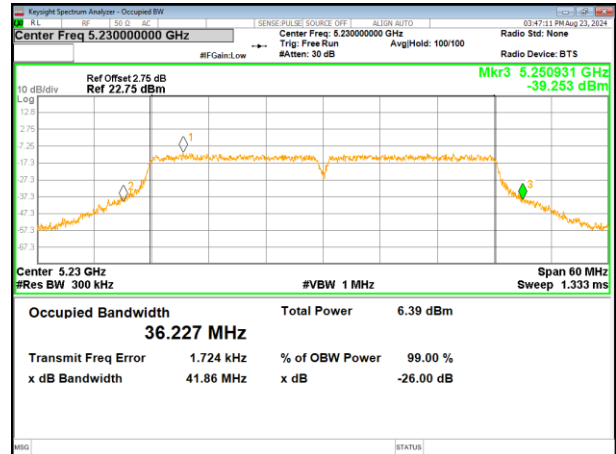


(802.11ac20) plot on channel 48

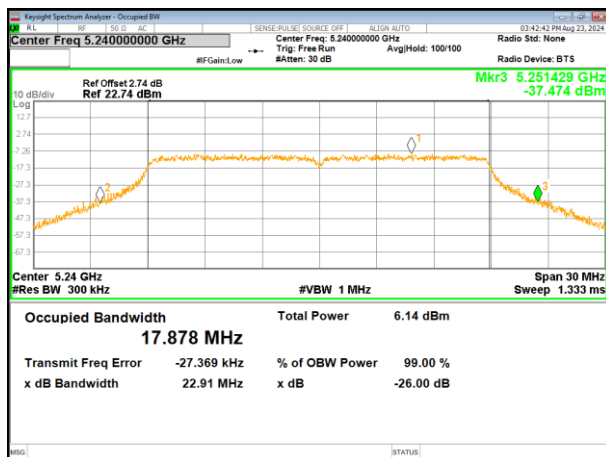


Test plot

(802.11ac40) plot on channel 38

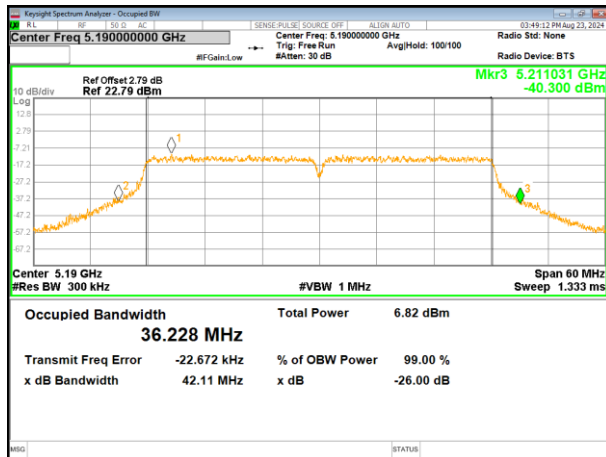


(802.11ac40) plot on channel 46

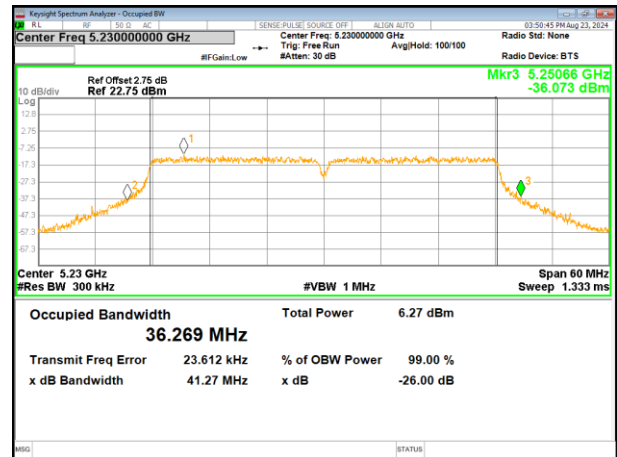


Test plot 99% Occupy Bandwidth


(802.11a) plot on channel 36

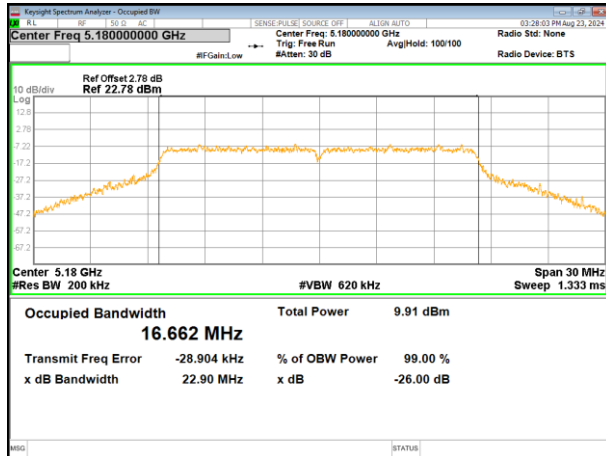


(802.11 n20) plot on channel 36

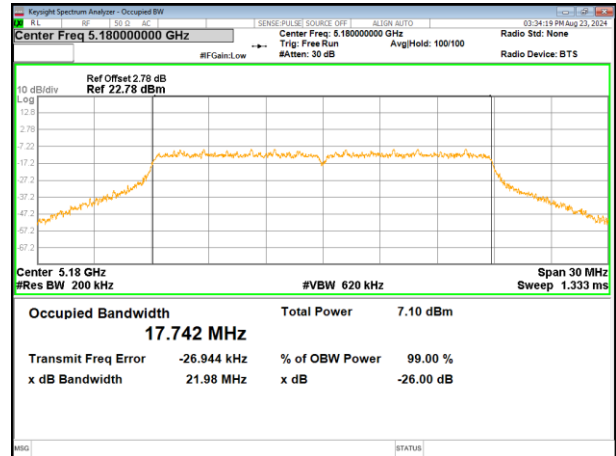


(802.11a) plot on channel 40

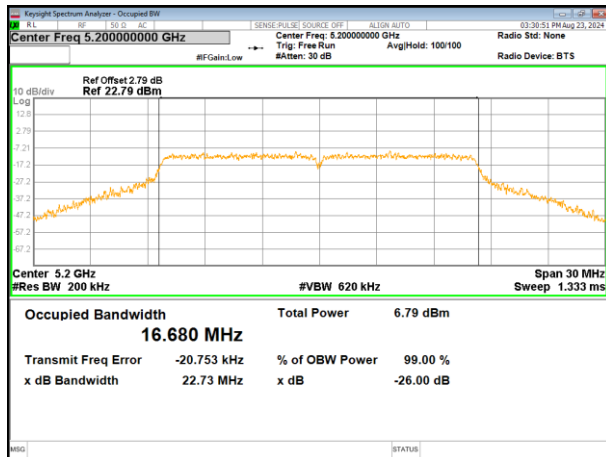


(802.11 n20) plot on channel 40

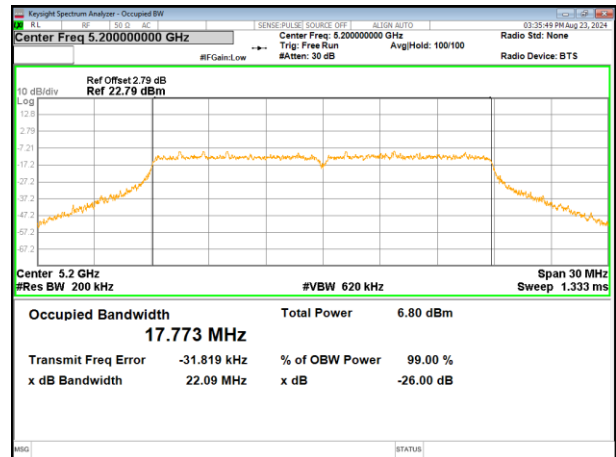

(802.11a) plot on channel 48

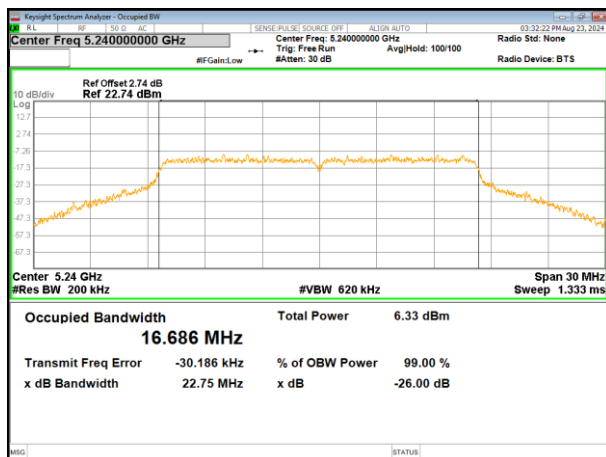


(802.11 n20) plot on channel 48

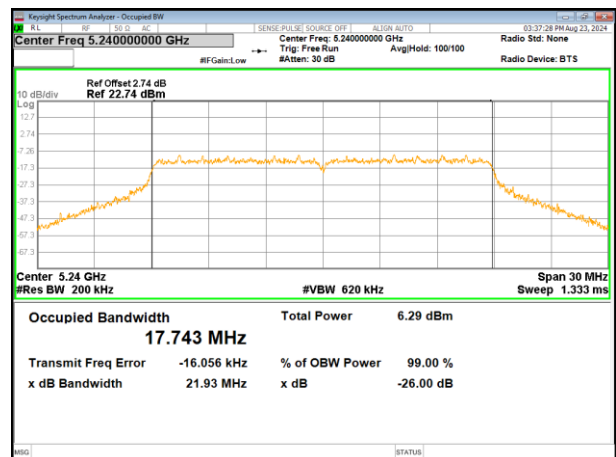


Test plot


(802.11ac20) plot on channel 36

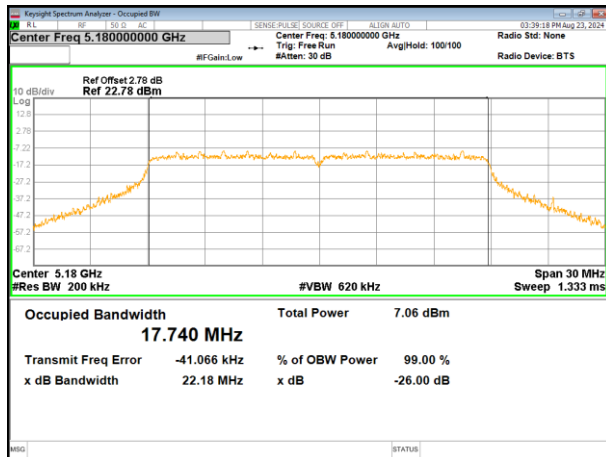


(802.11 n40) plot on channel 38

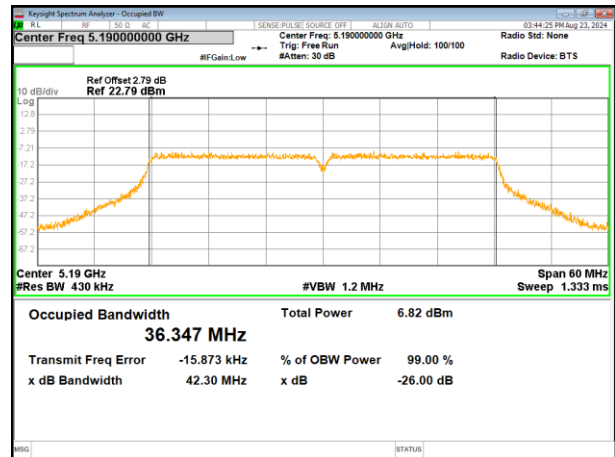


(802.11ac20) plot on channel 40

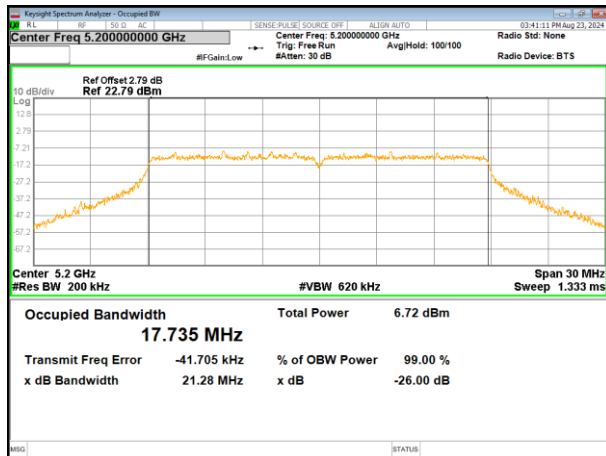

(802.11 n40) plot on channel 46

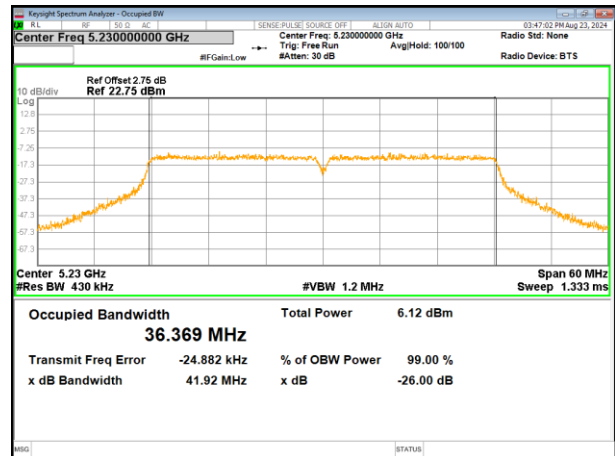


(802.11ac20) plot on channel 48

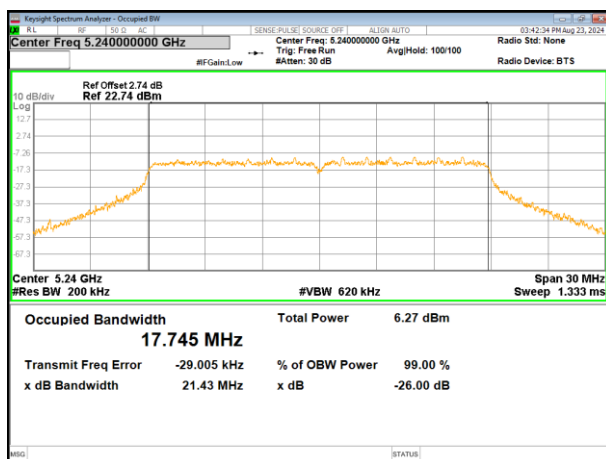


Test plot

(802.11ac40) plot on channel 38

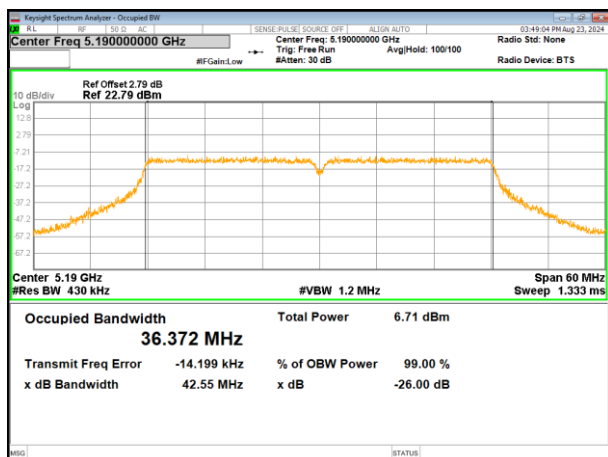

(802.11ac40) plot on channel 46

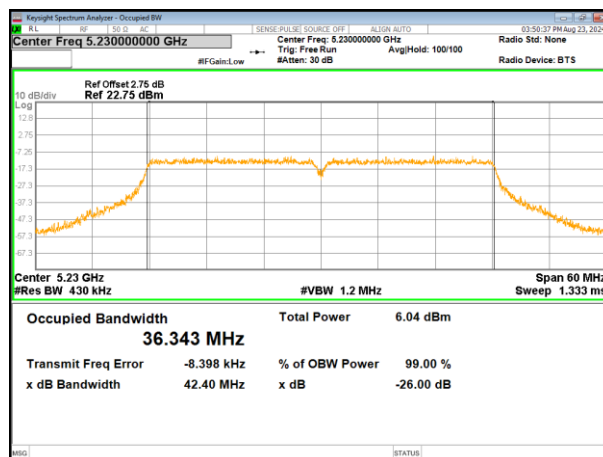


5745-5825MHz

Test CH	-6dB Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.32	17.56	17.62	36.32	36.39	--	>500	Pass
Middle	16.33	17.64	17.61	--	--	/		
Highest	16.32	17.60	17.65	36.39	36.45	--		


Remark: "---"is not applicable

Test plot


(802.11a) plot on channel 149

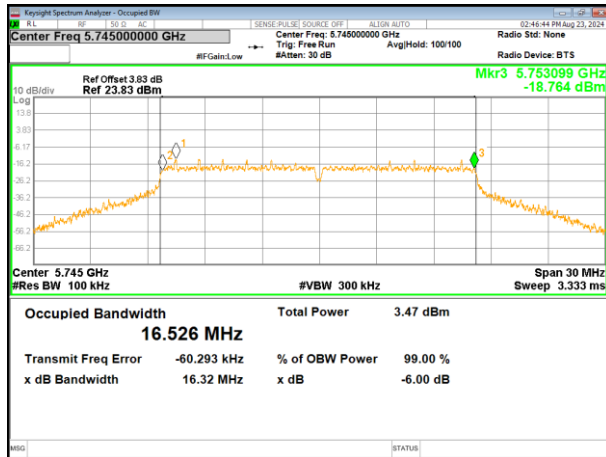


(802.11 n20) plot on channel 149

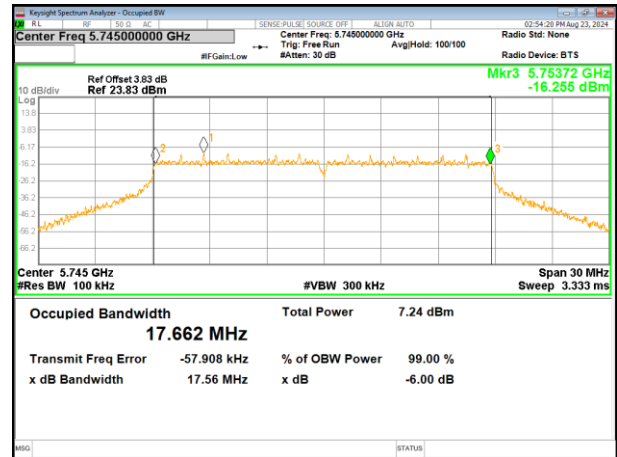


(802.11a) plot on channel 157

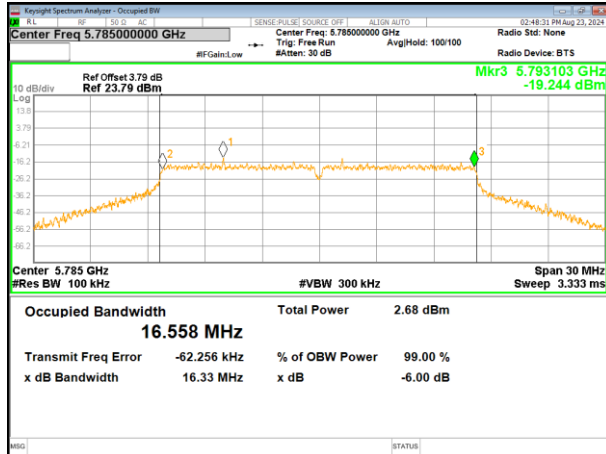


(802.11 n20) plot on channel 157

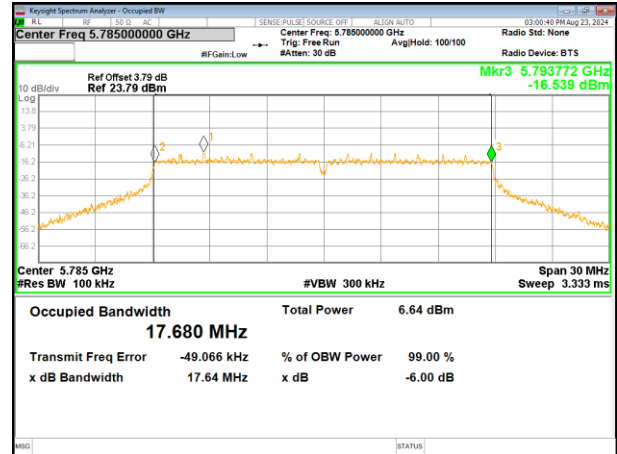

(802.11a) plot on channel 165

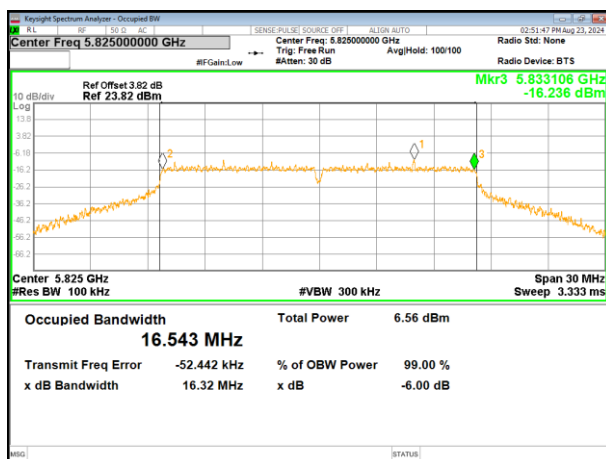


(802.11 n20) plot on channel 165

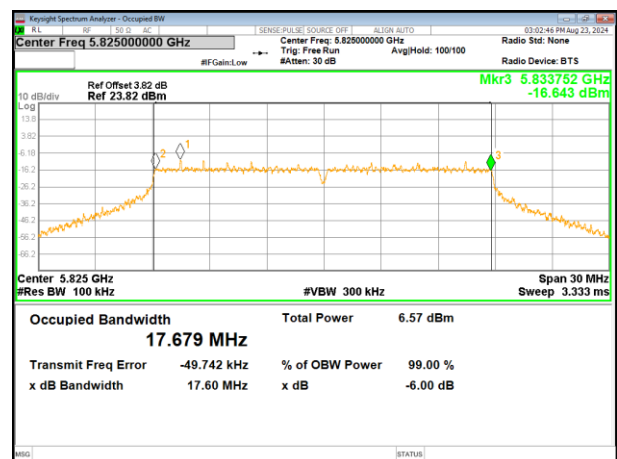


Test plot


(802.11ac20) plot on channel 149

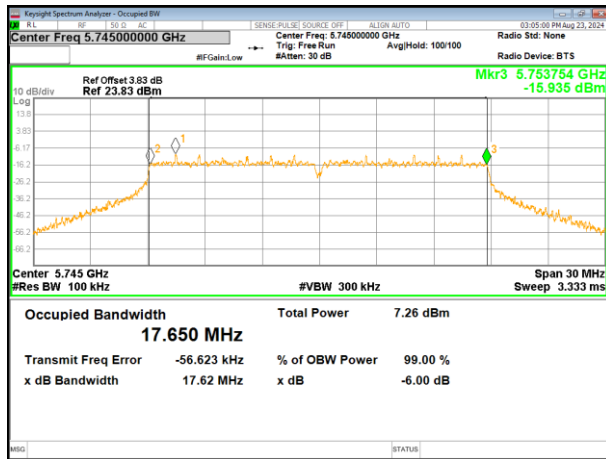


(802.11 n40) plot on channel 151

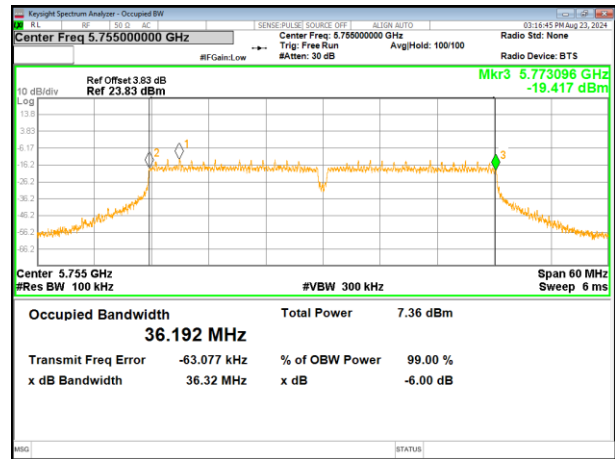


(802.11ac20) plot on channel 157

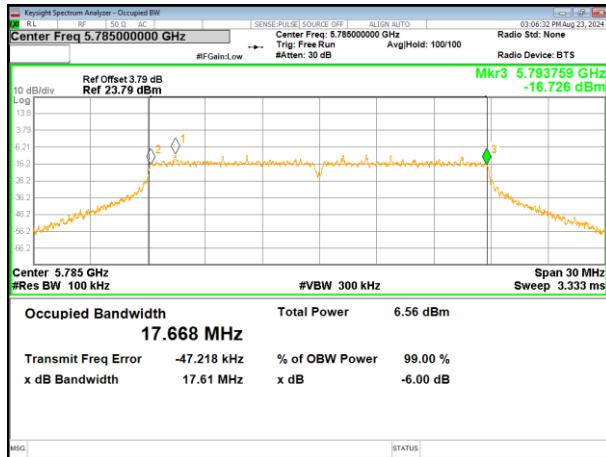

(802.11 n40) plot on channel 159

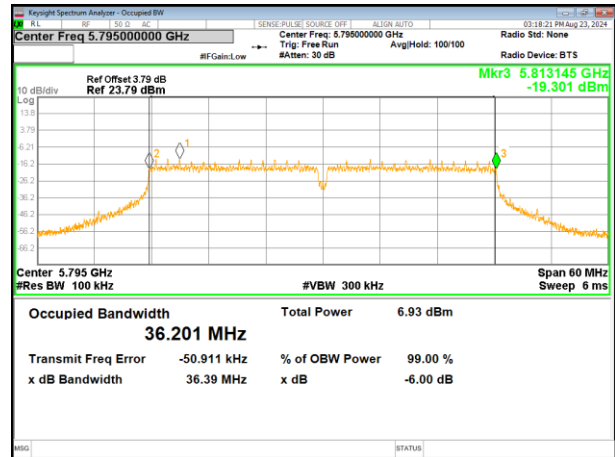


(802.11ac20) plot on channel 165

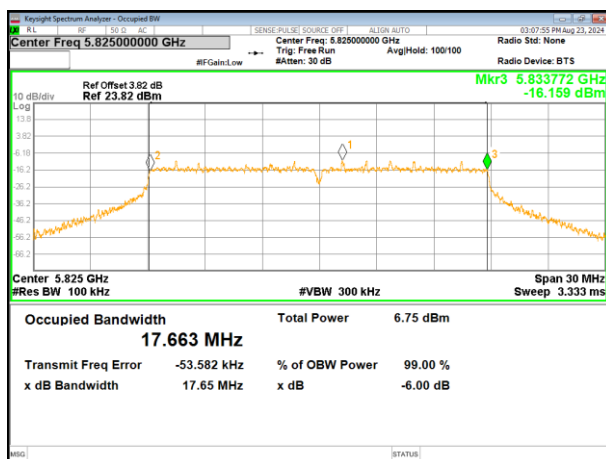


Test plot


(802.11 ac40) plot on channel 151

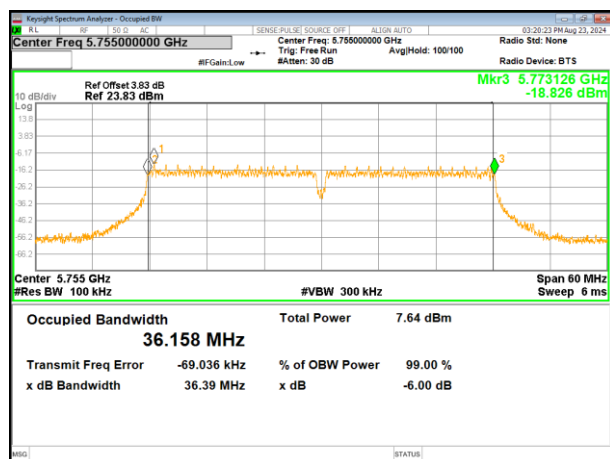

(802.11 ac40) plot on channel 159

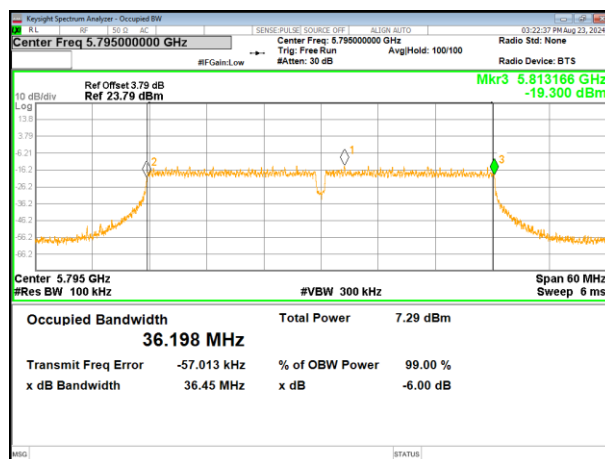

4.6 Power Spectral Density

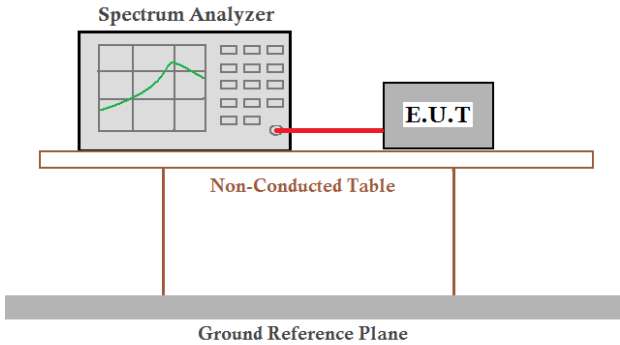
Test Requirement:	FCC Part15 E Section 15.407(a)(1)/ (a)(3)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm/1MHz for master device
		≤11dBm/1MHz for client device
	5250-5350	≤11dBm/1MHz for client device
	5470-5725	≤11dBm/1MHz for client device
	5725-5850	≤30dBm/500kHz
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 22.2°C	Humid.: 52%RH
Test voltage:	DC 5V	
Test results:	Pass	

Measurement Result


5180-5240MHz

Mode	Frequency	Measured Power Density (dBm/MHz)	Correction Factor (dB)	Total Measured Power Density (dBm/MHz)	Limit (dBm/MHz)
802.11 a	5180 MHz	1.034	0.09	1.124	11
	5200 MHz	-2.039	0.09	-1.949	11
	5240 MHz	-2.283	0.09	-2.193	11
802.11 n20	5180 MHz	-1.266	0.19	-1.076	11
	5200 MHz	-2.198	0.19	-2.008	11
	5240 MHz	-2.662	0.19	-2.472	11
802.11 ac20	5180 MHz	-1.429	0.28	-1.149	11
	5200 MHz	-2.317	0.53	-1.787	11
	5240 MHz	-2.389	0.53	-1.859	11
802.11 n40	5190 MHz	-4.525	0.28	-4.245	11
	5230 MHz	-5.496	0.28	-5.216	11
802.11 ac40	5190 MHz	-4.738	0.53	-4.208	11
	5230 MHz	-4.747	0.53	-4.217	11


(802.11a) PSD plot on channel 36

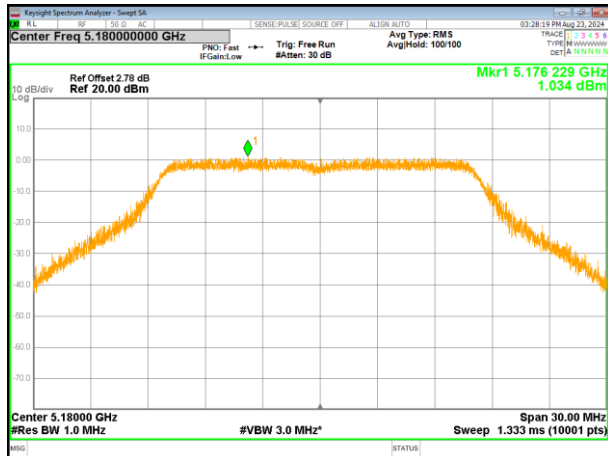


(802.11n20) PSD plot on channel 36

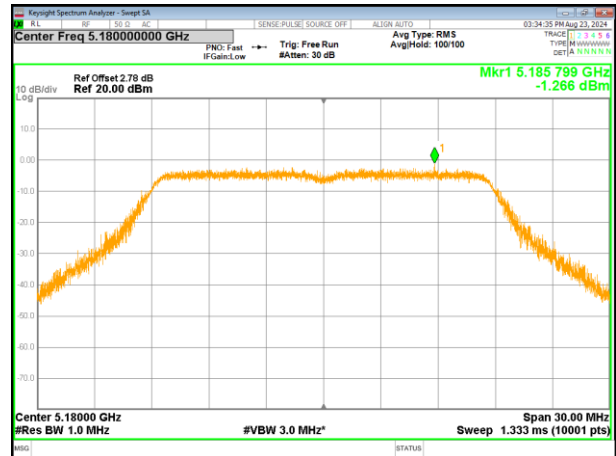


(802.11a) PSD plot on channel 40

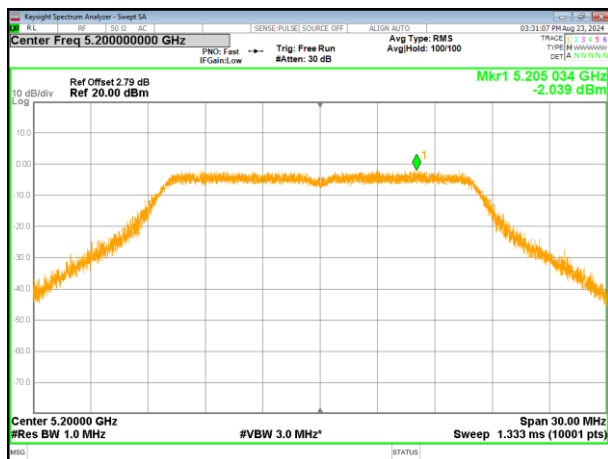


(802.11n20) PSD plot on channel 40

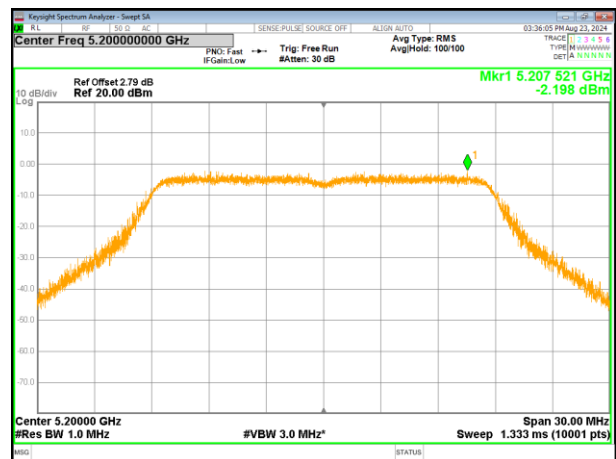


(802.11a) PSD plot on channel 48

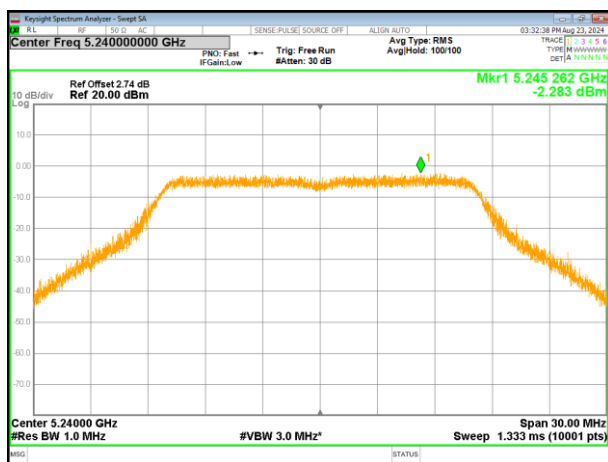


(802.11n20) PSD plot on channel 48

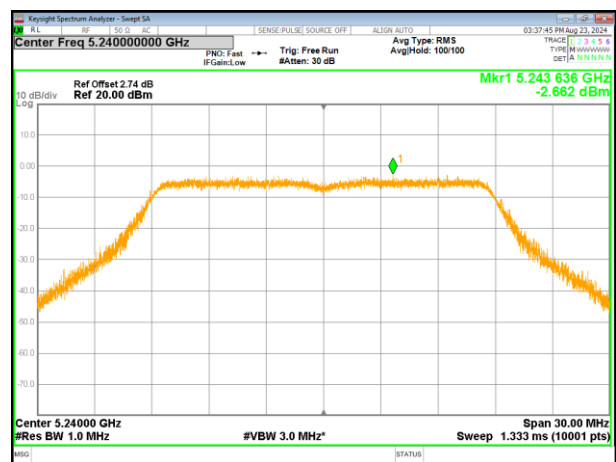


(802.11ac20) PSD plot on channel 36

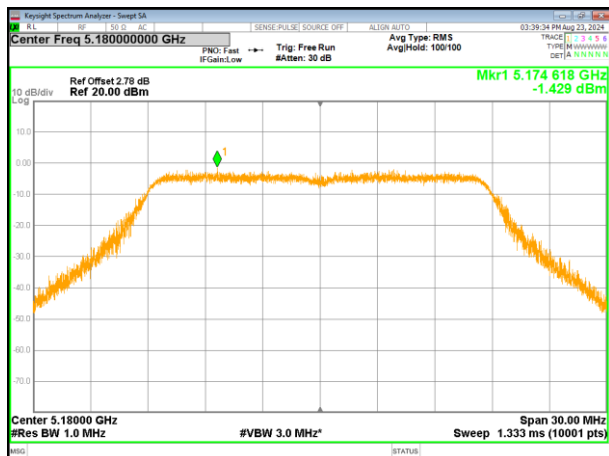


(802.11n40) PSD plot on channel 38

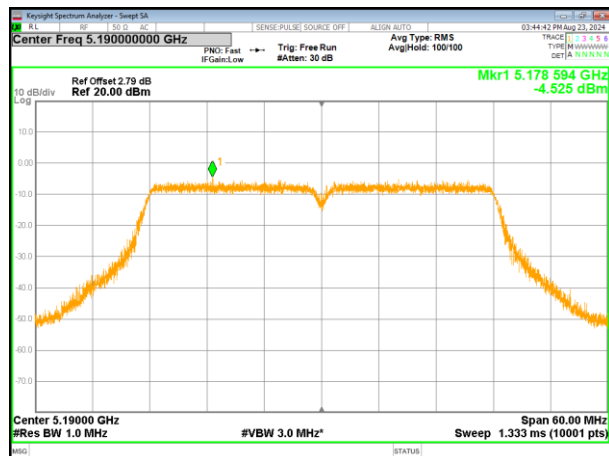


(802.11ac20) PSD plot on channel 40

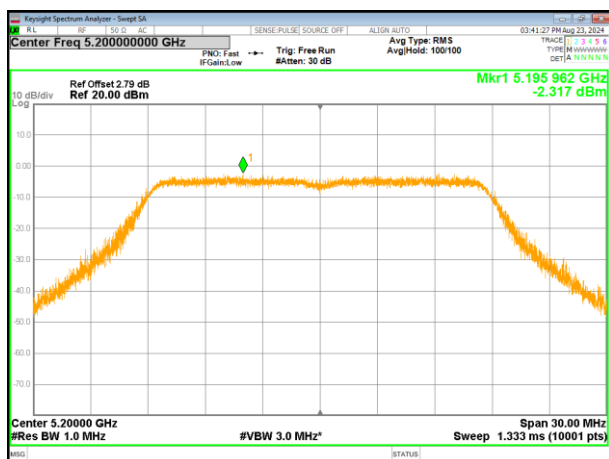


(802.11n40) PSD plot on channel 46

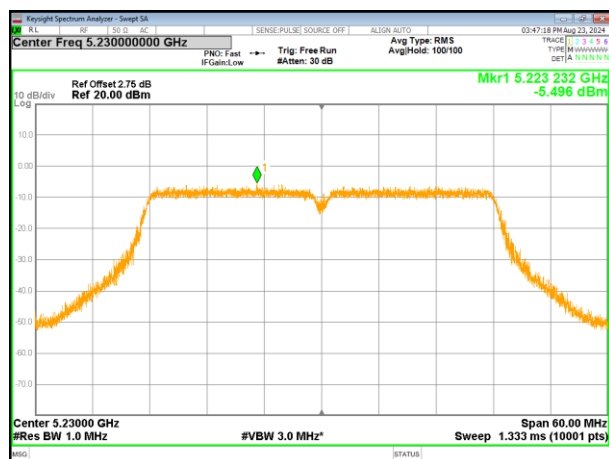


(802.11ac20) PSD plot on channel 48

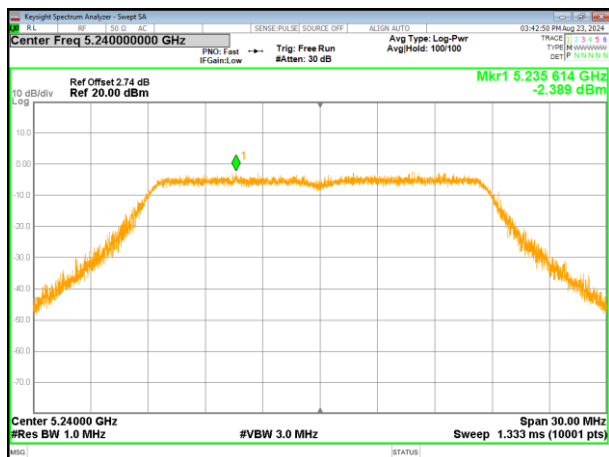

(802.11ac40) PSD plot on channel 38

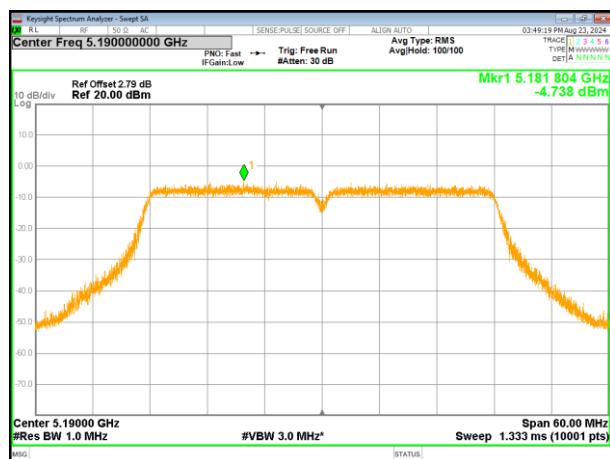

(802.11ac40) PSD plot on channel 46

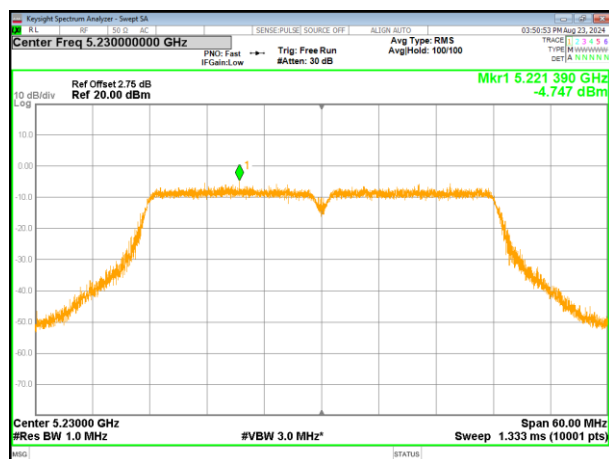

Mode	Frequency	Measured Power Density (dBm/510KHz)	Measured Power Density(dBm/500 KHz)	Correction Factor (dB)	Total Measured Power Density (dBm/500KHz)	Limit (dBm/MHz)
802.11 a	5745 MHz	-9.437	-9.523	0.090	-9.433	30
	5785 MHz	-9.684	-9.770	0.090	-9.680	30
	5825 MHz	-5.868	-5.954	0.090	-5.864	30
802.11 n20	5745 MHz	-5.004	-5.090	0.190	-4.900	30
	5785 MHz	-5.860	-5.946	0.190	-5.756	30
	5825 MHz	-5.889	-5.975	0.190	-5.785	30
802.11ac20	5745 MHz	-5.025	-5.111	0.280	-4.831	30
	5785 MHz	-5.169	-5.255	0.550	-4.705	30
	5825 MHz	-5.642	-5.728	0.550	-5.178	30
802.11 n40	5755 MHz	-8.508	-8.594	0.280	-8.314	30
	5795 MHz	-8.491	-8.577	0.280	-8.297	30
802.11ac40	5755 MHz	-7.947	-8.033	0.230	-7.803	30
	5795 MHz	-7.980	-8.066	0.230	-7.836	30

Note: 1. If the measurement is X dBm/510kHz, thus $X \text{ dBm/510kHz} = (10^{X/10}) \cdot (500 / 510) \text{ dBm/500kHz}$

2. Correction Factor (dB)= duty cycle factor+RBW factor