

澄海启诚电子厂


元件规格

物料品号:		物料名称: 天线			版本: 00
制作: 徐芳连	校核:	审批: 林源强	日期: 2020-05-18	页码: of	

外观图(单位:mm)

Transparent PVC, 33mm, tinning 3mm $\pm$ 0.5mm; 19 core *0.14mm, outer diameter 1.6mm

透明色PVC, 33mm, 单边剥口镀锡3mm $\pm$ 0.5mm; 19芯*0.14mm, 外径1.6mm

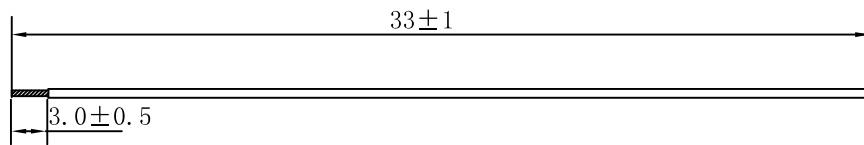

Chenghai Qicheng electronics factory

Product Specification

A. Electrical Characteristics **Frequency**

2400MHz ~2500MHz VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain -0.00DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.6 19P Transparent color

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions

1. Network Analyzers :

Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C

3. 3D Chamber Test System

Effiency &Gain

Effiency &Gain

2.40 -0.00

2.440 -0.11

2.48 -0.13