


# 承认书项目表

| NO. | 内 容<br>(Contents)      | 页数<br>(Number<br>of Page) | 页码<br>(Page<br>Code) |
|-----|------------------------|---------------------------|----------------------|
| 1   | 承认书封面 (Spec Cover)     | 1                         | 1                    |
| 2   | 承认书项目表 (Spec Item )    | 1                         | 2                    |
| 3   | 工程成品图 (Drawing)        | 1                         | 3                    |
| 4   | 电性测试报告 (Test Reports ) | 1                         | 4                    |
| 5   | S 参数测试 (S Parameter )  | 1                         | 5                    |
| 6   | 增益测试 (Gain Test )      | 1                         | 6                    |
| 7   |                        |                           |                      |
| 8   |                        |                           |                      |
| 9   |                        |                           |                      |
| 10  | -                      | -                         | -                    |
| 11  | -                      | -                         | -                    |
| 12  | -                      | -                         | -                    |

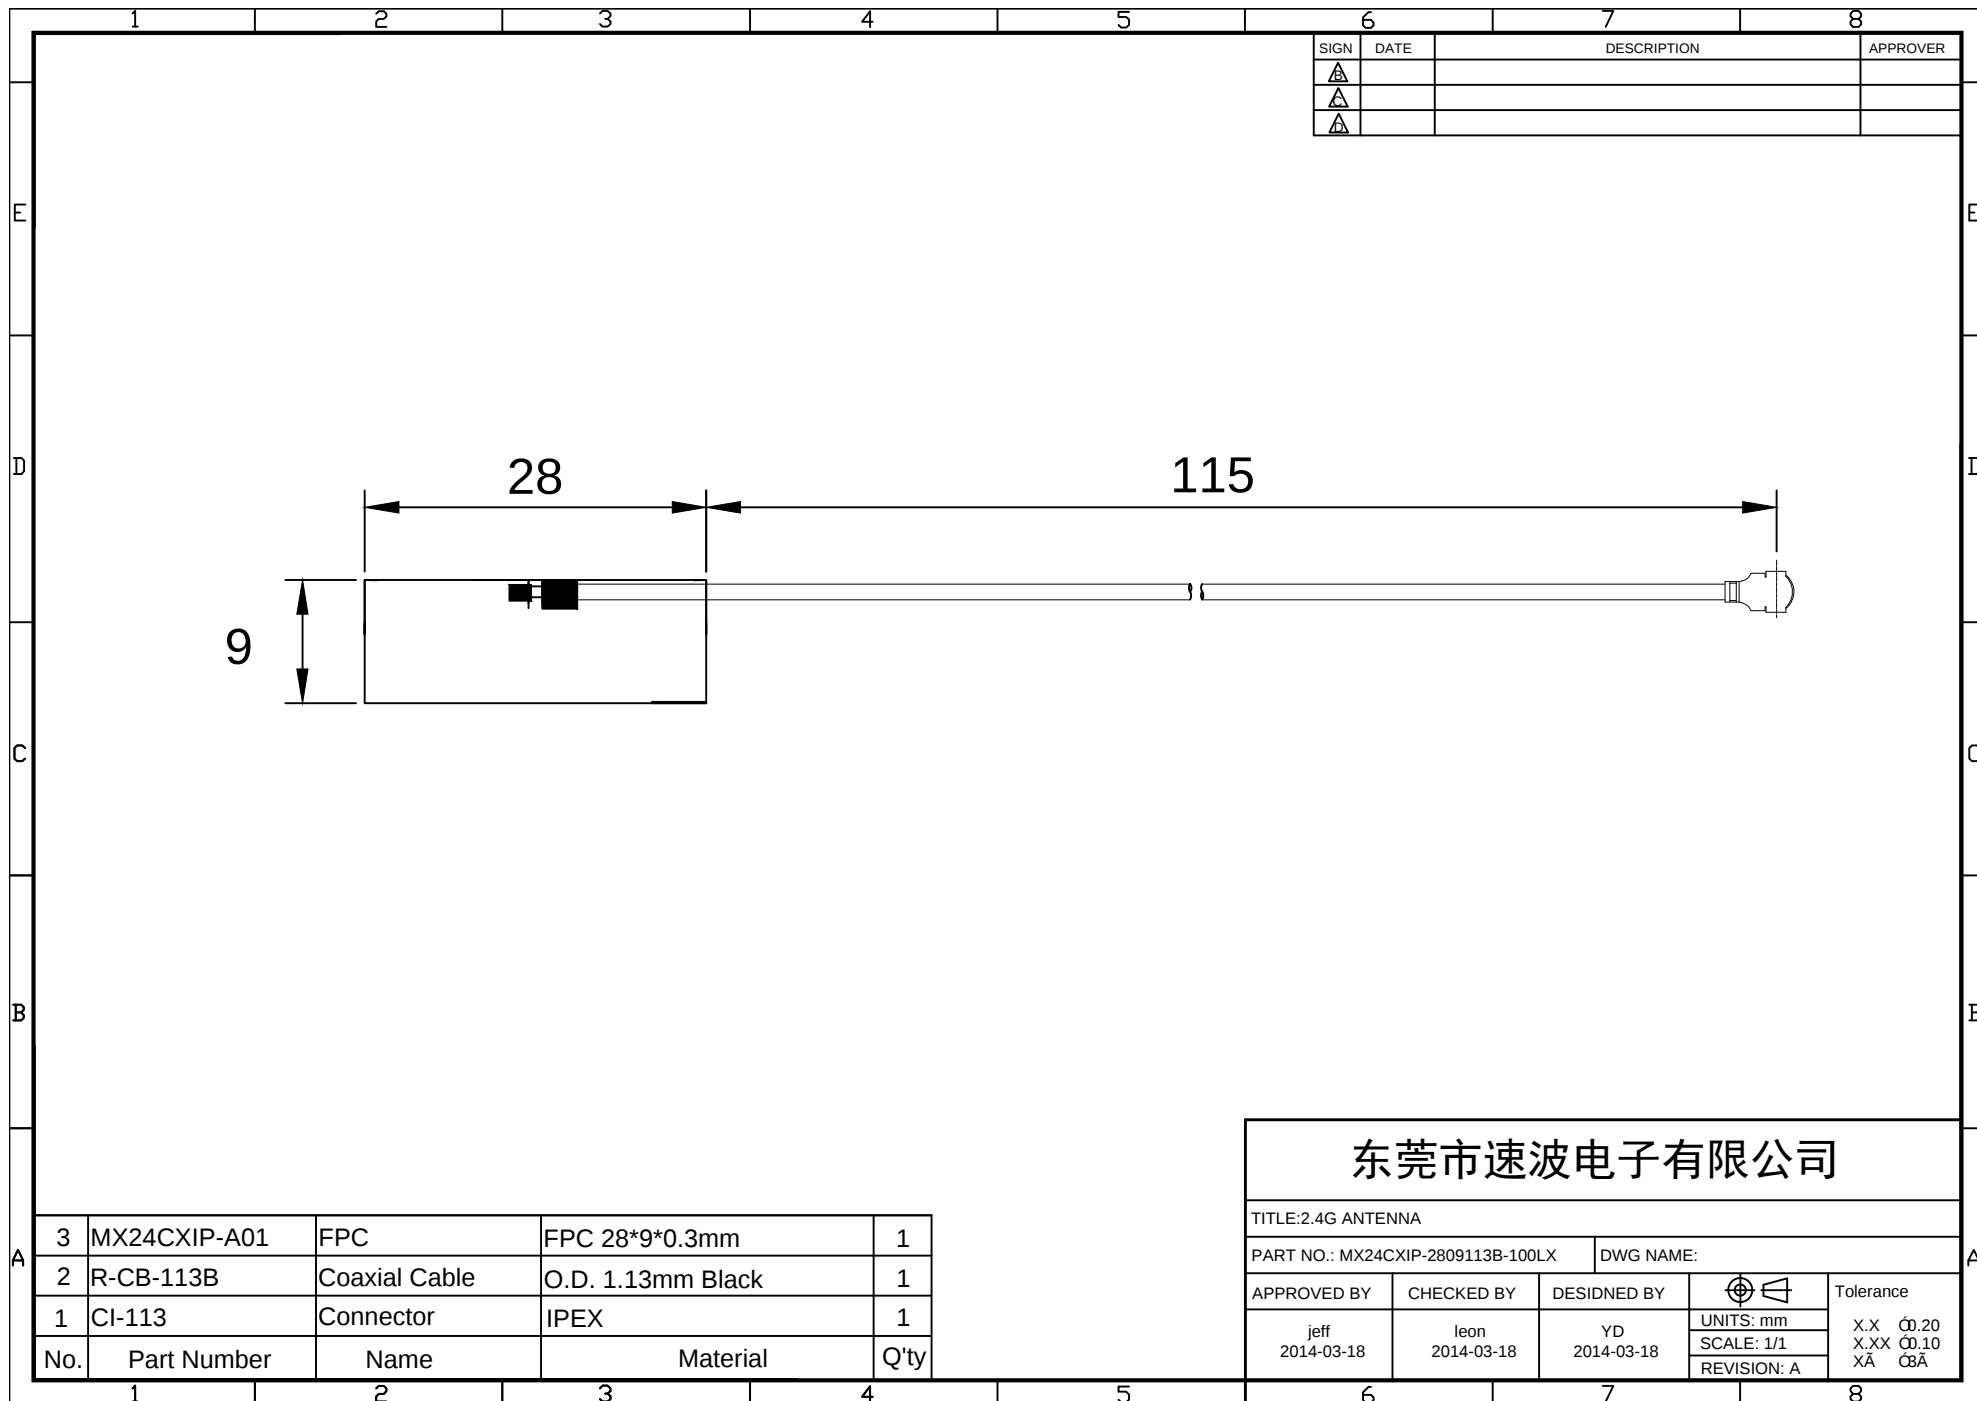

# 电性测试报告



## Test Reports

| Electrical Properties |                           |
|-----------------------|---------------------------|
| Frequency             | 2.4GHz                    |
| Impedance             | 50 Ohm Nominal            |
| V.S.W.R               | 1.92 : 1 Max              |
| Return Loss           | -10 dB Max                |
| Radiation             | Omni-directional          |
| Gain (Peak)           | 3dBi                      |
| Cable Loss            | 3.2 dB / m Max @ 2450 MHz |
| Polarization          | Linear, Vertical          |
| Admitted Power        | 1 W                       |
| Connector             | ipex                      |
| Physical Properties   |                           |
| Antenna Material      | FPCB                      |
| Cable Type            | O.D. 1.13mm // 115 mm     |
| Operating Temp.       | -10 ~ +60 °C              |
| Storage Temp.         | -10 ~ +70 °C              |
| Cable Color           | Black                     |

# S 参数测试

## S Parameter Test

*Agilent E5071C*

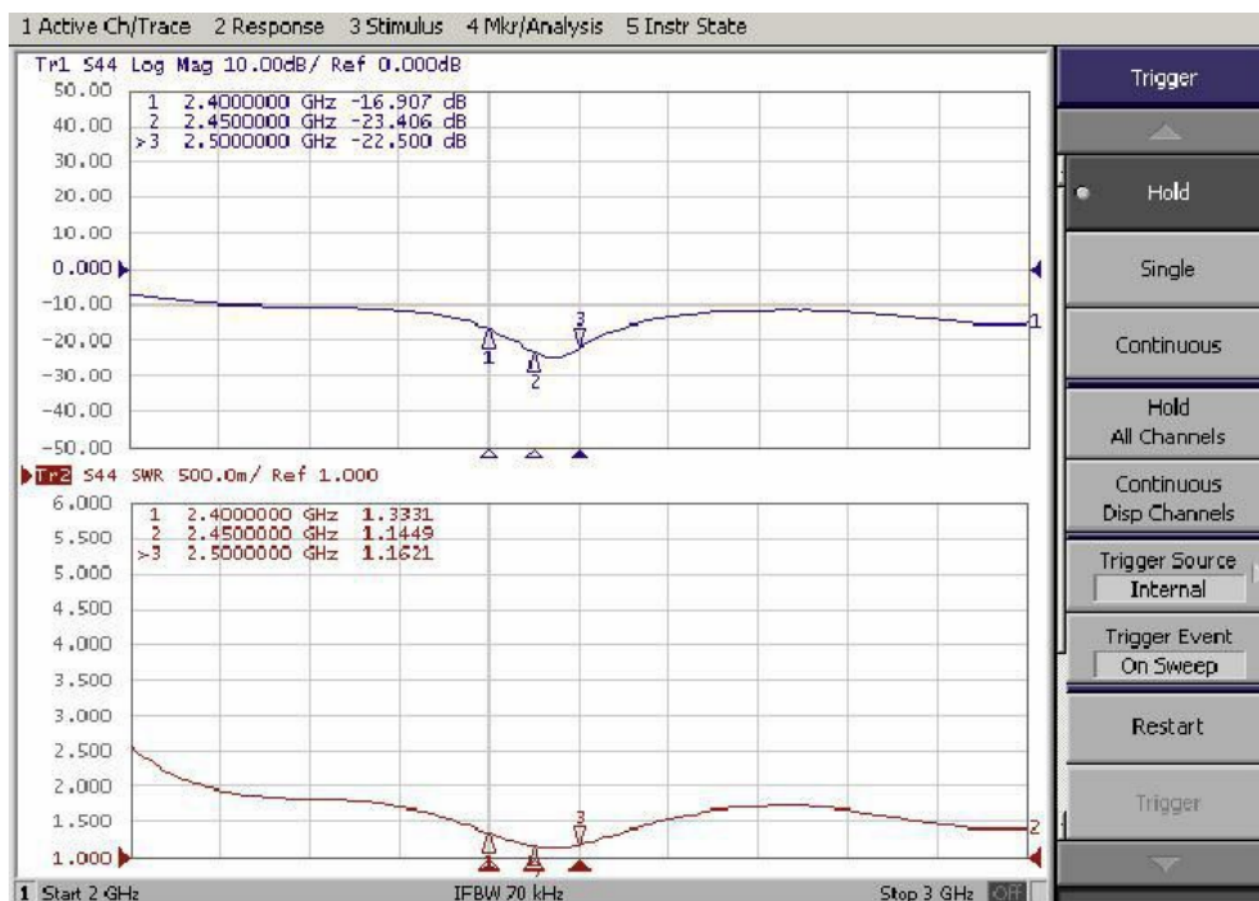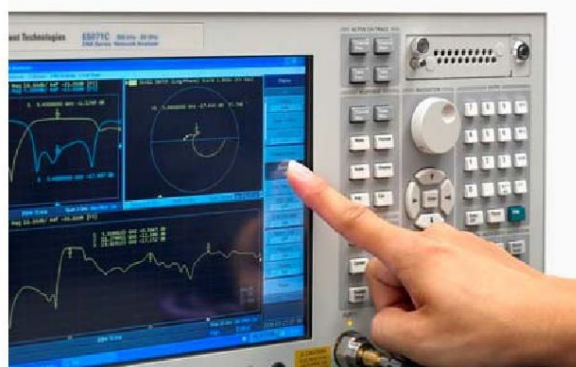

# 增益测试

## Gain Test

*Antenna  
Radiation  
Pattern  
VS  
Gain*

