



SAR Test Report

For

Applicant Name: Ji'an Zhongrui Electronics Co., Ltd.
Address: 4/f, building D, entrepreneurship incubator base, Ji'an National high-tech zone, Ji'an County
EUT Name: Wireless USB-C to HDMI Transmitter and Receiver
Brand Name: AVACON BENFEI
Model Number: 000374black

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Report Number: BTF250427R00901
Test Standards: 47 CFR Part 2.1093 IEEE Std. 1528-2013
IEEE C95.1-2019 KDB 447498 D01 KDB 865664 D01
KDB 865664 D02 KDB 248227 D01 KDB 447498 D02
KDB 690783 D01
FCC ID: 2BKUE-000374BLACK
Test Conclusion: Pass
Test Date: 2025-06-30
Date of Issue: 2025-07-01
Tested By: Jim. Yin
Date: 2025-07-01
Reviewed By: Amenda Zhong
Date: 2025-07-01
Approved By: Ryan.CJ
Date: 2025-07-01



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd. All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2025-07-01	Original
Note:	<i>Once the revision has been made, then previous versions reports are invalid.</i>	

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	5
3. Summary of Test Results	6
3.1 Test Standards	6
3.2 Device Category and SAR Limit	6
3.3 Test Result Summary	6
3.4 Test Uncertainty	7
4. Measurement System	9
4.1 Specific Absorption Rate (SAR) Definition	9
4.2 MVG SAR System	9
5. System Verification	14
5.1 Purpose of System Check	14
5.2 System Check Setup	14
6. TEST POSITION CONFIGURATIONS	15
6.1 Head Exposure Conditions	15
6.2 Body-worn Position Conditions	17
6.3 Hotspot Mode Exposure Position Conditions	18
6.4 Product Specific 10g Exposure Consideration	18
7. Measurement Procedure	19
7.1 Measurement Process Diagram	19
7.2 SAR Scan General Requirement	20
7.3 Measurement Procedure	21
7.4 Area & Zoom Scan Procedure	21
8. Conducted RF Output Power	22
8.1 Wi-Fi	22
9. Test Exclusion Consideration	22
9.1 SAR Test Exclusion Consideration Table	23
10. Test Result	23
11. SAR Measurement Variability	24
12. Simultaneous Transmission	24
12.1 Simultaneous Transmission Mode Considerations	24
13. Test Equipment List	25
ANNEX A Simulating Liquid Verification Result	26
ANNEX B System Check Result	26
ANNEX C Test Data	31
ANNEX D SAR Test Setup Photos	35
ANNEX E EUT External and Internal Photos	36
ANNEX F Calibration Information	36

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1409

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2. Product Information

2.1 Application Information

Company Name:	Ji'an Zhongrui Electronics Co., Ltd.
Address:	4/f, building D, entrepreneurship incubator base, Ji'an National high-tech zone, Ji'an County

2.2 Manufacturer Information

Company Name:	Ji'an Zhongrui Electronics Co., Ltd.
Address:	4/f, building D, entrepreneurship incubator base, Ji'an National high-tech zone, Ji'an County

2.3 Factory Information

Company Name:	Ji'an Zhongrui Electronics Co., Ltd.
Address:	4/f, building D, entrepreneurship incubator base, Ji'an National high-tech zone, Ji'an County

2.4 General Description of Equipment under Test (EUT)

EUT Name	Wireless USB-C to HDMI Transmitter and Receiver
Under Test Model Name	000374black
Sample No.	BTFSN250427014

2.5 Technical Information

Network and Wireless connectivity	5G WIFI 802.11a, 802.11n(HT20)
-----------------------------------	--------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	WLAN	
Frequency Range	802.11a/802.11n(HT20)	5150 ~ 5250 MHz 5745 ~ 5825 MHz
Antenna Type	WLAN: PCB Antenna	
Hotspot Function	Not Support	
Power Reduction	Not Support	
Exposure Category	General Population/Uncontrolled exposure	
EUT Stage	Portable Device	
Product	Type	
	<input type="checkbox"/> Production unit	<input checked="" type="checkbox"/> Identical prototype

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB 447498 D01	General RF Exposure Guidance v06
5	KDB 865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB 865664 D02	RF Exposure Reporting v01r02
7	KDB 248227 D01	802.11 Wi-Fi SAR v02r02
8	KDB 447498 D02	SAR Procedures for Dongle Xmtr v02r01
9	KDB 690783 D01	SAR Listings on Grant v01r03

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Body 1-g SAR (0 mm Gap)	WLAN 5.2 GHz	0.487	NII	0.487
	WLAN 5.8 GHz	0.452		

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std. 1528-2013.

3.4 Test Uncertainty

3.4.1 3.4.1 Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Budget of 1g/10gpsSAR for DUT with COMOSAR											
Ambient temperature: 18-25°C & $\Delta T \leq 2^\circ\text{C}$ Humidity: 30-70% Frequency range: 150MHz-7500MHz											
Symbol	Input quantity X_i (source of uncertainty)	PDF _i	Unc. $a(x_i)$ [± %]	Div. q	$u(x_i) =$ $a(x_i)/q_i$	c_i 1g	c_i 10 g	$u(y) =$ $c_i^* u(x_i)$ 1g [± %]	$u(y) =$ $c_i^* u(x_i)$ 10g [± %]	v_i	Frequency range [MHz]
Measurement System errors											
CF	Probe calibration	N (k=2)	11.00	2.00	5.50	1.00	1.00	5.50	5.50	∞	150-450
			14.00	2.00	7.00	1.00	1.00	7.00	7.00	∞	600-7500
CF _{drift}	Probe calibration drift	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-450
			4.00	1.73	2.31	1.00	1.00	2.31	2.31	∞	600-7500
LIN	Probe linearity	R	4.70	1.73	2.71	1.00	1.00	2.71	2.71	∞	
	Detection limit	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
BBS	Broadband signal	R	0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
ISO	Axial Isotropy	R	3.50	1.73	2.02	0.71	0.71	1.43	1.43	∞	
	Hemispherical Isotropy	R	5.90	1.73	3.41	0.71	0.71	2.41	2.41	∞	
DAE	Boundary effect	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
	Integration time	R	1.40	1.73	0.81	1.00	1.00	0.81	0.81	∞	
AMB	Response time	R	0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
	Readout electronics	N	0.50	1.00	0.50	1.00	1.00	0.50	0.50	∞	150-7500
AMB	Noise	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
	Reflections	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
Δ _{xyz}	Positioner Mechanical Tolerance	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	≥150 & ≤3000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>3000 & ≤6000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>6000 & ≤7500
Δ _{xyz}	Positioning with respect to Phantom Shell	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	≥150 & ≤3000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>3000 & ≤6000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>6000 & ≤7500
DAT	Data processing errors	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-7500
Phantom and DUT errors											
LIQ(σ,ε)	Conductivity measurement	N	4.07	1.00	4.07	0.79	0.77	3.22	3.13	9	
	Permittivity measurement	N	5.06	1.00	5.06	0.23	0.26	1.16	1.32	9	
LIQ(T _c)	Liquid Conductivity- Temperature Uncertainty	R	2.50	1.73	1.44	0.79	0.77	1.14	1.11	∞	
	Liquid Permittivity- Temperature Uncertainty	R	2.50	1.73	1.44	0.23	0.26	0.33	0.38	∞	150-7500
EPS	Shell permittivity	R	2.90	1.73	1.67	0.00	0.00	0.00	0.00	∞	≥150 & ≤3000
			2.90	1.73	1.67	0.25	0.25	0.42	0.42	∞	>3000 & ≤6000
			2.90	1.73	1.67	0.50	0.50	0.84	0.84	∞	>6000 & ≤7500
DIS	Distance between the radiating element of the DUT and the phantom medium	N	2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	≥150 & ≤3000
			2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	>3000 & ≤6000
			3.20	1.00	3.20	2.00	2.00	6.40	6.40	∞	>6000 & ≤7500
D _{xyz}	Repeatability of positioning the DUT or source against the phantom	N	2.60	1.00	2.60	1.00	1.00	2.60	2.60	13	
	H	N	3.00	1.00	3.00	1.00	1.00	3.00	3.00	23	
MOD	Effect of operating mode on probe sensitivity	R	8.20	1.73	4.73	1.00	1.00	4.73	4.73	∞	
RF _{drift}	Variation in SAR due to drift in output of DUT	R	5.00	1.73	2.89	1.00	1.00	2.89	2.89		
Corrections to the SAR result											
C(ε',σ)	Phantom deviation from target (ε',σ)	N	1.90	1.00	1.90	1.00	1.00	1.90	1.90		
C(R)	SAR scaling	R	5.00	1.73	2.89	1.00	1.00	2.89	2.89		150-7500
u(ΔSAR)	Combined uncertainty								12.54	12.53	150-450
									13.40	13.40	≥600 & ≤3000
									13.44	13.43	>3000 & ≤6000
									13.89	13.88	>6000 & ≤7500
U	Expanded uncertainty (95% confidence interval)								25.08	25.07	150-450
									26.80	26.79	≥600 & ≤3000
									26.87	26.86	>3000 & ≤6000
									27.77	27.76	>6000 & ≤7500

3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Budget of 1g/10g psSAR for System Validation/Check COMOSAR											
Symbol	Input quantity X_i (source of uncertainty)	PDF _i	Unc. $a(x_i)$ [± %]	Div. q_i	$u(x_i) =$ $a(x_i)/q_i$	c_i 1g	c_i 10g	$u(y) =$ $c_i^*u(x_i)$ 1g [± %]	$u(y) =$ $c_i^*u(x_i)$ 10g [± %]	v_i	Frequency range [MHz]
								Measurement System errors			
CF	Probe calibration	N (k=2)	11.00	2.00	5.50	1.00	1.00	5.50	5.50	∞	150-450
			14.00	2.00	7.00	1.00	1.00	7.00	7.00	∞	600-7500
CF _{drift}	Probe calibration drift	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-450
			4.00	1.73	2.31	1.00	1.00	2.31	2.31	∞	600-7500
LIN	Probe linearity	R	4.70	1.73	2.71	1.00	1.00	2.71	2.71	∞	
	Detection limit	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
ISO	Axial Isotropy	R	3.50	1.73	2.02	0.71	0.71	1.43	1.43	∞	
	Hemispherical Isotropy	R	5.90	1.73	3.41	0.71	0.71	2.41	2.41	∞	
DAE	Boundary effect	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
	Integration time	R	1.40	1.73	0.81	1.00	1.00	0.81	0.81	∞	
	Response time	R	0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
	Readout electronics	N	0.50	1.00	0.50	1.00	1.00	0.50	0.50	∞	150-7500
AMB	Noise	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
	Reflections	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
Δxyz	Positioner Mechanical Tolerance	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	≥150 & ≤3000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>3000 & ≤6000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>6000 & ≤10000
DAT	Positioning with respect to Phantom Shell	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	≥150 & ≤3000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>3000 & ≤6000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>6000 & ≤10000
DAT	Data processing errors	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-7500
Phantom and Dipoles errors											
LIQ(σ,ε)	Conductivity measurement	N	4.07	1.00	4.07	0.79	0.77	3.22	3.13	9	
	Permittivity measurement	N	5.06	1.00	5.06	0.23	0.26	1.16	1.32	9	
LIQ(T _c)	Liquid Conductivity - Temperature Uncertainty	R	2.50	1.73	1.44	0.79	0.77	1.14	1.11	∞	
	Liquid Permittivity - Temperature Uncertainty	R	2.50	1.73	1.44	0.23	0.26	0.33	0.38	∞	150-7500
EPS	Shell permittivity	R	2.90	1.73	1.67	0.00	0.00	0.00	0.00	∞	≥150 & ≤3000
			2.90	1.73	1.67	0.25	0.25	0.42	0.42	∞	>3000 & ≤6000
			2.90	1.73	1.67	0.50	0.50	0.84	0.84	∞	>6000 & ≤10000
DIS	Distance between the radiating element of the DUT and the phantom medium	N	2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	≥150 & ≤3000
			2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	>3000 & ≤6000
			3.20	1.00	3.20	2.00	2.00	6.40	6.40	∞	>6000 & ≤10000
VAL	Deviation of experimental antennas	N	4.50	1.73	2.60	1.00	1.00	2.60	2.60		
	Other uncertainty contributions	R	2.00	1.00	2.00	1.00	1.00	2.00	2.00		
P _{in}	Uncertainty in accepted power	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73		150-7500
Corrections to the SAR result											
C(ε',σ)	Phantom deviation from target (ε'σ)	N	1.90	1.00	1.90	1.00	1.00	1.90	1.90		150-7500
								10.78	10.77		150-450
u(ΔSAR)	Combined uncertainty								11.77	11.76	≥600 & ≤3000
									11.81	11.80	>3000 & ≤6000
									12.32	12.31	>600 & ≤7500
									21.56	21.54	150-450
U	Expanded uncertainty (95% confidence interval)								23.54	23.52	≥600 & ≤3000
									23.62	23.60	>3000 & ≤6000
									24.64	24.62	>6000 & ≤7500

4. Measurement System

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\mathbf{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 MVG SAR System

4.2.1 SAR system diagram

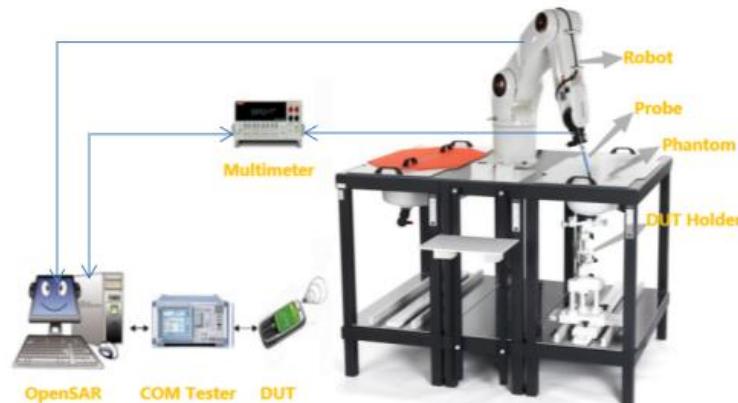

4.2.2 Robot



A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for $f \geq 4\text{GHz}$.
- Probe linearity: <0.25dB.
- Axial Isotropy: <0.25dB.
- Spherical Isotropy: <0.50dB.
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 20° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SAM Phantom

The thickness of the phantom amounts to $2 \text{ mm} \pm 0.2 \text{ mm}$. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon' < 5$. The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom			
	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2 \text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume		27 L	
Material		Fiberglass based	

ELLIPTICAL Phantom


The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.


ELLI Phantom

The shape of the phantom is an ellipse with length $600\text{mm} \pm 5\text{mm}$ and width $400\text{mm} \pm 5\text{mm}$. The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan\delta \leq 0.05$ and relative permittivity: $\epsilon' \leq 5$ for $f \leq 3 \text{ GHz}$ $3 \leq \epsilon' \leq 5$ for $f > 3 \text{ GHz}$. The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of $\pm 0.2 \text{ mm}$.

Technical & mechanical characteristics	
Shell thickness	$2 \text{ mm} \pm 0.2 \text{ mm}$
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

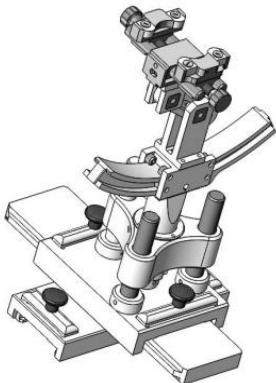

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005


(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028

4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth

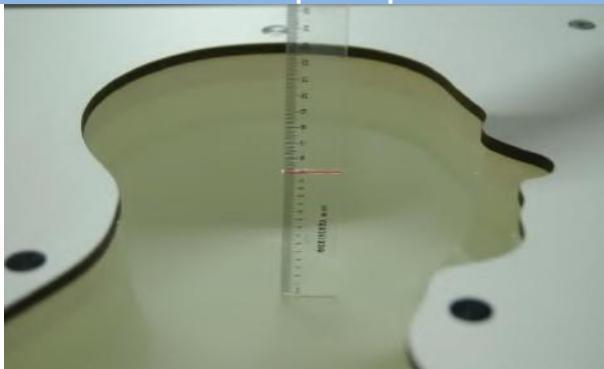

Body Liquid Depth



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol			Triton X-100		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

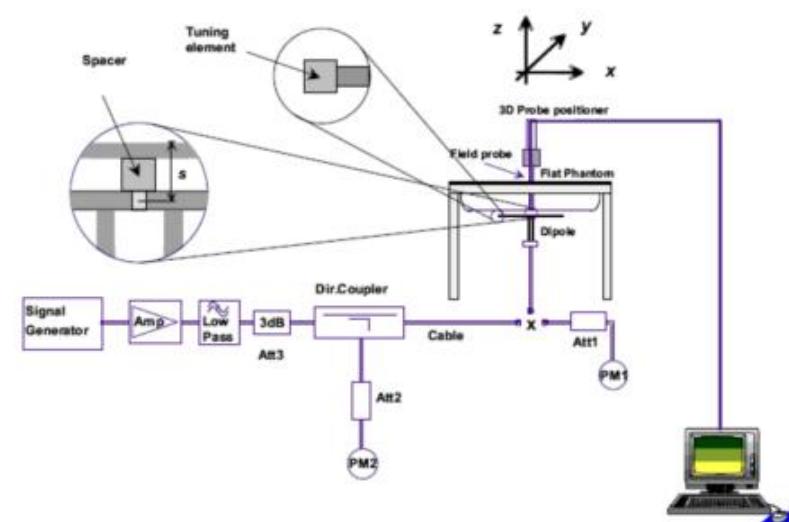

6. TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

6.1.1 Two Imaginary Lines on the Handset


- (a) The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_f of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical center line and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

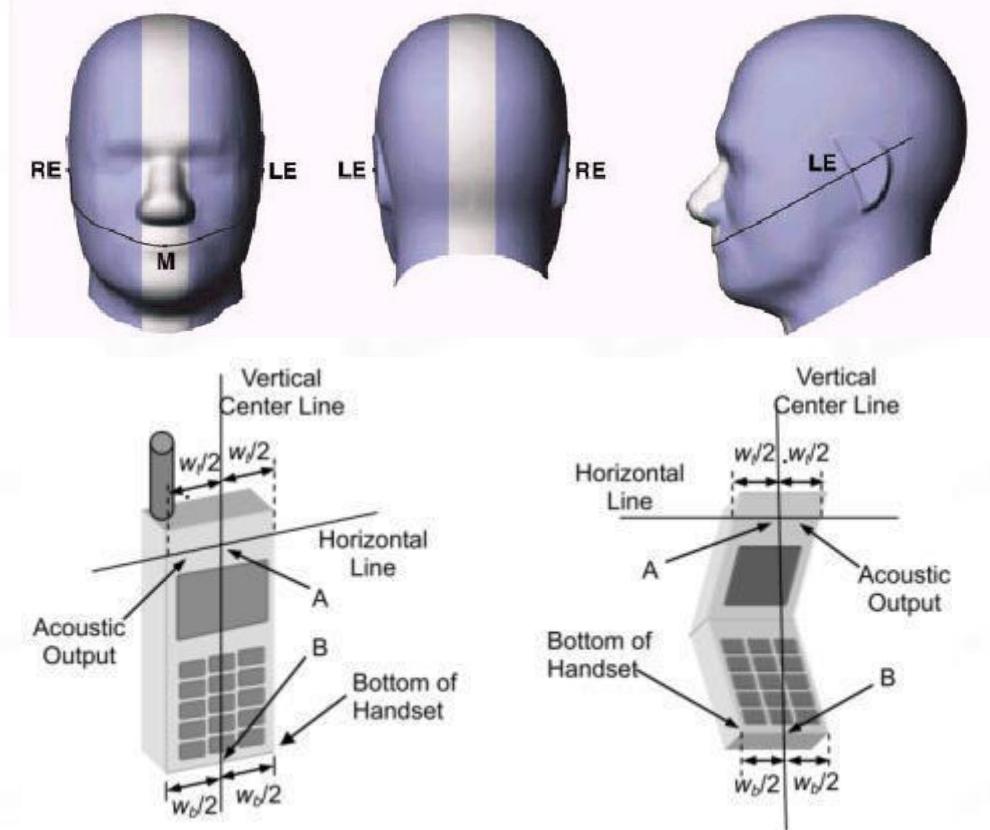

6.1.2 Two Imaginary Lines on the Handset

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

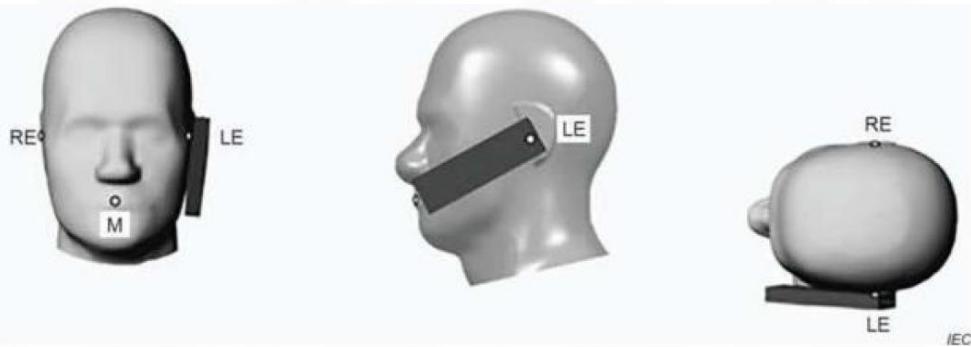

6.1.3 Titled Position

(a) To position the device in the “cheek” position described above.

(b) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

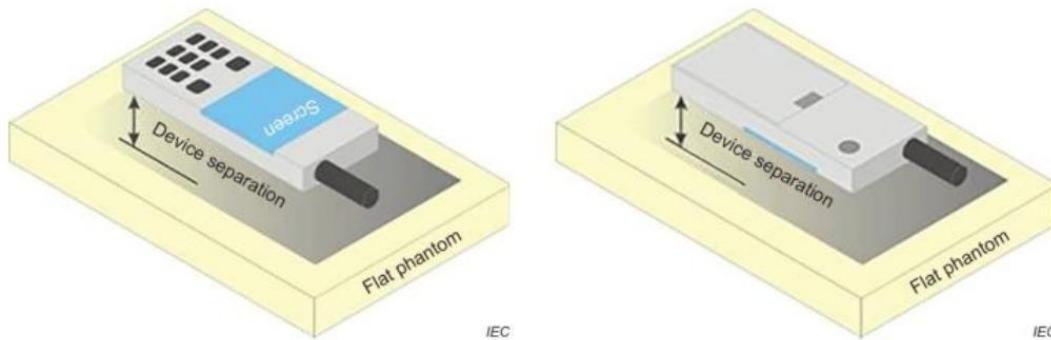

6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

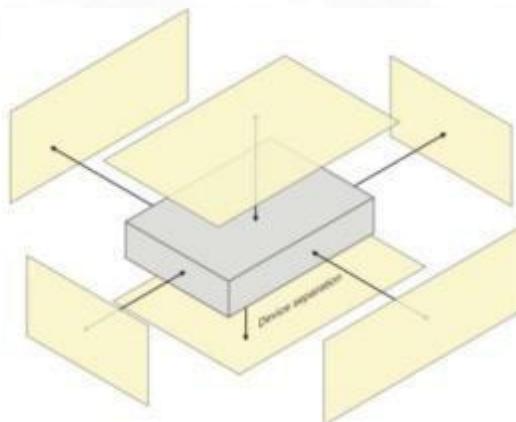

6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

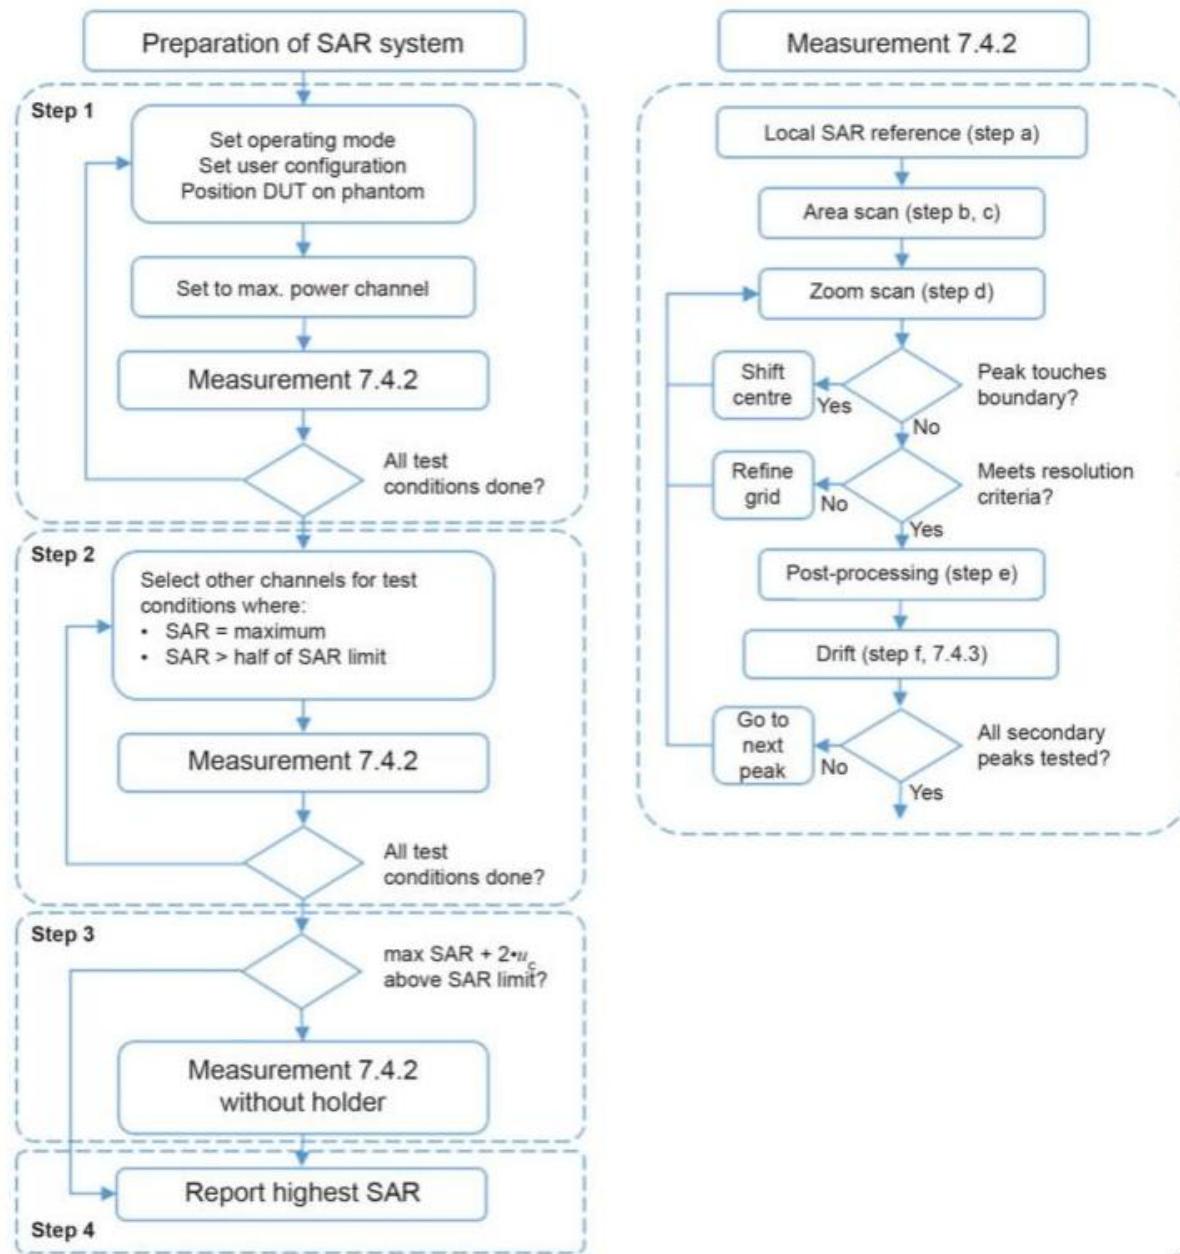

IEC

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

		≤3GHz	>3GHz		
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5±1 mm	½ δ·ln(2)±0.5 mm		
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30°±1°	20°±1°		
Maximum area scan spatial resolution: Δx Area , Δy Area		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm		
When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.					
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*		
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)	≤ 5 mm	3–4 GHz: ≤ 4 mm		
			4–5 GHz: ≤ 3 mm		
			5–6 GHz: ≤ 2 mm		
	graded grid	≤ 4 mm	3–4 GHz: ≤ 3 mm		
			4–5 GHz: ≤ 2.5 mm		
			5–6 GHz: ≤ 2 mm		
Δz Zoom (n>1): between subsequent points		≤ 1.5· Δz Zoom (n-1)			
Minimum zoom scan volume		≥30 mm	3–4 GHz: ≥ 28 mm		
			4–5 GHz: ≥ 25 mm		
			5–6 GHz: ≥ 22 mm		
<p>Note:</p> <ol style="list-style-type: none"> δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. 					

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.


8. Conducted RF Output Power

8.1 Wi-Fi

Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	12.39	12.50	No
		40	5200	12.30	12.50	No
		48	5240	12.77	13.00	Yes
	802.11n(HT20)	36	5180	12.24	12.50	No
		40	5200	12.26	12.50	No
		48	5240	12.77	13.00	No
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	14.12	14.50	No
		157	5785	13.79	14.00	No
		165	5825	14.16	14.50	No
	802.11n(HT20)	149	5745	14.30	14.50	Yes
		157	5785	13.66	14.00	No
		165	5825	13.89	14.00	No

9. Test Exclusion Consideration

Antenna information:

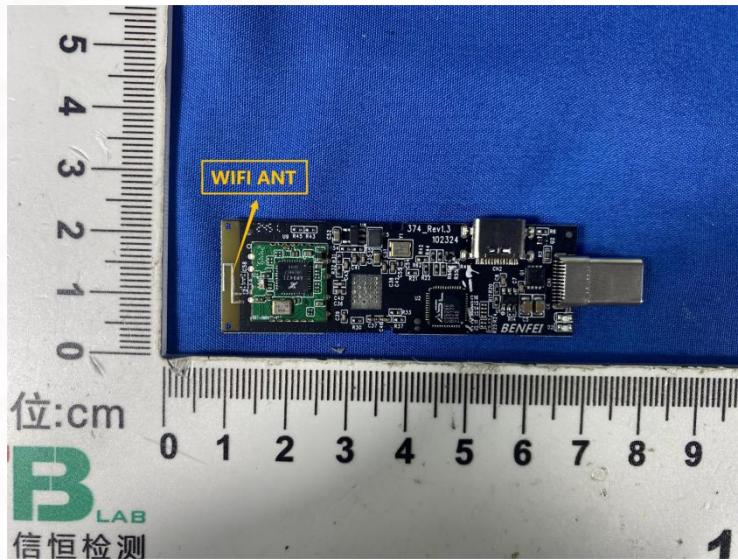

WLAN Antenna	WLAN TX/RX
Note:	
1. KDB 447498 D02 SAR Procedures for Dongle Xmtr v02r01, test all USB orientations [see figure below: (A) Horizontal-Up, (B) Horizontal-Down, (C) Vertical-Front, and (D) Vertical-Back] with a device-to-phantom separation distance of 5 mm or less according to KDB Publication 447498 D01 requirements. And the typical Horizontal-Up USB connection (A), found in the majority of host computers, must be tested using an appropriate host computer. If a suitable host computer is not available for testing the Horizontal-Down (B) or the remaining Vertical USB orientation, a high quality USB cable, 12 inches or less, may be used for testing these other orientations.	

9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x]$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

10. Test Result

Band	Mode	Test Position with 0 mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Meas. No.
U-NII-1 (5.150~5.250)	802.11a	Horizontal- Up side	48	5240	12.77	13.00	-2.180	0.426	1.054	0.449	/
		Horizontal- Down side	48	5240	12.77	13.00	1.950	0.462	1.054	0.487	1#
		Vertical- Front	48	5240	12.77	13.00	0.480	0.354	1.054	0.373	/
		Vertical- Back	48	5240	12.77	13.00	3.060	0.331	1.054	0.349	/
		Top edge	48	5240	12.77	13.00	-1.680	0.411	1.054	0.433	/
Band	Mode	Test Position with 0 mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Meas. No.
U-NII-3 (5.725~5.850)	802.11 n(HT20)	Horizontal- Up side	149	5745	14.30	14.50	-0.860	0.418	1.047	0.438	/
		Horizontal- Down side	149	5745	14.30	14.50	-2.500	0.432	1.047	0.452	2#
		Vertical- Front	149	5745	14.30	14.50	1.470	0.321	1.047	0.336	/
		Vertical- Back	149	5745	14.30	14.50	3.110	0.310	1.047	0.325	/
		Top edge	149	5745	14.30	14.50	2.150	0.394	1.047	0.413	/

Note:

1. The maximum SAR Value of each test band is marked bold.
2. SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
3. Per KDB 447498 D04 v01, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
4. Per KDB 447498 D04 v01, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
5. Per KDB 447498 D04 v01, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{10}[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]$, where tune-up limit is the maximum rated power among all production units.

Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is 0.462 < 0.80 W/kg, repeated measurement is not required.

12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device only has 1 Tx antenna, Wifi antenna supporting 5G Wi-Fi. So we don't need to consider simultaneous condition.

13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	0125-EPGO-445	2025/02/01	2026/01/31
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2024/10/25	2025/10/24
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2024/10/25	2025/10/24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/25	2025/10/24
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2025/04/02	2026/04/01
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2025/04/02	2026/04/01
3dB Attenuator	MIDWEST MICROWAVE	263-3dB	N/A	2025/04/02	2026/04/01
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2024/10/25	2025/10/24
5200MHz-5800MHz Validation Dipole	MVG	SID5000	07/22 DIP5G000-670	2025/05/26	2028/05/25
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	2025/02/05	2026/02/04
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2024/10/25	2025/10/24
Thermometer	Riters	DT-232	21A11	2025/04/02	2026/04/01
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	N/A	N/A
SAM Phantom	MVG	SAM	07/22 SAM149	N/A	N/A
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	N/A	N/A
Mechanical Calibration Kit	PNA	N/A	N/A	2024/10/25	2025/10/24
Open SAR test software	MVG	N/A	V5.3.5	N/A	N/A

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) is within 5 Ohms of calibrated measurement.

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ε _r		σ(s/m)		Delta (ε _r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
5200	36.00	36.20	4.66	4.57	0.56%	-1.93%	±5%	21.2	30/6/2025
5800	35.30	35.18	5.27	5.32	-0.34%	0.95%	±5%	21.2	30/6/2025

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	10g SAR (W/Kg)	1g SAR (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Deviation	1g SAR Deviation
5200	100	2.281	7.952	22.81	79.52	22.78	78.16	0.13%	1.74%
5800	100	2.467	7.757	24.67	77.57	22.71	78.32	8.63%	-0.96%

System Performance Check Data (5200 MHz)

System check at 5200 MHz

Date of measurement: 30/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.18
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	36.203
Relative permittivity (imaginary part)	15.772
Conductivity (S/m)	4.572

C. SAR Surface and Volume

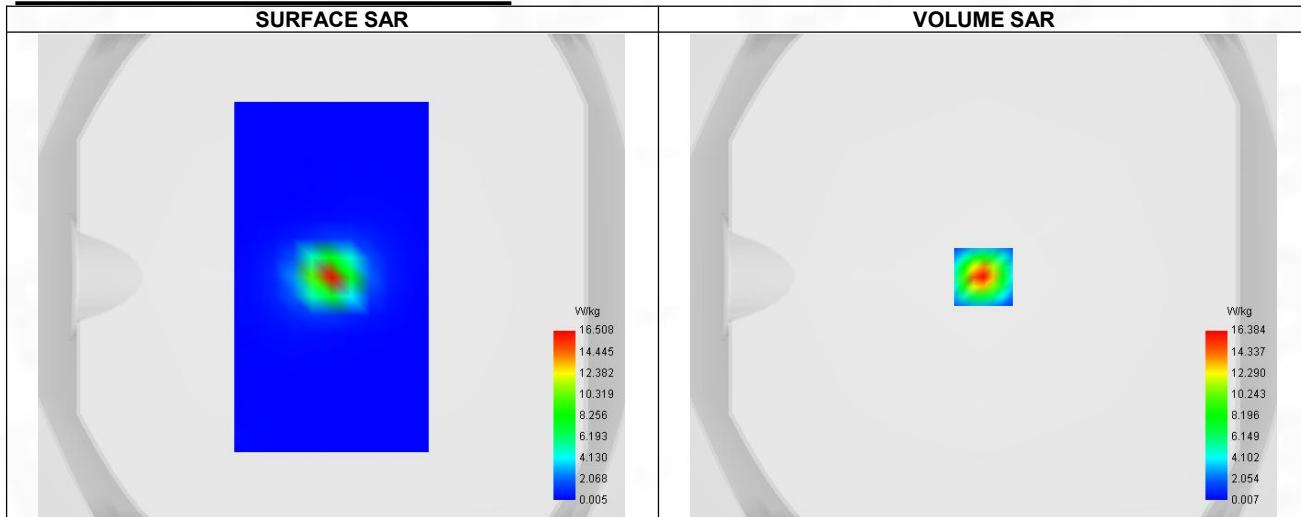


D. SAR 1g & 10g


SAR 10g (W/Kg)	2.281
SAR 1g (W/Kg)	7.952
Variation (%)	1.670
Horizontal validation criteria: minimum distance (mm)	8.000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.080

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	26.742	16.372	8.854	4.927	2.728	1.518	0.837	0.455	0.243

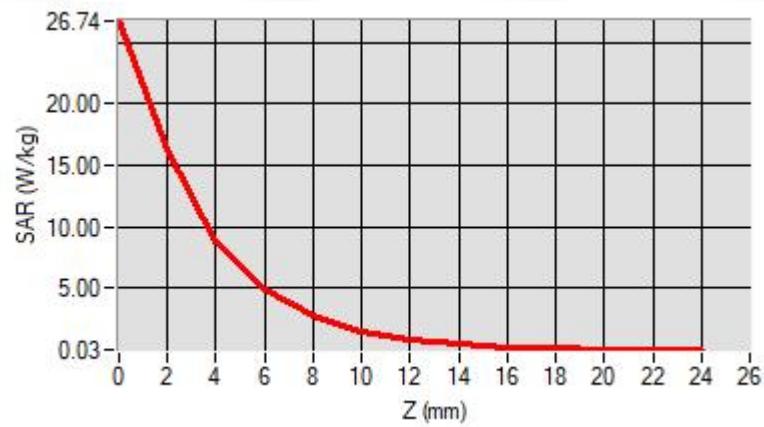

F. 3D Image

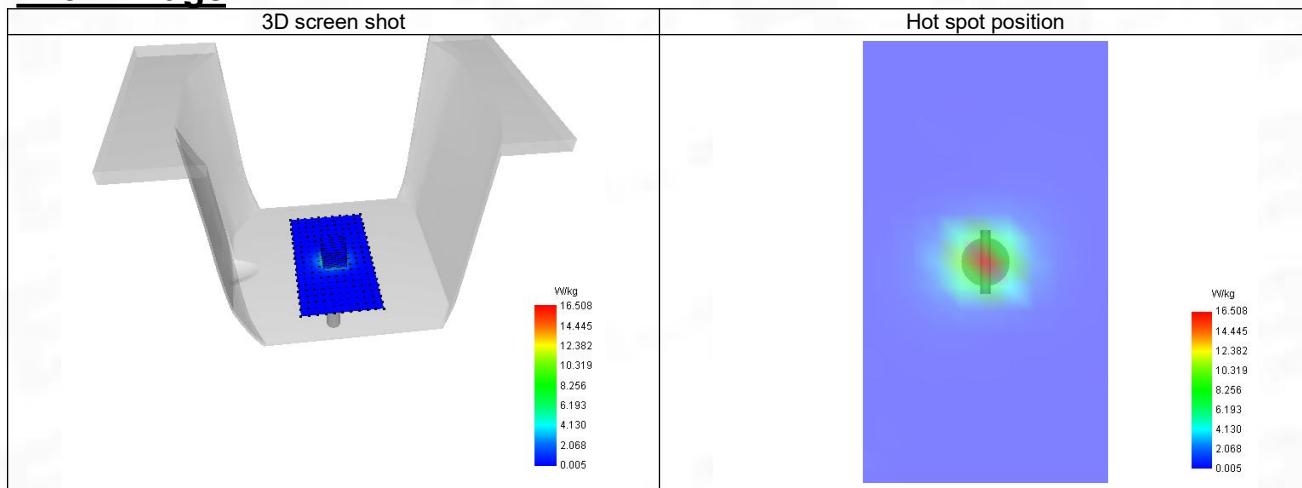

System Performance Check Data (5800 MHz)

System check at 5800 MHz

Date of measurement: 30/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.11
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5800.000
Relative permittivity (real part)	35.182
Relative permittivity (imaginary part)	16.355
Conductivity (S/m)	5.321

C. SAR Surface and Volume

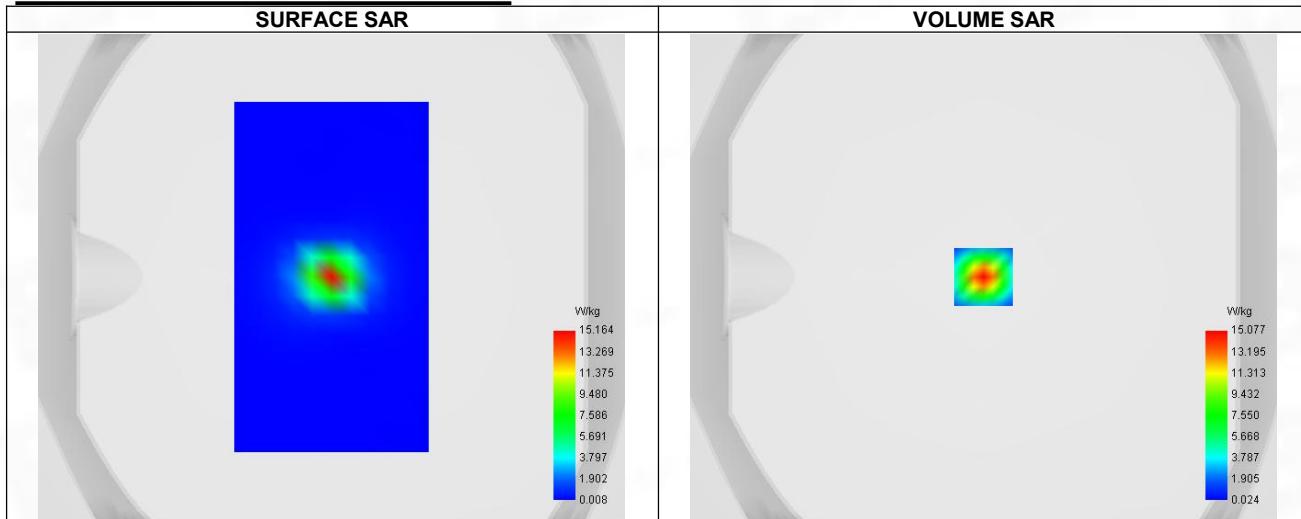


D. SAR 1g & 10g


SAR 10g (W/Kg)	2.467
SAR 1g (W/Kg)	7.757
Variation (%)	-3.060
Horizontal validation criteria: minimum distance (mm)	8.000
Vertical validation criteria: SAR ratio M2/M1 (%)	50.538

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	27.178	15.064	7.613	3.475	1.481	0.604	0.268	0.122	0.069

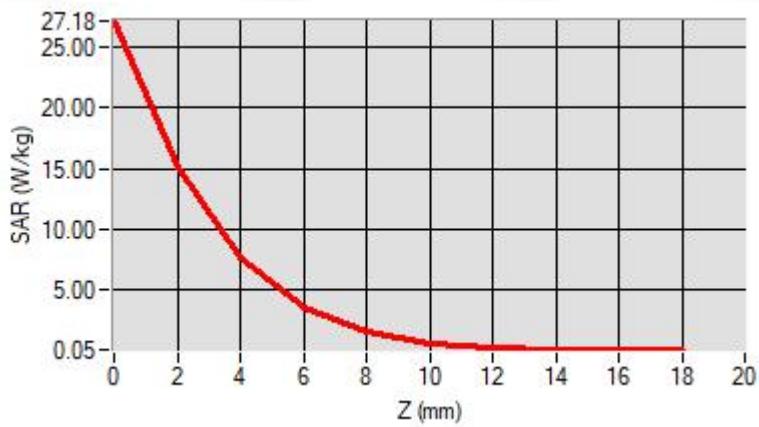

F. 3D Image

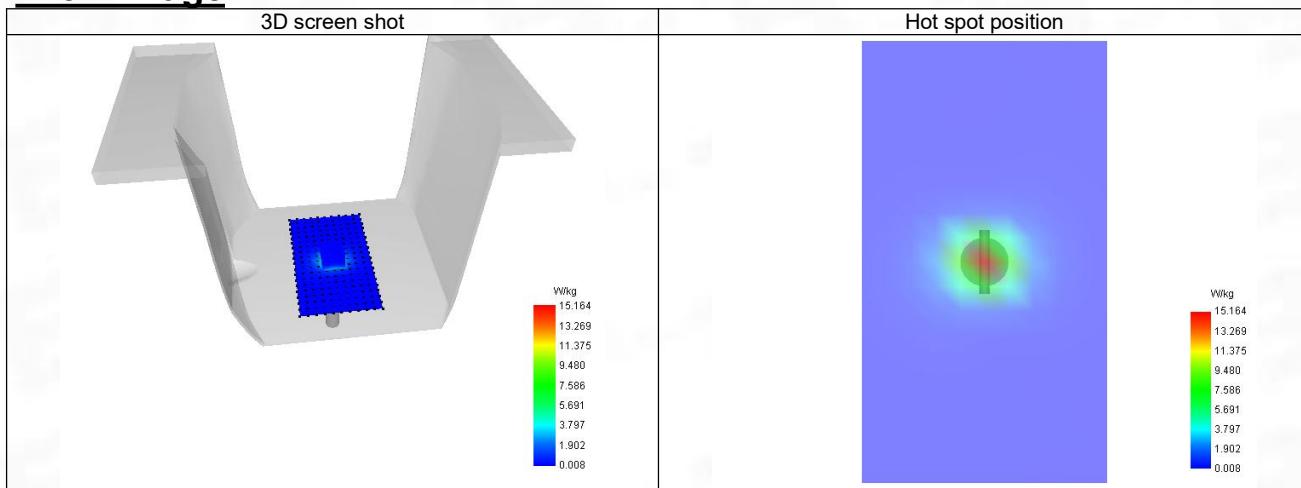

ANNEX C Test Data

1-Body with Horizontal- Down position in dist. 0mm on Channel 48 in IEEE 802.11a U-NII

SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 30/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.18
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Channels/Frequency	Higher (48)/ frequency 5240.000 Mhz
Signal	IEEE 802.11 a

B. Permitivity

Middle TX Frequency (MHz)	5240.000
Relative permitivity (real part)	36.149
Relative permitivity (imaginary part)	15.864
Conductivity (S/m)	4.633

C. SAR Surface and Volume

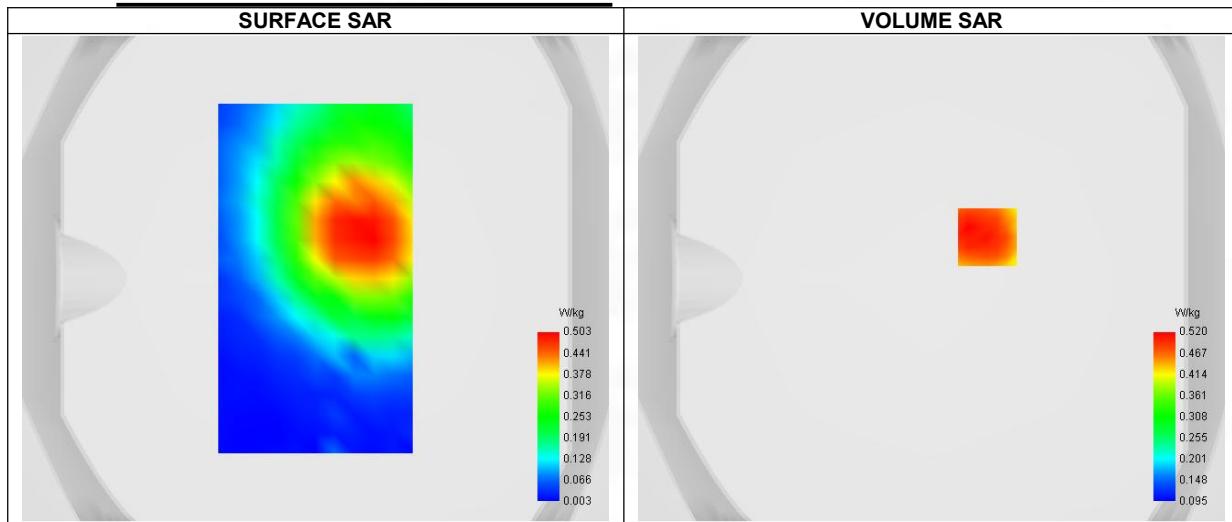


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.233
SAR 1g (W/Kg)	0.462
Variation (%)	1.950
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	77.308

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.603	0.520	0.402	0.411	0.316	0.334	0.246	0.259	0.184	0.221	0.155	0.162

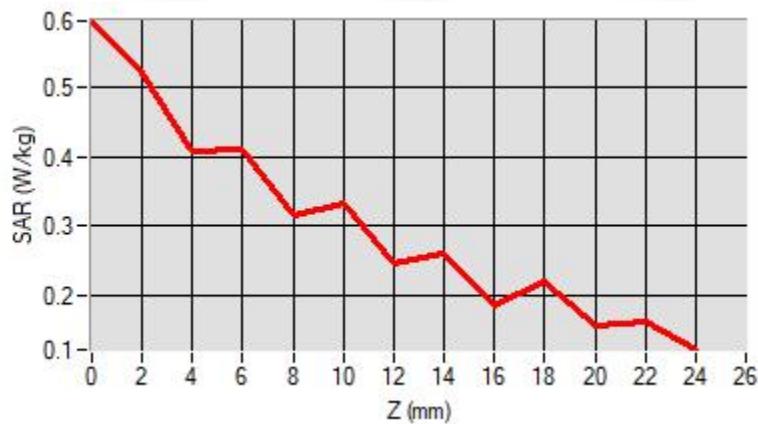

F. 3D Image

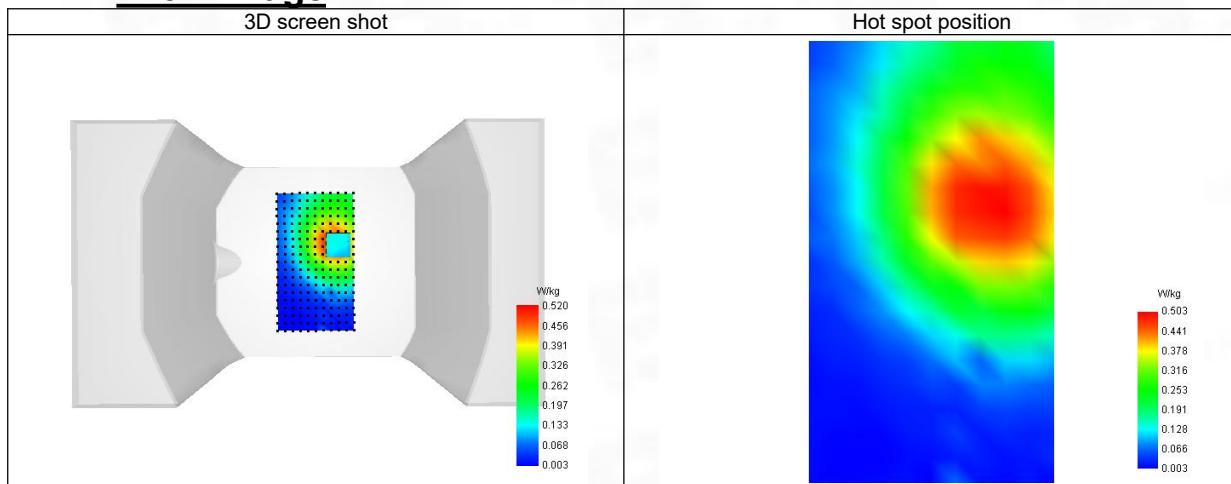

2-Body with Horizontal- Down position in dist. 0mm on Channel 149 in IEEE 802.11n U-NII
SAR Measurement at U-NII-3 (Body, Validation Plane)


Date of measurement: 30/6/2025

A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.11
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Channels/Frequency	Lower (149) frequency 5745.000 Mhz
Signal	IEEE 802.11 n

B. Permittivity

Middle TX Frequency (MHz)	5745.000
Relative permittivity (real part)	35.251
Relative permittivity (imaginary part)	16.197
Conductivity (S/m)	5.261

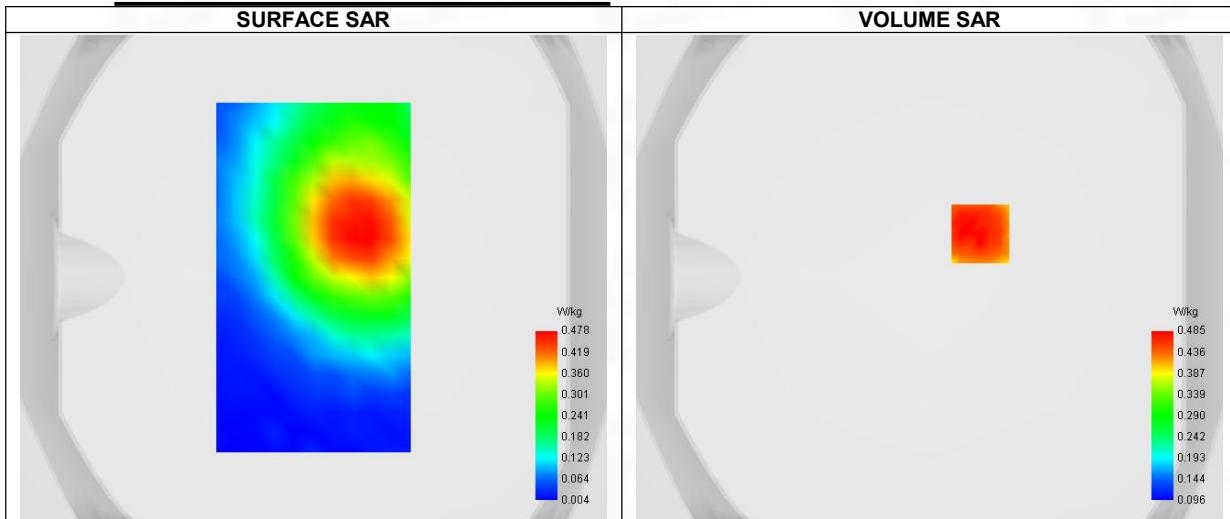C. SAR Surface and Volume

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.273
SAR 1g (W/Kg)	0.432
Variation (%)	-2.500
Horizontal validation criteria: minimum distance (mm)	12.000
Vertical validation criteria: SAR ratio M2/M1 (%)	78.763

E. Z Axis Scan


Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.608	0.485	0.382	0.378	0.304	0.309	0.253	0.248	0.183	0.195	0.154	0.146




F. 3D Image

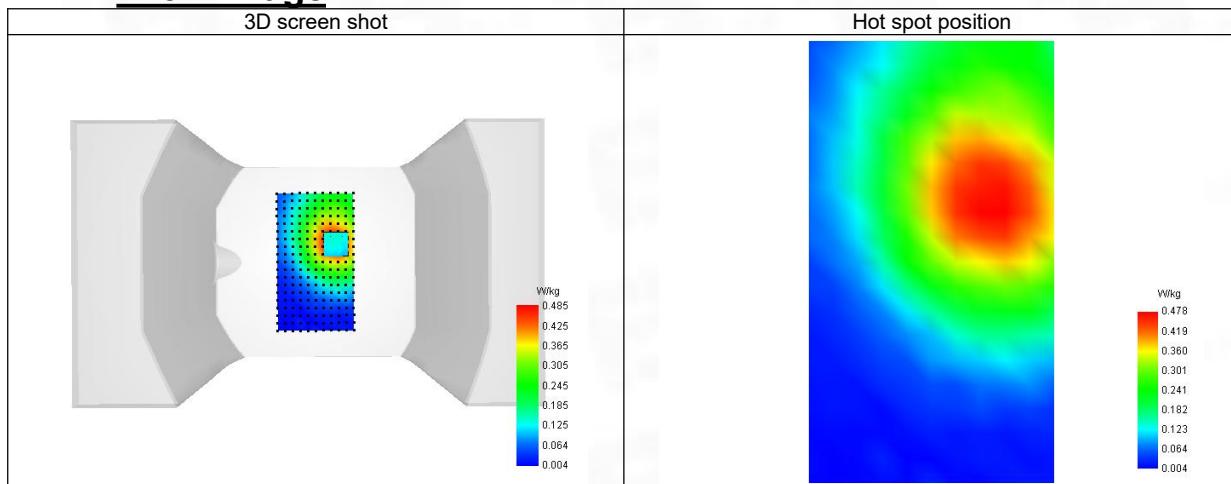

ANNEX D SAR Test Setup Photos

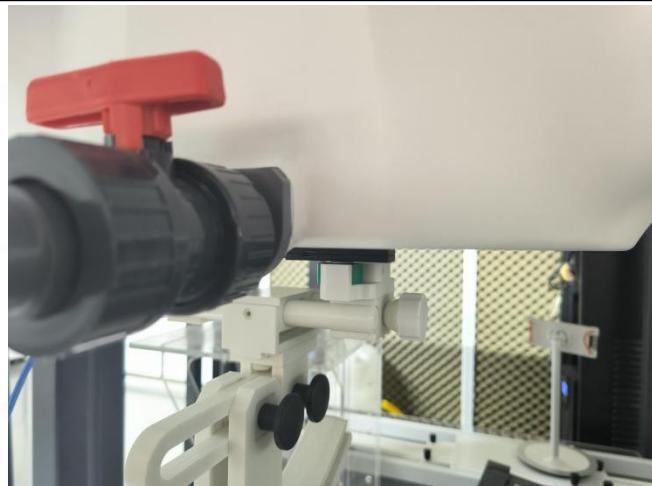Reference Photo: simulation liquid depth 15.9cm	
	
Reference Photos	
	
Horizontal- Up side (dist. 0mm)	Horizontal- Down side (dist. 0mm)
	
Vertical- Front (dist. 0mm)	Vertical- Back (dist. 0mm)

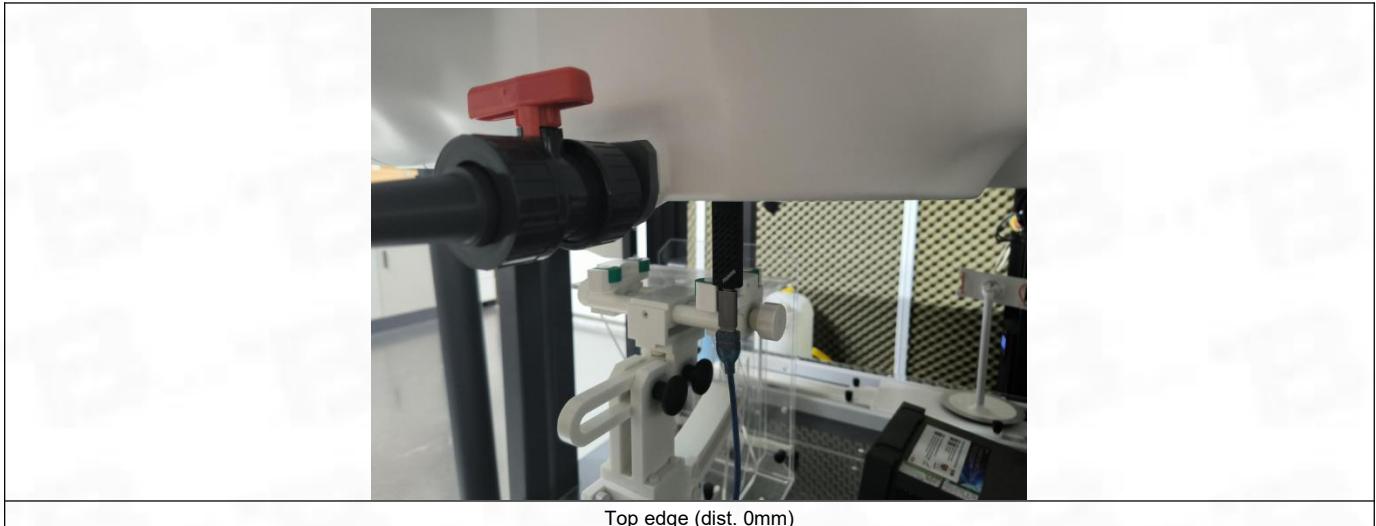

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--