

FCC RF Test Report

APPLICANT : Akteena
EQUIPMENT : Akteena LumosX AI Dashcam
BRAND NAME : Akteena
MODEL NAME : A9-2299D
FCC ID : 2BL79-A922
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 16, 2025 ~ Apr. 21, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 Antenna Requirements.....	19
4 LIST OF MEASURING EQUIPMENT.....	20
5 MEASUREMENT UNCERTAINTY	21
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4O2401B	Rev. 01	Initial issue of report	May 08, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 15.64 dB at 2483.62 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	-
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark: Not required means after assessing, test items are not necessary to carry out.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Akteena

Akteena INC, 41369 Vincenti Ct., Novi Michigan 48375, U.S.A

1.2 Manufacturer

VVDN Technologies Pvt Ltd

Plot No: CP-07, Sector-8,IMT Manesar, Gurugram-122050,Haryana,INDIA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Akteena LumosX AI Dashcam
Brand Name	Akteena
Model Name	A9-2299D
FCC ID	2BL79-A922
IMEI Code	Conducted: 357750172665241 Radiation: 357750172665239
HW Version	C1
SW Version	Thermal-DCV2.7
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The device supports Powered by 12Vdc and 24Vdc, for RF testing, we evaluate is not affect RF performance, so we choice 12Vdc power source to test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 5.19 dBm (0.0033 W)
99% Occupied Bandwidth	BLE 1Mbps: 1.051 MHz
Antenna Type / Gain	FPC Antenna type with gain 1.17 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: The device supports Bluetooth LE 1Mbps only.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH05-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps

RSE Co-location
Bluetooth-LE_GFSK CH39 + B13 BW=5M

2.3 Connection Diagram of Test System

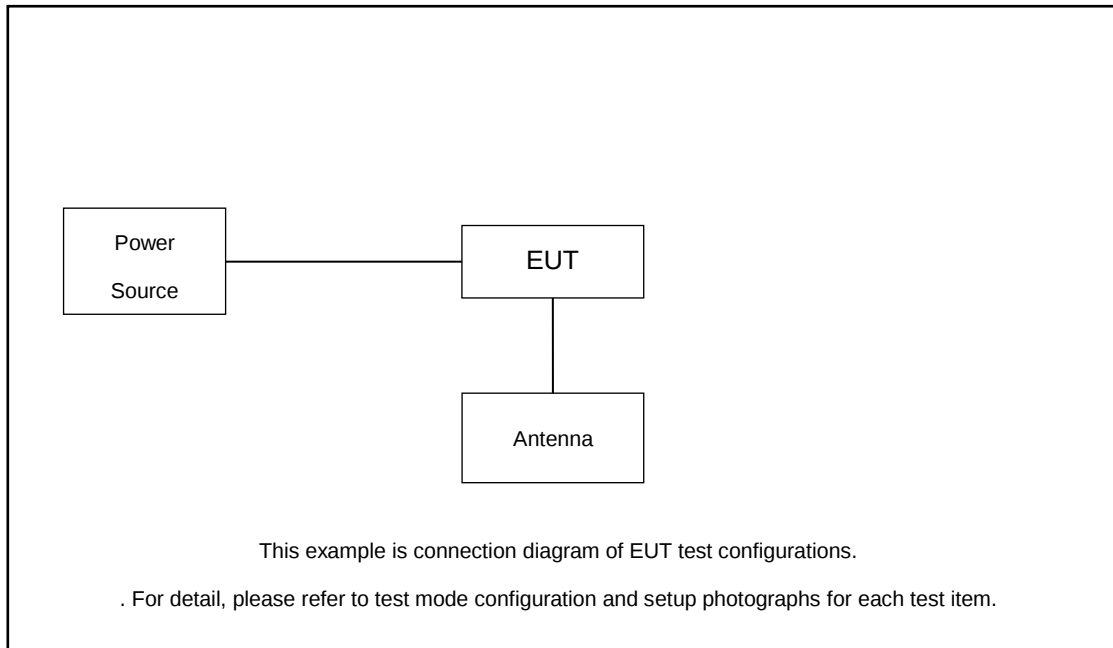

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Antenna	N/A	N/A	N/A	N/A	N/A
3.	DC Power	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.19 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.19 + 20 = 22.19 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

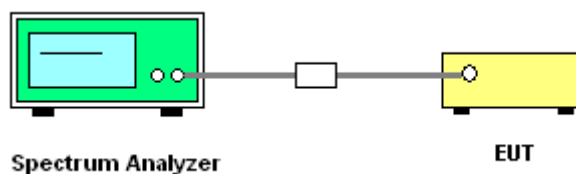

3.1.5 Test Result of 6dB Bandwidth and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

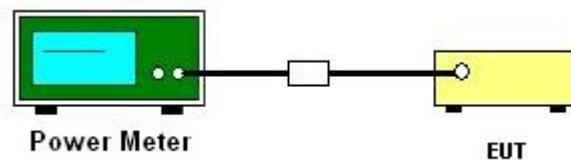

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

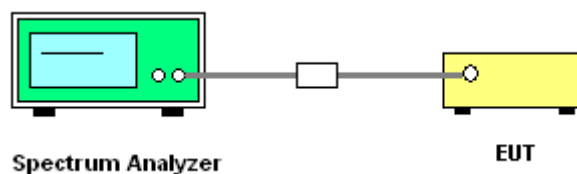

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

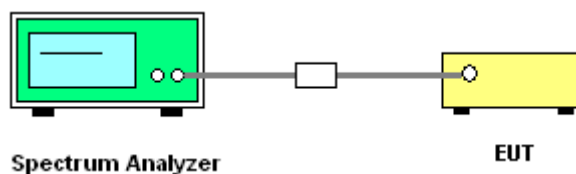

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.
For average measurement:
 - $\text{VBW} = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

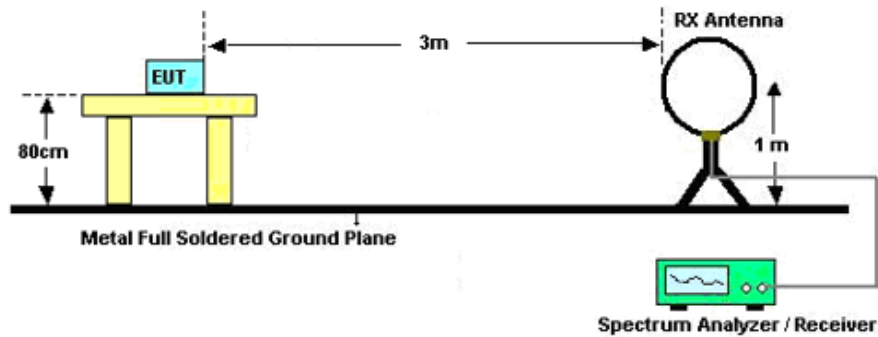

For radiated emissions from 30MHz to 1GHz

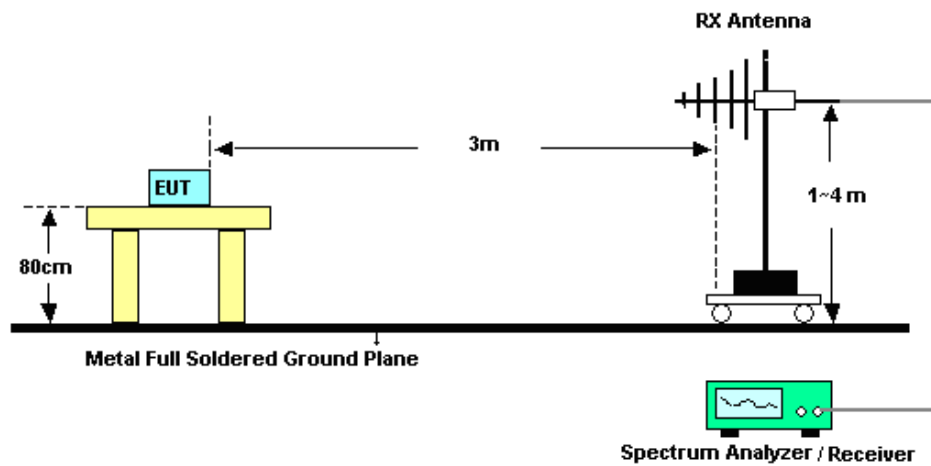

For radiated emissions above 1GHz

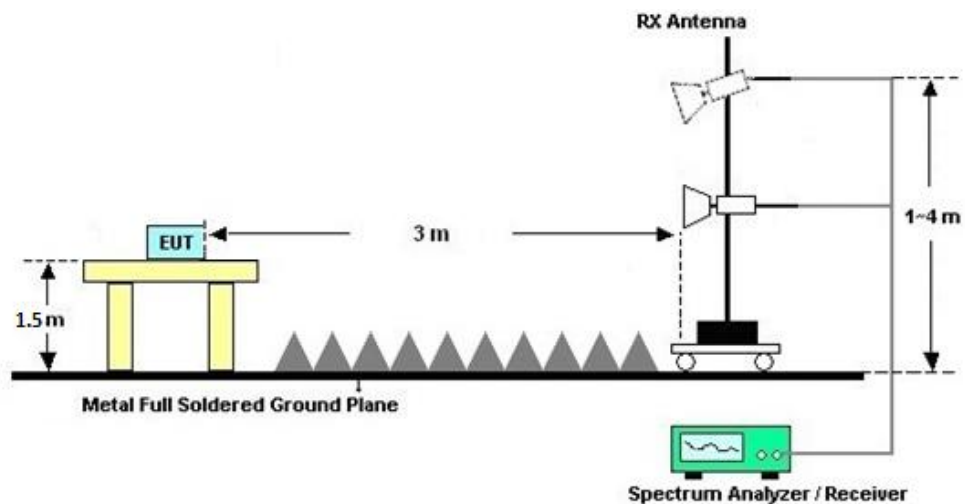



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 04, 2024	Feb. 16, 2025	Jul. 03, 2025	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2024	Feb. 16, 2025	Oct. 09, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Feb. 16, 2025	Sep. 07, 2025	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 18, 2024	Feb. 16, 2025	Apr. 17, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 11, 2024	Feb. 16, 2025	Apr. 10, 2025	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Feb. 16, 2025	Oct. 21, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Feb. 16, 2025	Jul. 02, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Feb. 16, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Jan. 02, 2025	Feb. 16, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 02, 2025	Feb. 16, 2025	Jan. 01, 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 16, 2025	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 16, 2025	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 16, 2025	NCR	Radiation (03CH05-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 21, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 21, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 21, 2025	Jan. 01, 2026	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.02dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.34dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

**Ambient Condition:** 25 °C, 45 %RH**According Standard:** ■Part15C**Test Date:** 2025.4.21**Test Engineer:** Jiang Jun


DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.72	2401.63	2402.34	0.5	PASS
		2440	0.72	2439.64	2440.35	0.5	PASS
		2480	0.72	2479.64	2480.36	0.5	PASS



Test Graphs

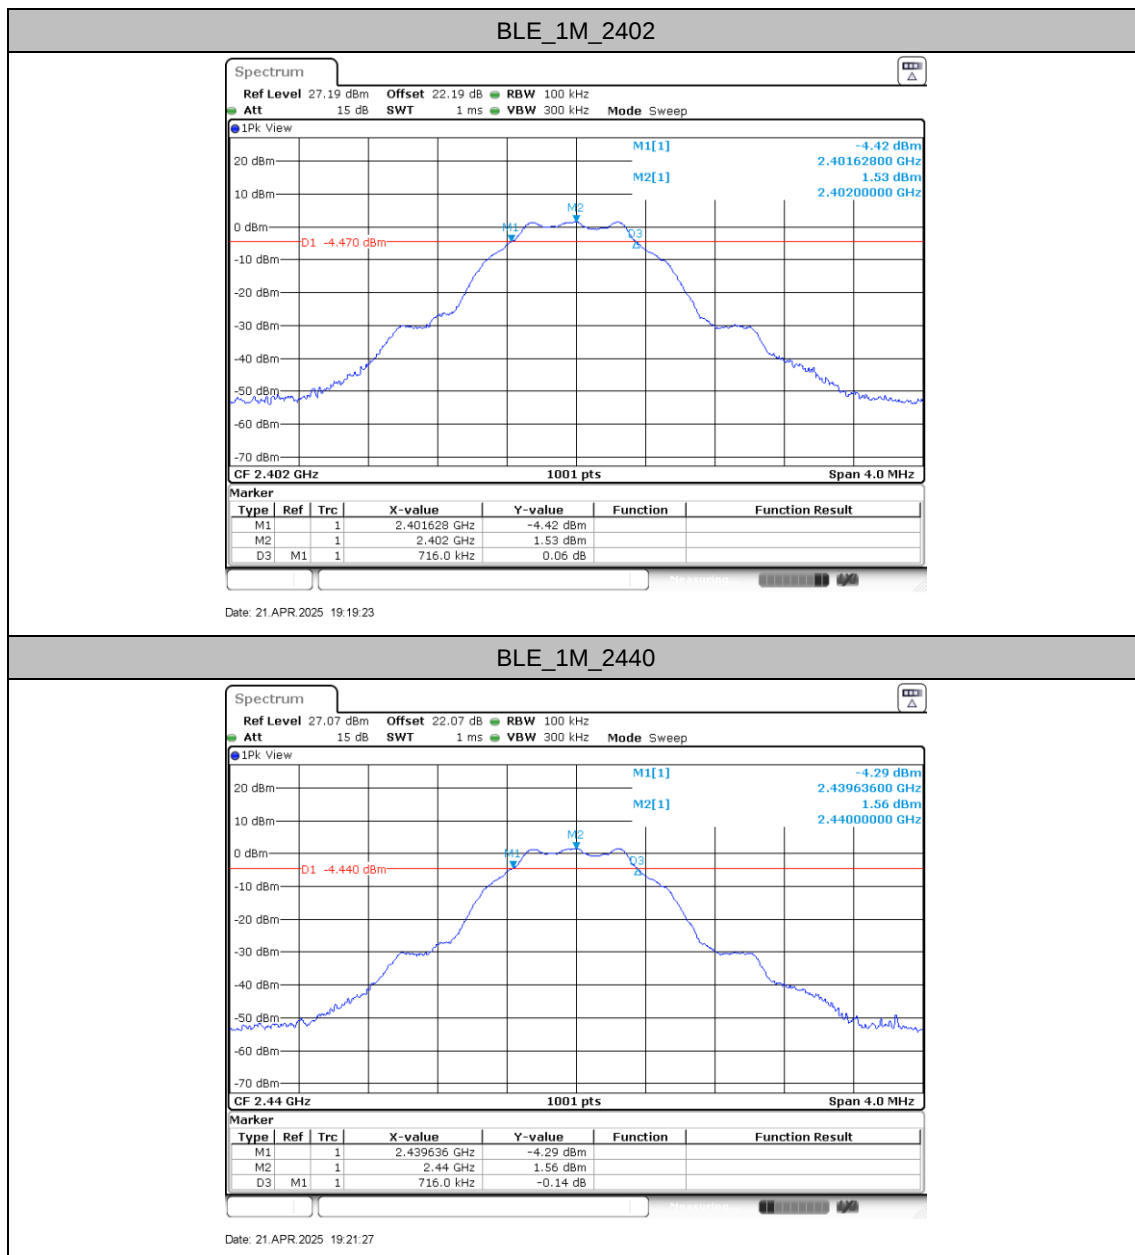

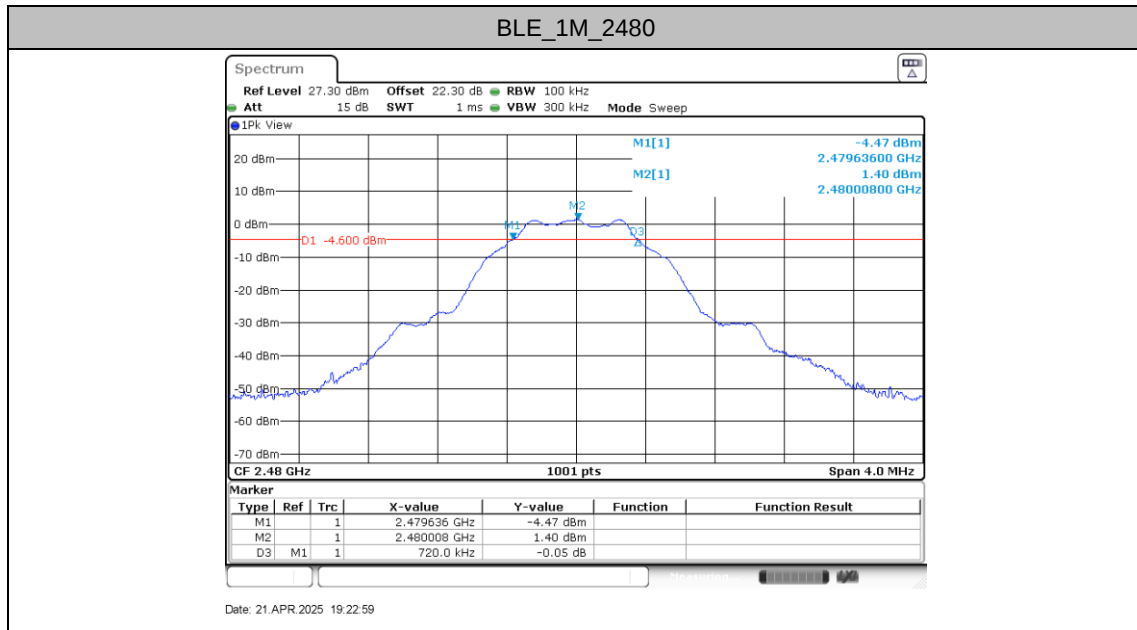




Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.047	2401.4725	2402.5195	---	---
		2440	1.047	2439.4765	2440.5235	---	---
		2480	1.051	2479.4805	2480.5315	---	---



Test Graphs

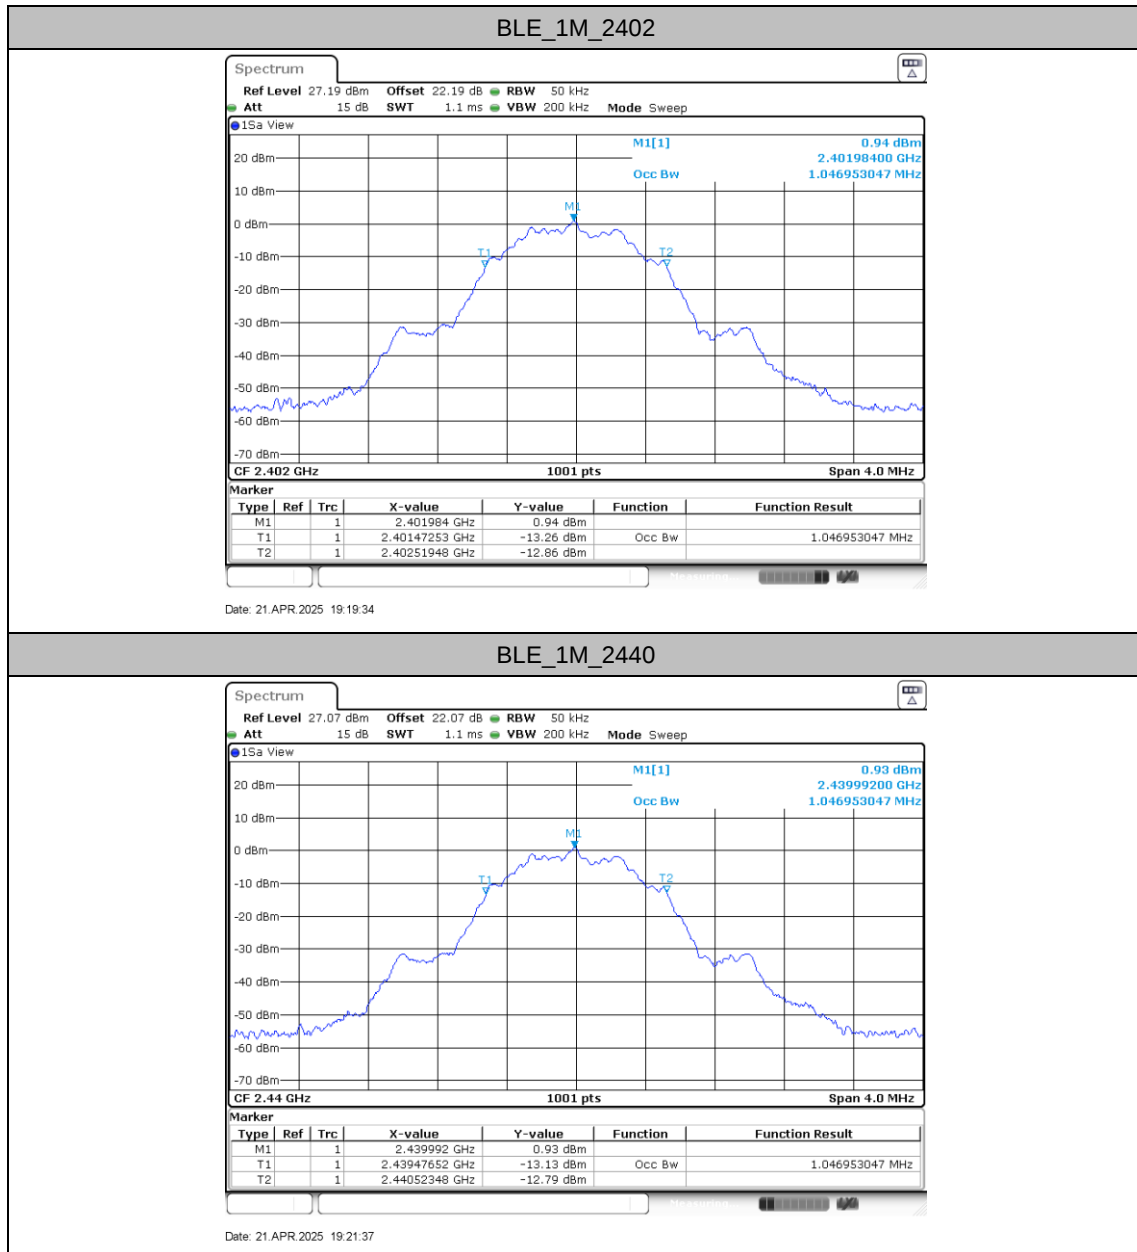

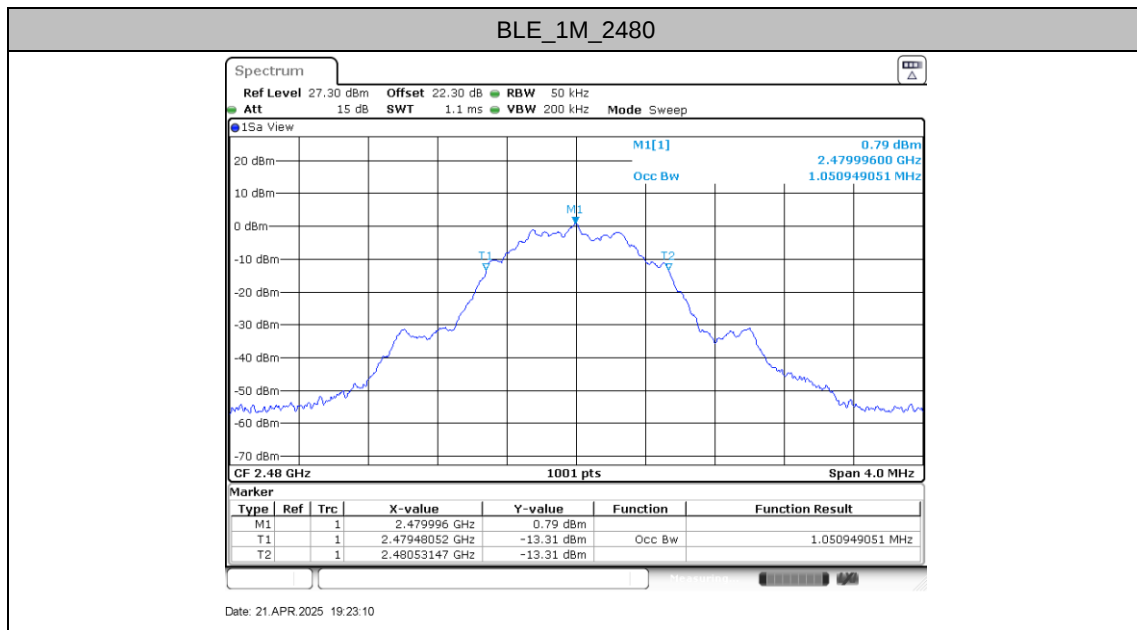



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
BLE1M	Ant1	0	5.19	30.00	1.17	6.36	36.00	Pass
		19	5.12	30.00	1.17	6.29	36.00	Pass
		39	4.67	30.00	1.17	5.84	36.00	Pass

Note: Power setting is default.



Test Result Average

TestMode	Antenna	CH.	Duty Factor (dB)	Average Conducted Power (dBm)
BLE1M	Ant1	0	2.04	4.90
		19	2.04	5.01
		39	2.04	4.49




Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-11.95	≤8.00	PASS
		2440	-11.94	≤8.00	PASS
		2480	-12.11	≤8.00	PASS



Test Graphs

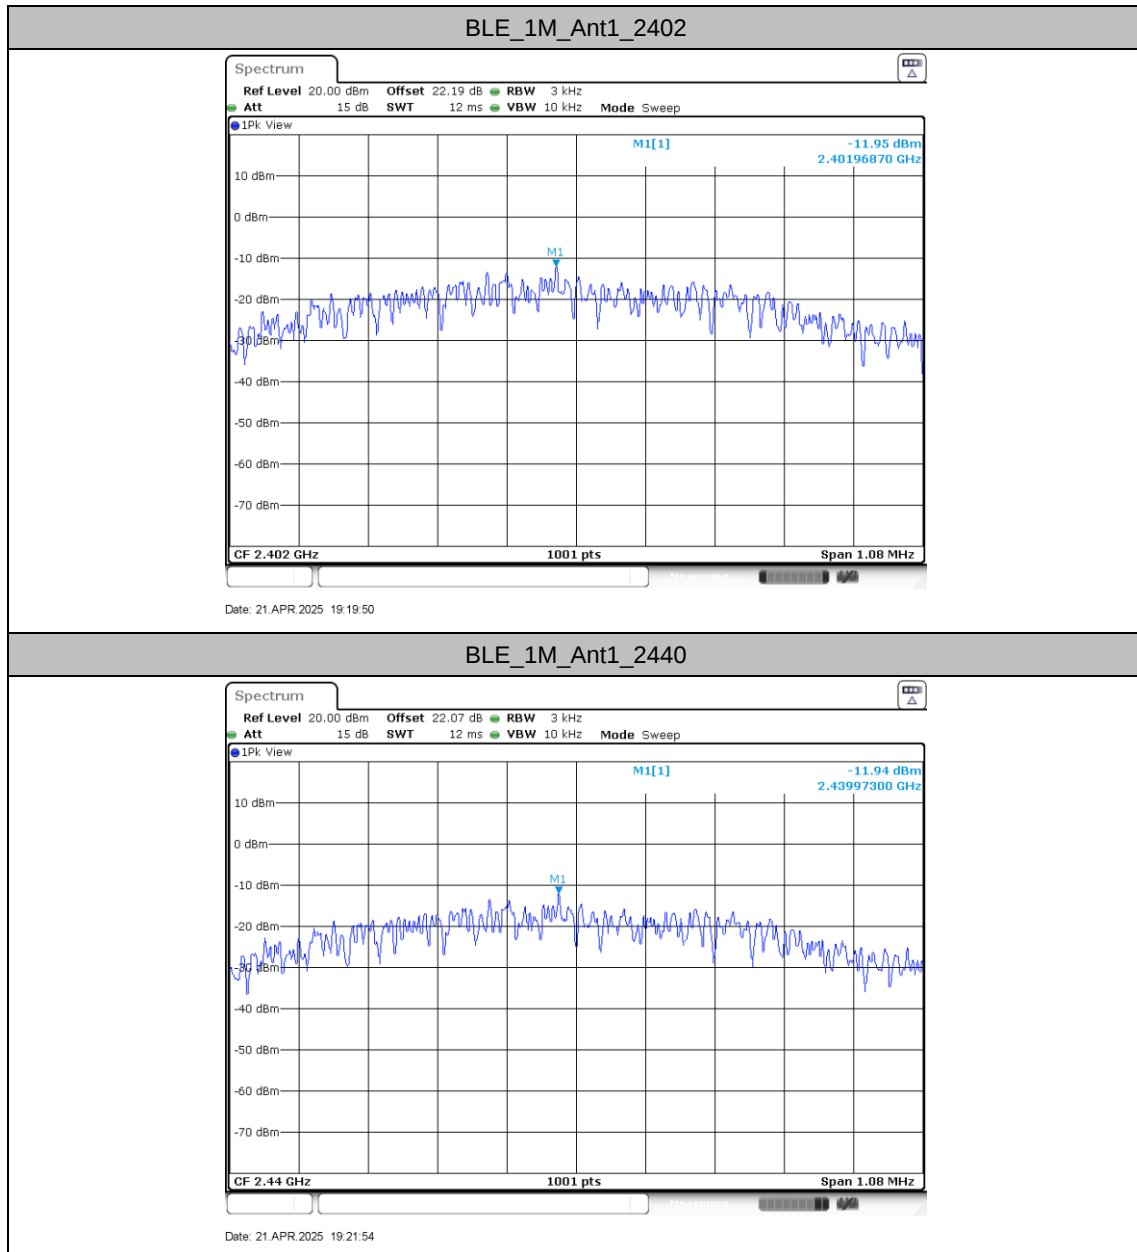

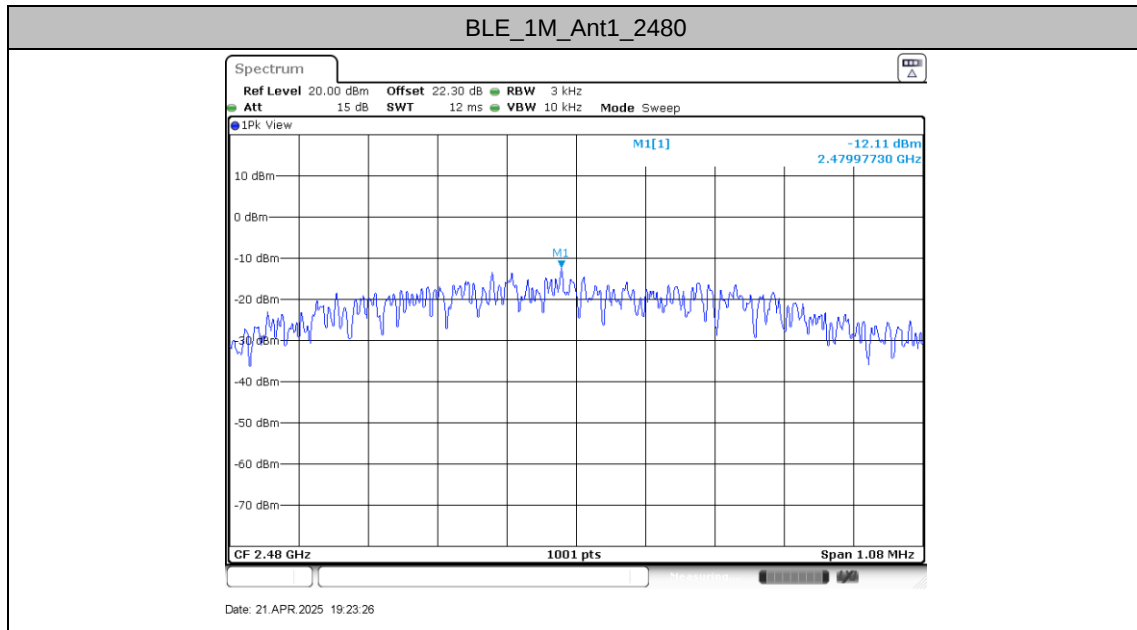




Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant1	2402	2402.00	1.56
		2440	2440.00	1.57
		2480	2480.00	1.42



Test Graphs

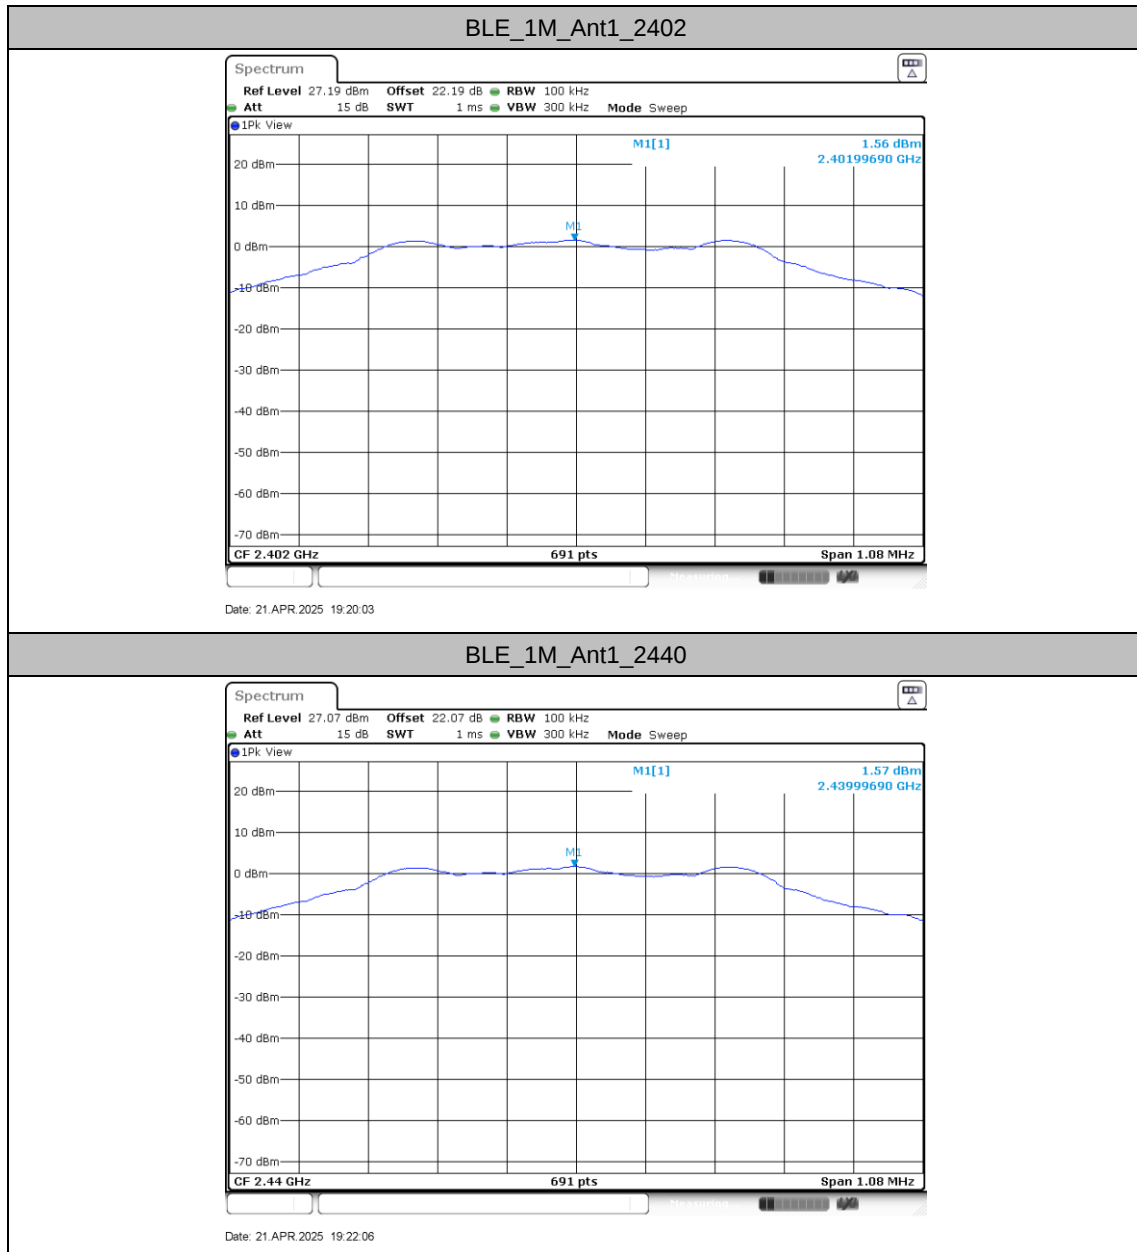

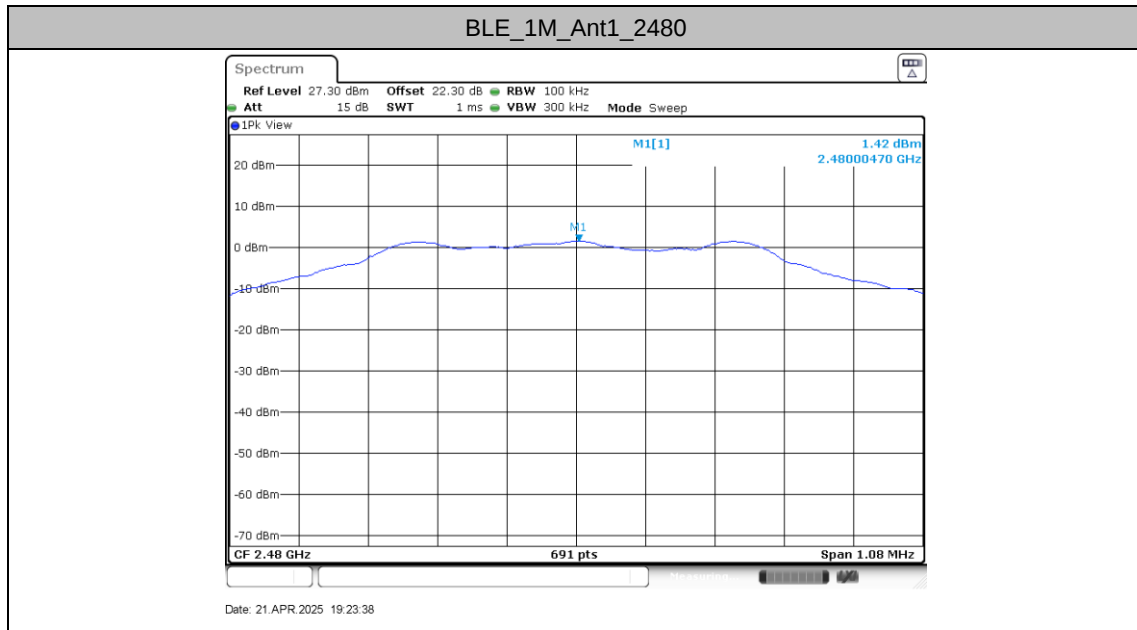




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
BLE_1M	Ant1	Low	2402	1.56	-50.41	≤-18.44	PASS
		High	2480	1.42	-50.08	≤-18.58	PASS



Test Graphs

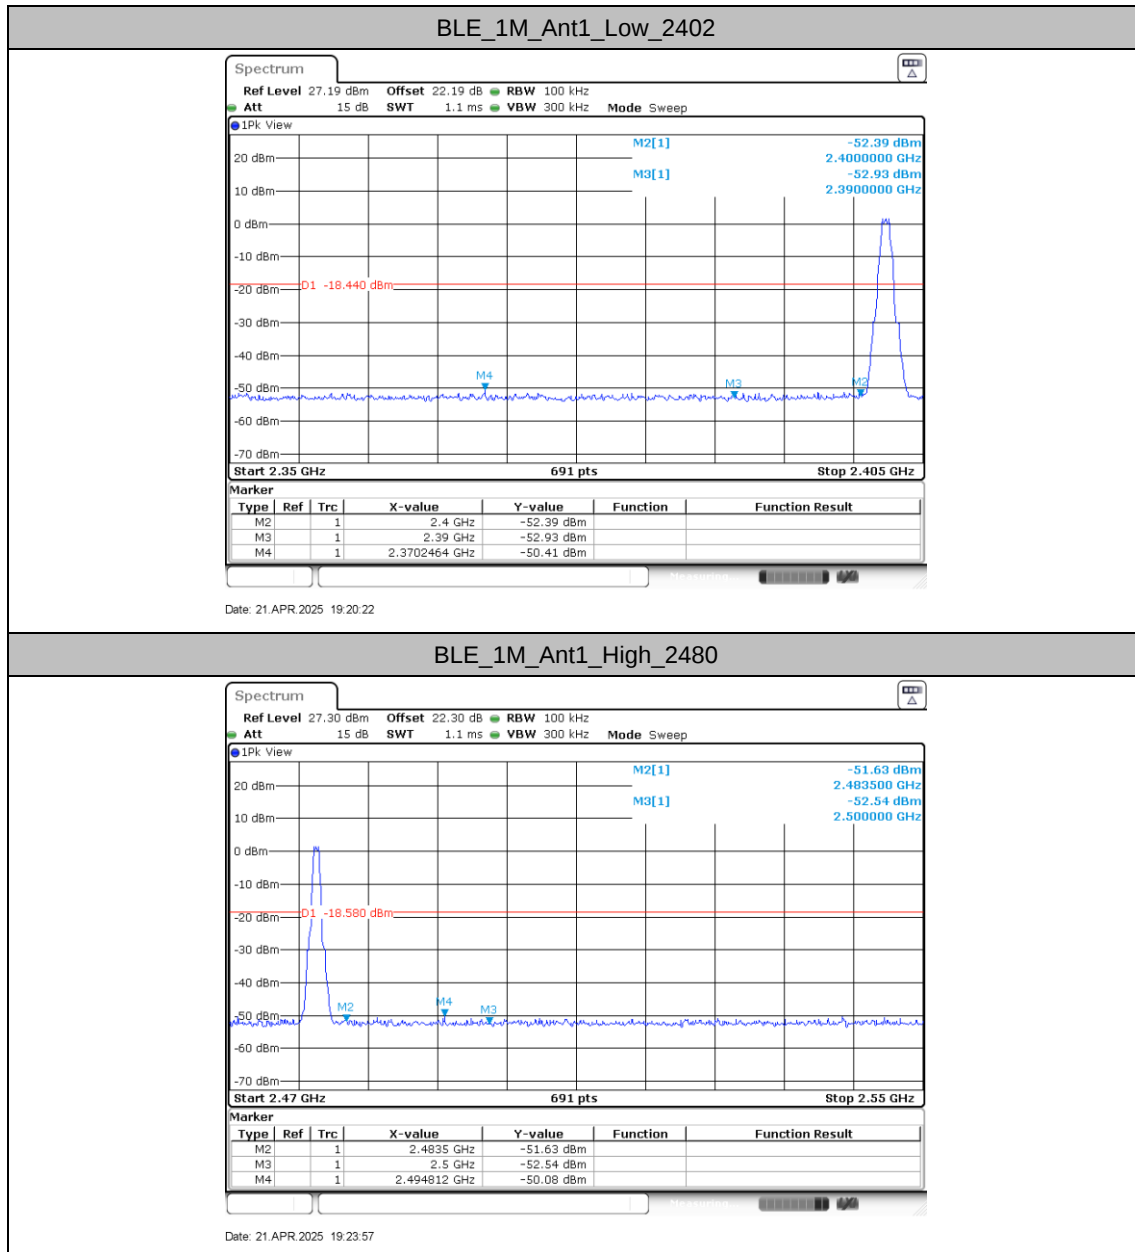




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant1	2402	30~1000	1.56	-45.68	≤-18.44	PASS
			1000~26500	1.56	-41.33	≤-18.44	PASS
		2440	30~1000	1.57	-44.97	≤-18.43	PASS
			1000~26500	1.57	-41.74	≤-18.43	PASS
		2480	30~1000	1.42	-46.31	≤-18.58	PASS
			1000~26500	1.42	-41.92	≤-18.58	PASS




Test Graphs

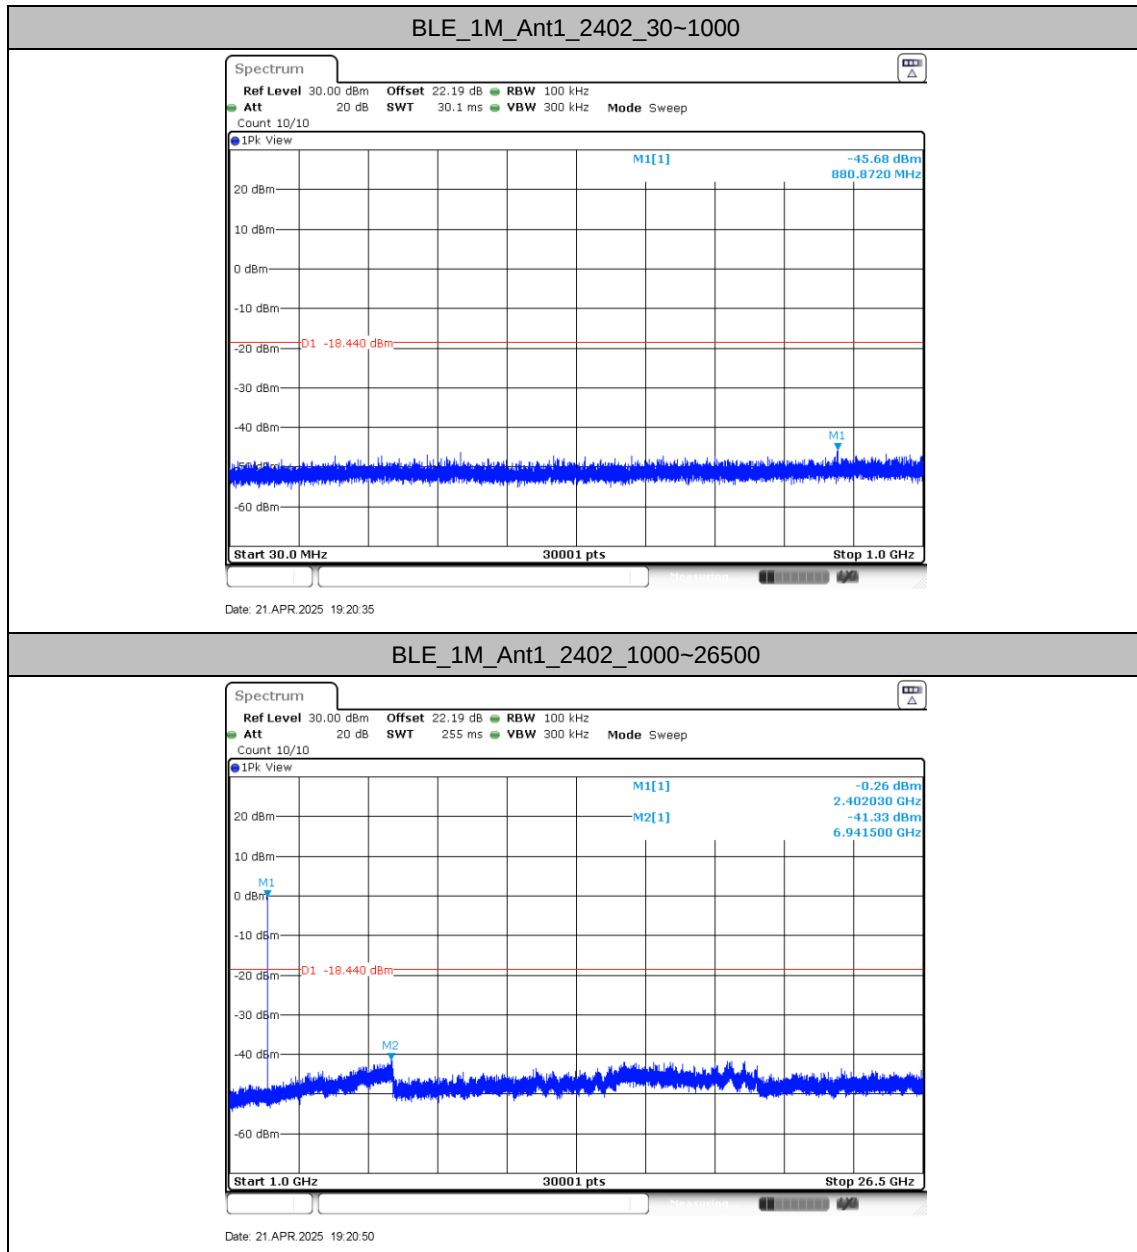




BLE_1M_Ant1_2440_30~1000

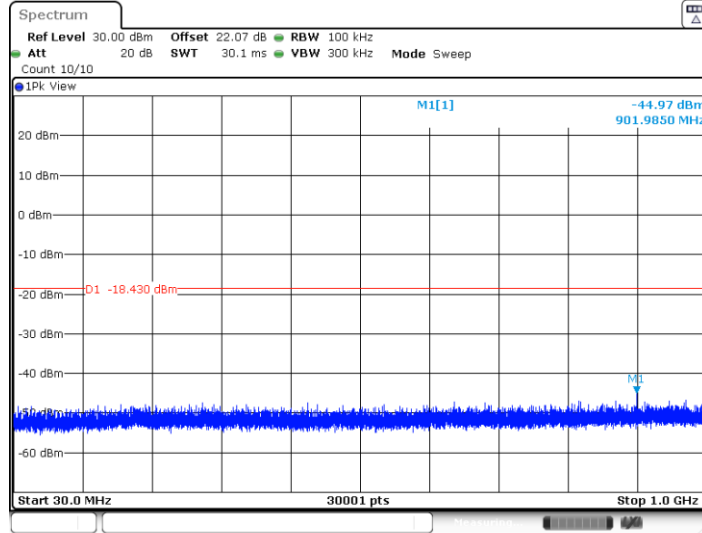


BLE_1M_Ant1_2440_1000~26500

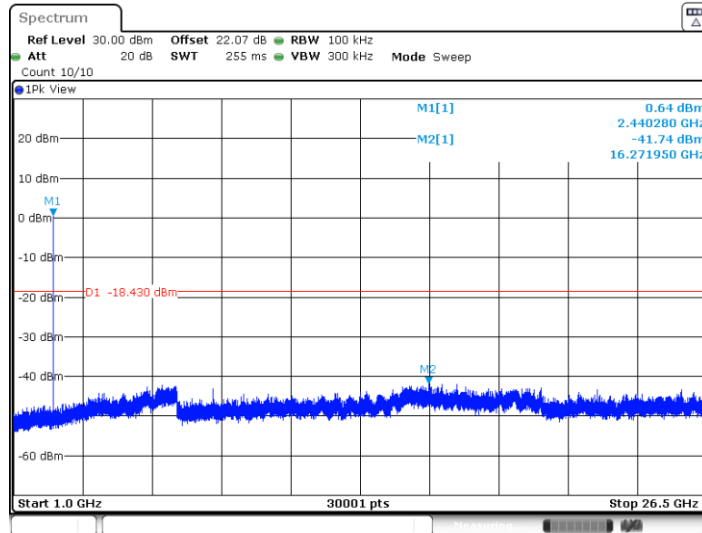




BLE_1M_Ant1_2480_30~1000

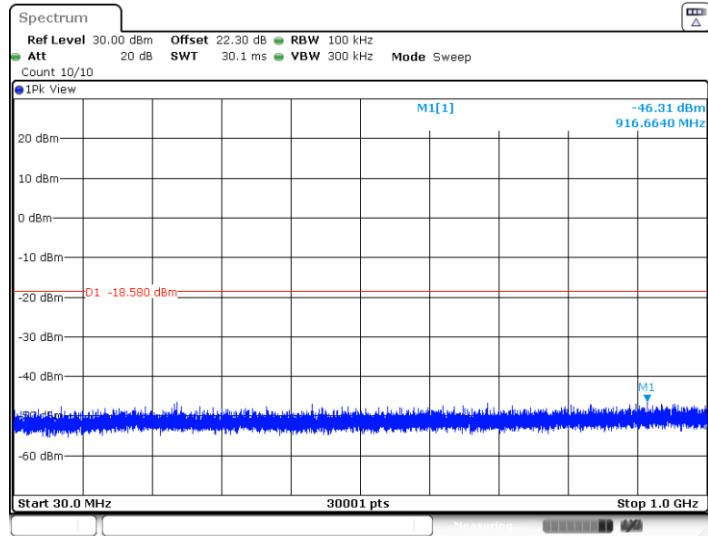

Date: 21 APR 2025 19:24:10

BLE_1M_Ant1_2480_1000~26500

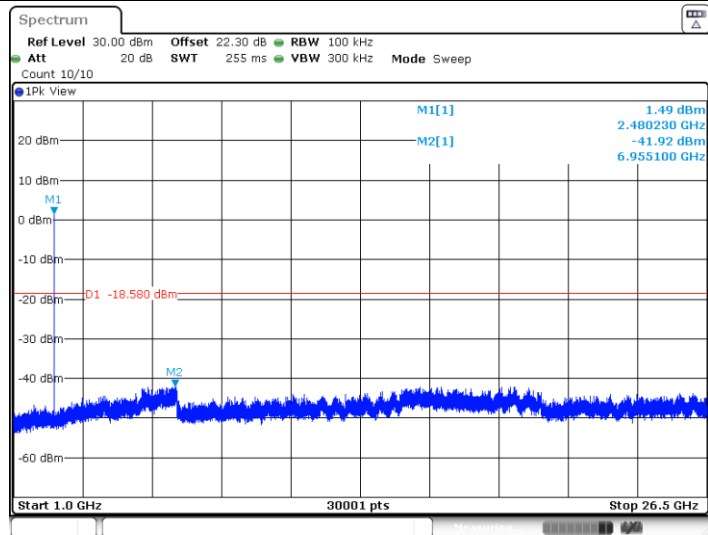

Date: 21 APR 2025 19:24:25



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	1	Bluetooth-LE_GSKF	0	2402	1Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-

B13 BW=5M





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
4	Bluetooth-LE_GSKF	0	2387.22	38.14	54.00	-15.86	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE_GSKF	0	4804.00	40.40	74.00	-33.60	V	PEAK	Pass	Harmonic
5	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GSKF	19	7320.00	42.30	74.00	-31.70	H	PEAK	Pass	Harmonic
6	Bluetooth-LE_GSKF	39	2483.62	38.36	54.00	-15.64	V	AVERAGE	Pass	Band Edge
6	Bluetooth-LE_GSKF	39	7440.00	43.42	74.00	-30.58	H	PEAK	Pass	Harmonic
7	Bluetooth-LE_GSKF	39	2490.22	38.24	54.00	-15.76	H	Average	Pass	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	40.64	74.00	-33.36	H	Peak	Pass	Harmonic

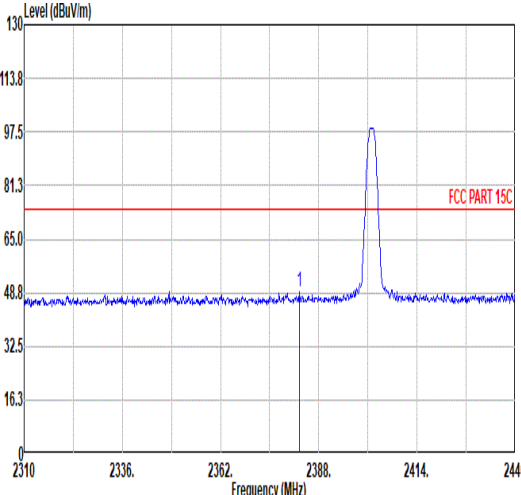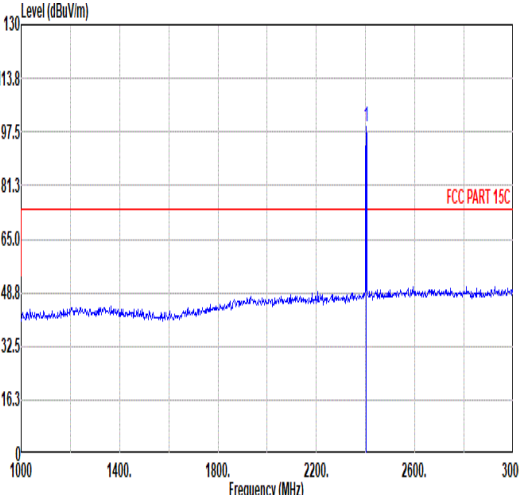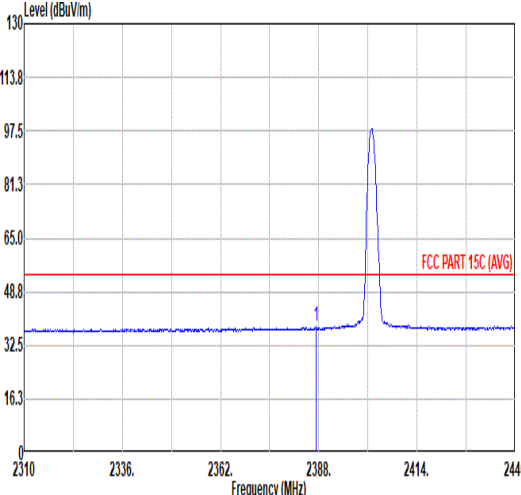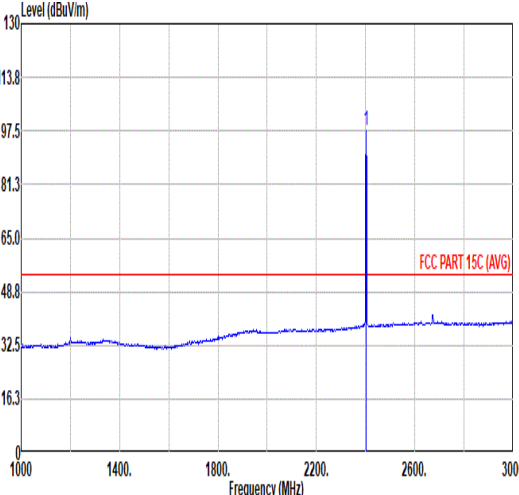

		4																																																																																																	
Mode		Band Edge																																																																																																	
		2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																	
ANT		1																																																																																																	
Pol.		Horizontal						Fundamental																																																																																											
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.80</td><td>48.88</td><td>74.00</td><td>-25.12</td><td>40.94</td><td>31.85</td><td>7.09</td><td>37.00</td><td>6.00</td><td>304</td><td>142</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2382.80	48.88	74.00	-25.12	40.94	31.85	7.09	37.00	6.00	304	142	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.05</td><td>-----</td><td>-----</td><td>91.01</td><td>31.91</td><td>7.12</td><td>36.99</td><td>6.00</td><td>304</td><td>142</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2402.00	99.05	-----	-----	91.01	31.91	7.12	36.99	6.00	304	142
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2382.80	48.88	74.00	-25.12	40.94	31.85	7.09	37.00	6.00	304	142	PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2402.00	99.05	-----	-----	91.01	31.91	7.12	36.99	6.00	304	142	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.22</td><td>38.14</td><td>54.00</td><td>-15.86</td><td>30.17</td><td>31.86</td><td>7.10</td><td>36.99</td><td>6.00</td><td>304</td><td>142</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2387.22	38.14	54.00	-15.86	30.17	31.86	7.10	36.99	6.00	304	142	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>97.76</td><td>-----</td><td>-----</td><td>89.72</td><td>31.91</td><td>7.12</td><td>36.99</td><td>6.00</td><td>304</td><td>142</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2402.00	97.76	-----	-----	89.72	31.91	7.12	36.99	6.00	304	142
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2387.22	38.14	54.00	-15.86	30.17	31.86	7.10	36.99	6.00	304	142	AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2402.00	97.76	-----	-----	89.72	31.91	7.12	36.99	6.00	304	142	AVERAGE																																																																																							

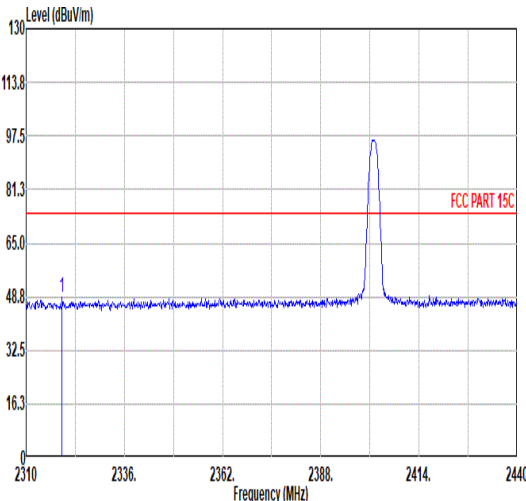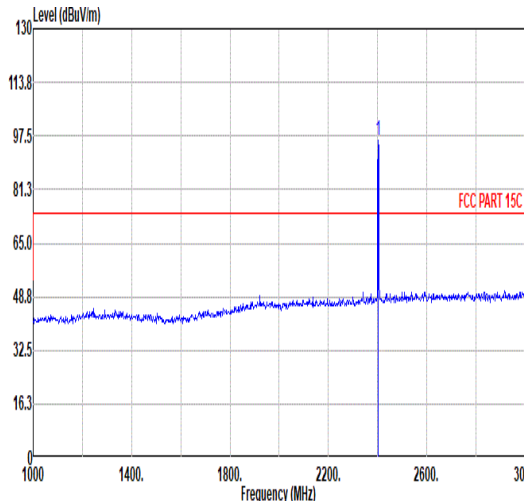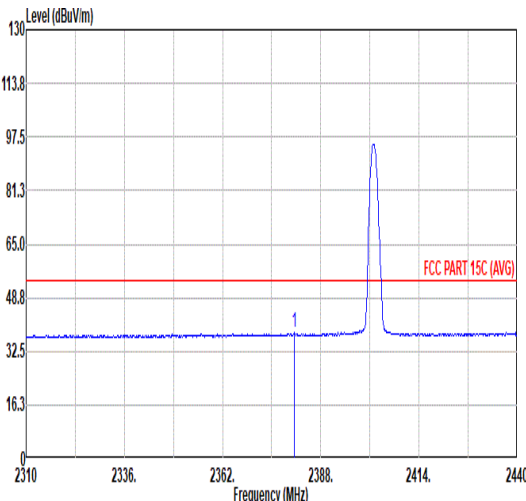
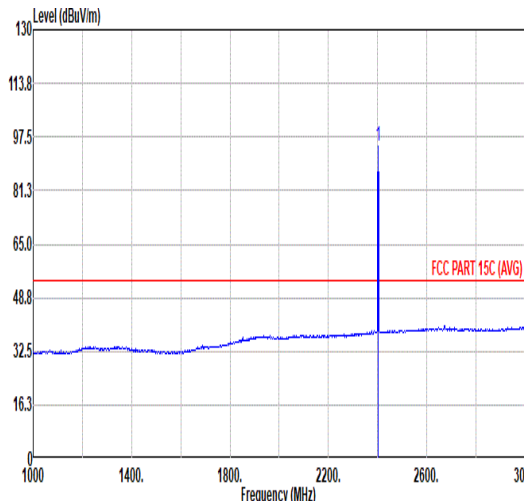


Mode	4																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2319.49</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>40.69</td><td>31.66</td><td>7.00</td><td>37.01</td><td>6.00</td><td>100</td><td>54 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2319.49	48.34	74.00	-25.66	40.69	31.66	7.00	37.01	6.00	100	54 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>96.34</td><td>-----</td><td>-----</td><td>88.30</td><td>31.91</td><td>7.12</td><td>36.99</td><td>6.00</td><td>100</td><td>54 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.34	-----	-----	88.30	31.91	7.12	36.99	6.00	100	54 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2319.49	48.34	74.00	-25.66	40.69	31.66	7.00	37.01	6.00	100	54 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2402.00	96.34	-----	-----	88.30	31.91	7.12	36.99	6.00	100	54 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2380.98</td><td>38.03</td><td>54.00</td><td>-15.97</td><td>30.10</td><td>31.84</td><td>7.09</td><td>37.00</td><td>6.00</td><td>100</td><td>54 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2380.98	38.03	54.00	-15.97	30.10	31.84	7.09	37.00	6.00	100	54 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>94.62</td><td>-----</td><td>-----</td><td>86.58</td><td>31.91</td><td>7.12</td><td>36.99</td><td>6.00</td><td>100</td><td>54 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	94.62	-----	-----	86.58	31.91	7.12	36.99	6.00	100	54 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2380.98	38.03	54.00	-15.97	30.10	31.84	7.09	37.00	6.00	100	54 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2402.00	94.62	-----	-----	86.58	31.91	7.12	36.99	6.00	100	54 AVERAGE																																																																																										







Mode	4																																																										
	Harmonic																																																										
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																										
ANT	1																																																										
Pol.	Horizontal											Vertical																																															
Peak Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.03</td><td>74.00</td><td>-33.97</td><td>61.26</td><td>33.90</td><td>10.20</td><td>65.33</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.03	74.00	-33.97	61.26	33.90	10.20	65.33	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	4804.00	40.03	74.00	-33.97	61.26	33.90	10.20	65.33	0.00	---	---	PEAK																																															
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.40</td><td>74.00</td><td>-33.60</td><td>61.63</td><td>33.90</td><td>10.20</td><td>65.33</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.40	74.00	-33.60	61.63	33.90	10.20	65.33	0.00	---	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	4804.00	40.40	74.00	-33.60	61.63	33.90	10.20	65.33	0.00	---	---	PEAK																																															



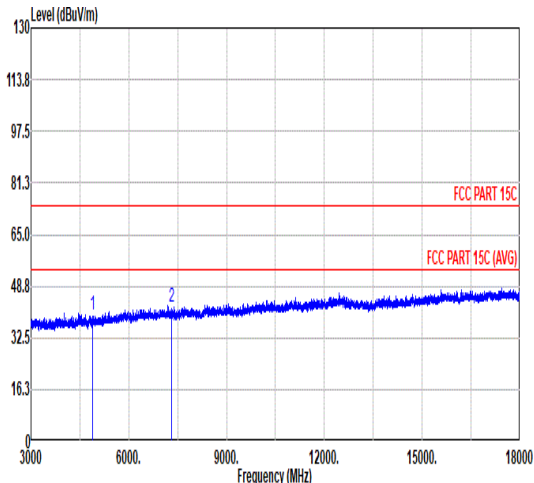
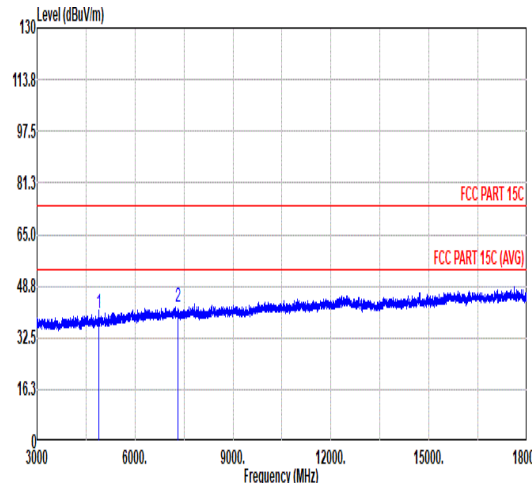


Mode	5																																																																				
	Harmonic																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>39.73</td><td>74.00</td><td>-34.27</td><td>61.10</td><td>33.90</td><td>10.30</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>42.30</td><td>74.00</td><td>-31.70</td><td>60.00</td><td>35.58</td><td>12.72</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	39.73	74.00	-34.27	61.10	33.90	10.30	65.57	0.00	---	---	PEAK	2	7320.00	42.30	74.00	-31.70	60.00	35.58	12.72	66.00	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4880.00	39.73	74.00	-34.27	61.10	33.90	10.30	65.57	0.00	---	---	PEAK																																																									
2	7320.00	42.30	74.00	-31.70	60.00	35.58	12.72	66.00	0.00	---	---	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.15</td><td>74.00</td><td>-33.85</td><td>61.52</td><td>33.90</td><td>10.30</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>42.13</td><td>74.00</td><td>-31.87</td><td>59.83</td><td>35.58</td><td>12.72</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.15	74.00	-33.85	61.52	33.90	10.30	65.57	0.00	---	---	PEAK	2	7320.00	42.13	74.00	-31.87	59.83	35.58	12.72	66.00	0.00	---	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4880.00	40.15	74.00	-33.85	61.52	33.90	10.30	65.57	0.00	---	---	PEAK																																																									
2	7320.00	42.13	74.00	-31.87	59.83	35.58	12.72	66.00	0.00	---	---	PEAK																																																									

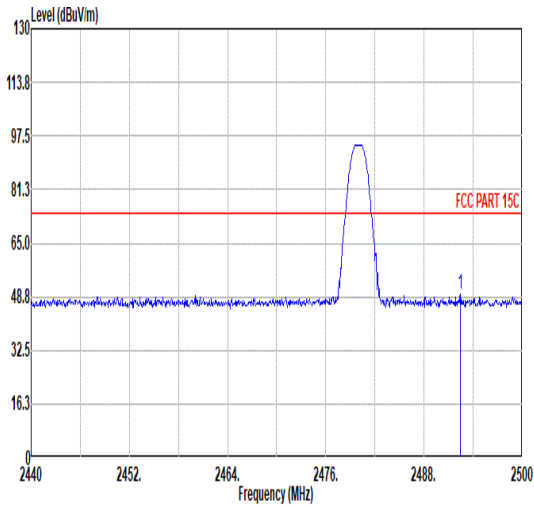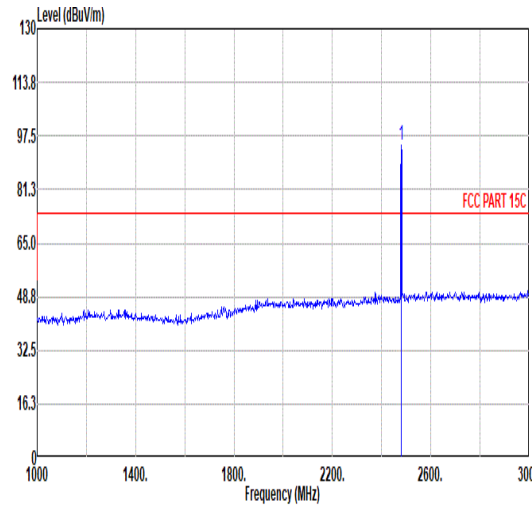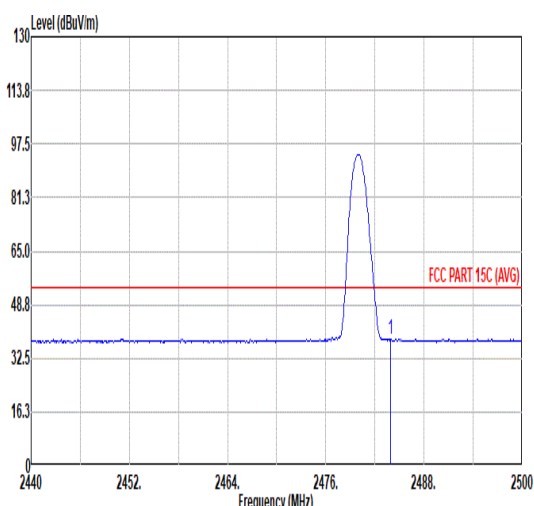
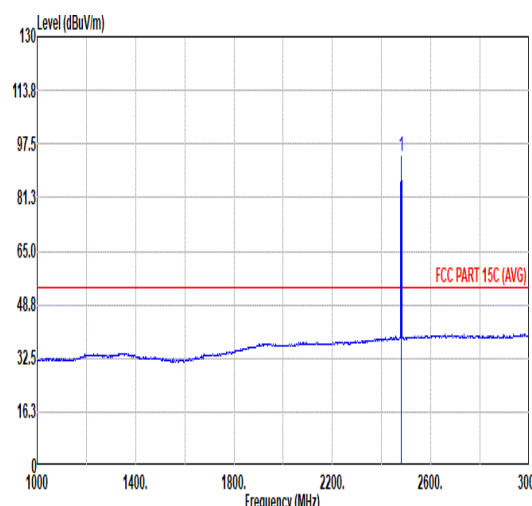


Mode	6																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.44</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>40.99</td><td>32.18</td><td>7.27</td><td>37.05</td><td>6.00</td><td>100</td><td>29 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.44	49.39	74.00	-24.61	40.99	32.18	7.27	37.05	6.00	100	29 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.76</td><td>-----</td><td>-----</td><td>86.42</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>29 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.76	-----	-----	86.42	32.14	7.25	37.05	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2492.44	49.39	74.00	-24.61	40.99	32.18	7.27	37.05	6.00	100	29 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2480.00	94.76	-----	-----	86.42	32.14	7.25	37.05	6.00	100	29 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.92</td><td>38.25</td><td>54.00</td><td>-15.75</td><td>29.89</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>29 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	38.25	54.00	-15.75	29.89	32.15	7.26	37.05	6.00	100	29 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.75</td><td>-----</td><td>-----</td><td>85.41</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>29 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.75	-----	-----	85.41	32.14	7.25	37.05	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.92	38.25	54.00	-15.75	29.89	32.15	7.26	37.05	6.00	100	29 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2480.00	93.75	-----	-----	85.41	32.14	7.25	37.05	6.00	100	29 AVERAGE																																																																																										

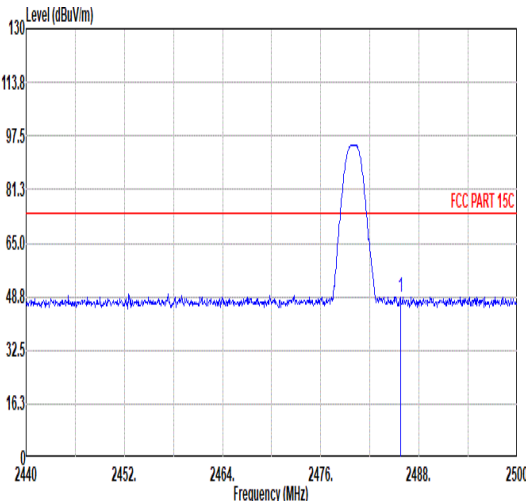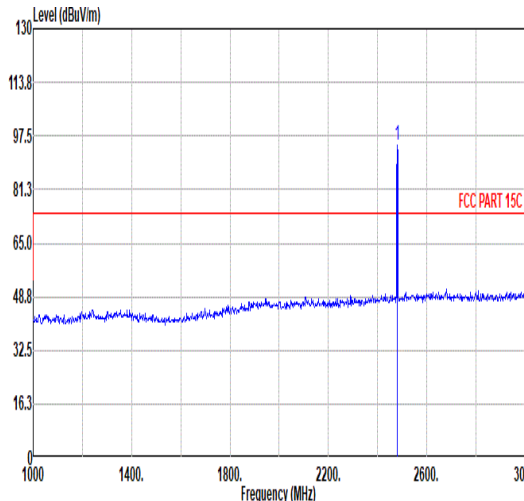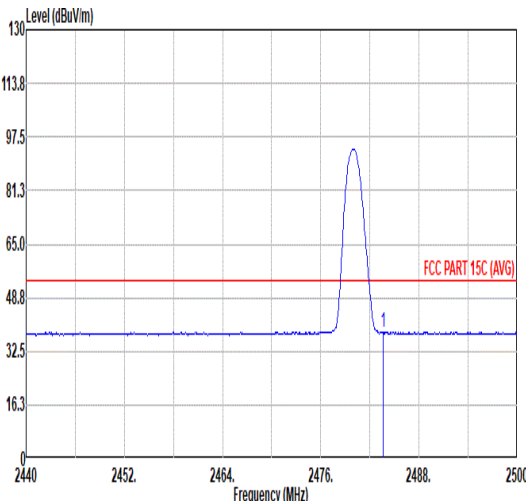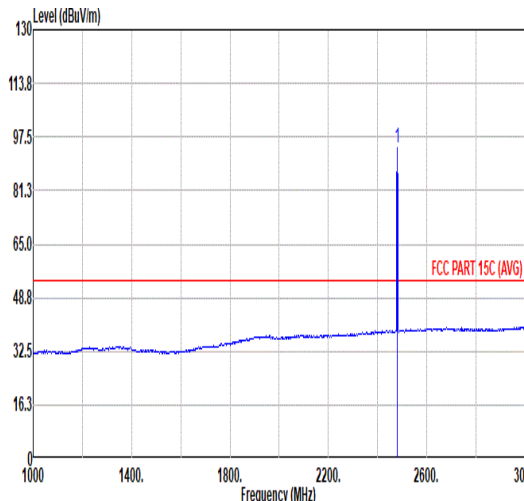

Mode	6																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.72</td><td>48.72</td><td>74.00</td><td>-25.28</td><td>40.35</td><td>32.16</td><td>7.26</td><td>37.05</td><td>6.00</td><td>382</td><td>295 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.72	48.72	74.00	-25.28	40.35	32.16	7.26	37.05	6.00	382	295 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.90</td><td>-----</td><td>-----</td><td>86.56</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>382</td><td>295 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.90	-----	-----	86.56	32.14	7.25	37.05	6.00	382	295 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2485.72	48.72	74.00	-25.28	40.35	32.16	7.26	37.05	6.00	382	295 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2480.00	94.90	-----	-----	86.56	32.14	7.25	37.05	6.00	382	295 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>38.36</td><td>54.00</td><td>-15.64</td><td>30.00</td><td>32.15</td><td>7.26</td><td>37.05</td><td>6.00</td><td>382</td><td>295 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	38.36	54.00	-15.64	30.00	32.15	7.26	37.05	6.00	382	295 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.16</td><td>-----</td><td>-----</td><td>85.82</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>382</td><td>295 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.16	-----	-----	85.82	32.14	7.25	37.05	6.00	382	295 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.62	38.36	54.00	-15.64	30.00	32.15	7.26	37.05	6.00	382	295 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2480.00	94.16	-----	-----	85.82	32.14	7.25	37.05	6.00	382	295 AVERAGE																																																																																										

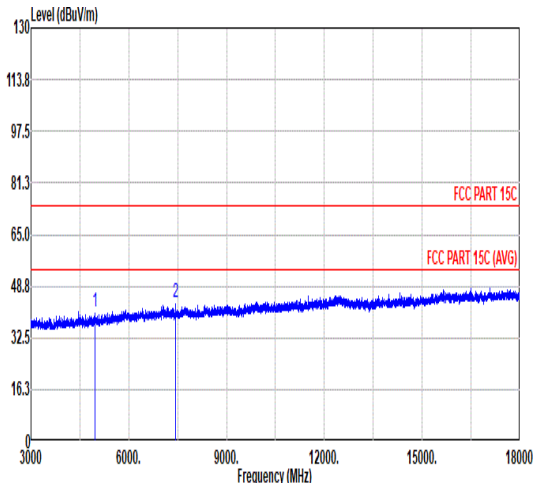
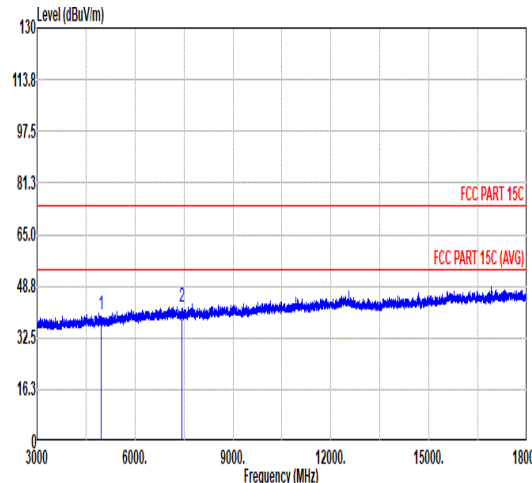


Mode	6																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.71</td><td>74.00</td><td>-33.29</td><td>61.83</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.42</td><td>74.00</td><td>-30.58</td><td>61.37</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.71	74.00	-33.29	61.83	33.90	10.40	65.42	0.00	---	---	PEAK	2	7440.00	43.42	74.00	-30.58	61.37	35.54	12.78	66.27	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>39.63</td><td>74.00</td><td>-34.37</td><td>60.75</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.26</td><td>74.00</td><td>-31.74</td><td>60.21</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	39.63	74.00	-34.37	60.75	33.90	10.40	65.42	0.00	---	---	PEAK	2	7440.00	42.26	74.00	-31.74	60.21	35.54	12.78	66.27	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.71	74.00	-33.29	61.83	33.90	10.40	65.42	0.00	---	---	PEAK																																																																																																																		
2	7440.00	43.42	74.00	-30.58	61.37	35.54	12.78	66.27	0.00	---	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	39.63	74.00	-34.37	60.75	33.90	10.40	65.42	0.00	---	---	PEAK																																																																																																																		
2	7440.00	42.26	74.00	-31.74	60.21	35.54	12.78	66.27	0.00	---	---	PEAK																																																																																																																		



Mode	6	
	18G-25G	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	The plot shows the horizontal peak average spectrum. The y-axis is Level (dBuV/m) from 0 to 130 in increments of 16.3. The x-axis is Frequency (MHz) from 18000 to 25000 in increments of 400. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Three horizontal red lines indicate FCC Part 15C limits: -90dB at 81.3 dBuV/m, -50dB at 65.0 dBuV/m, and -50dB at 48.8 dBuV/m. The measured signal is well below the -50dB limit.	The plot shows the vertical peak average spectrum. The y-axis is Level (dBuV/m) from 0 to 130 in increments of 16.3. The x-axis is Frequency (MHz) from 18000 to 25000 in increments of 400. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Three horizontal red lines indicate FCC Part 15C limits: -90dB at 81.3 dBuV/m, -50dB at 65.0 dBuV/m, and -50dB at 48.8 dBuV/m. The measured signal is well below the -50dB limit.



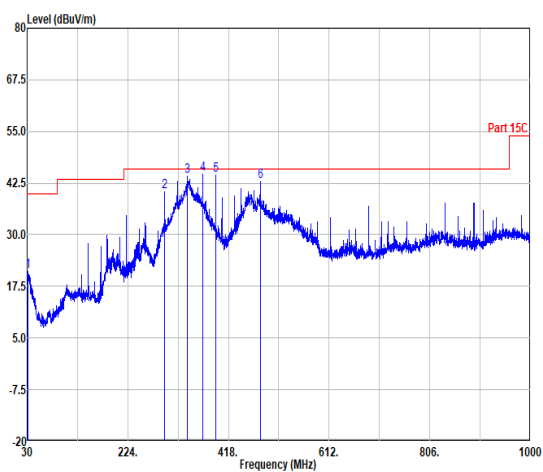
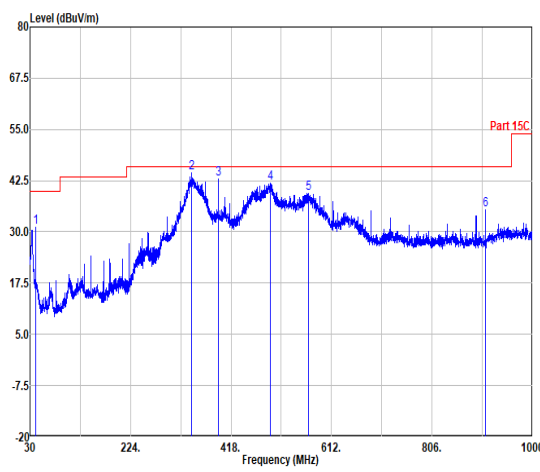


Mode	6																																																																																																									
	30-1G																																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak																																																																																																										
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>31.21</td><td>21.10</td><td>40.00</td><td>-18.90</td><td>29.04</td><td>24.50</td><td>0.36</td><td>32.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>294.81</td><td>40.52</td><td>46.00</td><td>-5.48</td><td>52.37</td><td>19.20</td><td>1.79</td><td>32.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>339.43</td><td>44.07</td><td>46.00</td><td>-1.93</td><td>55.09</td><td>19.93</td><td>1.90</td><td>32.85</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>368.77</td><td>44.59</td><td>46.00</td><td>-1.41</td><td>54.71</td><td>20.76</td><td>2.04</td><td>32.92</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>393.27</td><td>44.39</td><td>46.00</td><td>-1.61</td><td>53.69</td><td>21.57</td><td>2.13</td><td>33.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>480.08</td><td>43.02</td><td>46.00</td><td>-2.98</td><td>50.33</td><td>23.50</td><td>2.30</td><td>33.11</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	31.21	21.10	40.00	-18.90	29.04	24.50	0.36	32.00	---	---	Peak	2	294.81	40.52	46.00	-5.48	52.37	19.20	1.79	32.84	---	---	Peak	3	339.43	44.07	46.00	-1.93	55.09	19.93	1.90	32.85	---	---	Peak	4	368.77	44.59	46.00	-1.41	54.71	20.76	2.04	32.92	---	---	Peak	5	393.27	44.39	46.00	-1.61	53.69	21.57	2.13	33.00	---	---	Peak	6	480.08	43.02	46.00	-2.98	50.33	23.50	2.30	33.11	---	---
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	31.21	21.10	40.00	-18.90	29.04	24.50	0.36	32.00	---	---	Peak																																																																																															
2	294.81	40.52	46.00	-5.48	52.37	19.20	1.79	32.84	---	---	Peak																																																																																															
3	339.43	44.07	46.00	-1.93	55.09	19.93	1.90	32.85	---	---	Peak																																																																																															
4	368.77	44.59	46.00	-1.41	54.71	20.76	2.04	32.92	---	---	Peak																																																																																															
5	393.27	44.39	46.00	-1.61	53.69	21.57	2.13	33.00	---	---	Peak																																																																																															
6	480.08	43.02	46.00	-2.98	50.33	23.50	2.30	33.11	---	---	Peak																																																																																															
Peak																																																																																																										
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>40.67</td><td>31.19</td><td>40.00</td><td>-8.81</td><td>43.90</td><td>19.54</td><td>0.60</td><td>32.85</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>342.34</td><td>44.33</td><td>46.00</td><td>-1.67</td><td>55.21</td><td>20.05</td><td>1.92</td><td>32.85</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>393.27</td><td>43.00</td><td>46.00</td><td>-3.00</td><td>52.30</td><td>21.57</td><td>2.13</td><td>33.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>493.90</td><td>41.78</td><td>46.00</td><td>-4.22</td><td>48.76</td><td>23.84</td><td>2.32</td><td>33.14</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>566.90</td><td>39.43</td><td>46.00</td><td>-6.57</td><td>43.79</td><td>26.40</td><td>2.49</td><td>33.25</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>909.31</td><td>35.42</td><td>46.00</td><td>-10.58</td><td>35.22</td><td>29.29</td><td>3.13</td><td>32.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	40.67	31.19	40.00	-8.81	43.90	19.54	0.60	32.85	---	---	Peak	2	342.34	44.33	46.00	-1.67	55.21	20.05	1.92	32.85	---	---	Peak	3	393.27	43.00	46.00	-3.00	52.30	21.57	2.13	33.00	---	---	Peak	4	493.90	41.78	46.00	-4.22	48.76	23.84	2.32	33.14	---	---	Peak	5	566.90	39.43	46.00	-6.57	43.79	26.40	2.49	33.25	---	---	Peak	6	909.31	35.42	46.00	-10.58	35.22	29.29	3.13	32.22	---	---
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	40.67	31.19	40.00	-8.81	43.90	19.54	0.60	32.85	---	---	Peak																																																																																															
2	342.34	44.33	46.00	-1.67	55.21	20.05	1.92	32.85	---	---	Peak																																																																																															
3	393.27	43.00	46.00	-3.00	52.30	21.57	2.13	33.00	---	---	Peak																																																																																															
4	493.90	41.78	46.00	-4.22	48.76	23.84	2.32	33.14	---	---	Peak																																																																																															
5	566.90	39.43	46.00	-6.57	43.79	26.40	2.49	33.25	---	---	Peak																																																																																															
6	909.31	35.42	46.00	-10.58	35.22	29.29	3.13	32.22	---	---	Peak																																																																																															





Mode	7																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.80</td><td>48.55</td><td>74.00</td><td>-25.45</td><td>40.13</td><td>32.20</td><td>7.28</td><td>37.06</td><td>6.00</td><td>100</td><td>29 Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.80	48.55	74.00	-25.45	40.13	32.20	7.28	37.06	6.00	100	29 Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.76</td><td>-----</td><td>-----</td><td>88.42</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>29 Peak</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.76	-----	-----	88.42	32.14	7.25	37.05	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2498.80	48.55	74.00	-25.45	40.13	32.20	7.28	37.06	6.00	100	29 Peak																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	96.76	-----	-----	88.42	32.14	7.25	37.05	6.00	100	29 Peak																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.22</td><td>38.24</td><td>54.00</td><td>-15.76</td><td>29.85</td><td>32.17</td><td>7.27</td><td>37.05</td><td>6.00</td><td>100</td><td>29 Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.22	38.24	54.00	-15.76	29.85	32.17	7.27	37.05	6.00	100	29 Average	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.75</td><td>-----</td><td>-----</td><td>86.41</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>100</td><td>29 Average</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.75	-----	-----	86.41	32.14	7.25	37.05	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2490.22	38.24	54.00	-15.76	29.85	32.17	7.27	37.05	6.00	100	29 Average																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	94.75	-----	-----	86.41	32.14	7.25	37.05	6.00	100	29 Average																																																																																									

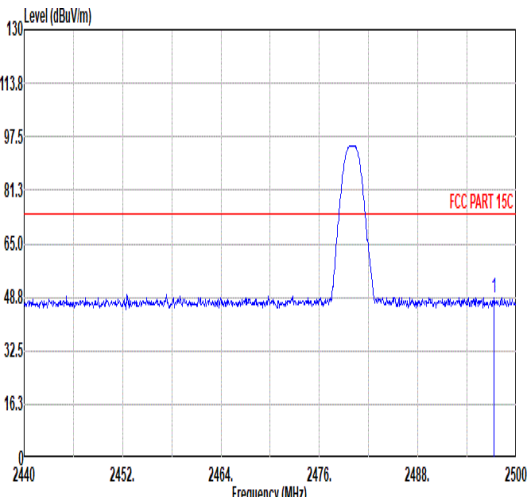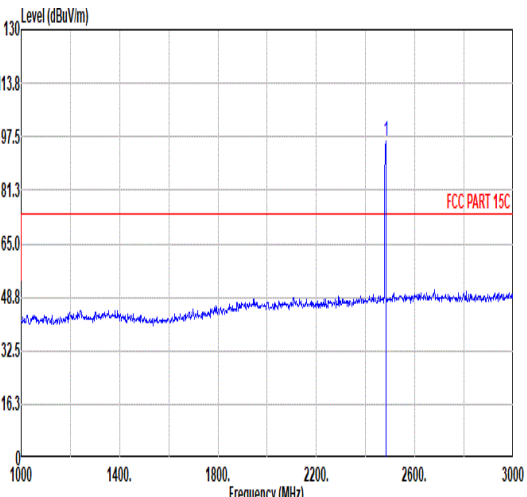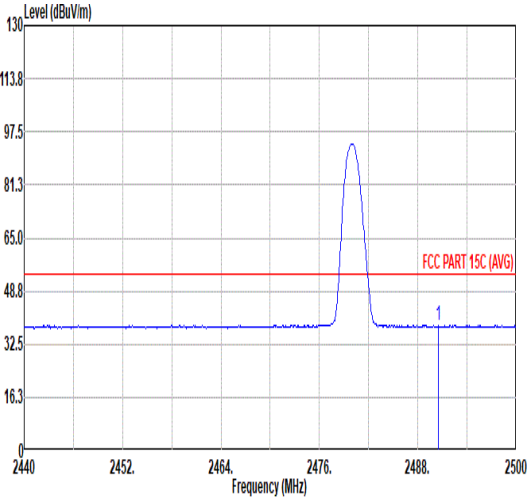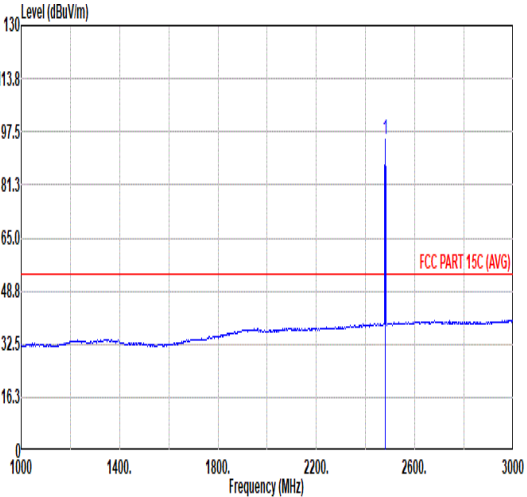

Mode	7																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical					Fundamental																																																																																											
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2497.30</td><td>48.54</td><td>74.00</td><td>-25.46</td><td>40.13</td><td>32.19</td><td>7.28</td><td>37.06</td><td>6.00</td><td>382</td><td>295 Peak</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2497.30	48.54	74.00	-25.46	40.13	32.19	7.28	37.06	6.00	382	295 Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2482.00</td><td>96.36</td><td>-----</td><td>-----</td><td>88.01</td><td>32.15</td><td>7.25</td><td>37.05</td><td>6.00</td><td>382</td><td>295 Peak</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2482.00	96.36	-----	-----	88.01	32.15	7.25	37.05	6.00	382
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2497.30	48.54	74.00	-25.46	40.13	32.19	7.28	37.06	6.00	382	295 Peak																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2482.00	96.36	-----	-----	88.01	32.15	7.25	37.05	6.00	382	295 Peak																																																																																							
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2490.52</td><td>38.19</td><td>54.00</td><td>-15.81</td><td>29.00</td><td>32.17</td><td>7.27</td><td>37.05</td><td>6.00</td><td>382</td><td>295 Average</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2490.52	38.19	54.00	-15.81	29.00	32.17	7.27	37.05	6.00	382	295 Average	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>95.16</td><td>-----</td><td>-----</td><td>86.82</td><td>32.14</td><td>7.25</td><td>37.05</td><td>6.00</td><td>382</td><td>295 Average</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	95.16	-----	-----	86.82	32.14	7.25	37.05	6.00	382
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2490.52	38.19	54.00	-15.81	29.00	32.17	7.27	37.05	6.00	382	295 Average																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2480.00	95.16	-----	-----	86.82	32.14	7.25	37.05	6.00	382	295 Average																																																																																							

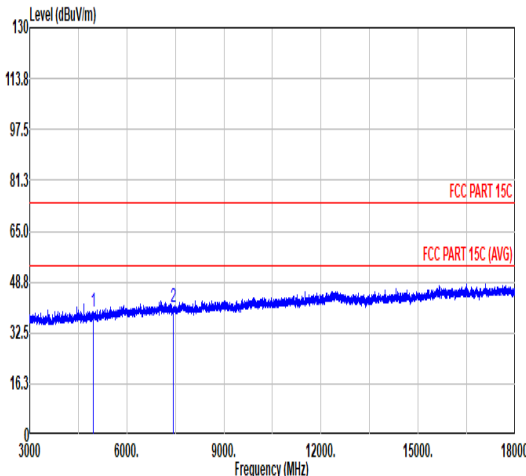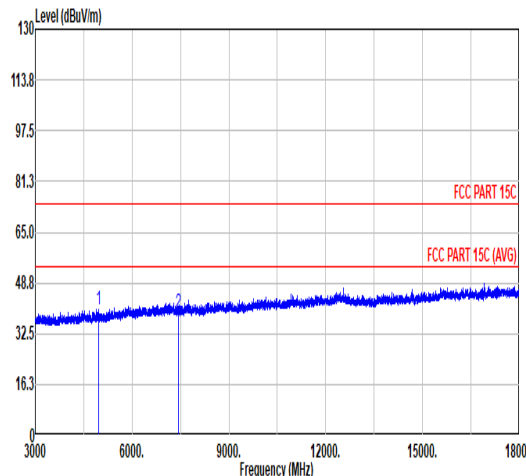

Mode	7																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>39.15</td><td>74.00</td><td>-34.85</td><td>60.27</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>40.64</td><td>74.00</td><td>-33.36</td><td>58.59</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	39.15	74.00	-34.85	60.27	33.90	10.40	65.42	0.00	---	---	Peak	2	7440.00	40.64	74.00	-33.36	58.59	35.54	12.78	66.27	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.25</td><td>74.00</td><td>-33.75</td><td>61.37</td><td>33.90</td><td>10.40</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>39.45</td><td>74.00</td><td>-34.55</td><td>57.40</td><td>35.54</td><td>12.78</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.25	74.00	-33.75	61.37	33.90	10.40	65.42	0.00	---	---	Peak	2	7440.00	39.45	74.00	-34.55	57.40	35.54	12.78	66.27	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	39.15	74.00	-34.85	60.27	33.90	10.40	65.42	0.00	---	---	Peak																																																																																																																		
2	7440.00	40.64	74.00	-33.36	58.59	35.54	12.78	66.27	0.00	---	---	Peak																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.25	74.00	-33.75	61.37	33.90	10.40	65.42	0.00	---	---	Peak																																																																																																																		
2	7440.00	39.45	74.00	-34.55	57.40	35.54	12.78	66.27	0.00	---	---	Peak																																																																																																																		

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	62.30	0.39	2.564	2.7KHz

Bluetooth LE 1Mbps

