

MPE Test Report

FCC ID: 2BLAK-MP102

Report No. : SSP25080284-2E

Applicant : Zhongshan Worth Electronic Technology Co., Ltd.

Product Name : Power Bank

Model Name : MP102

Test Standard : FCC CFR 47 PART 1, 1.1310

Date of Issue : 2025-08-30

Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Zhongshan Worth Electronic Technology Co., Ltd. Building 5, anlibang liyuan science and technology industrial park, no. 9 fuze road, sanjiao town, zhongshan City, China	
Manufacturer:	Zhongshan Worth Electronic Technology Co., Ltd. Building 5, anlibang liyuan science and technology industrial park, no. 9 fuze road, sanjiao town, zhongshan City, China	
Product Name:	Power Bank	
Brand Name:	-	
Main Model:	MP102	
Series Models:	-	
Test Standard:	FCC CFR 47 PART 1, 1.1310 KDB 680106 D01 Wireless Power Transfer v04	
Date of Test:	2025-08-18 to 2025-08-25	
Test Result:	PASS	
Tested By	 _____ (Coke Huang)	
Reviewed By:	 _____ (Lorzix Luo)	
Authorized Signatory:	 _____ (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Test Facilities.....	7
1.4 List of Measurement Instruments	7
1.5 Measurement Uncertainty	7
2. RF Exposure.....	8
2.1 Standard and Limit.....	8
2.2 Test Procedures	8
2.3 Test Setup Block Diagram.....	9
2.4 Test Data and Results	10
Annex A. Test Photos.....	12

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-08-30	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	Power Bank
Trade Name:	-
Test Model:	MP102
Series Models:	-
Rated Voltage:	USB-C Input: 12V=1.5A, 9V=2A, 5V=3A USB-C Output: 12V=1.67A, 9V=2.22A, 5V=3A USB-A Output: 12V=1.5A, 10V=2.25A, 9V=2A, 5V=3A Output: 5W, 7.5W, 10W, 15W (Wireless output) DC 3.85V by battery, USB 5V Charging
Power Adapter:	-
Battery:	DC 3.85V, 10000mAh
Test Sample No:	SSP25080284-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC (QI)
Operating Frequency:	Wireless charging Output :110.5kHz-205kHz
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	☒ Portable Device ☐ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description		Remark
TM1	Wireless charging 7.5W+adapter charging		-
TM2	Wireless charging 5W+adapter charging		-
TM3	Wireless charging 15W		-
TM4	Wireless charging 10W		-
TM5	Wireless charging 7.5W		-
TM6	Wireless charging 5W		-
Note 1: All modes above have been tested and only the worst modes: TM3, data are represented in the report.			
Note 2: The AC mode only supports 5W and 7.5W output.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB cable	100	Unshielded	Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	UGREEN	CD289	15197
Phone	iPhone	iPhone 12pro	-

1.3 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.4 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Electromagnetic radiation tester	WAVECONTROL	SMP3	23SL0158	2024-10-16	2025-10-15
Electromagnetic field probe	WAVECONTROL	WP400-3	24WP240067	2024-10-16	2025-10-16
Test Software	WAVECONTROL	SMP	N/A	N/A	N/A

Probe radius: 1.65CM

1.5 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
E-field	10Hz ~ 100kHz	$\pm 2.6\%$
	100kHz ~ 400kHz	$\pm 4.9\%$
H-field	10Hz ~ 3kHz	$\pm 2.5\%$
	3kHz ~ 10kHz	$\pm 2.6\%$
	10kHz ~ 100kHz	$\pm 4.3\%$
	100kHz ~ 400kHz	$\pm 5.0\%$

2. RF Exposure

2.1 Standard and Limit

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	--	--	f/300	6
1500–100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	--	--	f/1500	30
1500–100,000	--	--	1.0	30


f = frequency in MHz

2.2 Test Procedures

The EUT was measured according to the KDB 680106 D01v04.

- 1) The RF exposure test was performed in an anechoic chamber.
- 2) The measurement probe was placed at test distance(2~20cm) which is between the edge of the wireless charger and the geometric center of probe for portable exposure, and the measurement probe was placed at test distance(20~24cm) which is between the edge of the wireless charger and the geometric center of probe for mobile exposure.
- 3) Choose the worst mode among battery with zero/partial/full charge, then perform measurement.
- 4) The highest emission level was recorded and all sides (A, B, C, D, E, F) were completed.
- 5) Calculate the final E/H-field strength.

2.3 Test Setup Block Diagram

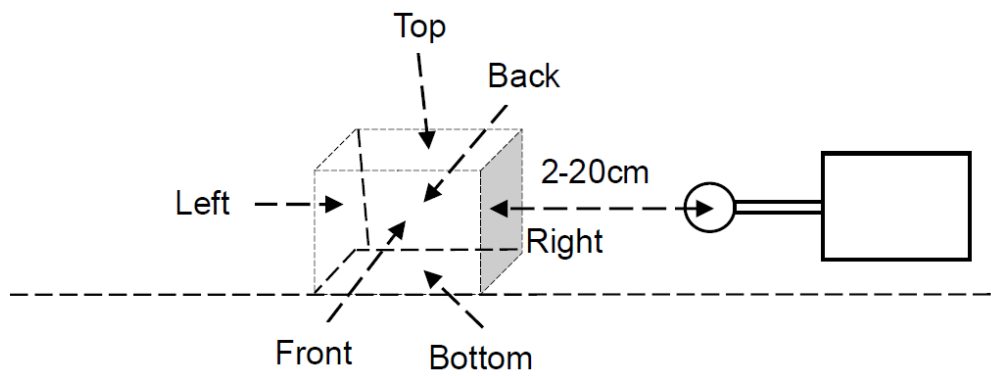

Note: Front side = A, Right side = B, Back side = C, Left side = D, Top side = E, Bottom side = F.

2.4 Test Data and Results

For portable exposure conditions:

Operating modes with client device (1 %, 50%, 99% battery status of client device) have been tested, only show the data of worst case of battery status of client device.

H-field measurements taken every 2 cm (starting as close to 20 cm as possible) on each side of the device were also evaluated for portable exposure use condition.

Test Mode: TM3(the worst mode)

Transmitter Battery Level: 99%

Test Distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.670	1.181	1.151	0.241	0.556	0.742
4	0.162	0.671	0.542	0.112	0.265	0.251
6	0.091	0.331	0.253	0.062	0.155	0.121
8	0.061	0.177	0.124	0.041	0.102	0.056
10	0.039	0.113	0.071	0.031	0.062	0.046
12	0.032	0.061	0.041	0.021	0.041	0.037
14	0.022	0.043	0.032	0.022	0.034	0.025
16	0.021	0.034	0.025	0.024	0.025	0.023
18	0.017	0.023	0.024	0.012	0.023	0.027
20	0.013	0.021	0.023	0.011	0.021	0.022

Test Distance (cm)	Test Position						Limits (A/m)
	A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	F (A/m)	
2	0.536	0.945	0.921	0.193	0.445	0.594	1.63
4	0.130	0.537	0.434	0.090	0.212	0.201	1.63
6	0.073	0.265	0.202	0.050	0.124	0.097	1.63
8	0.049	0.142	0.099	0.033	0.082	0.045	1.63
10	0.031	0.090	0.057	0.025	0.050	0.037	1.63
12	0.026	0.049	0.033	0.017	0.033	0.030	1.63
14	0.018	0.034	0.026	0.018	0.027	0.020	1.63
16	0.017	0.027	0.020	0.019	0.020	0.018	1.63
18	0.014	0.018	0.019	0.010	0.018	0.022	1.63
20	0.010	0.017	0.018	0.009	0.017	0.018	1.63

Note: H-field(A/m) = H-field(uT)/1.25.

Using Polynomial order 10, the value of 4 cm and 6 cm can be estimated, and the result of comparison meets the requirements (<30%), therefore, the calculation method is acceptable.

Distance: 4cm

Test Position	A	B	C	D	E	F
Valuation (A/m)	0.130	0.537	0.434	0.090	0.212	0.201
Measure Value (A/m)	0.129	0.536	0.433	0.089	0.210	0.199
Agreement Ratio (%)	-0.78%	-0.19%	-0.23%	-1.12%	-0.95%	-0.10%
Limit (%)	30%	30%	30%	30%	30%	30%
Result	Pass	Pass	Pass	Pass	Pass	Pass

Distance: 6cm

Test Position	A	B	C	D	E	F
Valuation (A/m)	0.073	0.265	0.202	0.050	0.124	0.097
Measure Value (A/m)	0.072	0.264	0.201	0.049	0.123	0.095
Agreement Ratio (%)	-1.39%	-0.38%	-0.50%	-2.04%	-0.81%	-2.10%
Limit (%)	30%	30%	30%	30%	30%	30%
Result	Pass	Pass	Pass	Pass	Pass	Pass

Based on the above results, using Polynomial order 10, the value of 0 cm can be estimated as below.

Test Distance (cm)	Test Position						Limits (A/m)
	A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	F (A/m)	
0	1.25	1.30	1.49	0.35	0.56	1.36	1.63
Test Results: PASS							

Annex A. Test Photos

Test View 1**Test View 2**

Test View 3**Test View 4**

Test View 5



Test View 6



******* END OF REPORT *******