

# TEST REPORT

|           |                       |
|-----------|-----------------------|
| Applicant | Ludus Materials Ltd.  |
| Address   | Givat brenner, Israel |

|                                     |                                                                                                          |
|-------------------------------------|----------------------------------------------------------------------------------------------------------|
| Manufacturer or Supplier            | Qing Yuan Right Source Plastic Company Limited                                                           |
| Address                             | ZhangWu Village, Yinghua St, Donghua Town, Yingde City, GuangDong Province, PR China, Postal Code 513059 |
| Product                             | Ludus Paddle                                                                                             |
| Brand Name                          | Ludus                                                                                                    |
| Model                               | LMP01                                                                                                    |
| Additional Model & Model Difference | N/A                                                                                                      |
| Date of tests                       | Oct. 09, 2024 ~ Oct. 23, 2024                                                                            |

the tests have been carried out according to the requirements of the following standards:

☒ **FCC Part 15, Subpart C, Section 15.225**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Prepared by Eric Fang<br>Project Engineer / EMC Department                          | Approved by Glyn He<br>Assistant Manager / EMC Department                            |
|  |  |

Date: Nov. 28, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## TABLE OF CONTENTS

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>RELEASE CONTROL RECORD .....</b>                              | <b>4</b>  |
| <b>1 SUMMARY OF TEST RESULTS.....</b>                            | <b>5</b>  |
| <b>2 MEASUREMENT UNCERTAINTY .....</b>                           | <b>5</b>  |
| <b>3 GENERAL INFORMATION .....</b>                               | <b>6</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                             | 6         |
| 3.2 DESCRIPTION OF TEST MODES .....                              | 7         |
| 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST .....                  | 7         |
| 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....    | 7         |
| 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....               | 9         |
| 3.4 DESCRIPTION OF SUPPORT UNITS .....                           | 9         |
| <b>4 TEST TYPES AND RESULTS.....</b>                             | <b>10</b> |
| 4.1. RADIATED EMISSION AND BANDEDGE MEASUREMENT .....            | 10        |
| 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... | 10        |
| 4.1.2 TEST INSTRUMENTS .....                                     | 11        |
| 4.1.3 TEST PROCEDURES .....                                      | 12        |
| 4.1.4 DEVIATION FROM TEST STANDARD .....                         | 12        |
| 4.1.5 TEST SETUP.....                                            | 13        |
| 4.1.6 EUT OPERATING CONDITIONS.....                              | 14        |
| 4.1.7 TEST RESULTS .....                                         | 14        |
| 4.2. FREQUENCY TOLERANCE .....                                   | 16        |
| 4.2.1. LIMIT OF FREQUENCY TOLERANCE .....                        | 16        |
| 4.2.2. TEST INSTRUMENTS .....                                    | 16        |
| 4.2.3. TEST PROCEDURES .....                                     | 17        |
| 4.2.4. DEVIATION FROM TEST STANDARD .....                        | 17        |
| 4.2.5. TEST SETUP.....                                           | 17        |
| 4.2.6. EUT OPERATING CONDITIONS.....                             | 18        |
| 4.2.7. TEST RESULTS .....                                        | 18        |
| 4.3. 20DB BANDWIDTH.....                                         | 19        |
| 4.3.1 LIMITS OF 20DB BANDWIDTH .....                             | 19        |
| 4.3.2 TEST INSTRUMENTS .....                                     | 19        |
| 4.3.3 TEST PROCEDURE .....                                       | 20        |
| 4.3.4 DEVIATION FROM TEST STANDARD .....                         | 20        |



**Test Report No.: RF2409WDG0225-2**

|       |                                                                                             |    |
|-------|---------------------------------------------------------------------------------------------|----|
| 4.3.5 | TEST SETUP .....                                                                            | 20 |
| 4.3.6 | EUT OPERATING CONDITION .....                                                               | 21 |
| 4.3.7 | TEST RESULTS .....                                                                          | 21 |
| 5.    | PHOTOGRAPHS OF THE TEST CONFIGURATION .....                                                 | 22 |
| 6.    | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE<br>EUT BY THE LAB ..... | 23 |



Test Report No.: RF2409WDG0225-2

## RELEASE CONTROL RECORD

| ISSUE NO.       | REASON FOR CHANGE | DATE ISSUED   |
|-----------------|-------------------|---------------|
| RF2409WDG0225-2 | Original release  | Nov. 28, 2024 |

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C |                                                                                     |        |                                |
|------------------------------------------|-------------------------------------------------------------------------------------|--------|--------------------------------|
| STANDARD SECTION                         | TEST TYPE AND LIMIT                                                                 | RESULT | REMARK                         |
| 15.207                                   | AC Power Conducted Emission                                                         | N/A    | Powered from battery           |
| 15.225 (a)&(b)&(c)                       | The field strength of any emissions within the band                                 | PASS   | Meet the requirement of limit. |
| 15.225 (d)                               | The field strength of any emissions appearing outside of the 13.110-14.010 MHz band | PASS   | Meet the requirement of limit. |
| 15.225 (e)                               | Frequency tolerance                                                                 | PASS   | Meet the requirement of limit. |
| 15.215 (c)                               | 20dB Bandwidth                                                                      | PASS   | Meet the requirement of limit. |
| 15.203                                   | Antenna Requirement                                                                 | PASS   | No antenna connector is used.  |

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT        | FREQUENCY     | UNCERTAINTY |
|--------------------|---------------|-------------|
| Radiated emissions | 9KHz ~ 30MHz  | 2.80dB      |
|                    | 30MHz ~ 1GMHz | 4.65dB      |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| <b>PRODUCT</b>               | Ludus Paddle                                     |
| <b>MODEL NO.</b>             | LMP01                                            |
| <b>ADDITIONAL MODELS</b>     | N/A                                              |
| <b>FCC ID</b>                | 2BLAR-LMP01                                      |
| <b>POWER SUPPLY</b>          | DC 3.7V from Battery or DC 5V from USB Host Unit |
| <b>MODULATION TECHNOLOGY</b> | NFC                                              |
| <b>MODULATION TYPE</b>       | ASK                                              |
| <b>OPERATING FREQUENCY</b>   | 13.56MHz                                         |
| <b>NUMBER OF CHANNEL</b>     | 1                                                |
| <b>ANTENNA TYPE</b>          | PCB antenna                                      |
| <b>I/O PORTS</b>             | Refer to user's manual                           |
| <b>CABLE SUPPLIED</b>        | See note 5                                       |

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2409WDG0225) for detailed product photo.
4. When the EUT in charging mode that RF function can't working.
5. Product cable information as follows:

| ID | Descriptions            | Qty. | Length<br>(m) | Shielding<br>(Y/N) | Cores<br>(Qty.) | Remark |
|----|-------------------------|------|---------------|--------------------|-----------------|--------|
| 1  | USB-A to Microusb cable | 1    | 0.5           | N                  | 0               | N/A    |

### 3.2 DESCRIPTION OF TEST MODES

The EUT only have one channel.

| CHANNEL | FREQUENCY (MHz) |
|---------|-----------------|
| 1       | 13.56           |

#### 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

#### 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

| EUT CONFIGURE<br>MODE | APPLICABLE TO |    |     |    | DESCRIPTION              |
|-----------------------|---------------|----|-----|----|--------------------------|
|                       | RE            | FT | PLC | BW |                          |
| A                     | √             | √  | -   | √  | Powered by Fully Battery |

Where **RE:** Radiated Emission

**PLC:** Power Line Conducted Emission

**FT:** Frequency tolerance

**BW:** 20dB Bandwidth

#### RADIATED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT<br>CONFIGURE<br>MODE | TESTED CHANNEL | TESTED FREQUENCY<br>(MHZ) | MODULATION TYPE | AXIS |
|--------------------------|----------------|---------------------------|-----------------|------|
| A                        | 1              | 13.56                     | ASK             | X    |

**FREQUENCY TOLERANCE:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT<br>CONFIGURE<br>MODE | TESTED CHANNEL | TESTED FREQUENCY<br>(MHZ) | MODULATION TYPE | AXIS |
|--------------------------|----------------|---------------------------|-----------------|------|
| A                        | 1              | 13.56                     | ASK             | X    |

**20dB BANDWIDTH:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT<br>CONFIGURE<br>MODE | TESTED CHANNEL | TESTED FREQUENCY<br>(MHZ) | MODULATION TYPE | AXIS |
|--------------------------|----------------|---------------------------|-----------------|------|
| A                        | 1              | 13.56                     | ASK             | X    |

**TEST CONDITION:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | TEST VOLTAGE<br>(SYSTEM) | TESTED BY |
|---------------|--------------------------|--------------------------|-----------|
| RE            | 21deg. C, 63%RH          | DC5V from Host Unit      | Roy       |
| FT            | 25deg. C, 60%RH          | DC5V from Host Unit      | Vincent   |
| PLC           | -                        | -                        | -         |
| BW            | 25deg. C, 60%RH          | DC5V from Host Unit      | Vincent   |

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. Section 15.225**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT         | BRAND | MODEL NO.   | SERIAL NO. | FCC ID |
|-----|-----------------|-------|-------------|------------|--------|
| 1   | DC Power Source | APC   | ADL-50V-30A | D31907J058 | N/A    |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | AC Line: unshielded, detachable 1.4m                |

## 4 TEST TYPES AND RESULTS

### 4.1. RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

The field strength of any emissions shall not exceed the following limits:

- (a) 15.848mV/m(84dBuV/m) at 30m, within the band 13.553-13.567 MHz;
- (b) 334uV/m(50.5dBuV/m) at 30m, within the band 13.410-13.553 MHz and 13.567-13.710MHz;
- (c) 106uV/m(40.5dBuV/m) at 30m, within the band 13.110-13.410 MHz and 13.710-14.010MHz;

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

#### 4.1.2 TEST INSTRUMENTS

##### 9KHz~30MHz

| Equipment           | Manufacturer  | Model No.            | Serial No. | Next Cal.   |
|---------------------|---------------|----------------------|------------|-------------|
| EMI Test Receiver   | Rohde&Schwarz | ESR7                 | 101564     | Jan. 02, 25 |
| Active Loop Antenna | SCHWARZBECK   | FMZB 1519B           | 1519B-045  | Apr. 13, 25 |
| Amplifier           | Burgeon       | BPA-530              | 100210     | Feb. 21 25  |
| Coaxial RF Cable    | /             | /                    | /          | Jun. 27, 25 |
| Test Software       | ADT           | ADT_Radiated_V8.7.07 | N/A        | N/A         |

**NOTE:** 1. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.

2. The test was performed in 10m Chamber

3. The FCC Site Registration No. is 749762.

##### 30MHz~1GHz

| Equipment                     | Manufacturer  | Model No.                 | Serial No. | Next Cal.   |
|-------------------------------|---------------|---------------------------|------------|-------------|
| EMI Test Receiver             | Rohde&Schwarz | ESU40                     | 100449     | Jan. 02, 25 |
| Trilog-Broadband Antenna      | SCHWARZBECK   | VULB 9168                 | 9168-554   | Dec. 25, 25 |
| Pre-Amplifier                 | Burgeon       | BPA-530                   | 100220     | Feb. 21, 25 |
| 3m Semi-anechoic Chamber      | Burgeon       | 9m*6m*6m                  | NSEMC003   | May. 20, 25 |
| Coaxial RF Cable(3m Below 1G) | /             | /                         | /          | Jun. 23, 25 |
| Test software                 | ADT           | ADT_Radiated_V 7.6.15.9.2 | N/A        | N/A         |

**NOTE:**

1. The test was performed in 966 Chamber (a 3m Semi-anechoic chamber).
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3x10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.
- g. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.

**NOTE:**


1. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz for peak detection (PK) at fundamental frequency below 1GHz; The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at radiated spurious emission frequency below 1GHz.
2.  $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
3.  $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$
4.  $\text{Margin value} = \text{Emission level} - \text{Limit value}$ .

#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.5 TEST SETUP

##### Below 30MHz test setup

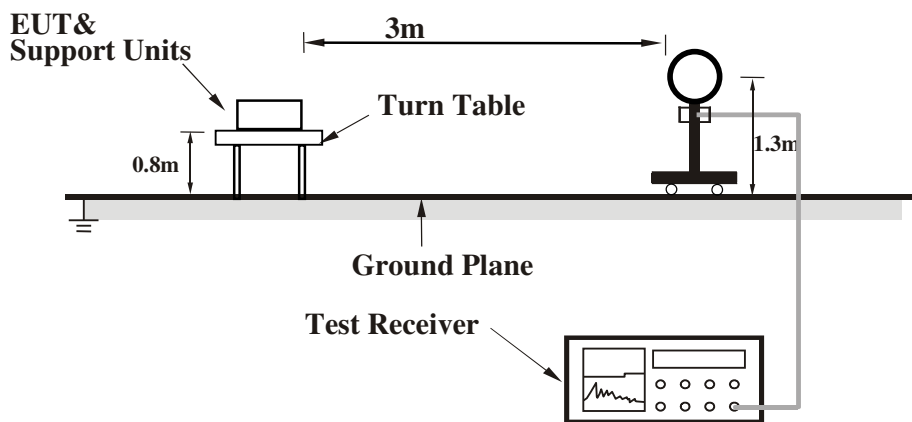

##### Below 1GHz test setup

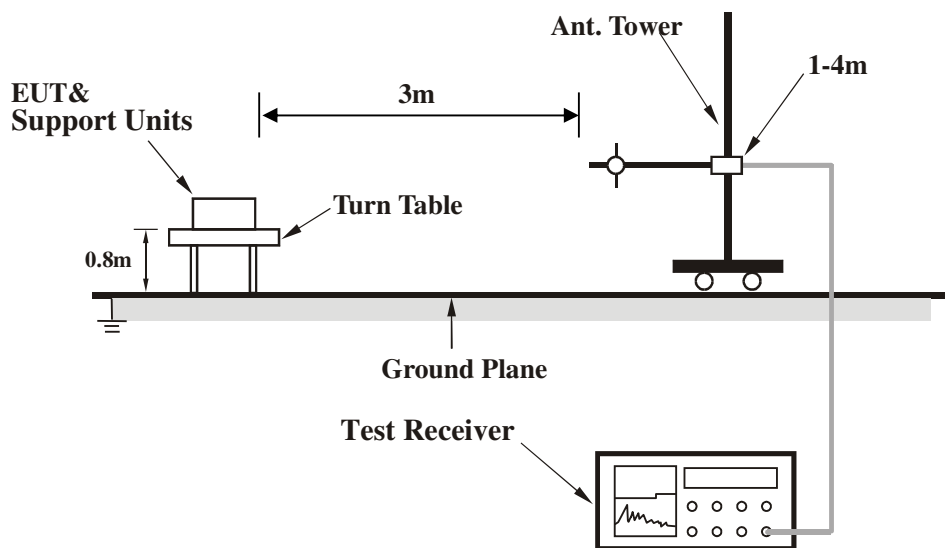

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS


Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 TEST RESULTS

##### FIELD STRENGTH (BELOW 30MHZ AT 3M)

| No. | Freq.<br>(MHz) | Correction<br>Factor<br>(dB/m) | Raw<br>Value<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Polarity      | Limit<br>(dBuV/m) | Margin<br>(dB) |
|-----|----------------|--------------------------------|------------------------|-------------------------------|---------------|-------------------|----------------|
| 1   | *13.56(QP)     | -10.71                         | 63.59                  | 52.88                         | parallel      | 124.0             | -71.12         |
| 2   | *13.56(QP)     | -10.71                         | 62.98                  | 52.27                         | perpendicular | 124.0             | -71.73         |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. All three antenna orientations(parallel, perpendicular, and ground-parallel) testing. But the worst orientation showed in report only.

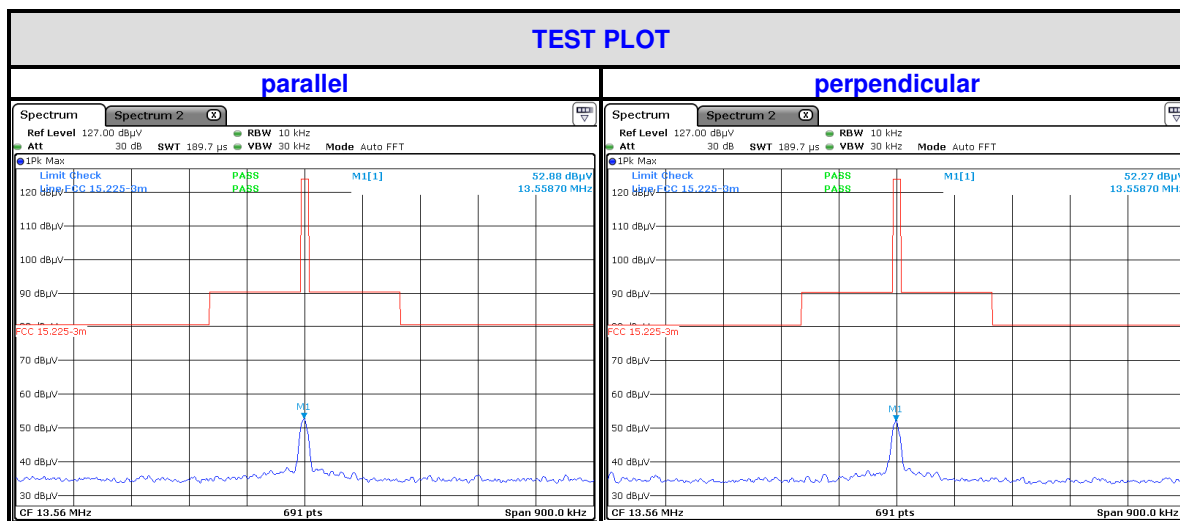

**BELOW 1GHz WORST-CASE DATA:**

|                        |             |                              |                 |
|------------------------|-------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | Channel 1   | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9KHz ~ 1GHz |                              |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 31.55          | 16.06 QP                      | 40.00             | -23.94         | 1.90 H                   | 26                         | 35.23                  | -19.17                         |
| 2                                                   | 174.57         | 14.71 QP                      | 43.50             | -28.79         | 1.74 H                   | 42                         | 32.57                  | -17.86                         |
| 3                                                   | 258.51         | 28.00 QP                      | 46.00             | -18.00         | 1.57 H                   | 59                         | 44.99                  | -16.99                         |
| 4                                                   | 267.84         | 27.62 QP                      | 46.00             | -18.38         | 1.07 H                   | 109                        | 44.25                  | -16.63                         |
| 5                                                   | 460.59         | 21.55 QP                      | 46.00             | -24.45         | 1.23 H                   | 93                         | 32.37                  | -10.82                         |
| 6                                                   | 496.35         | 23.58 QP                      | 46.00             | -22.42         | 1.38 H                   | 78                         | 33.76                  | -10.18                         |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 34.66          | 15.40 QP                      | 40.00             | -24.60         | 1.14 V                   | 43                         | 34.49                  | -19.09                         |
| 2                                                   | 151.25         | 12.72 QP                      | 43.50             | -30.78         | 1.88 V                   | 116                        | 29.34                  | -16.62                         |
| 3                                                   | 264.73         | 17.22 QP                      | 46.00             | -28.78         | 1.33 V                   | 62                         | 33.97                  | -16.75                         |
| 4                                                   | 328.46         | 16.42 QP                      | 46.00             | -29.58         | 1.99 V                   | 132                        | 31.14                  | -14.72                         |
| 5                                                   | 451.27         | 19.67 QP                      | 46.00             | -26.33         | 2.00 V                   | 147                        | 30.66                  | -10.99                         |
| 6                                                   | 620.71         | 22.80 QP                      | 46.00             | -23.20         | 2.00 V                   | 170                        | 30.44                  | -7.64                          |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

## 4.2. FREQUENCY TOLERANCE

### 4.2.1. LIMIT OF FREQUENCY TOLERANCE

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 4.2.2. TEST INSTRUMENTS

| Equipment                        | Manufacturer  | Model No.                     | Serial No.  | Next Cal.   |
|----------------------------------|---------------|-------------------------------|-------------|-------------|
| Power Sensor                     | Keysight      | U2021XA                       | MY57320002  | Apr. 07, 25 |
| Digital Multimeter               | FLUKE         | 15B                           | A1220010DG  | N/A         |
| Humid & Temp Programmable Tester | Haida         | HD-225T                       | 110807201   | Oct. 15, 25 |
| Oscilloscope                     | Agilent       | DSO9254A                      | MY51260160  | Jul. 07, 25 |
| Signal and Spectrum Analyzer     | Rohde&Schwarz | FSV40                         | 101094      | Jan. 01, 25 |
| Signal Generator                 | Agilent       | N5183A                        | MY50140980  | Jul. 11, 25 |
| MXG-B RF Vector Signal Generator | Keysight      | N5182B                        | MY56200288  | Jul. 11, 25 |
| BLUETOOTH TESTER                 | Rohde&Schwarz | CBT32                         | 100811      | N/A         |
| Attenuator                       | MINI          | BW-S10W2+                     | S130129FGE2 | N/A         |
| DC Source                        | Keysight      | E3642A                        | MY56146098  | N/A         |
| Test software                    | ADT           | ADT_RF Test Software V6.6.5.3 | N/A         | N/A         |

#### NOTE:

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.


#### 4.2.3. TEST PROCEDURES

- a) The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b) Turn the EUT on and couple its output to a spectrum analyzer.
- c) Turn the EUT off and set the chamber to the highest temperature specified.
- d) Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e) Repeat step c) and d) with the temperature chamber set to the lowest temperature.
- f) The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.2.4. DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5. TEST SETUP

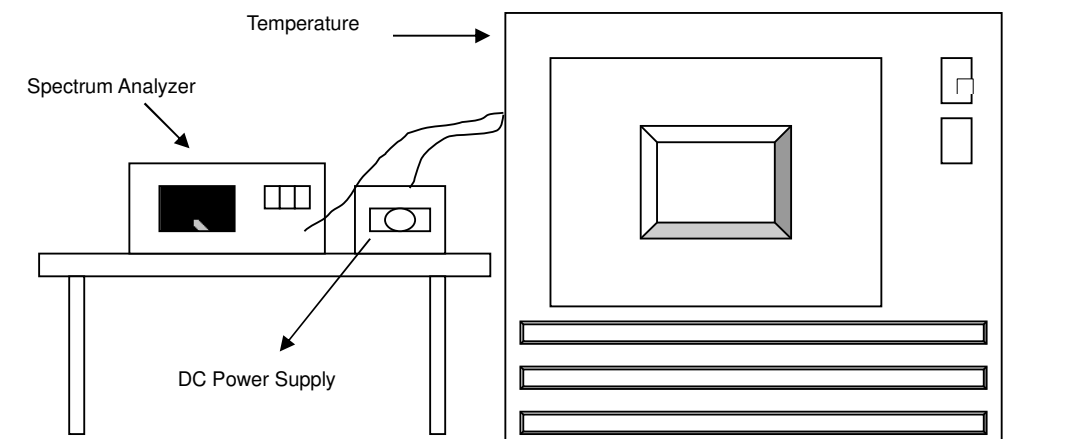

#### 4.2.6. EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.2.7. TEST RESULTS

| FREQUENCY STABILITY VERSUS TEMP. |                        |                       |                    |                       |                    |                       |                    |                       |                    |
|----------------------------------|------------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|
| TEMP.<br>(°C)                    | POWER<br>SUPPLY<br>(V) | 0 MINUTE              |                    | 2 MINUTE              |                    | 5 MINUTE              |                    | 10 MINUTE             |                    |
|                                  |                        | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift |
|                                  |                        | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  |
| 55                               | 3.7Vdc                 | 13.55925              | -0.006             | 13.55993              | -0.001             | 13.55993              | -0.001             | 13.55993              | -0.001             |
| 50                               | 3.7Vdc                 | 13.55986              | -0.001             | 13.55981              | -0.001             | 13.55979              | -0.002             | 13.55991              | -0.001             |
| 40                               | 3.7Vdc                 | 13.56035              | 0.003              | 13.56075              | 0.006              | 13.56063              | 0.005              | 13.56029              | 0.002              |
| 30                               | 3.7Vdc                 | 13.55976              | -0.002             | 13.55942              | -0.004             | 13.55974              | -0.002             | 13.55993              | -0.001             |
| 20                               | 3.7Vdc                 | 13.56073              | 0.005              | 13.56013              | 0.001              | 13.56039              | 0.003              | 13.56008              | 0.001              |
| 10                               | 3.7Vdc                 | 13.55987              | -0.001             | 13.55982              | -0.001             | 13.55991              | -0.001             | 13.55977              | -0.002             |
| 0                                | 3.7Vdc                 | 13.56035              | 0.003              | 13.56015              | 0.001              | 13.56014              | 0.001              | 13.56016              | 0.001              |
| -10                              | 3.7Vdc                 | 13.56022              | 0.002              | 13.56034              | 0.003              | 13.56022              | 0.002              | 13.56009              | 0.001              |
| -20                              | 3.7Vdc                 | 13.56028              | 0.002              | 13.56011              | 0.001              | 13.56028              | 0.002              | 13.56052              | 0.004              |

| FREQUENCY STABILITY VERSUS VOLTAGE |                        |                       |                    |                       |                    |                       |                    |                       |                    |
|------------------------------------|------------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------------|
| TEMP.<br>(°C)                      | POWER<br>SUPPLY<br>(V) | 0 MINUTE              |                    | 2 MINUTE              |                    | 5 MINUTE              |                    | 10 MINUTE             |                    |
|                                    |                        | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift | Measured<br>Frequency | Frequency<br>Drift |
|                                    |                        | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  | (MHz)                 | %                  |
| 20                                 | 3.7Vdc                 | 13.56073              | 0.005              | 13.56013              | 0.001              | 13.56039              | 0.003              | 13.56008              | 0.001              |
|                                    | 4.255Vdc               | 13.55991              | -0.001             | 13.55977              | -0.002             | 13.55975              | -0.002             | 13.55991              | -0.001             |
|                                    | 3.145Vdc               | 13.55987              | -0.001             | 13.55984              | -0.001             | 13.55991              | -0.001             | 13.55976              | -0.002             |

### 4.3. 20dB BANDWIDTH

#### 4.3.1 LIMITS OF 20dB BANDWIDTH

The 20dB bandwidth shall be specified in operating frequency band.(13.11MHz – 14.01MHz)

#### 4.3.2 TEST INSTRUMENTS

| Equipment                        | Manufacturer  | Model No.                     | Serial No.  | Next Cal.   |
|----------------------------------|---------------|-------------------------------|-------------|-------------|
| Power Sensor                     | Keysight      | U2021XA                       | MY57320002  | Apr. 07, 25 |
| Digital Multimeter               | FLUKE         | 15B                           | A1220010DG  | N/A         |
| Humid & Temp Programmable Tester | Haida         | HD-225T                       | 110807201   | Oct. 15, 25 |
| Oscilloscope                     | Agilent       | DSO9254A                      | MY51260160  | Jul. 07, 25 |
| Signal and Spectrum Analyzer     | Rohde&Schwarz | FSV40                         | 101094      | Jan. 01, 25 |
| Signal Generator                 | Agilent       | N5183A                        | MY50140980  | Jul. 11, 25 |
| MXG-B RF Vector Signal Generator | Keysight      | N5182B                        | MY56200288  | Jul. 11, 25 |
| BLUETOOTH TESTER                 | Rohde&Schwarz | CBT32                         | 100811      | N/A         |
| Attenuator                       | MINI          | BW-S10W2+                     | S130129FGE2 | N/A         |
| DC Source                        | Keysight      | E3642A                        | MY56146098  | N/A         |
| Test software                    | ADT           | ADT_RF Test Software V6.6.5.3 | N/A         | N/A         |

**NOTE:**

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.


#### 4.3.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP




#### 4.3.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously.

#### 4.3.7 TEST RESULTS

| CHANNEL | CHANNEL FREQUENCY (MHz) | 20dB BANDWIDTH (KHz) |
|---------|-------------------------|----------------------|
| 1       | 13.56                   | 25.040               |

| Lower & Upper Test Frequency Point (MHz) | Test Frequency (MHz) | P/F  |
|------------------------------------------|----------------------|------|
| Lower                                    | 13.5461              | PASS |
| Upper                                    | 13.5711              | PASS |

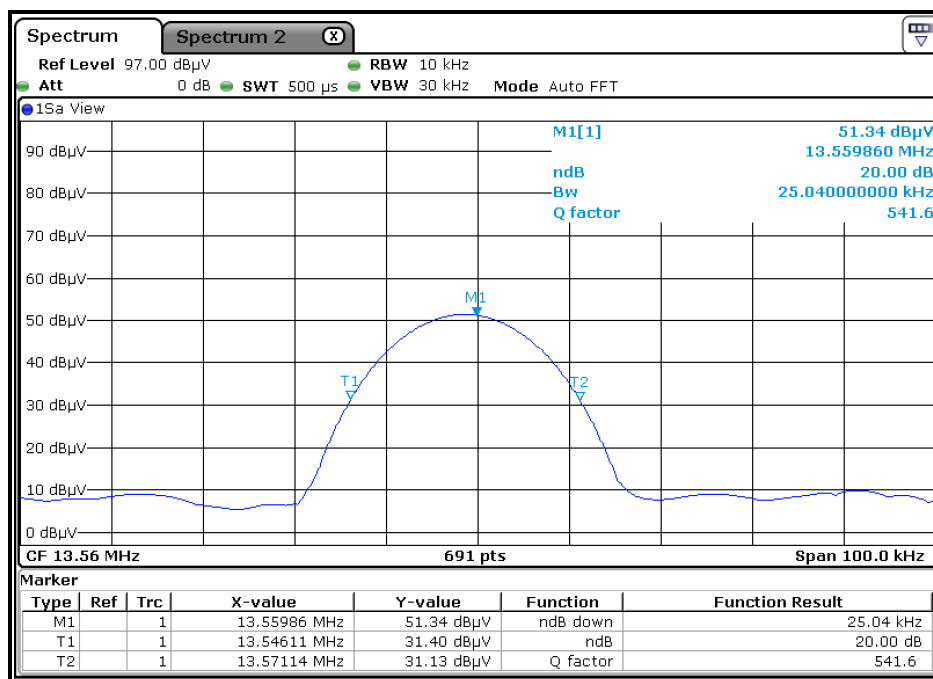



Test Report No.: RF2409WDG0225-2

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2409WDG0225-2

## 6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---