



TEST REPORT

Applicant: Arad Connectivity Co., Ltd.
Address: 5F.-1, No. 63, Sec. 1, Hangzhou S. Rd.,
Zhongzheng Dist., Taipei City 100022, Taiwan
(R.O.C.)
Equipment Type: MN52H series
Model Name: MN52H
Brand Name: Aradconn
FCC ID: 2BLIDMN52H
ISED Number: 33328-MN52H
Test Standard: 47 CFR Part 15 Subpart B
ICES-003 (Issue 7, October 2020)
ANSI C63.4-2014
Sample Arrival Date: Mar. 06, 2025
Test Date: Mar. 06, 2025 - Mar.07, 2025
Date of Issue: Apr. 17, 2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center



Prepared by: Chai Yong

Reviewed by: Huang Chengkun

Approved by: Chen Zidong
(Technical Director)

Chai Yong

Huang Chengkun

Chen Zidong

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 17, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	3
1.1 Test Laboratory	3
1.2 Test Location	3
2 PRODUCT INFORMATION	4
2.1 Applicant Information	4
2.2 Manufacturer Information	4
2.3 General Description for Equipment under Test (EUT)	4
2.4 Ancillary Equipment	5
2.5 Technical Information	5
3 SUMMARY OF TEST RESULTS	6
3.1 Test Standards	6
3.2 Verdict	6
3.3 Decision Rule	6
3.4 Test Uncertainty	6
4 GENERAL TEST CONFIGURATIONS	7
4.1 Test Enclosure List	7
4.2 Test Configurations	7
4.3 Test Setups	8
5 TEST ITEMS	10
5.1 Emission Tests	10
5.1.1 Radiated emission	10
5.1.2 Conducted emission	13
ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST	14
A.1 Radiated emission	14
A.2 Conducted emission	21

ANNEX B TEST SETUP PHOTOS	24
ANNEX C EUT EXTERNAL PHOTOS	24
ANNEX D EUT INTERNAL PHOTOS	24

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are CN0142.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Arad Connectivity Co., Ltd.
Address	5F.-1, No. 63, Sec. 1, Hangzhou S. Rd., Zhongzheng Dist., Taipei City 100022 , Taiwan (R.O.C.)

2.2 Manufacturer Information

Manufacturer	Arad Connectivity Co., Ltd.
Address	5F.-1, No. 63, Sec. 1, Hangzhou S. Rd., Zhongzheng Dist., Taipei City 100022 , Taiwan (R.O.C.)

2.3 General Description for Equipment under Test (EUT)

Equipment Type	MN52H series		
Model Name Under Test	MN52H		
Series Model Name	N/A		
Description of Model Name Differentiation	N/A		
Hardware Version	N/A		
Software Version	N/A		
Dimensions (Approx.)	N/A		
Weight (Approx.)	N/A		
Antenna Information	Antenna type	Manufacturer	Antenna peak gain(dBi)
	PCB	Pluse Electronics	2.2
	PCB	Pluse Electronics	3.3
	Dipole	Pluse Electronics	2
	PCB	Arad Connectivity Co., Ltd.	0.8
	Ceramics	Arad Connectivity Co., Ltd.	1.05
	Note :The product MN52H is equipped with above antenna. All Antenna are tested, only the worst data of Ceramics Antenna shown in this report.		

2.4 Ancillary Equipment

Note: Not applicable.

2.5 Technical Information

Network and wireless connectivity	Bluetooth
Classification of equipment	Class B
Highest frequency generated or used in the device or on which the device operates or tunes(MHz)	2483.5 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 (Issue 7, October 2020)	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	Pass	--

3.3 Decision Rule

- ☐ No Need
- ☒ Use General conformity decision rule (Consider uncertainty or not ☒ No ☐ Yes)
- ☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐ No ☐ Yes)

3.4 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (150 kHz-30 MHz)-AMN	2.6 dB
Radiated emissions (30 MHz-1 GHz)-966#1	4.2 dB
Radiated emissions (1 GHz-18 GHz) -966#1	5.3 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	DELL	Vostro14-3400	N/A	N/A	N/A	☒
USB Cable	N/A	N/A	N/A	0.8 m	N/A	☒


4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Full System Test Mode</u> EUT + Laptop + USB Cable

4.3 Test Setups


Test Setup 1

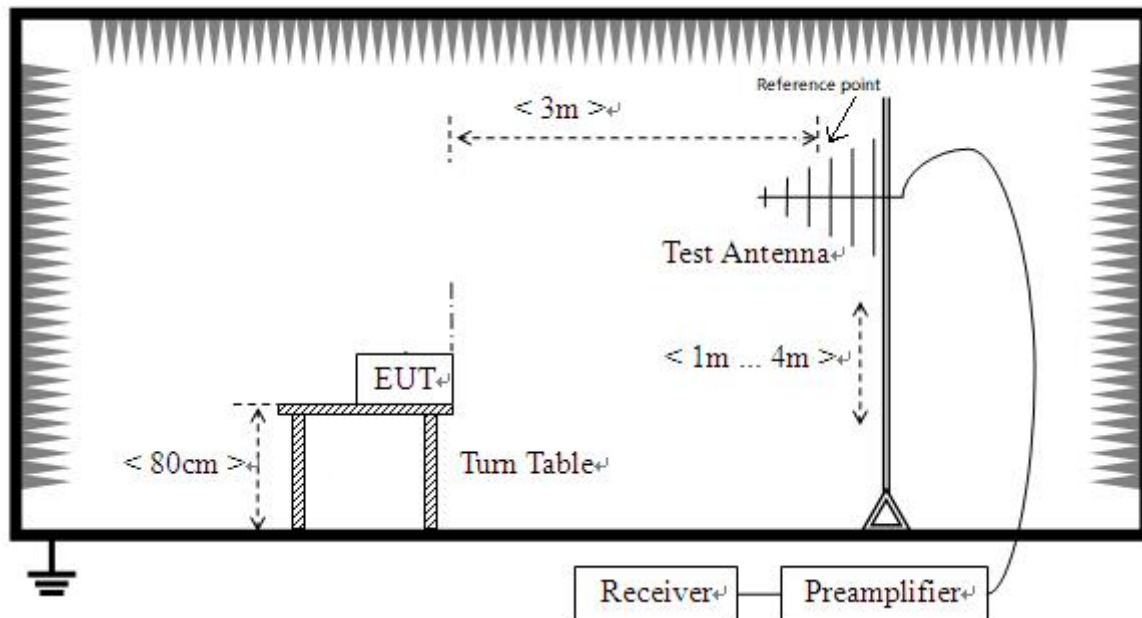

Radiated Emission (30 MHz-1 GHz)

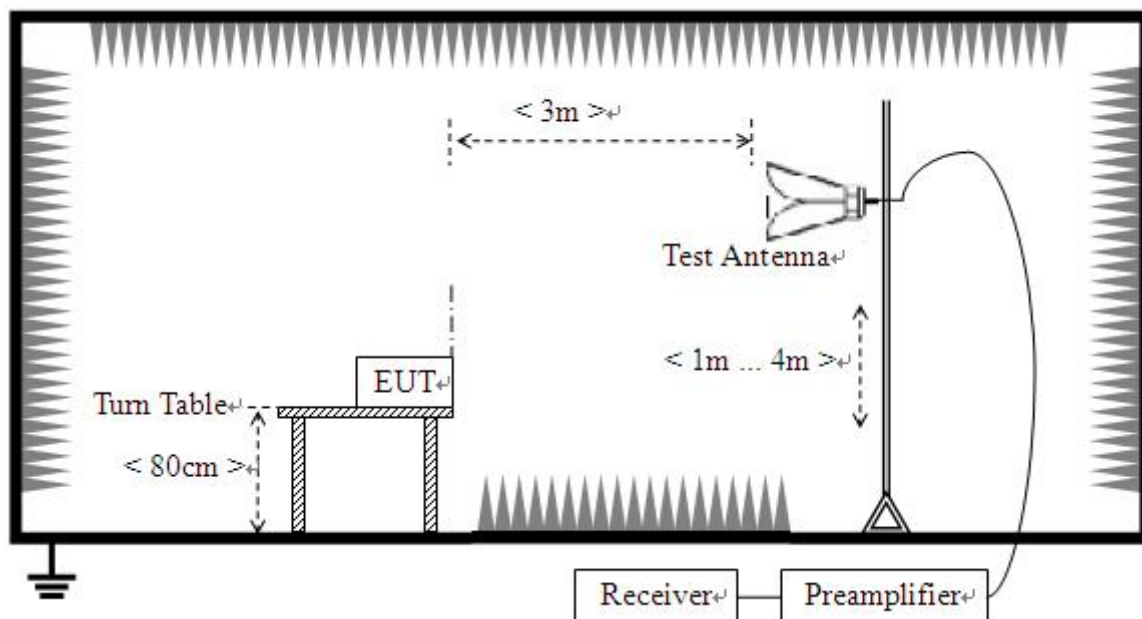

Radiated Emission (above 1 GHz)

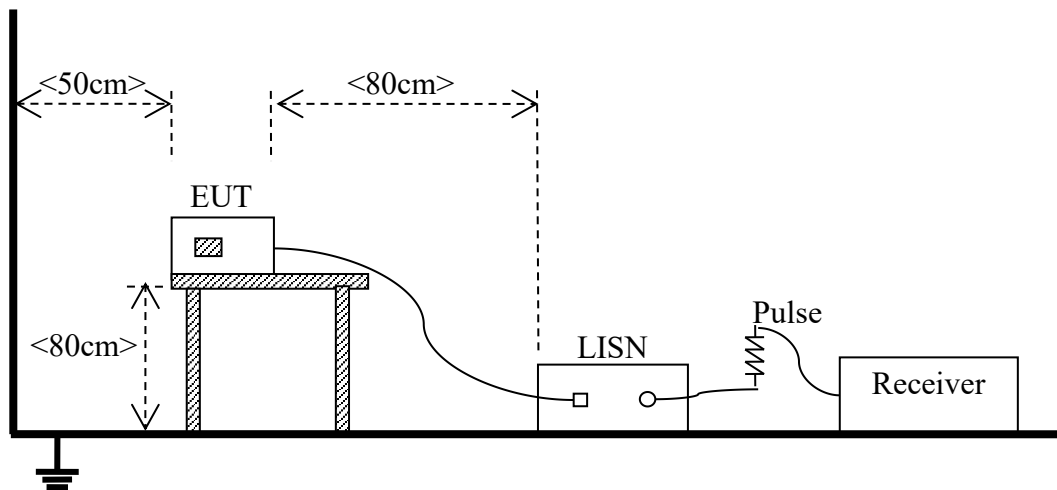Test Setup 2

Conducted emission, AC ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

Note:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4-2014.
- 4) For 30-1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

ISED:

Frequency range (MHz)	Class A (at 3 m) Quasi-peak (dB μ V/m)	Class B (at 3 m) Quasi-peak (dB μ V/m)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960 - 1000	60.0	54.0
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m) Average (dB μ V/m)	Class A (3 m) Peak (dB μ V/m)	Class B (3 m) Average (dB μ V/m)	Class B (3 m) Peak (dB μ V/m)
1 - F_M	60	80	54	74
Note: 1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table. 2. The measurement bandwidth shall be 1 MHz or greater. 3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test. 4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test				

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ up to a maximum of 40 GHz
Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

5.1.1.2 Test setup

Please refer to 4.2 section description of test setup of test setup 1. The photo of test setup please refer to ANNEX B.

5.1.1.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
3. An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.
4. The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.
5. Use the following spectrum analyzer settings:
 Span = wide enough to fully capture the emission being measured
 RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$
 VBW $\geq$ RBW
 Sweep = auto
 Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$
 Trace = max hold

5.1.1.4 Test result and test equipment list

Please refer to ANNEX A.1.

Note:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)
3. Margin = Limit – Results

5.1.2 Conducted emission

5.1.2.1 Limit

Frequency range (MHz)	Class A		Class B	
	Quasi-peak (dBμV)	Average (dBμV)	Quasi-peak (dBμV)	Average (dBμV)
0.15 - 0.50	79	66	66 to 56	56 to 46
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Note:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test setup

Please refer to 4.2 section description of test setup of test setup 2. The photo of test setup please refer to ANNEX B.

5.1.2.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. The EUT is connected to the power mains through a LISN which provides 50 Ω/50 μH of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
3. Use the following spectrum analyzer settings:
 RBW = 9 kHz
 VBW ≥ RBW
 Sweep = 10ms
 Detector function = Peak & Average
 Trace = max hold

5.1.2.4 Test result and test equipment list

Please refer to ANNEX A.2.

Note:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST

A.1 Radiated emission

Note 1: Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30 MHz to 1000 MHz. To reduce the testing time, a peak measuring receiver may be used instead of a quasi-peak measuring receiver. In case of dispute, measurement with a quasi-peak measuring receiver will take precedence.

Note 2: The FCC limit is stricter than the IC and only reflects FCC Radiated Emission test data.


Note 3: When the EUT is on, it will automatically emit Bluetooth signal and cannot be turned off. So the marked spikes near 2400 MHz with circle should be ignored because they are Bluetooth carrier frequencies, the marked spikes near 4800 MHz and 7200 MHz with circle should be ignored because they are Bluetooth harmonic frequencies.

Sample No.	SC-SZ2520840-S02	Temperature	21.5°C
Humidity	52%RH	Test Voltage	DC 3.3V From PC
Test Engineer	Hao Longda	Test Date	2025.03.06

Test Mode 1

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

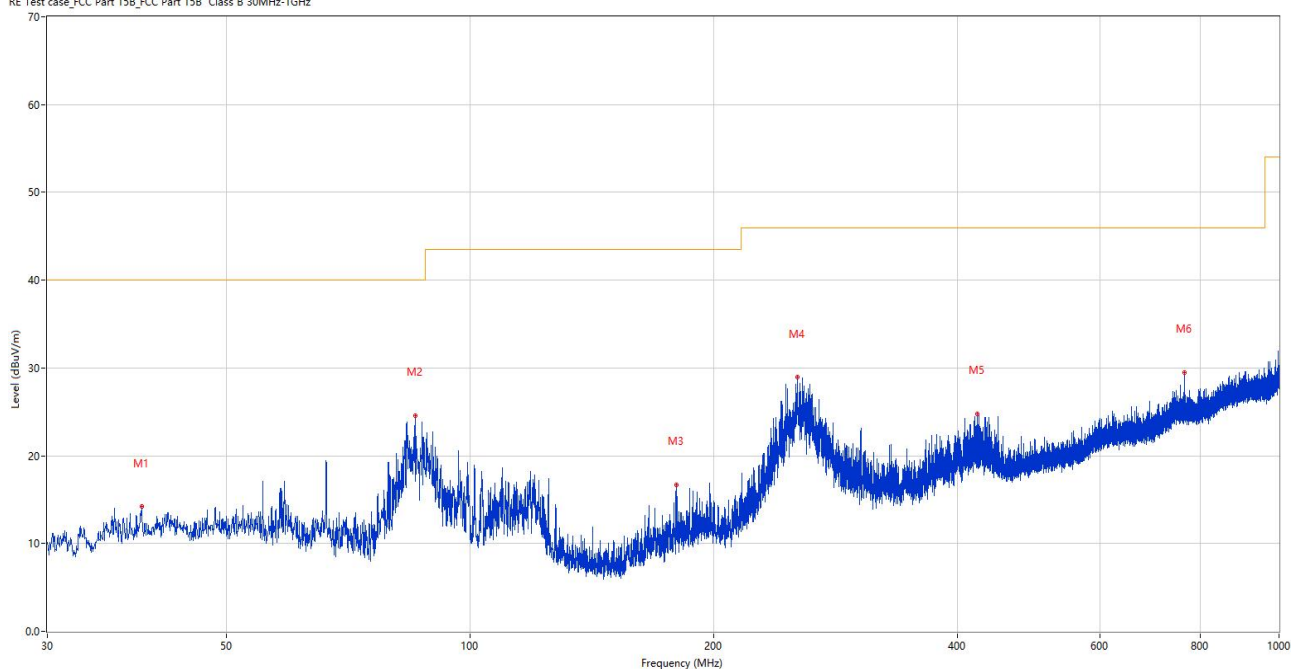

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.215	14.18	-26.29	40.0	25.82	Peak	360.00	100	Vertical	Pass
2	85.436	24.53	-29.78	40.0	15.47	Peak	105.00	100	Vertical	Pass
3	179.671	16.72	-28.08	43.5	26.78	Peak	344.00	100	Vertical	Pass
4	253.779	28.91	-24.36	46.0	17.09	Peak	353.00	200	Vertical	Pass
5	423.238	24.79	-20.26	46.0	21.21	Peak	160.00	100	Vertical	Pass
6	763.417	29.51	-12.65	46.0	16.49	Peak	68.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

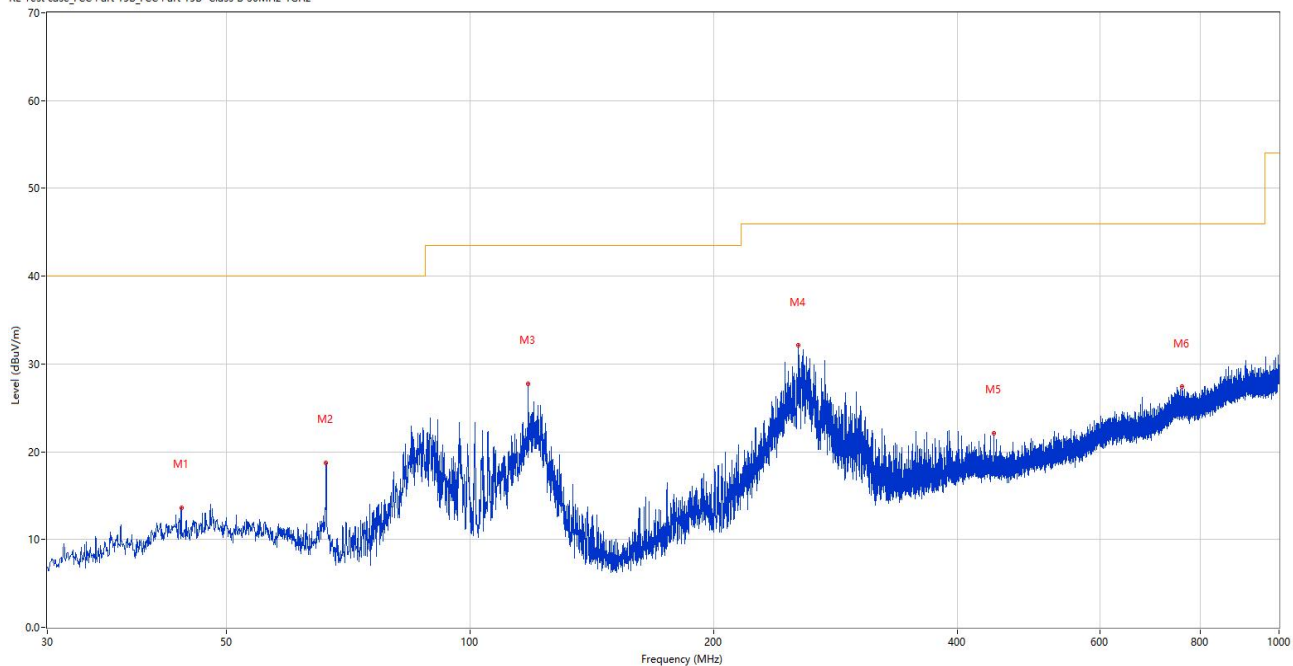

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.919	13.60	-25.04	40.0	26.40	Peak	342.00	200	Horizontal	Pass
2	66.326	18.74	-27.91	40.0	21.26	Peak	203.00	200	Horizontal	Pass
3	117.930	27.73	-28.00	43.5	15.77	Peak	196.00	200	Horizontal	Pass
4	254.506	32.09	-24.40	46.0	13.91	Peak	102.00	100	Horizontal	Pass
5	443.656	22.06	-20.00	46.0	23.94	Peak	286.00	100	Horizontal	Pass
6	758.858	27.39	-12.62	46.0	18.61	Peak	28.00	200	Horizontal	Pass


Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11	☒
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9163	BH-EMC-L132	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

Sample No.	SC-SZ2520840-S02	Temperature	21.5°C
Humidity	52%RH	Test Voltage	DC 3.3V From PC
Test Engineer	Hao Longda	Test Date	2025.03.06

Test Mode 1

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz


RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

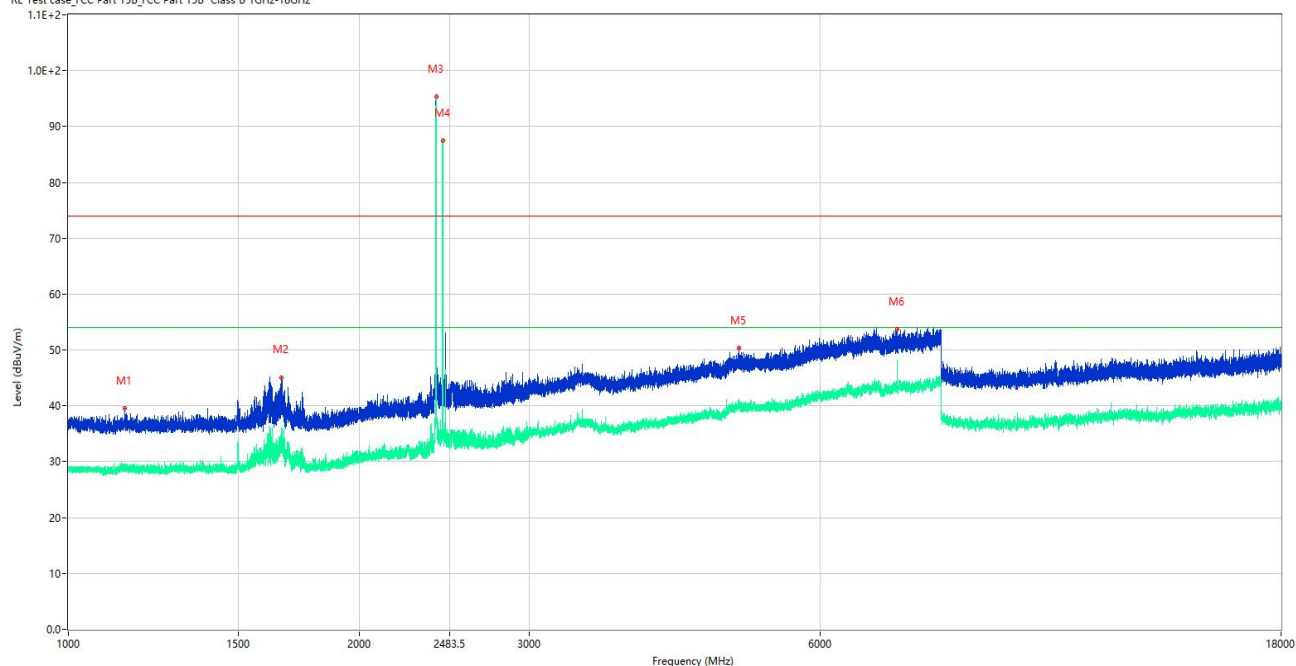

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1143.500	39.52	-15.60	74.0	34.48	Peak	360.00	100	Vertical	Pass
1**	1143.500	28.87	-15.60	54.0	25.13	AV	360.00	100	Vertical	Pass
2	1661.900	45.01	-16.23	74.0	28.99	Peak	360.00	100	Vertical	Pass
2**	1661.900	33.84	-16.23	54.0	20.16	AV	360.00	100	Vertical	Pass
3	2401.900	95.30	-12.74	74.0	-21.30	Peak	134.00	100	Vertical	N/A
3**	2401.900	94.88	-12.74	54.0	-40.88	AV	134.00	100	Vertical	N/A
4	2440.100	87.52	-12.37	74.0	-13.52	Peak	328.00	100	Vertical	N/A
4**	2440.100	87.54	-12.37	54.0	-33.54	AV	328.00	100	Vertical	N/A
5	4943.000	50.30	-1.75	74.0	23.70	Peak	148.00	100	Vertical	Pass
5**	4943.000	41.17	-1.75	54.0	12.83	AV	148.00	100	Vertical	Pass
6	7205.750	53.73	0.80	74.0	20.27	Peak	300.00	100	Vertical	N/A
6**	7205.750	46.20	0.80	54.0	7.80	AV	300.00	100	Vertical	N/A

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

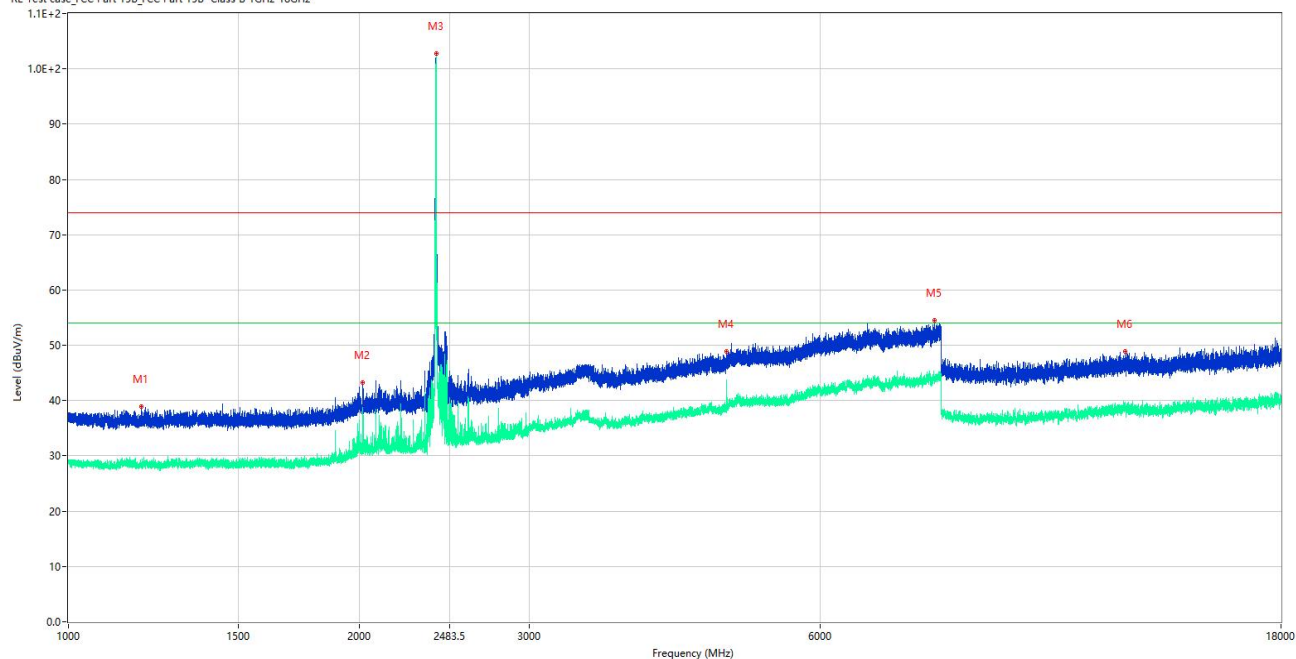

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1190.700	38.87	-15.83	74.0	35.13	Peak	347.00	100	Horizontal	Pass
1**	1190.700	28.20	-15.83	54.0	25.80	AV	347.00	100	Horizontal	Pass
2	2017.900	43.30	-14.19	74.0	30.70	Peak	236.00	100	Horizontal	Pass
2**	2017.900	38.28	-14.19	54.0	15.72	AV	236.00	100	Horizontal	Pass
3	2402.000	102.69	-12.73	74.0	-28.69	Peak	256.00	100	Horizontal	N/A
3**	2402.000	102.20	-12.73	54.0	-48.20	AV	256.00	100	Horizontal	N/A
4	4804.500	48.86	-2.68	74.0	25.14	Peak	262.00	100	Horizontal	N/A
4**	4804.500	42.76	-2.68	54.0	11.24	AV	262.00	100	Horizontal	N/A
5	7874.500	54.58	1.72	74.0	19.42	Peak	46.00	100	Horizontal	Pass
5**	7874.500	44.35	1.72	54.0	9.65	AV	46.00	100	Horizontal	Pass
6	12407.500	48.95	-2.53	74.0	25.05	Peak	360.00	100	Horizontal	Pass
6**	12407.500	38.35	-2.53	54.0	15.65	AV	360.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	BH-EMC-L111	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒


A.2 Conducted emission

Sample No.	SC-SZ2520840-S02	Temperature	22.8°C
Humidity	47%RH	Test Voltage	DC 3.3V From PC
Test Engineer	Wu Dejun	Test Date	2025.03.07

Test Mode 1


A.2.1 AC ports - L Phase

CE Test case_FCC_CE_FCC PART 15B_Class B

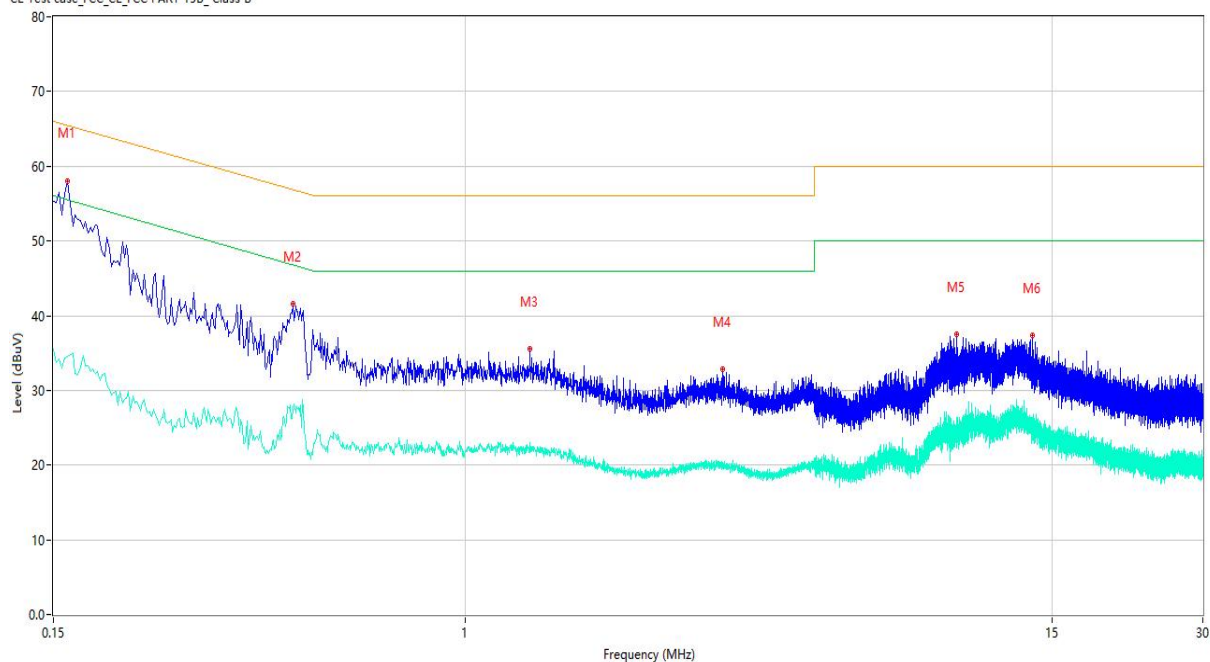

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	58.04	9.75	65.46	7.42	Peak	L	Pass
1**	0.160	34.55	9.75	55.46	20.91	AV	L	Pass
2	0.452	41.57	9.74	56.84	15.27	Peak	L	Pass
2**	0.452	27.60	9.74	46.84	19.24	AV	L	Pass
3	1.348	35.49	9.70	56.00	20.51	Peak	L	Pass
3**	1.348	21.83	9.70	46.00	24.17	AV	L	Pass
4	3.278	32.78	9.66	56.00	23.22	Peak	L	Pass
4**	3.278	19.81	9.66	46.00	26.19	AV	L	Pass
5	9.658	37.49	9.49	60.00	22.51	Peak	L	Pass
5**	9.658	25.05	9.49	50.00	24.95	AV	L	Pass
6	13.658	37.41	9.31	60.00	22.59	Peak	L	Pass
6**	13.658	25.74	9.31	50.00	24.26	AV	L	Pass

A.2.2 AC ports - N Phase

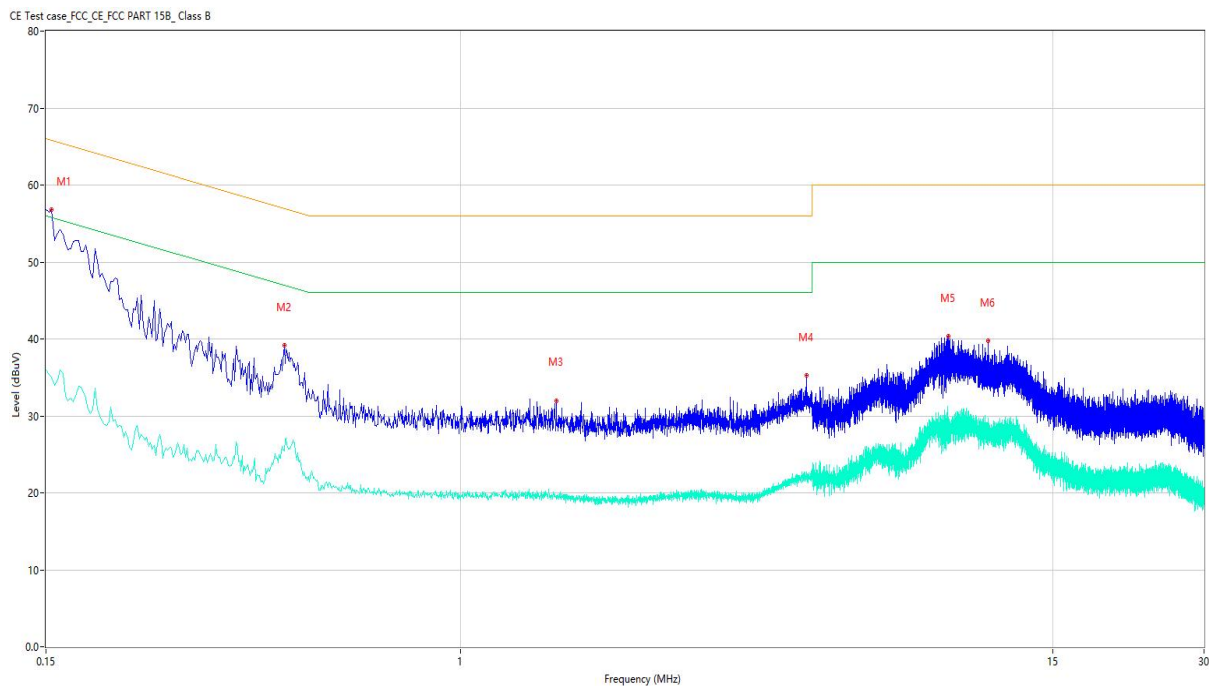

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	56.85	9.70	65.78	8.93	Peak	N	Pass
1**	0.154	35.00	9.70	55.78	20.78	AV	N	Pass
2	0.446	39.13	9.79	56.95	17.82	Peak	N	Pass
2**	0.446	25.44	9.79	46.95	21.51	AV	N	Pass
3	1.550	31.99	9.87	56.00	24.01	Peak	N	Pass
3**	1.550	19.66	9.87	46.00	26.34	AV	N	Pass
4	4.870	35.25	9.82	56.00	20.75	Peak	N	Pass
4**	4.870	22.16	9.82	46.00	23.84	AV	N	Pass
5	9.320	40.39	9.75	60.00	19.61	Peak	N	Pass
5**	9.320	29.79	9.75	50.00	20.21	AV	N	Pass
6	11.172	39.72	9.68	60.00	20.28	Peak	N	Pass
6**	11.172	29.20	9.68	50.00	20.80	AV	N	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	TJEMC144	2024.04.06	2025.04.05	☒
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2025.02.11	2026.02.10	☒
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2025.02.11	2026.02.10	☒
Shielded Room	YiHeng	4.1m*4.0m *3.2m	BH-EMC-L006	2024.02.22	2027.02.21	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH2530192-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH2530192-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH2530192-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--