

Product Name: AC1200 Gigabit Whole Home Mesh WiFi System	Report No: ITEZA2-202400362RF1
Product Model: Please refer to the Page 6 model list	Security Classification: Open
Version: V1.0	Total Page:102

## TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
Aaron Long	Stone Tang	Joky Wang	

# FCC Radio Test Report

**FCC ID: 2BLJV-R-W52410**

According to

**47 CFR FCC Part 15, Subpart C(Section 15.247)**

**ANSI C63.10:2013**

Applicant:	Shenzhen Dbit Network Equipment Co., Ltd
Address:	4002, Phase II, Qianhai Shimao Financial Center, No. 3040 Xinghai Avenue, Nanshan Street, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China
Manufacturer:	Shenzhen Dbit Network Equipment Co., Ltd
Address:	4002, Phase II, Qianhai Shimao Financial Center, No. 3040 Xinghai Avenue, Nanshan Street, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, China
Factory:	Micronet Union Technology (Chengdu) Co., Ltd
Address:	No.2068, Aviation Kechuang Avenue, Hi-Tech Industrial Park, Xindu District, Chengdu, China
Sample No.:	1000035553
Product Name:	AC1200 Gigabit Whole Home Mesh WiFi System
Brand Name:	N/A
Model No.:	Please refer to the Page 6 model list
Test No.:	D-MAC3

Date of Receipt:	2024/10/22
Date of Test:	2024/10/22~2024/12/18
Issued Date:	2024/12/18
Testing Lab:	TIRT

**Note:** This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>5</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
<b>2 . GENERAL INFORMATION</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	10
2.3 DUTY CYCLE	11
2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	20
2.5 SUPPORT UNITS	20
<b>3 .AC POWER LINE CONDUCTED EMISSIONS</b>	<b>21</b>
3.1 LIMIT	21
3.2 TEST PROCEDURE	21
3.3 DEVIATIONFROMTESTSTANDARD	21
3.4 TESTSETUP	22
3.5 EUT OPERATION CONDITIONS	22
3.6 TEST RESULTS	22
<b>4 . RADIATED EMISSIONS</b>	<b>23</b>
4.1 LIMIT	23
4.2 TEST PROCEDURE	24
4.3 DEVIATIONFROMTESTSTANDARD	25
4.4 TESTSETUP	25
4.5 EUT OPERATIONCONDITIONS	27
4.6 TEST RESULTS - 9 KHZ TO 30MHZ	27
4.7 TEST RESULTS - 30 MHZTO 1000MHZ	27
4.8 TEST RESULTS- ABOVE 1000MHZ	27
<b>5 .BANDWIDTH</b>	<b>28</b>
5.1 LIMIT	28
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM STANDARD	28
5.4 TEST SETUP	28
5.5 EUT OPERATION CONDITIONS	28
5.6 TESTRESULTS	28

Table of Contents	Page
<b>6 .MAXIMUM OUTPUT POWER</b>	<b>29</b>
6.1 LIMIT	29
6.2 TEST PROCEDURE	29
6.3 DEVIATION FROM STANDARD	29
6.4 TEST SETUP	29
6.5 EUT OPERATION CONDITIONS	29
6.6 TESTRESULTS	29
<b>7 .CONDUCTED SPURIOUS EMISSIONS</b>	<b>30</b>
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 DEVIATION FROM STANDARD	30
7.4 TEST SETUP	30
7.5 EUT OPERATION CONDITIONS	30
7.6 TESTRESULTS	30
<b>8 .POWER SPECTRAL DENSITY</b>	<b>31</b>
8.1 LIMIT	31
8.2 TEST PROCEDURE	31
8.3 DEVIATION FROM STANDARD	31
8.4 TEST SETUP	31
8.5 EUT OPERATION CONDITIONS	31
8.6 TESTRESULTS	31
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>32</b>
<b>10 .EUT TEST PHOTO</b>	<b>33</b>
<b>11. PHOTOS OF EUT</b>	<b>35</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>41</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>	<b>43</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>44</b>
<b>APPENDIXD -RADIATED EMISSION- ABOVE 1000MHZ</b>	<b>46</b>
<b>APPENDIXE - BANDWIDTH</b>	<b>50</b>
<b>APPENDIXF - MAXIMUMOUTPUT POWER</b>	<b>59</b>
<b>APPENDIXG - CONDUCTED SPURIOUS EMISSIONS</b>	<b>60</b>
<b>APPENDIXH - POWER SPECTRAL DENSITY</b>	<b>94</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
ITEZA2-202400362RF1	V1.0	OriginalReport.	2024.12.18	Valid

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

**Model List**

D-MAC1, D-MAC2, D-MAC3, D-MAC4, D-MAC5, D-MAC6, D-MAC7, D-MAC8, D-MAC9, D-MAC10, D-MAC11, D-MAC12, D-MAC13, D-MAC14, D-MAC15, D-MAC16, D-MAC17, D-MAC18, D-MAC19, D-MAC20, D-MAC21, D-MAC22, D-MAC23, D-MAC24, D-MAC25, D-MAC26, D-MAC27, D-MAC28, D-MAC29, D-MAC30, D-MAC31, D-MAC32, D-MAC33, D-MAC34, D-MAC35, D-MAC36, D-MAC37, D-MAC38, D-MAC39, D-MAC40, D-MAC41, D-MAC42, D-MAC43, D-MAC44, D-MAC45, D-MAC46, D-MAC47, D-MAC48, D-MAC49, D-MAC50

## 1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))  
The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz~18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temprature	±0.7°C
Time	±1.2%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

**1.3 TEST ENVIRONMENT CONDITIONS**

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Radiated Emissions-9kHz to 30 MHz	24.5°C	50%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Radiated Emissions-Above 1000MHz	26.0°C	53%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Bandwidth	25.0°C	56%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Maximum Output Power	24.9°C	54%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Conducted Spurious Emissions	25.1°C	62%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang
Power Spectral Density	26.0°C	60%	DC 12V from SWITCHING POWER ADAPTER	Stone Tang

**2. GENERAL INFORMATION****2.1 GENERAL DESCRIPTION OF EUT**

Equipment	AC1200 Gigabit Whole Home Mesh WiFi System
Brand Name	N/A
Test Model	D-MAC3
Series Model	Please refer to the Page 6 model list
Model Difference(s)	There is no difference except the structural housing of the model. All tests are made with the D-MAC3 model.
Software Version	V1.0.0
Hardware Version	V1.0
Power Rating	DC 12V from SWITCHING POWER ADAPTER
Operation Frequency	2412 MHz~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Maximum Output Average Power	IEEE 802.11b Ant1: 16.17dBm (0.041400W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

**2. Channel List:**

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

**3. Antenna Specification:**

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	Dongguan ivy technology co.,LTD.	D-MAC3	FPC	N/A	4.85
2	Dongguan ivy technology co.,LTD.	D-MAC3	FPC	N/A	4.85

Note:

1. The antenna gain is provided by the manufacturer.
2. The antenna is for testing purposes only.
3. The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports.  
(First measure the power (mW) of each antenna separately, and the total power is equal to Ant1mW + Ant2mW+....)

**2.2 DESCRIPTION OF TEST MODES**

Keeping TX			
Mode	Data rate (Mbps)	Channel	Frequency(MHz)
IEEE 802.11 b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11 g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13.5	Low :CH1	2422
	13.5	Middle:CH4	2437
	13.5	High:CH7	2452




Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.


**NOTE:**




- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~18GHz and 18GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.


**2.3 DUTY CYCLE**




TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	8.38	8.42	99.52
	Ant2	2412	8.38	8.41	99.64
	Ant1	2437	8.39	8.42	99.64
	Ant2	2437	8.39	8.41	99.76
	Ant1	2462	8.38	8.42	99.52
	Ant2	2462	8.39	8.41	99.76
11G	Ant1	2412	1.39	1.43	97.20
	Ant2	2412	1.39	1.43	97.20
	Ant1	2437	1.40	1.43	97.90
	Ant2	2437	1.39	1.43	97.20
	Ant1	2462	1.39	1.43	97.20
	Ant2	2462	1.39	1.42	97.89
11N20MIMO	Ant1	2412	1.30	1.33	97.74
	Ant2	2412	1.30	1.33	97.74
	Ant1	2437	1.30	1.34	97.01
	Ant2	2437	1.30	1.34	97.01
	Ant1	2462	1.30	1.34	97.01
	Ant2	2462	1.30	1.34	97.01
11N40MIMO	Ant1	2422	0.65	0.68	95.59
	Ant2	2422	0.65	0.68	95.59
	Ant1	2437	0.64	0.68	94.12
	Ant2	2437	0.65	0.69	94.20
	Ant1	2452	0.65	0.69	94.20
	Ant2	2452	0.64	0.68	94.12

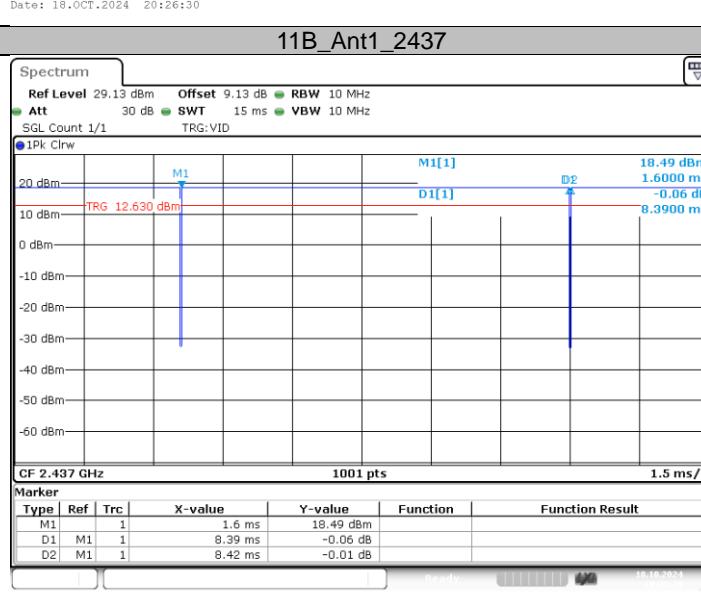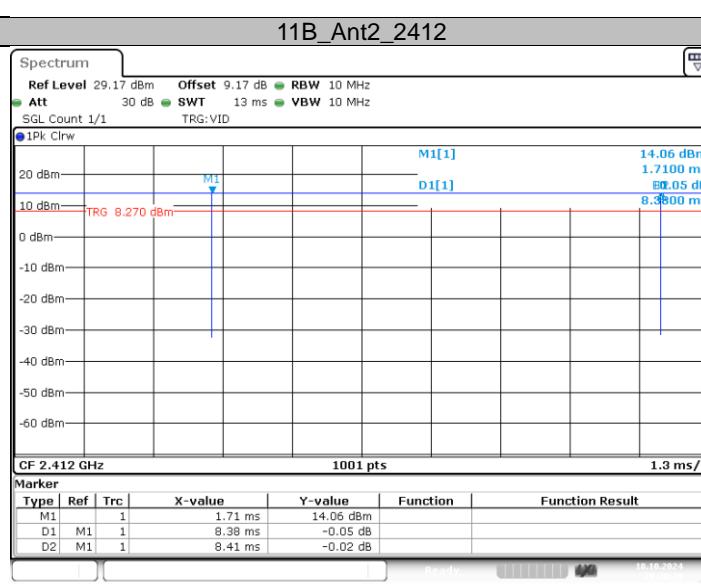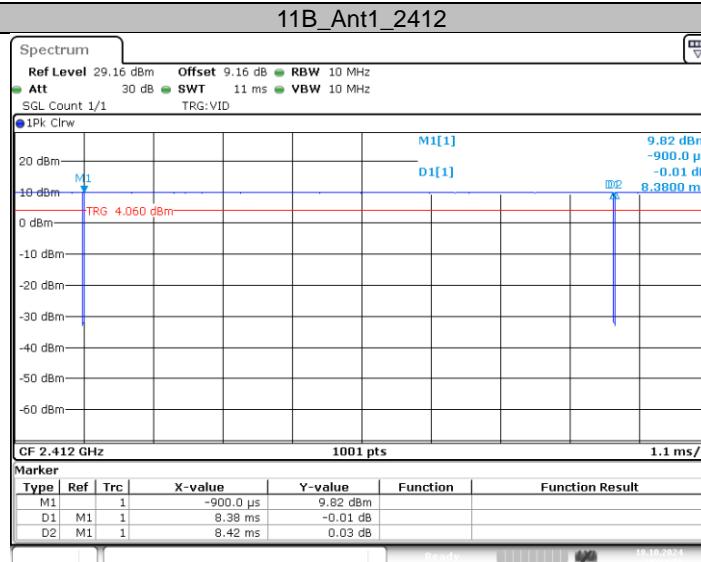




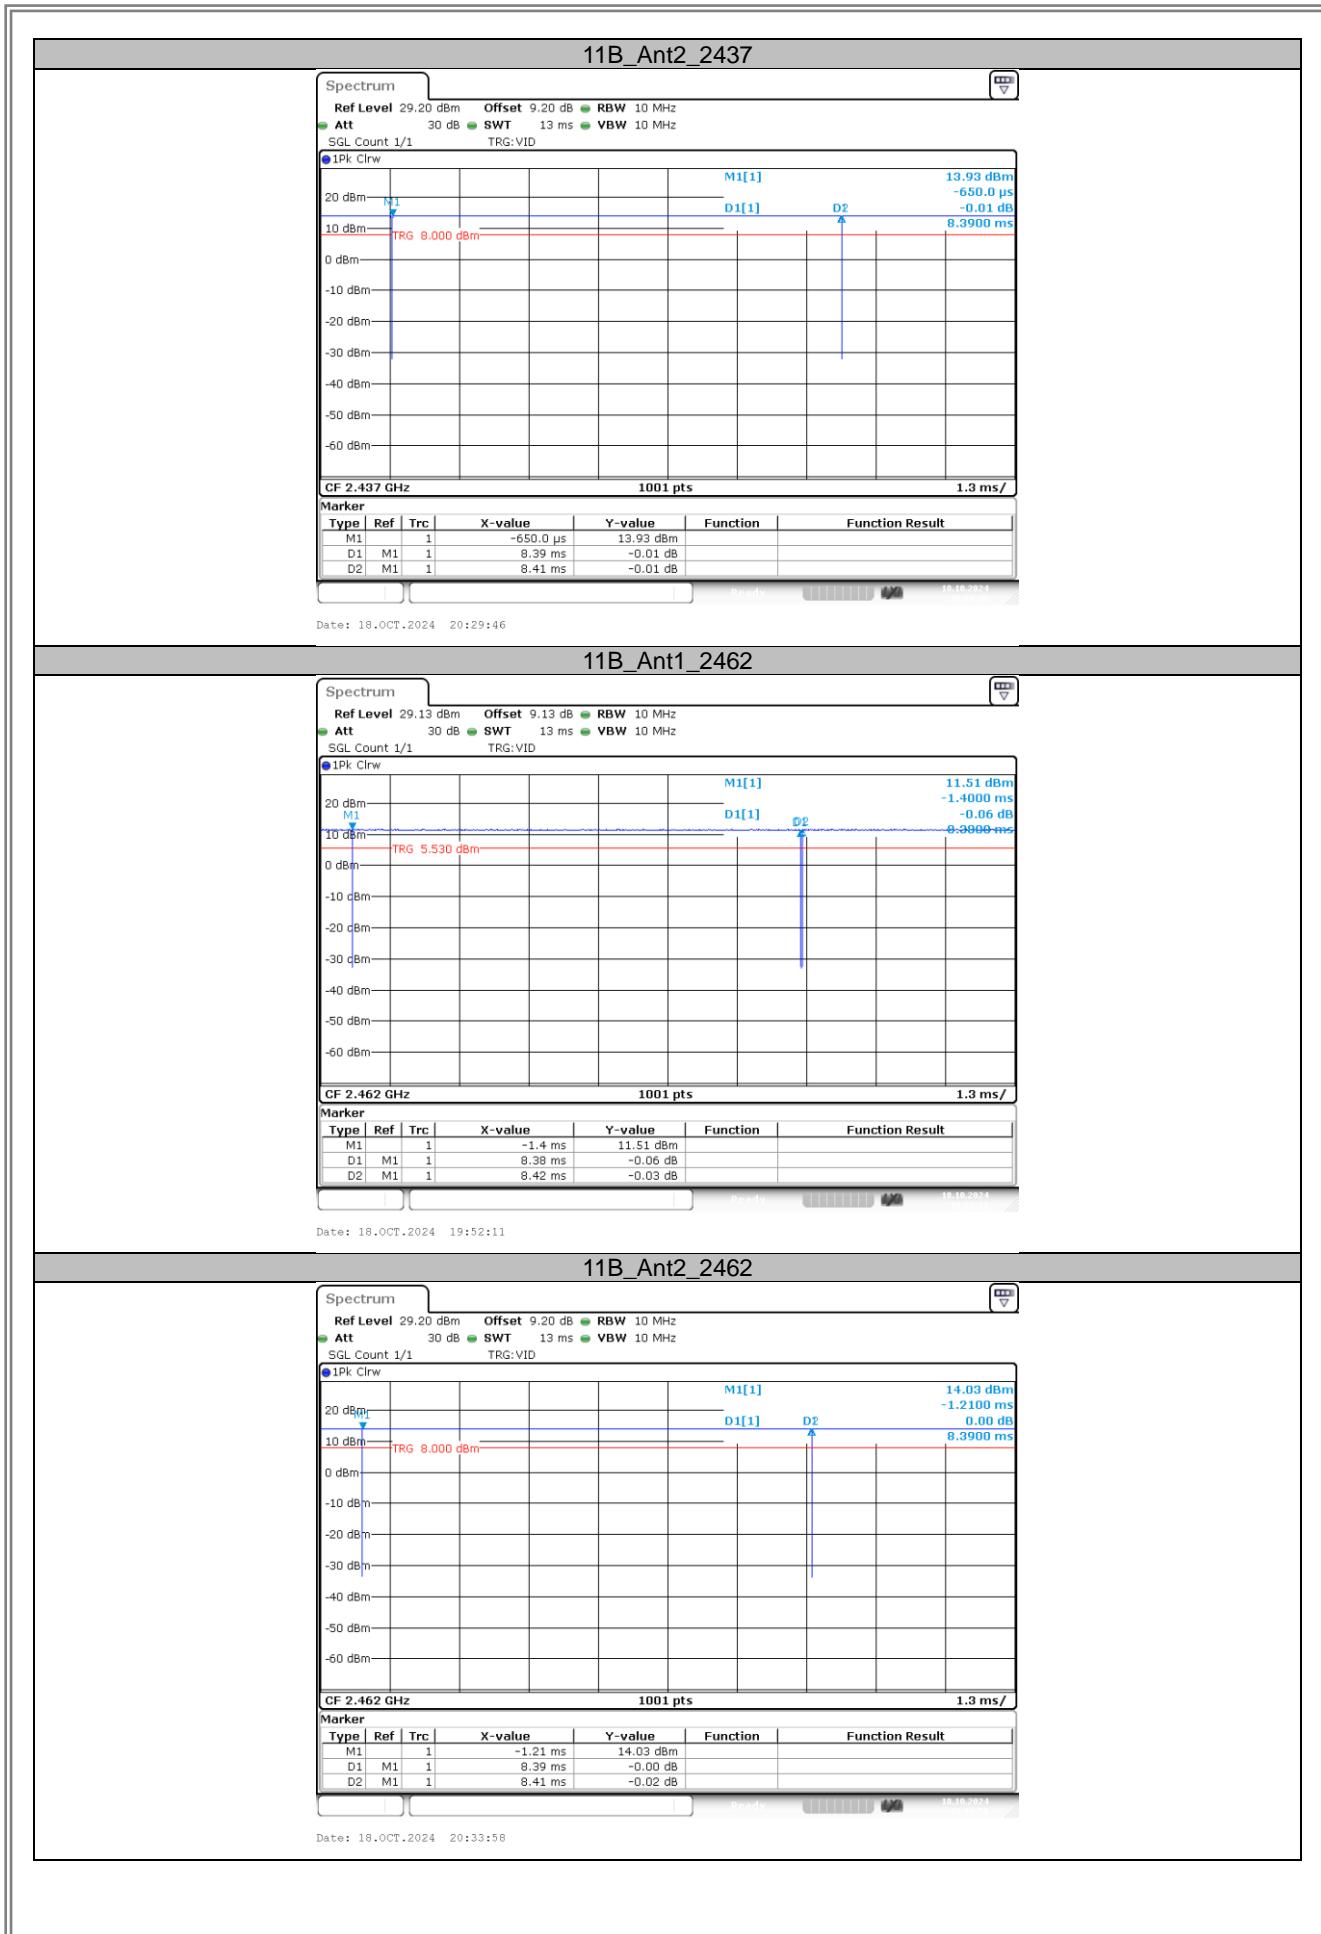


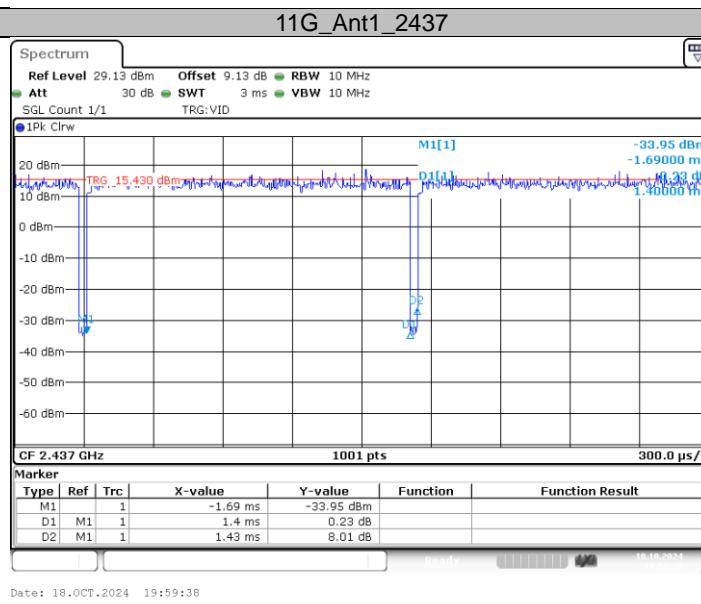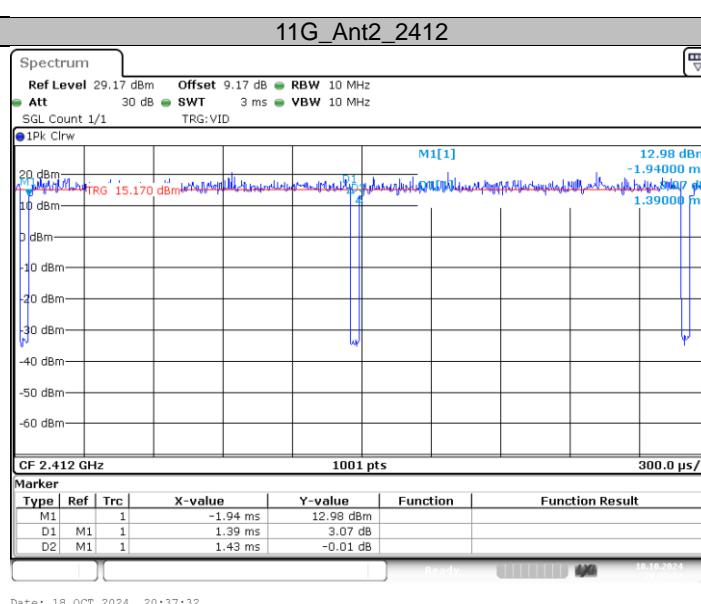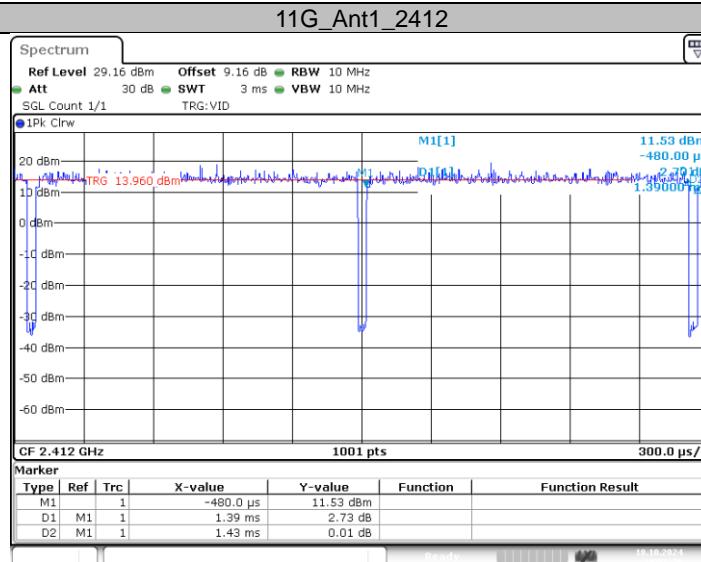


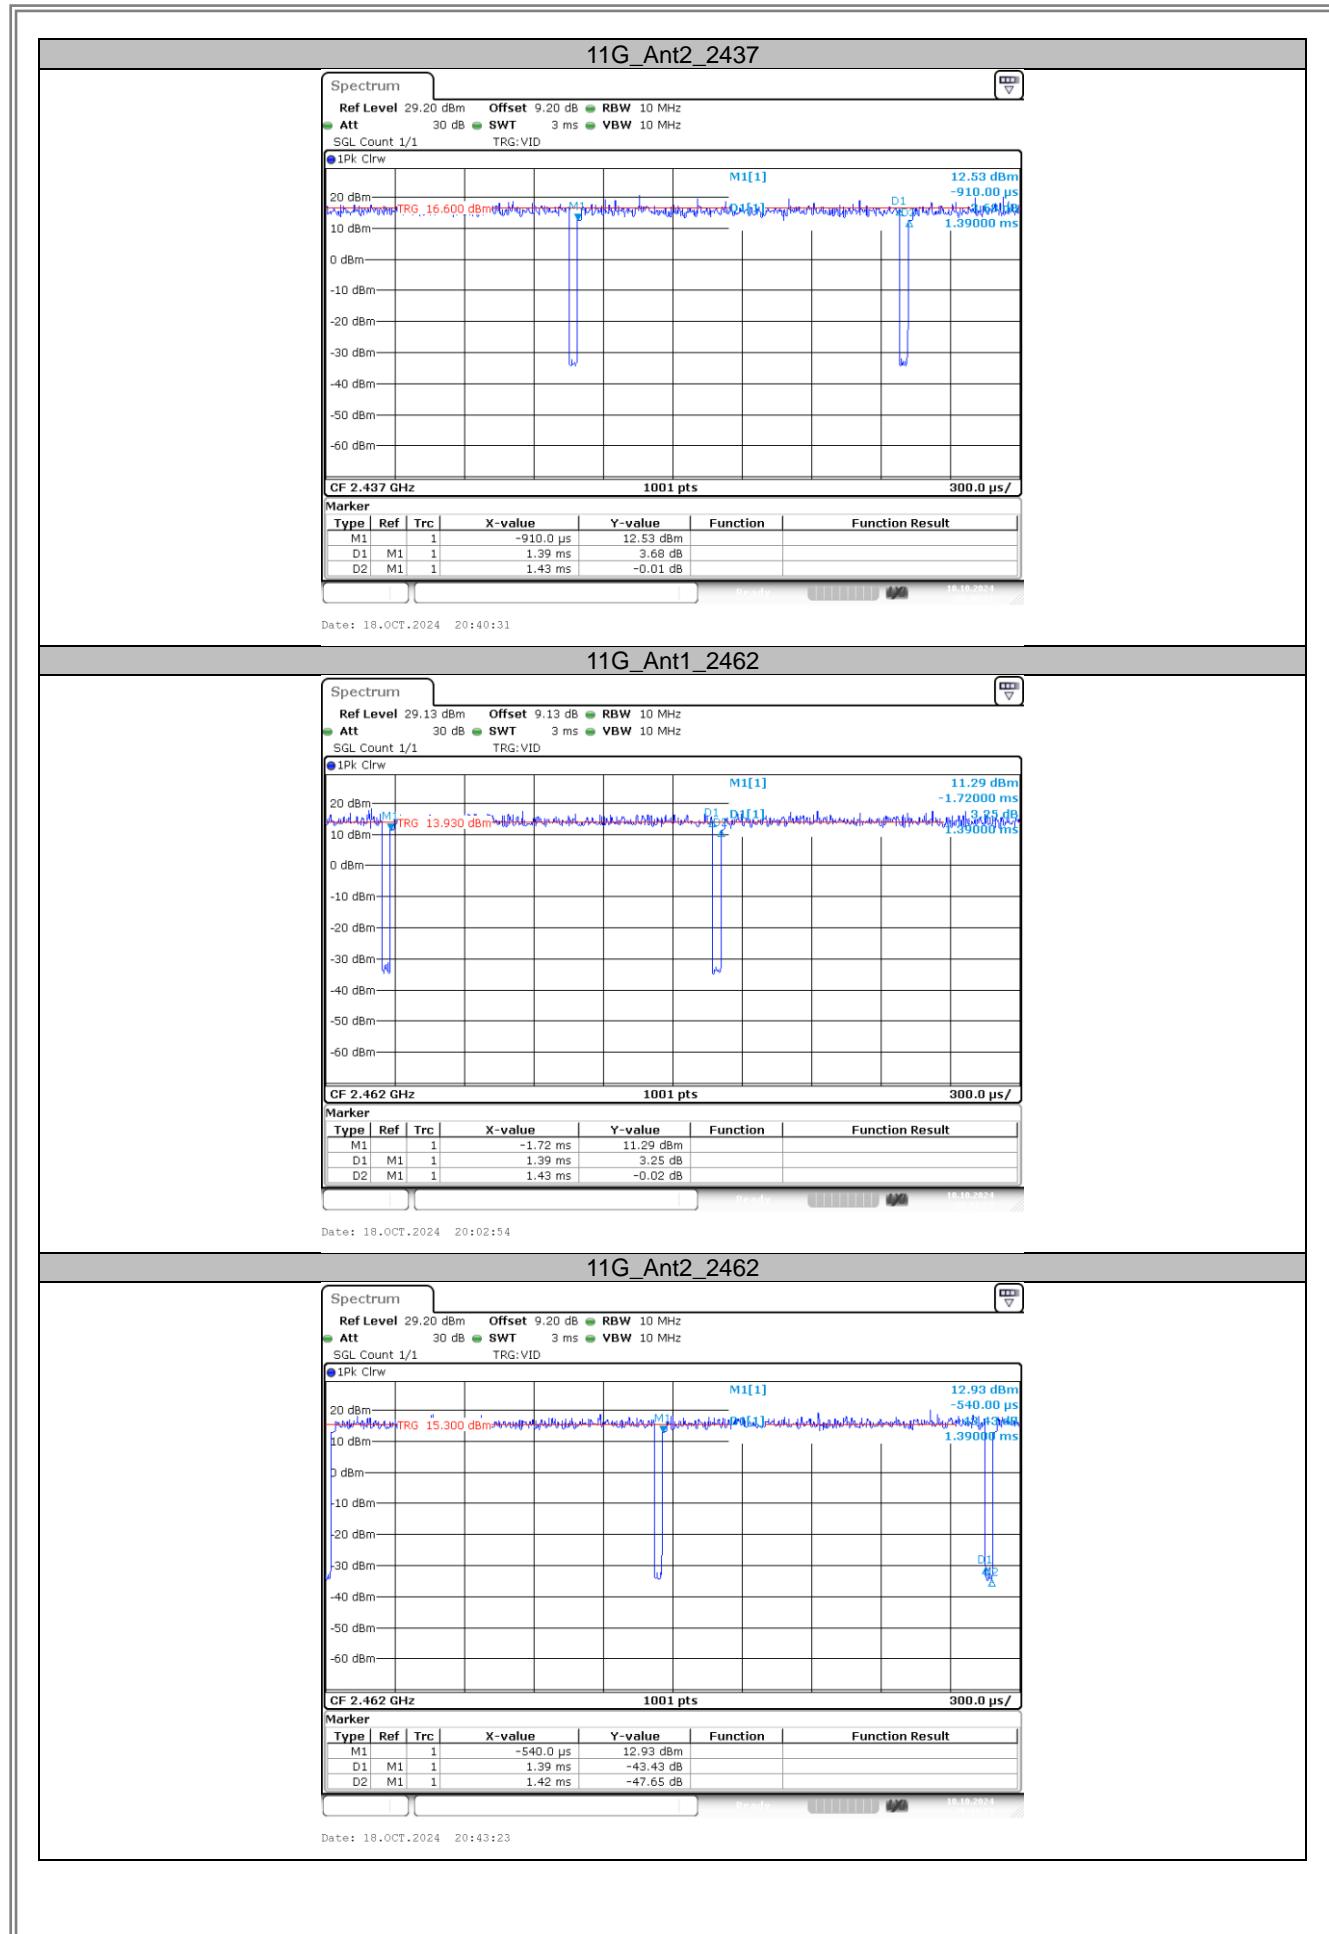


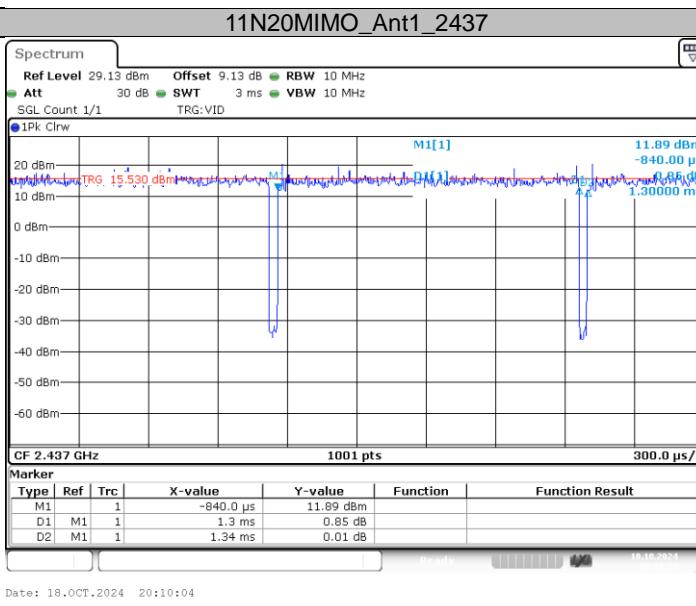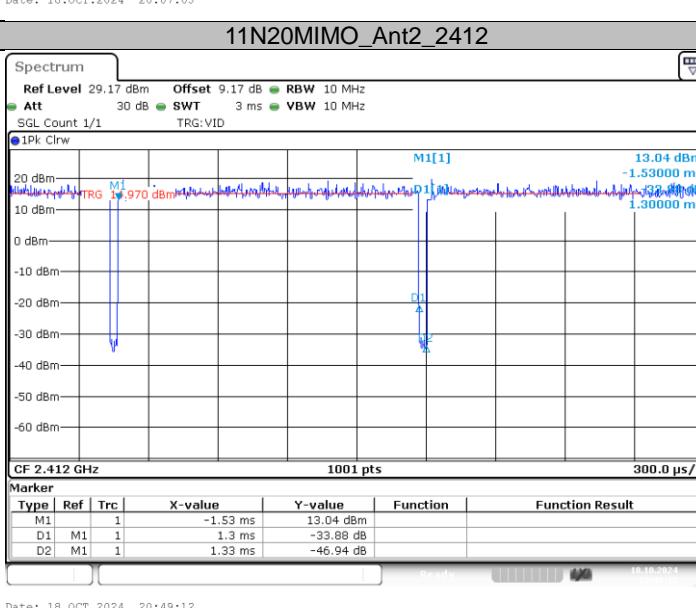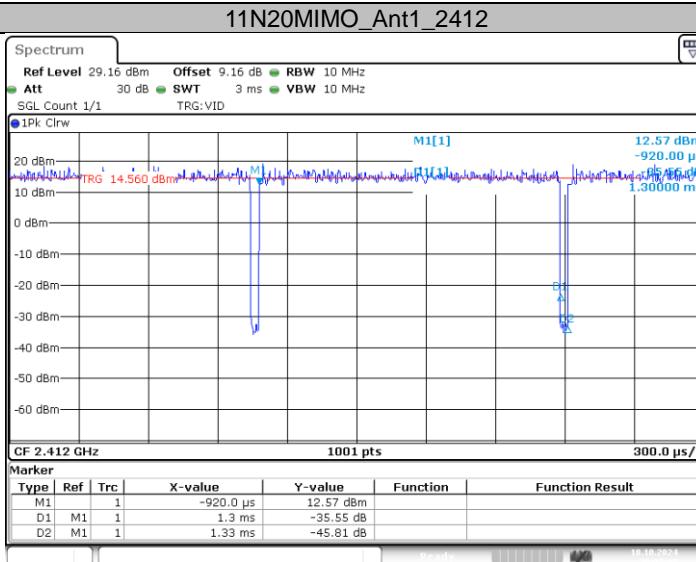

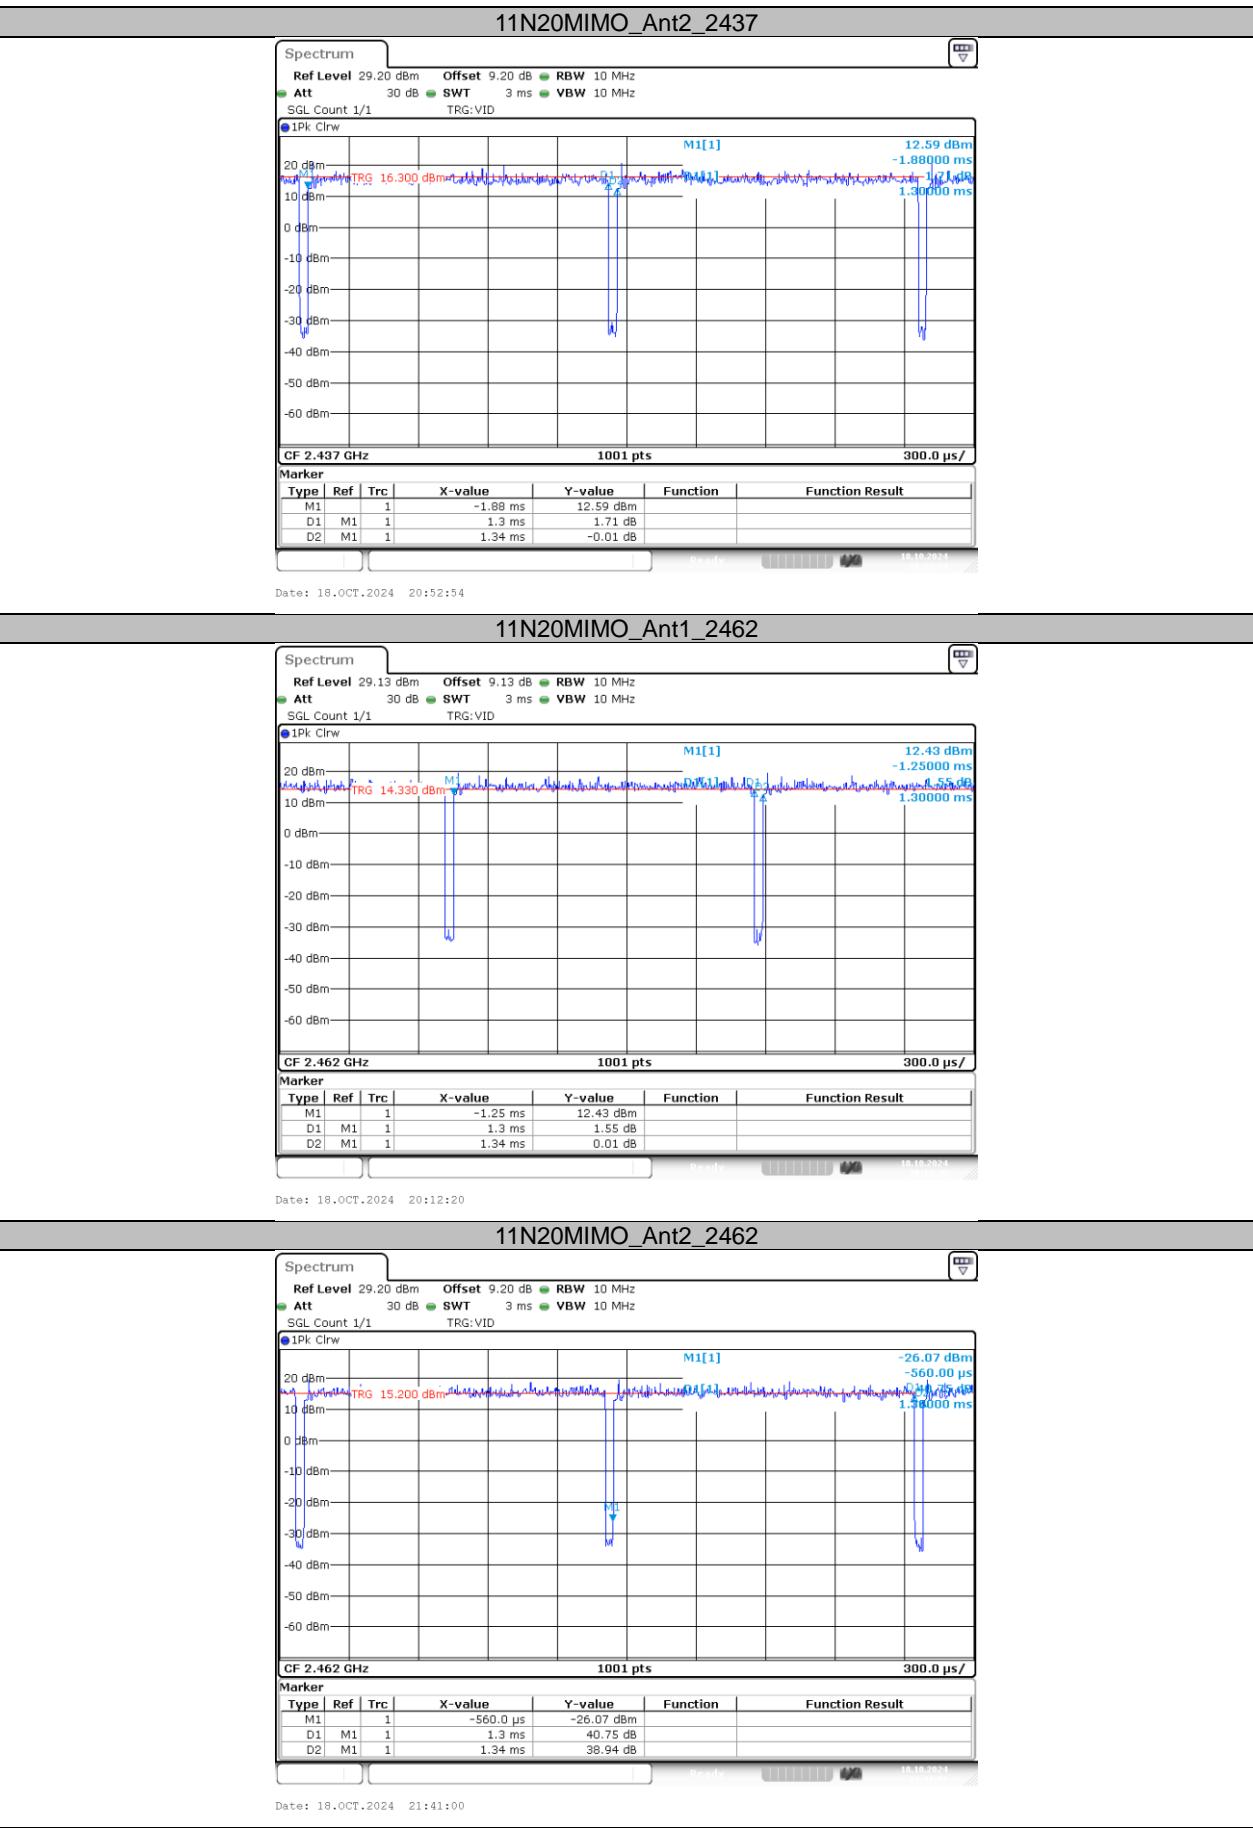

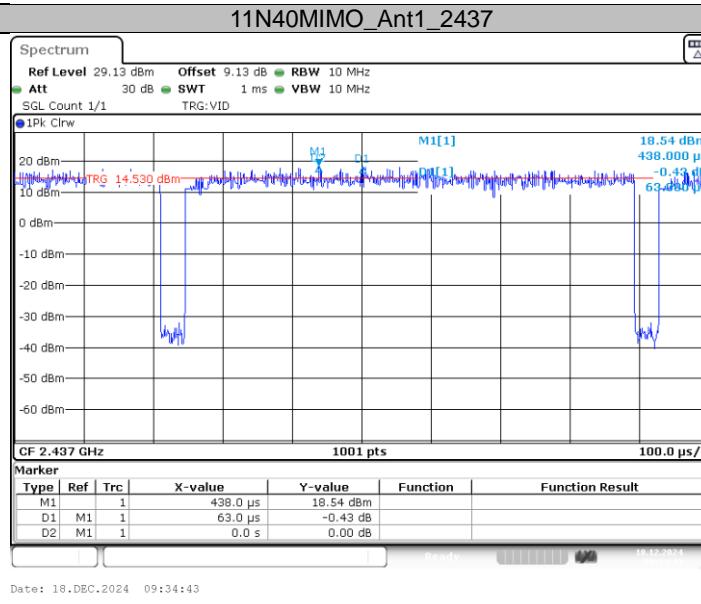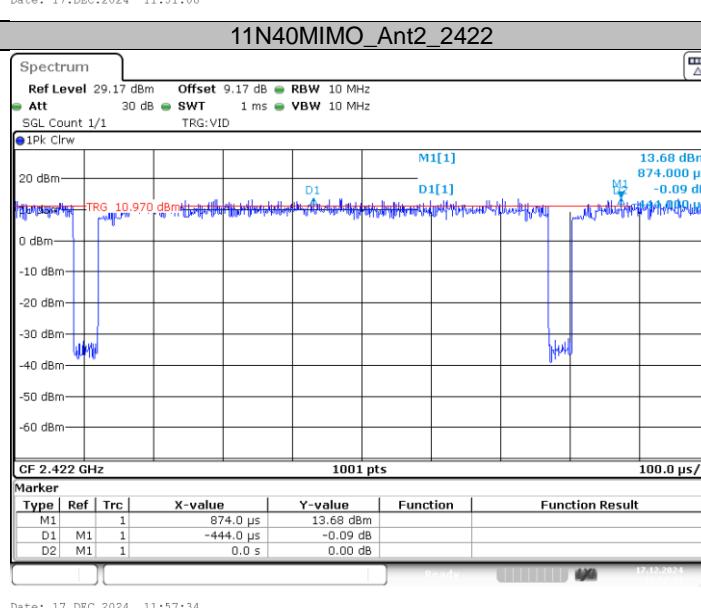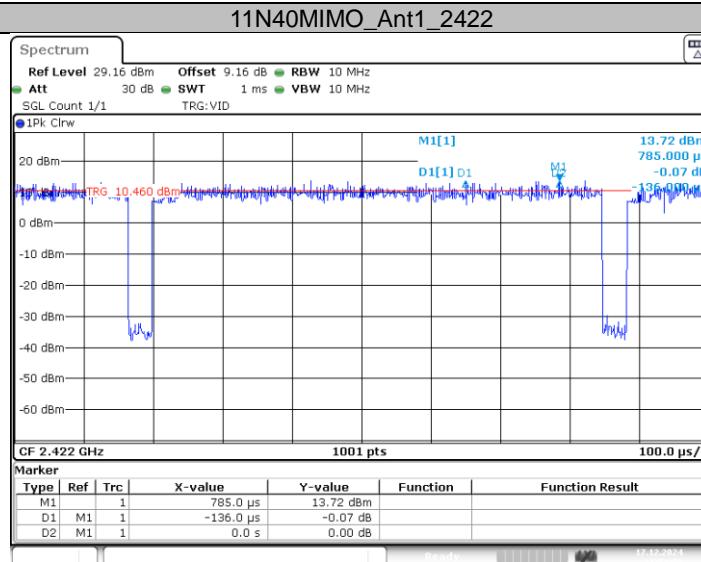

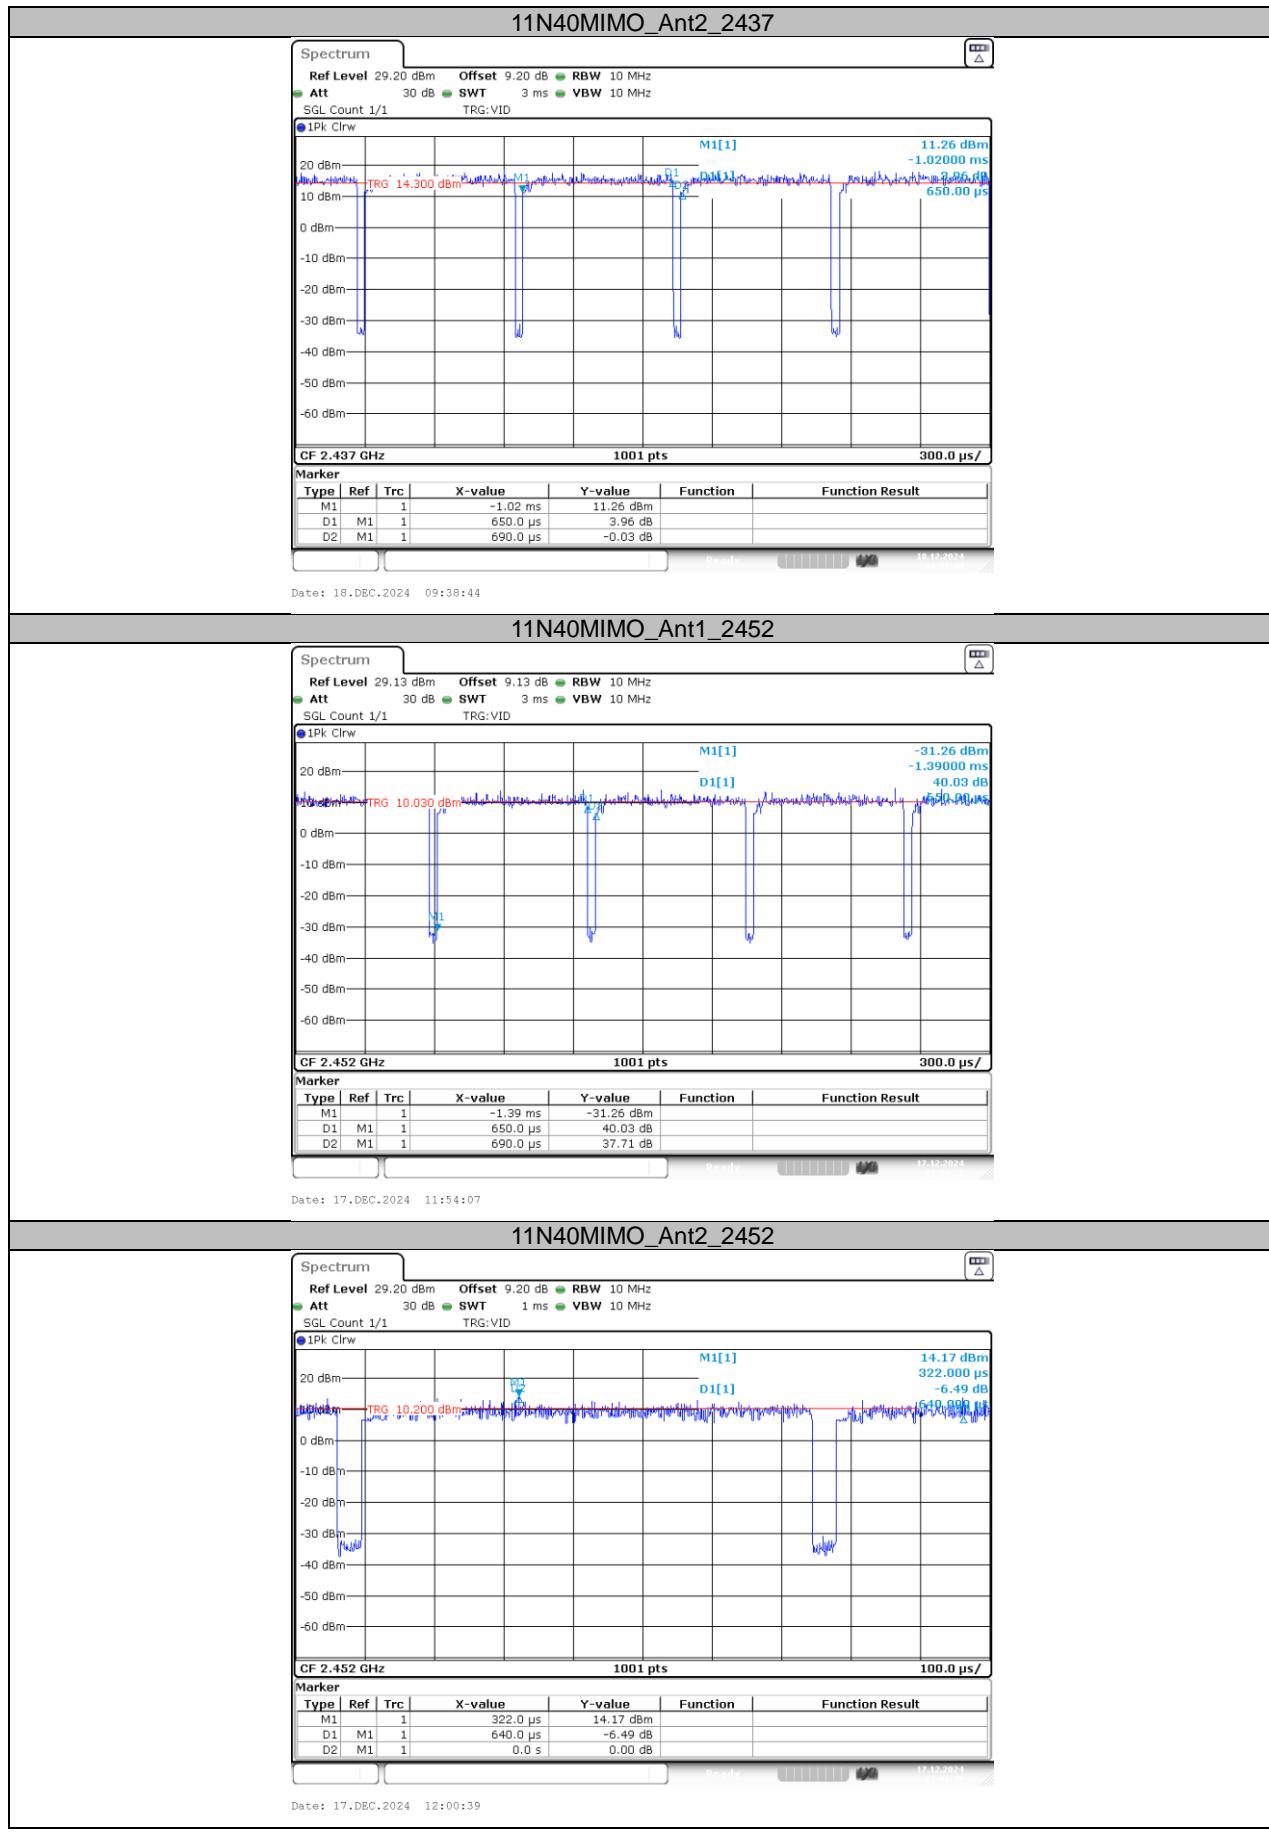

**2.4BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED****2.5SUPPORT UNITS**

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/

### 3.AC POWER LINE CONDUCTED EMISSIONS

#### 3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0 -30.0	60	50

**NOTE:**

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4 TEST SETUP

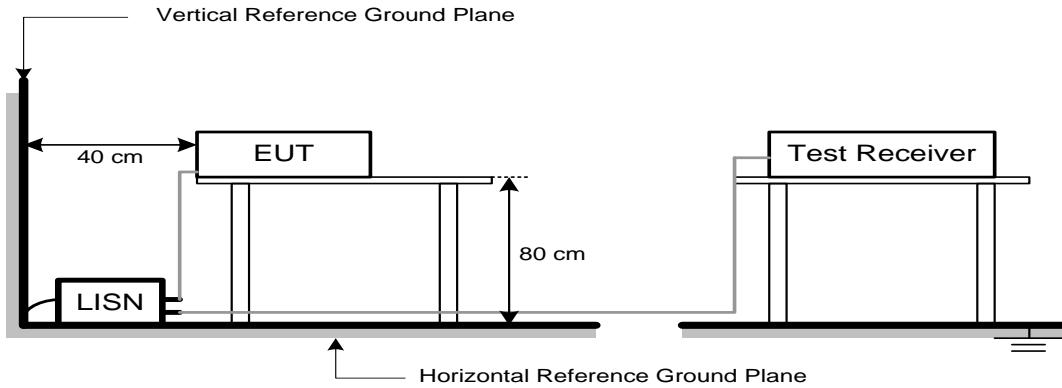

The LISN edge is arranged parallel to the edge of the test table

The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT

### 3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

#### NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**4.2 TEST PROCEDURE**

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:



Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz


Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for PK value 1MHz / 1/THz for AVG value

Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5GHz for PK/AVG detector

**4.3 DEVIATION FROM TEST STANDARD**

No deviation.

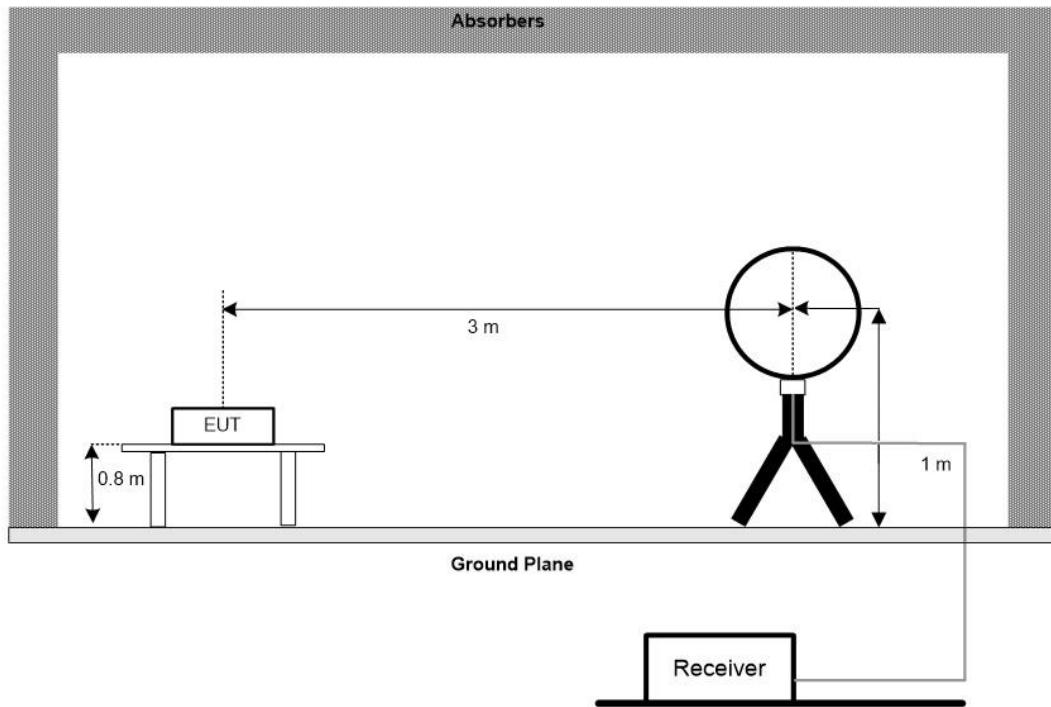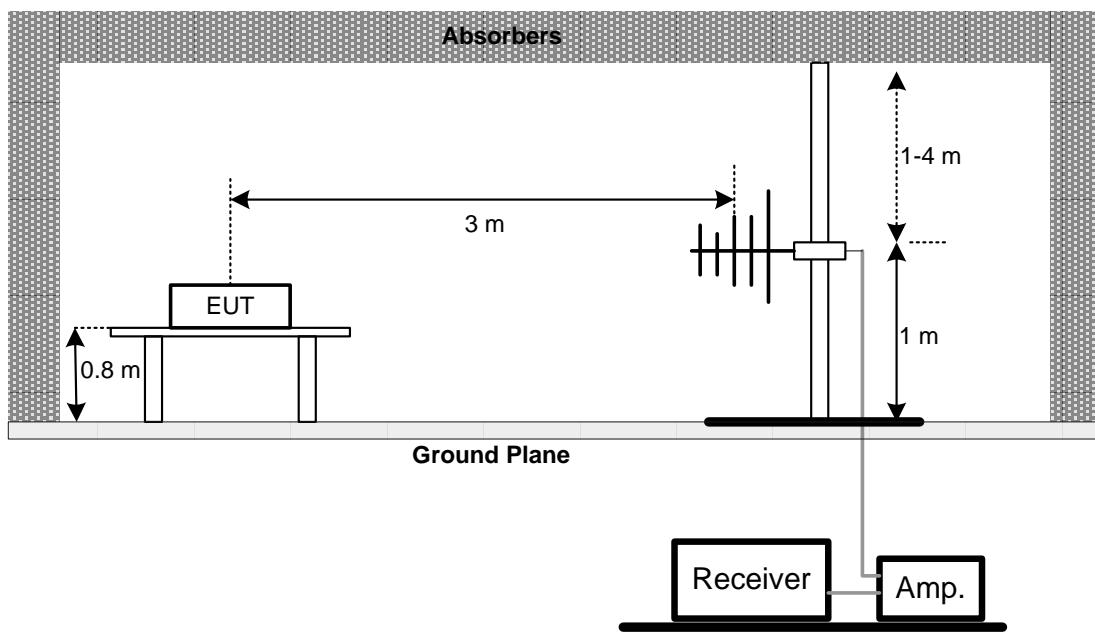**4.4 TEST SETUP****9 kHz to 30 MHz****30 MHz to 1 GHz**

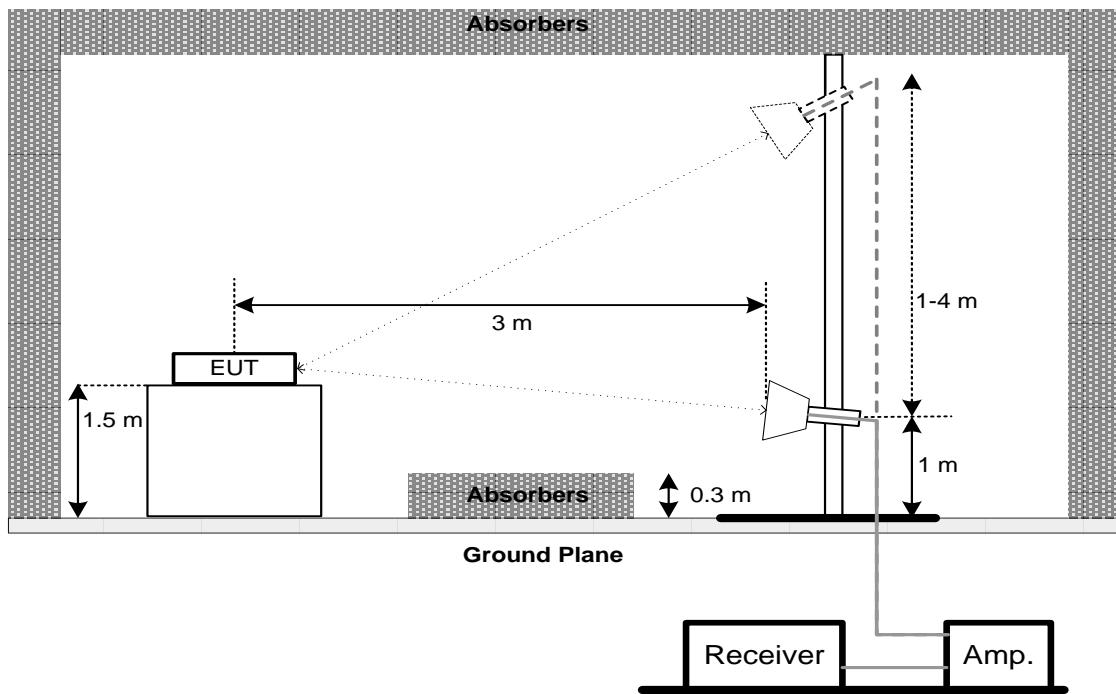**Above 1 GHz**

**4.5EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**4.6TEST RESULTS - 9 KHZ TO 30MHZ**

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

**4.7TEST RESULTS - 30 MHZTO 1000MHZ**

Please refer to the APPENDIX C.

**4.8TEST RESULTS- ABOVE 1000MHZ**

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5.BANDWIDTH

### 5.1LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

### 5.2TEST PROCEDURE

- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.3DEVIATION FROM STANDARD

No deviation.

### 5.4TEST SETUP

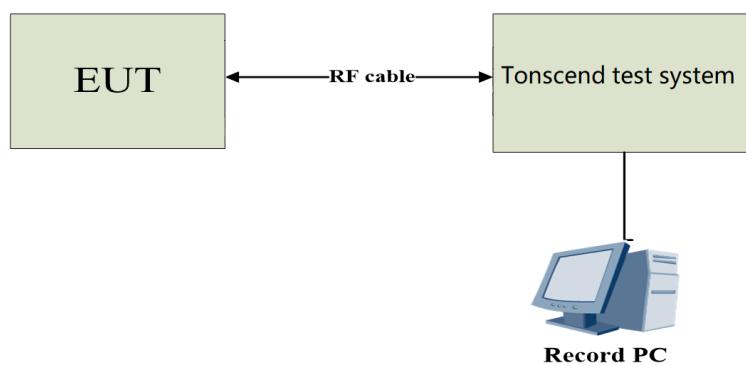

### 5.5EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 5.6TESTRESULTS

Please refer to the APPENDIX E.

## 6.MAXIMUM OUTPUT POWER

### 6.1LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000Watt or 30.00 dBm


### 6.2TEST PROCEDURE

- a. The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.1.3(for Average power)of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

### 6.3DEVIATION FROM STANDARD

No deviation.

### 6.4TEST SETUP

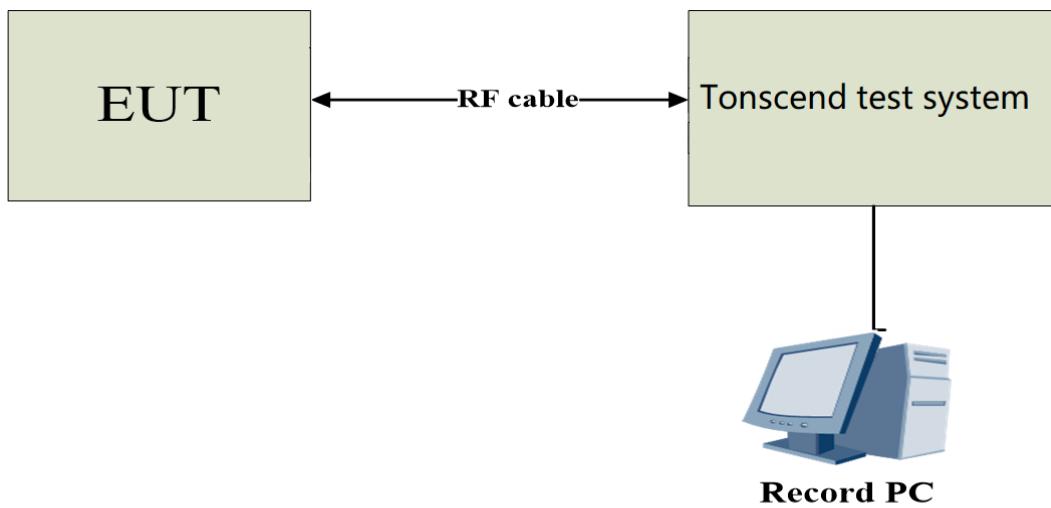

### 6.5EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6TESTRESULTS

Please refer to the APPENDIX F.

## 7.CONDUCTED SPURIOUS EMISSIONS

### 7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 7.2 TEST PROCEDURE


- The EUT was directly connected to the tonsend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

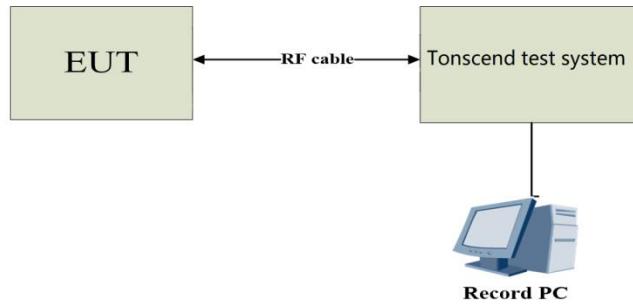

### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX G.

## 8. POWER SPECTRAL DENSITY

### 8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

### 8.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

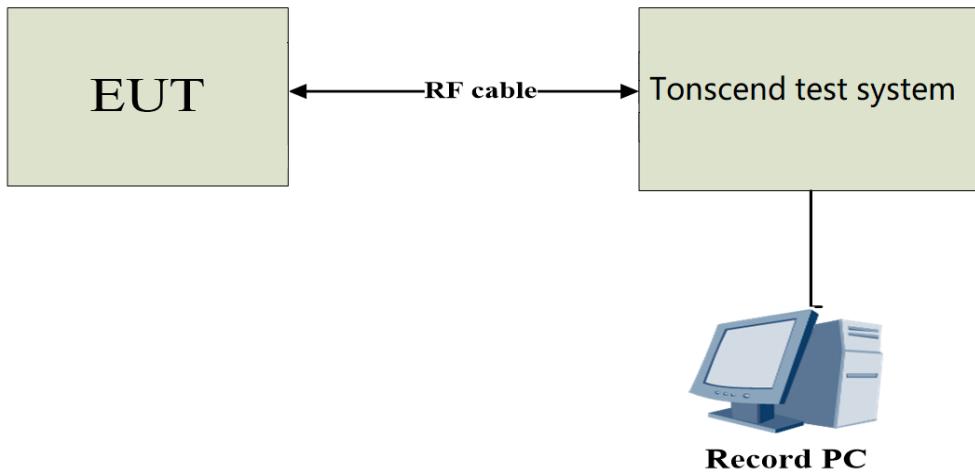

### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.



### 8.6 TEST RESULTS

Please refer to the APPENDIX H.

**9. MEASUREMENT INSTRUMENTS LIST**

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2024/01/05	2025/01/04
Integral Antenna	Schwarzbeck	VULB 9163	01314	2022/12/11	2024/12/10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2022/12/11	2024/12/10
Preamplifier	Emtrace	RP01A	'02017	2024/01/05	2025/01/04
Preamplifier	Schwarzbeck	BBV9744	00143	2024/01/05	2025/01/04
Loop Antenna	ZHINAN	ZN30900A	12024	2024/01/05	2025/01/04
Horn Antenna	Schwarzbeck	BBHA9170	00956	2024/01/05	2025/01/04
RF Cable	/	LMR400UF-NMNM-7.0M	/	2024/01/05	2025/01/04
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2024/01/05	2025/01/04
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-10 2611-mk	2024/11/02	2025/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-1029 15-Bp	2024/11/02	2025/11/01
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2024/01/05	2025/01/04
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2024/01/05	2025/01/04

Remark: "N/A" denotes no model name, serial no. or calibration specified.

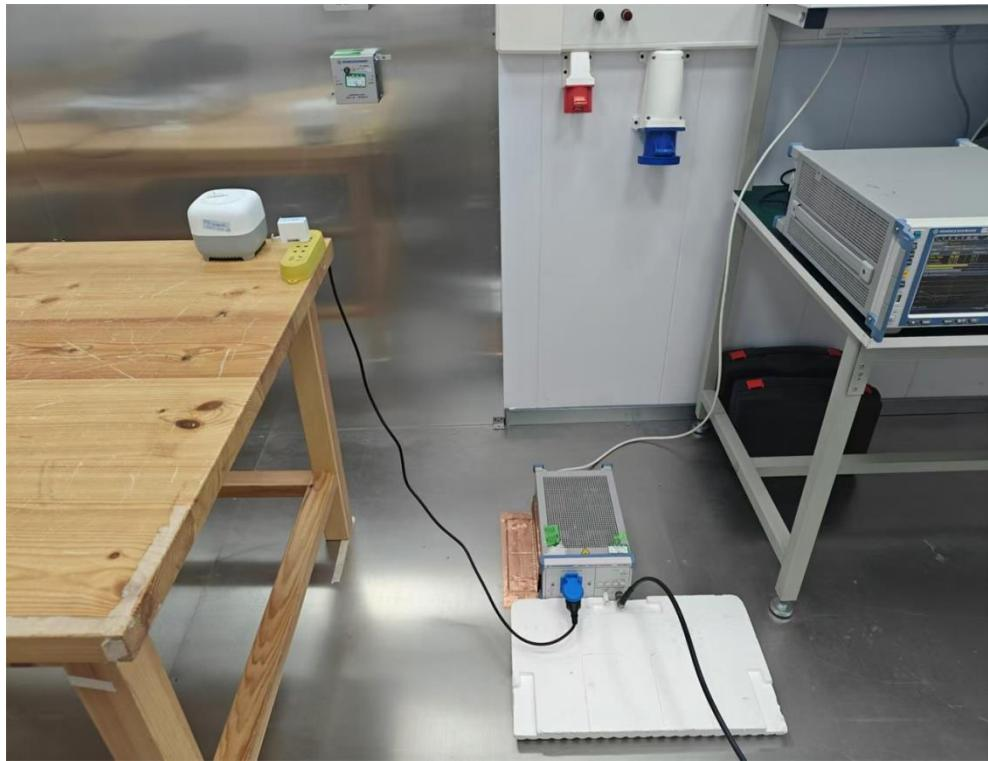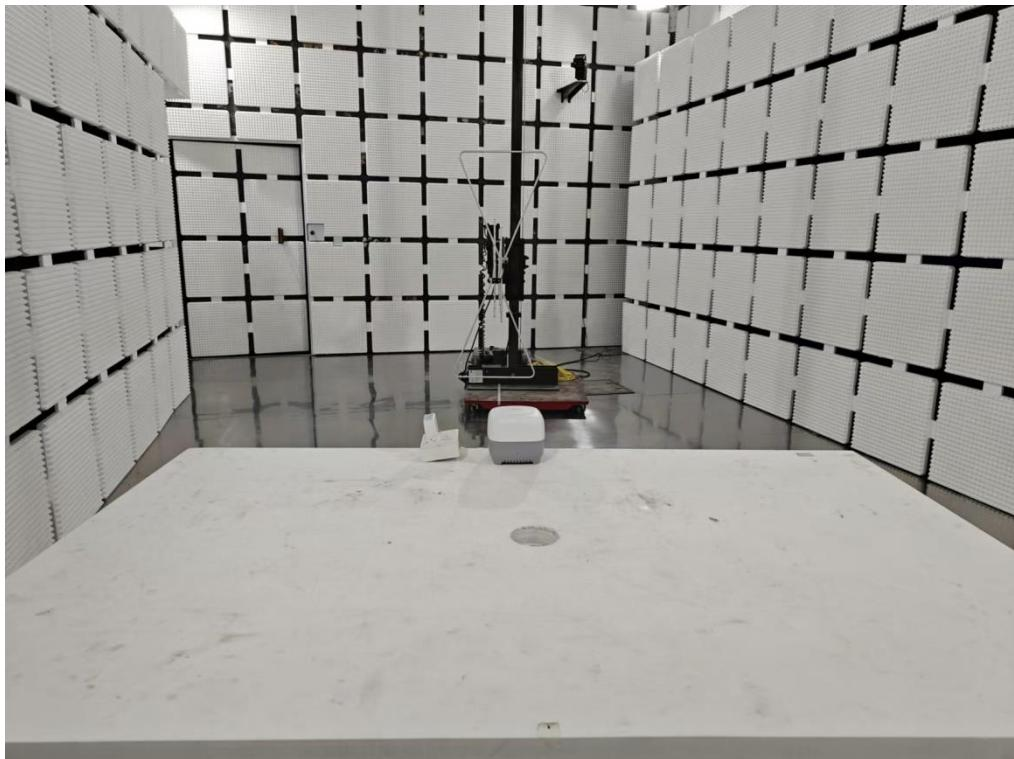**10.EUT TEST PHOTO****AC Power Line Conducted Emissions Test Photos****Radiated Emissions Test Photos****30 MHz to 1 GHz**

**Radiated Emissions Test Photos****Above 1 GHz****Conducted Test Photos**

**11. PHOTOS OF EUT**

