

ANNEX D TEST DATA

For

Project No.:	8233EU011114W
Client:	SHENZHEN CHL INDUSTRIES CO.,LTD
Product Name:	Party Speaker with Flame Light
Model No.:	GKS60
FCC ID:	2BLKS-GKS60
Technology:	Bluetooth BDR&EDR
Test Engineer:	<i>Mikey zhu</i>
Test Date:	2024-09-24

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Carrier Frequency Separation	Pass
Number of Hopping Frequencies	Pass
Time of Occupancy (Dwell Time)	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass

1. Duty Cycle


1.1 Test Result


1.1.1 Ant1

Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.884	3.749	76.93	1.14	0.04
		2441	DH5	2.884	3.750	76.91	1.14	0.04
		2480	DH5	2.884	3.750	76.91	1.14	0.04
$\pi/4$ -DQPSK	SISO	2402	2DH5	2.894	3.751	77.15	1.13	0.03
		2441	2DH5	2.894	3.751	77.15	1.13	0.03
		2480	2DH5	2.895	3.751	77.18	1.12	0.03


1.2 Test Graph


1.2.1 Ant1

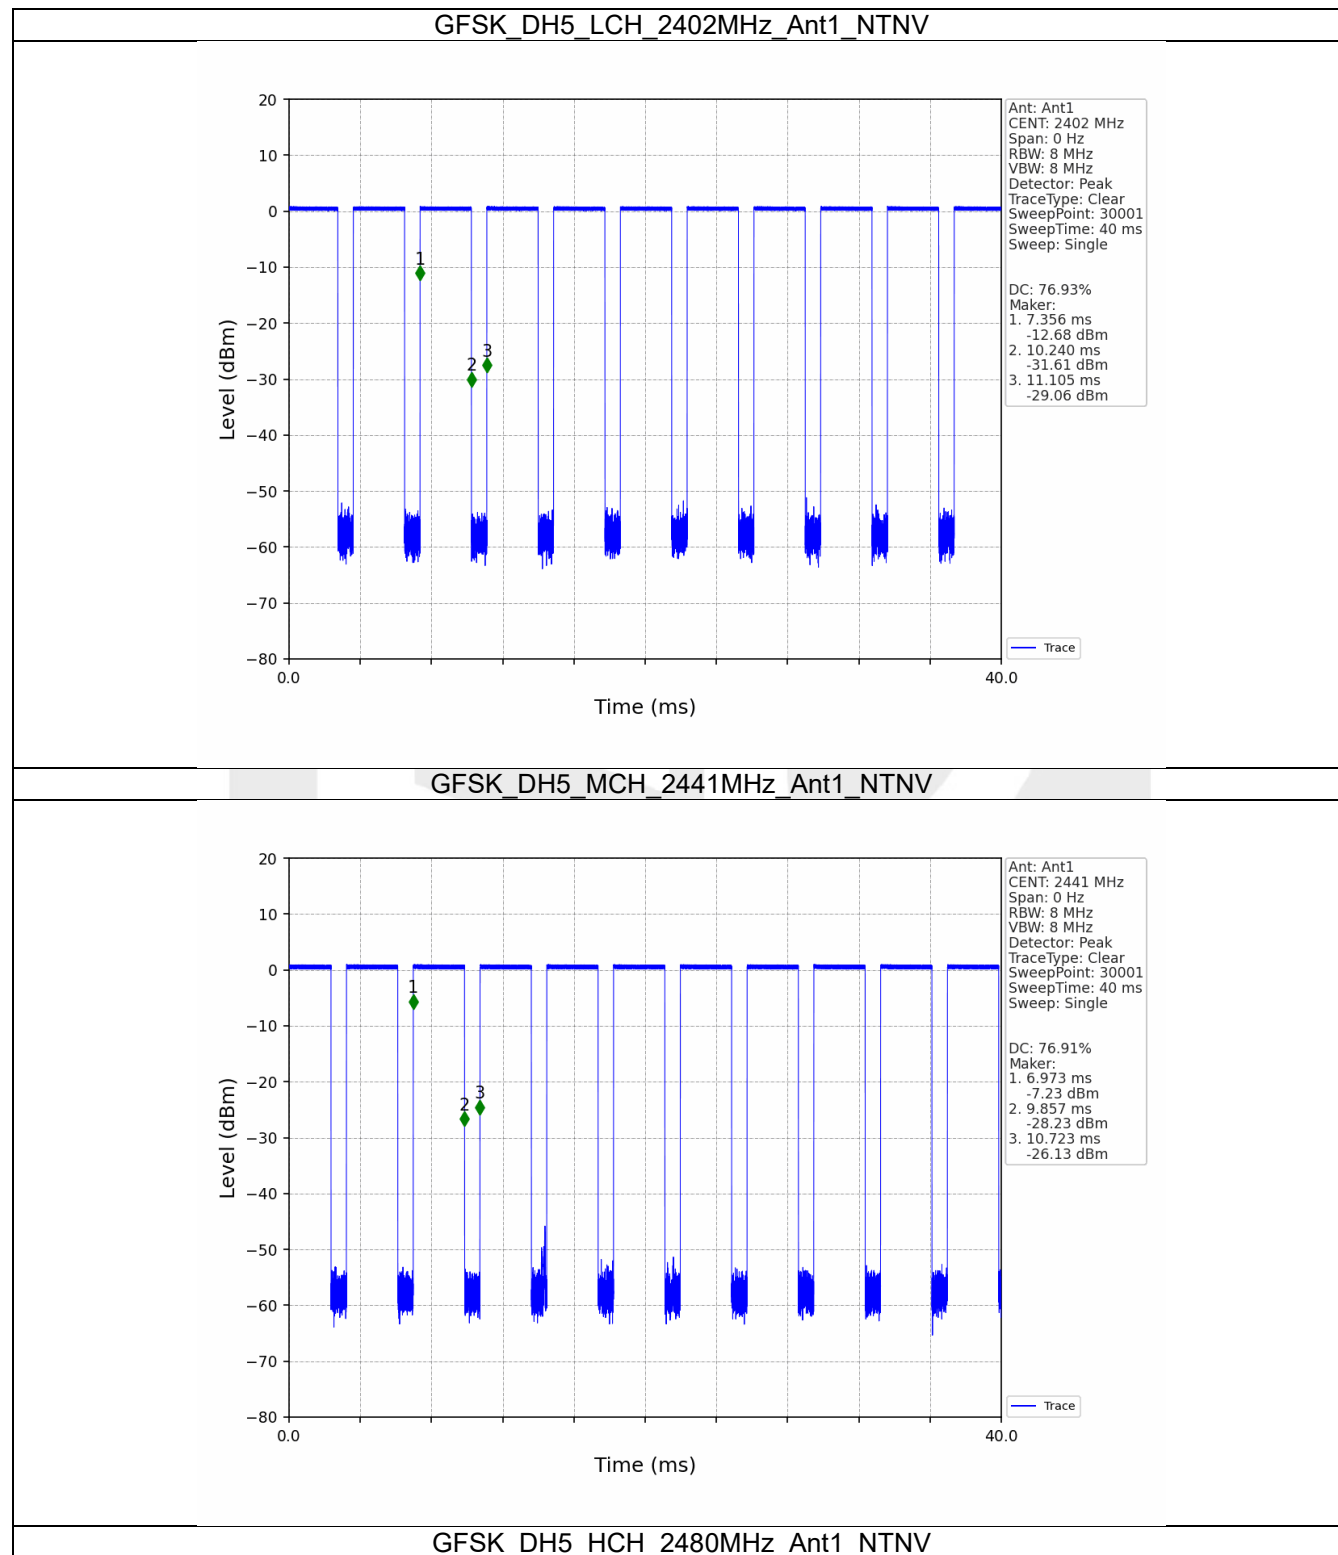

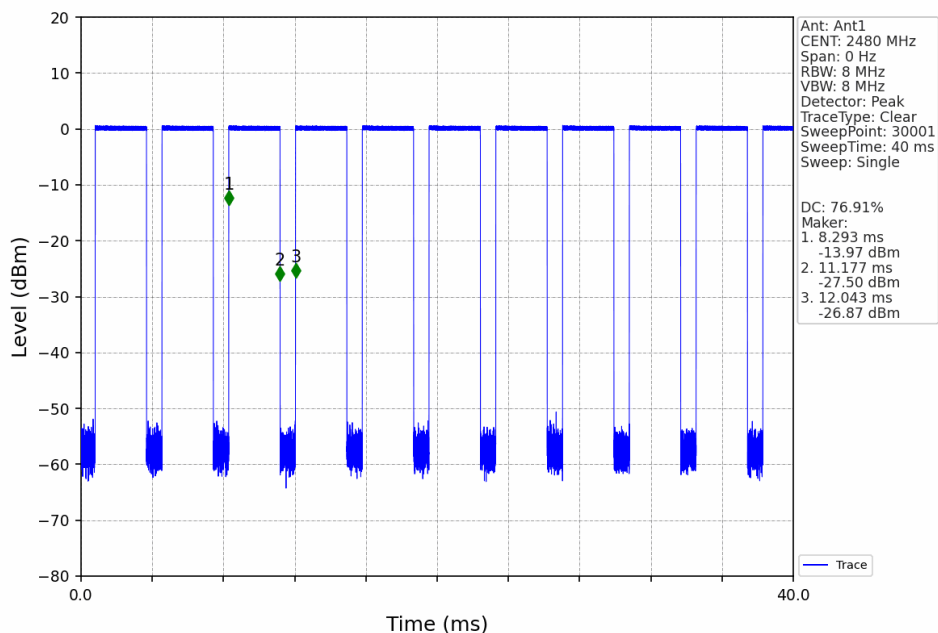

$\pi/4$ -DQPSK 2DH5 LCH 2402MHz Ant1 NTN

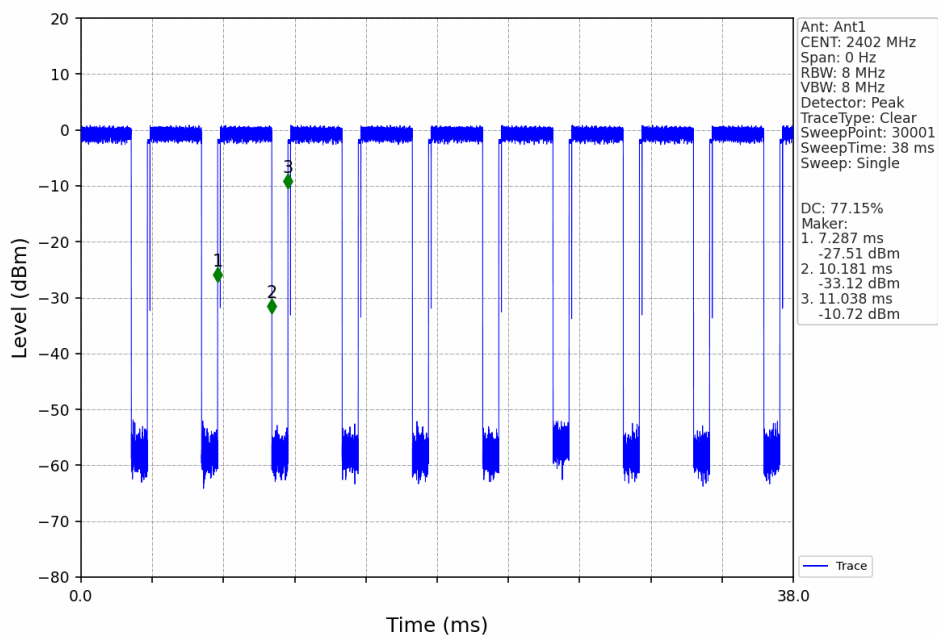

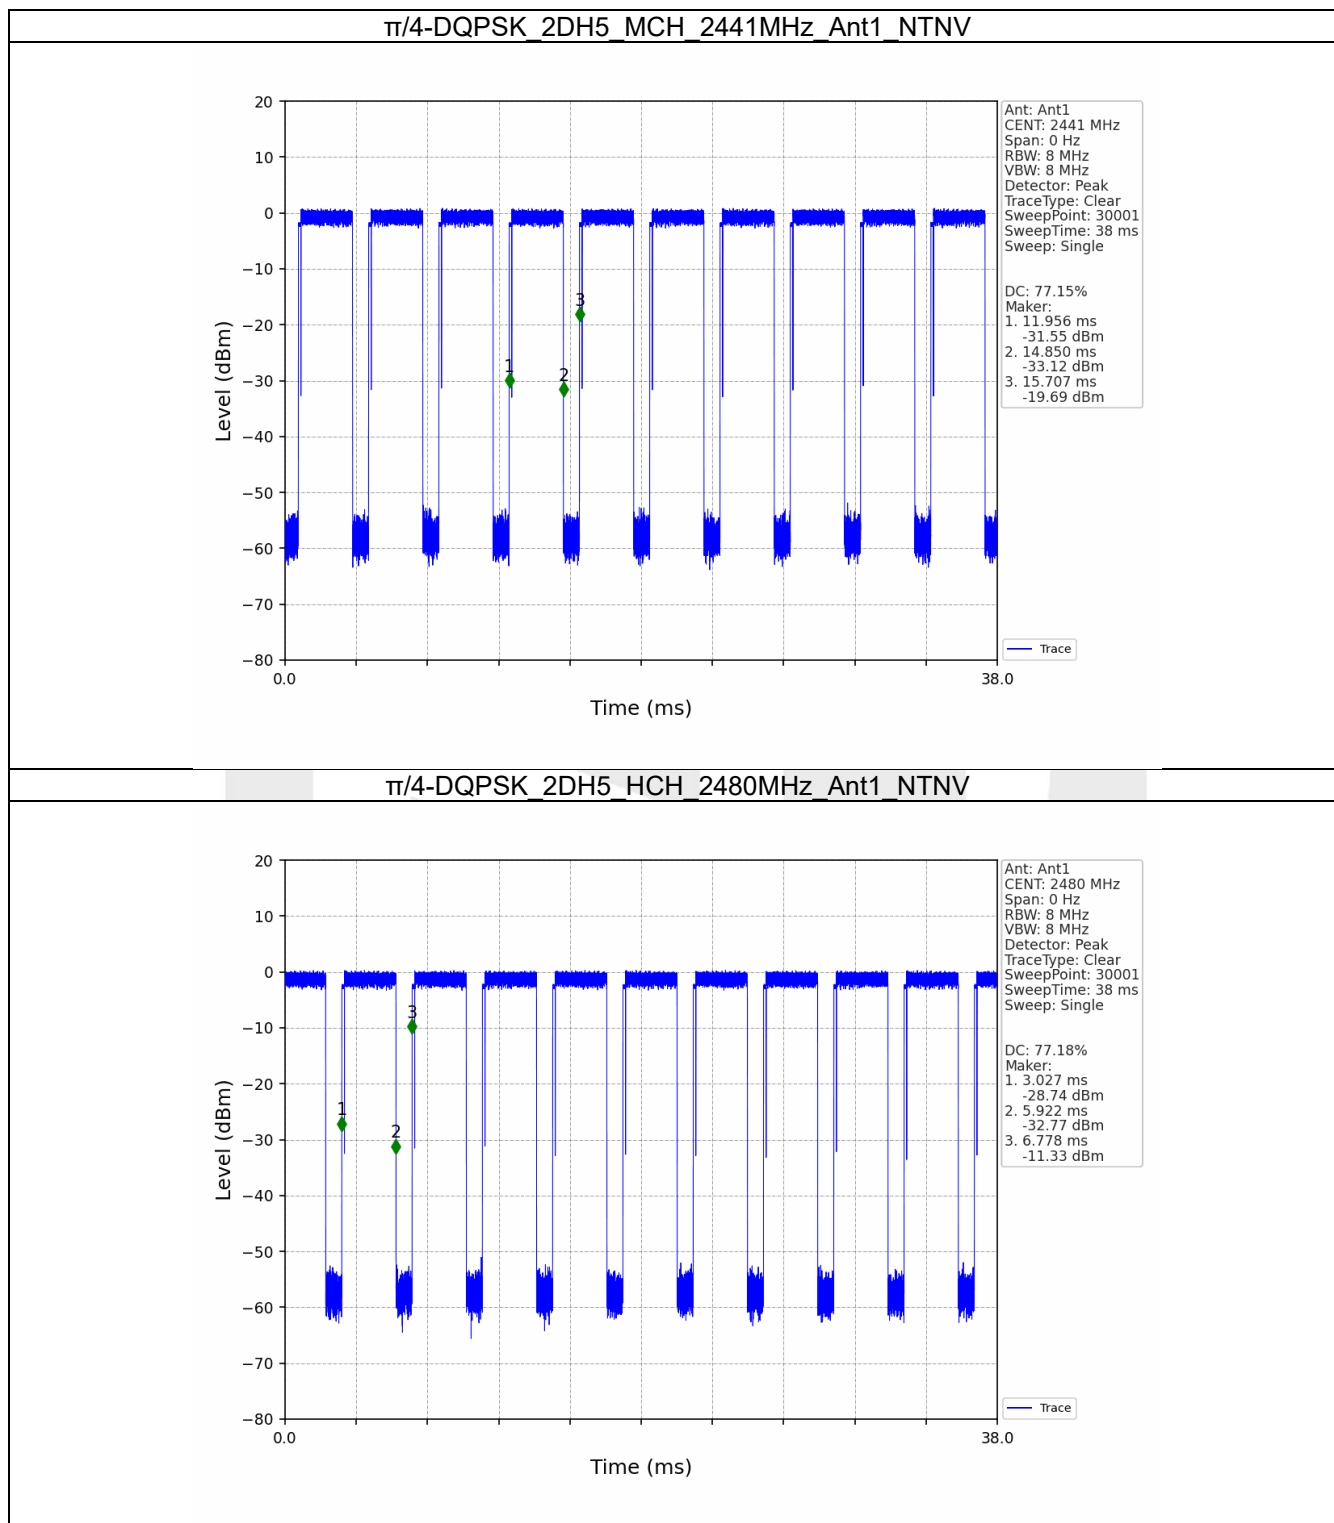

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.827	/	Pass
		2441	DH5	1	0.825	/	Pass
		2480	DH5	1	0.828	/	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	1.176	/	Pass
		2441	2DH5	1	1.176	/	Pass
		2480	2DH5	1	1.177	/	Pass


2.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.938	/	Pass
		2441	DH5	1	0.935	/	Pass
		2480	DH5	1	0.938	/	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	1.293	/	Pass
		2441	2DH5	1	1.291	/	Pass
		2480	2DH5	1	1.295	/	Pass


2.2 Test Graph


2.2.1 OBW

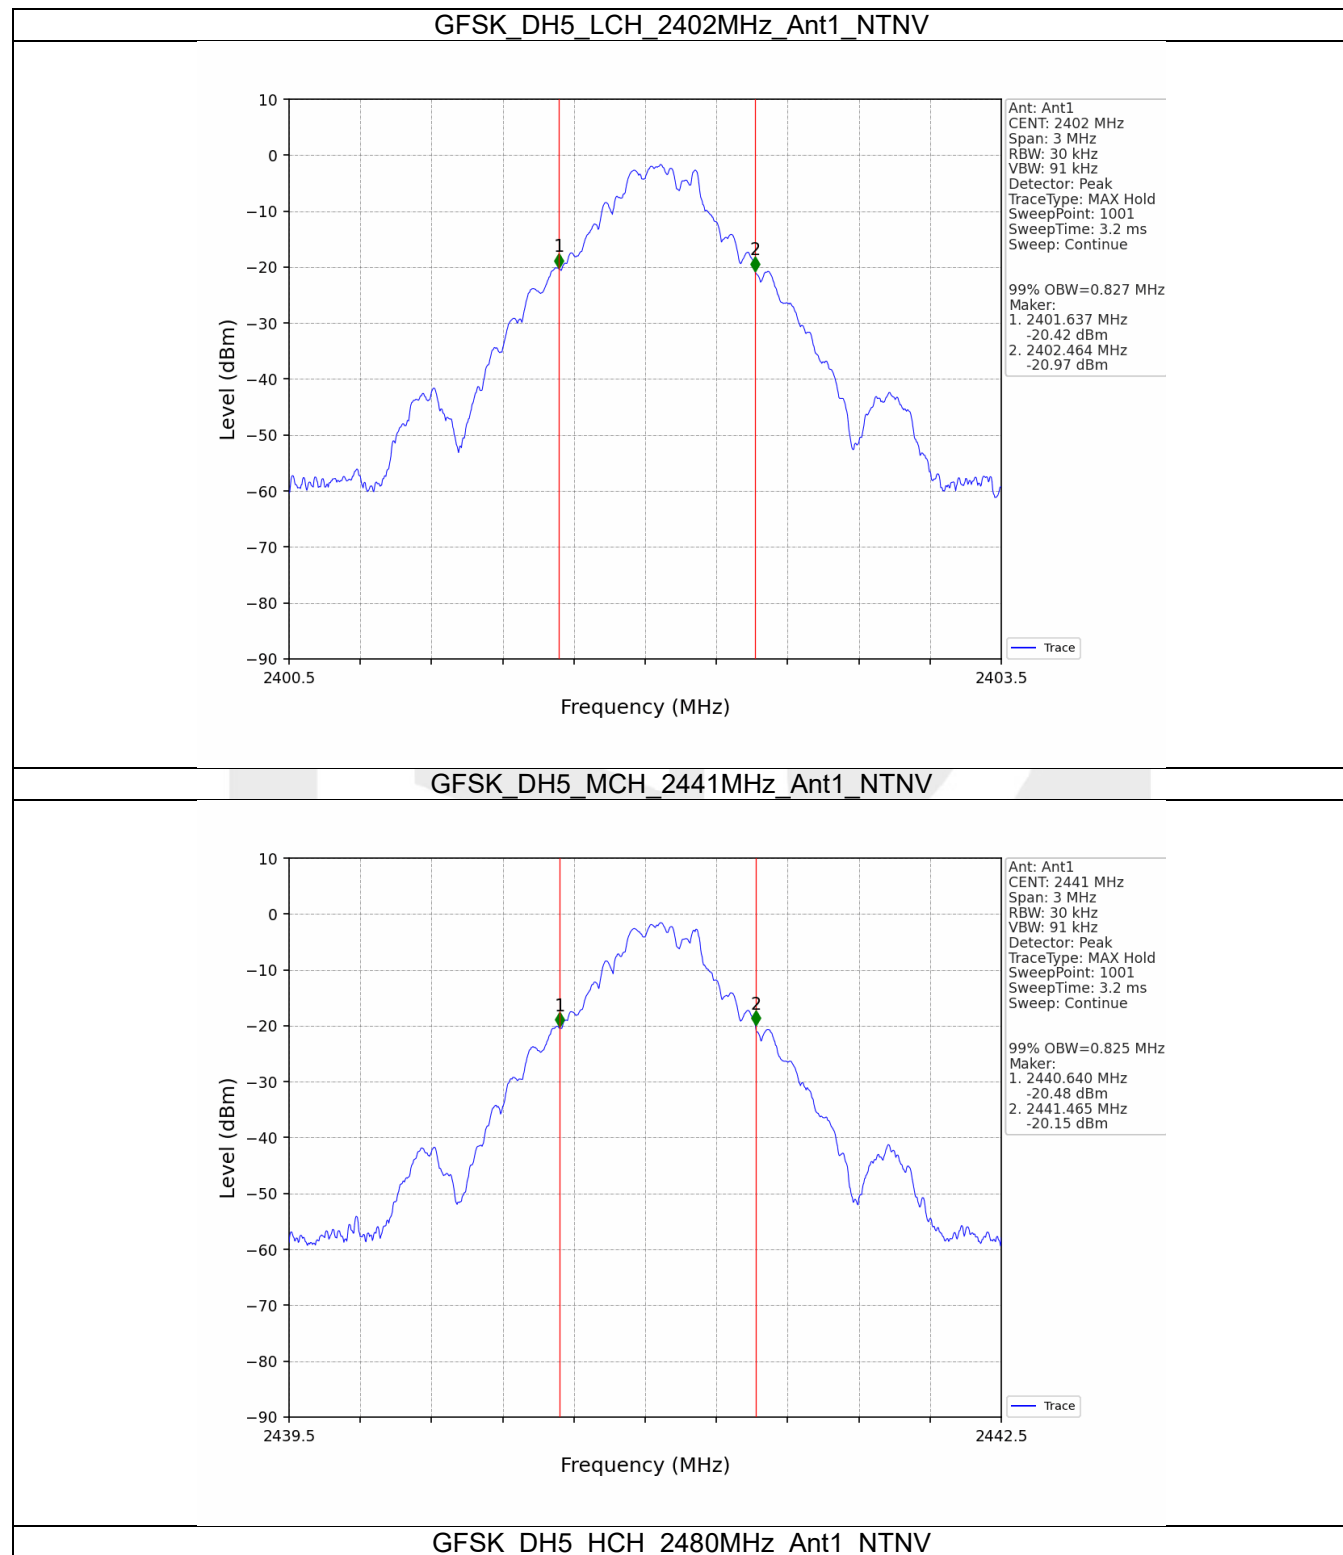

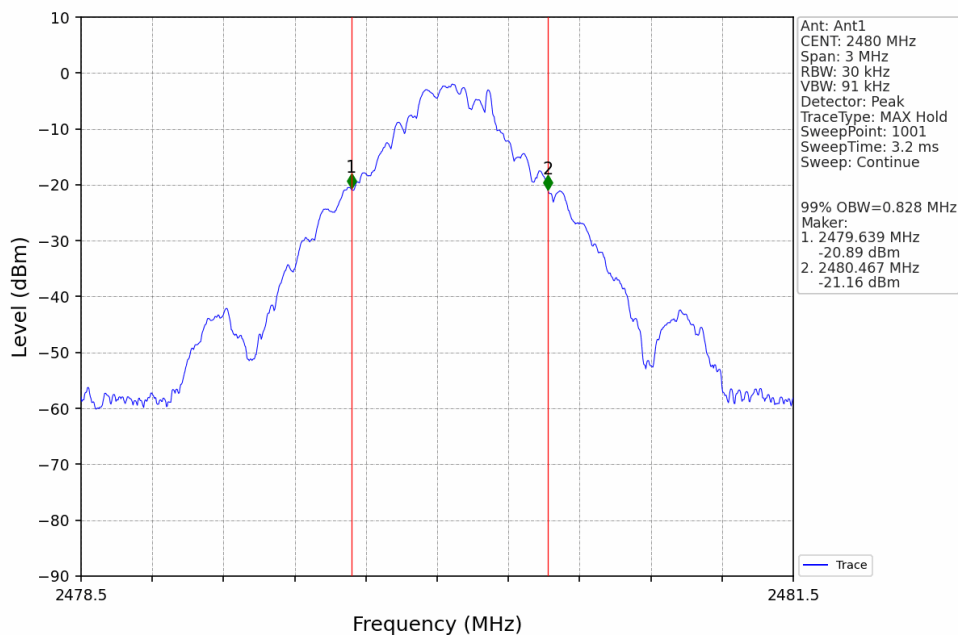



$\pi/4$ -DQPSK 2DH5 LCH 2402MHz Ant1 NTN

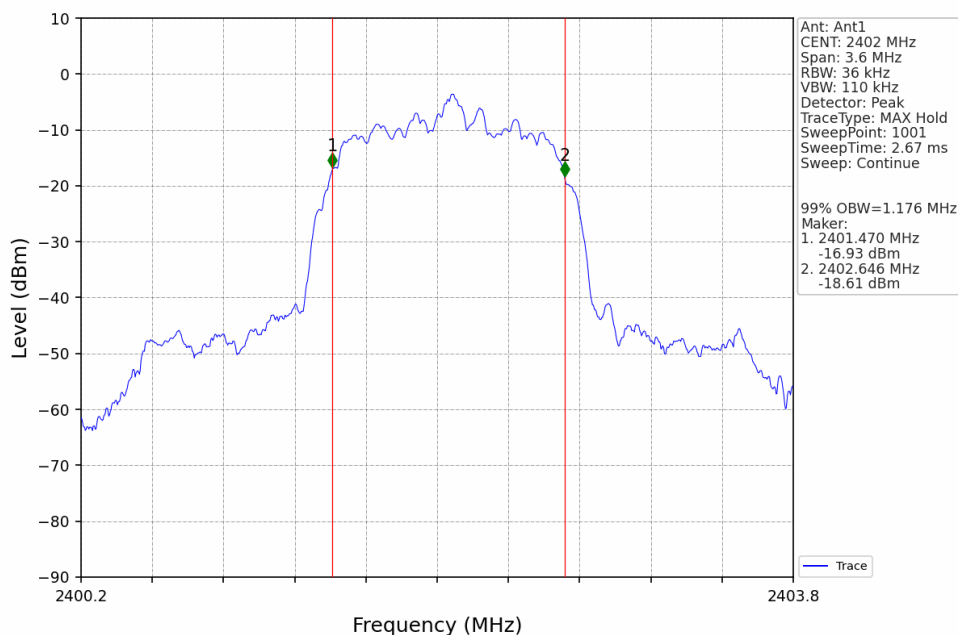

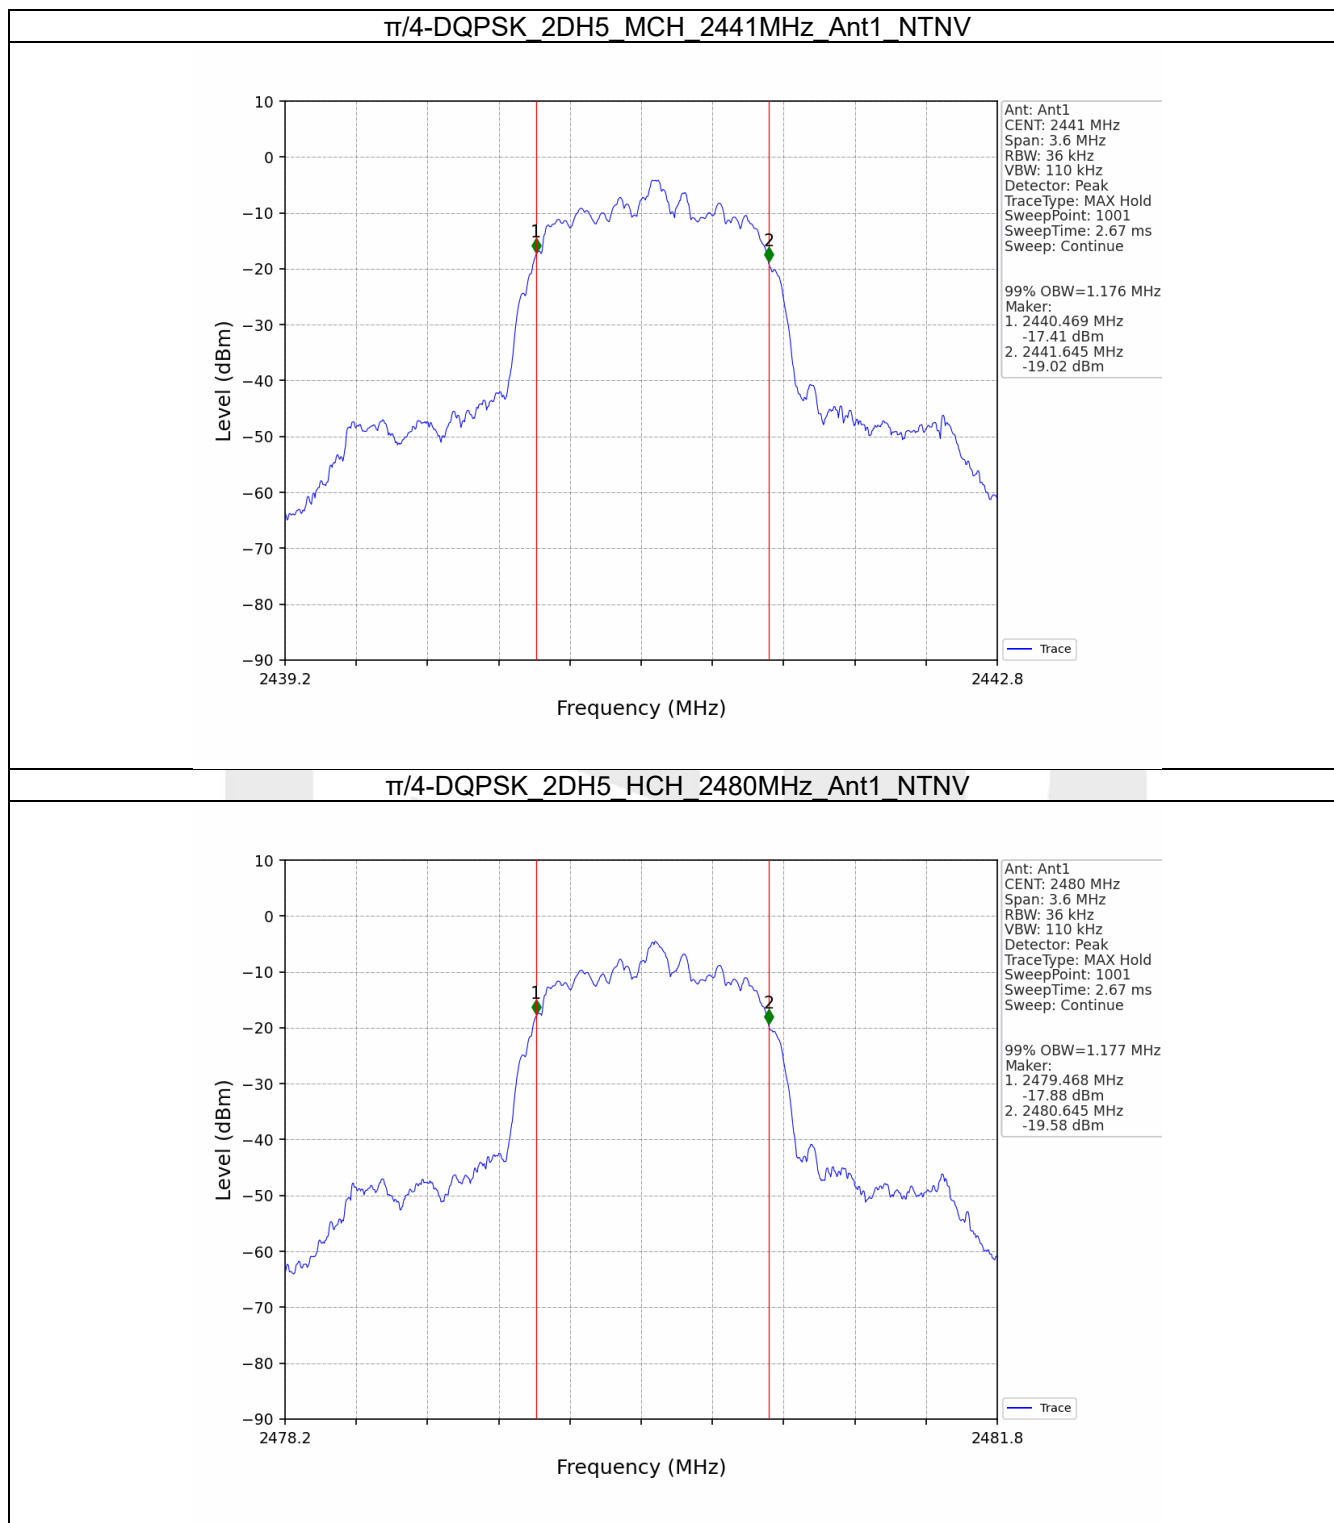



2.2.2 20dB BW

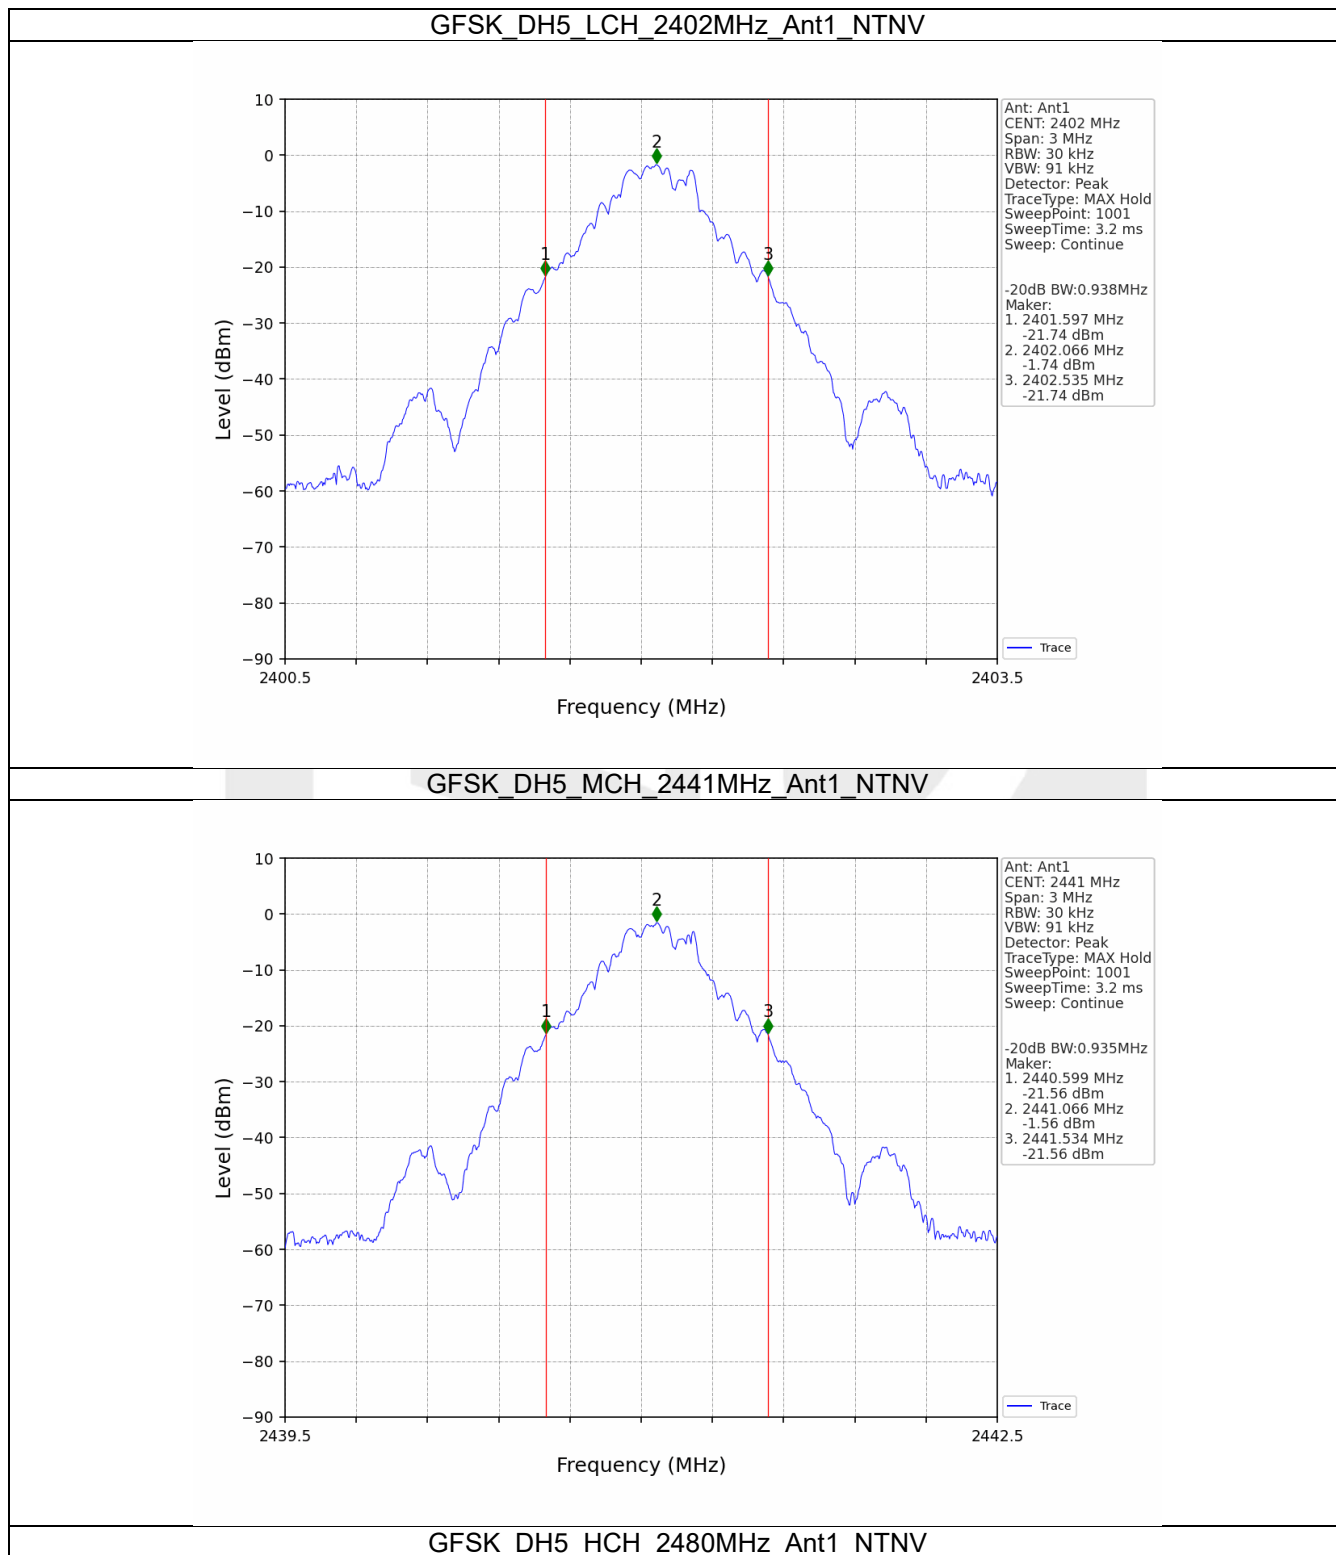

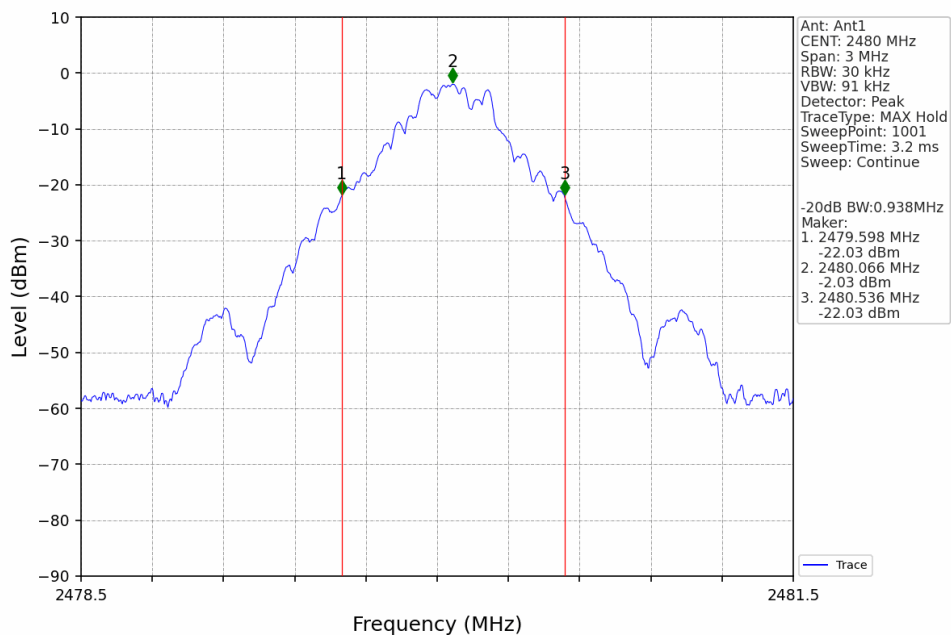

$\pi/4$ -DQPSK 2DH5 LCH 2402MHz Ant1 NTN

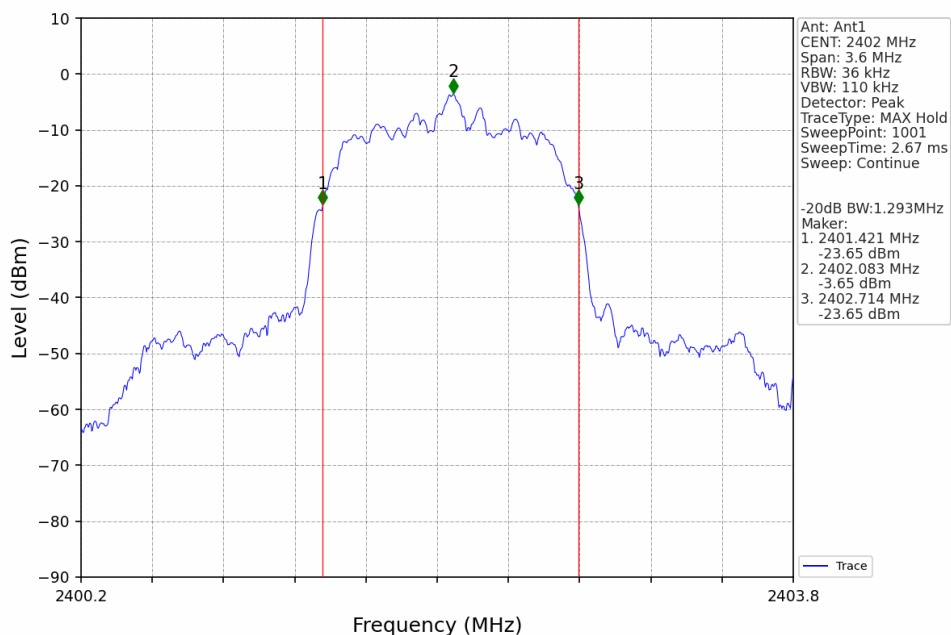

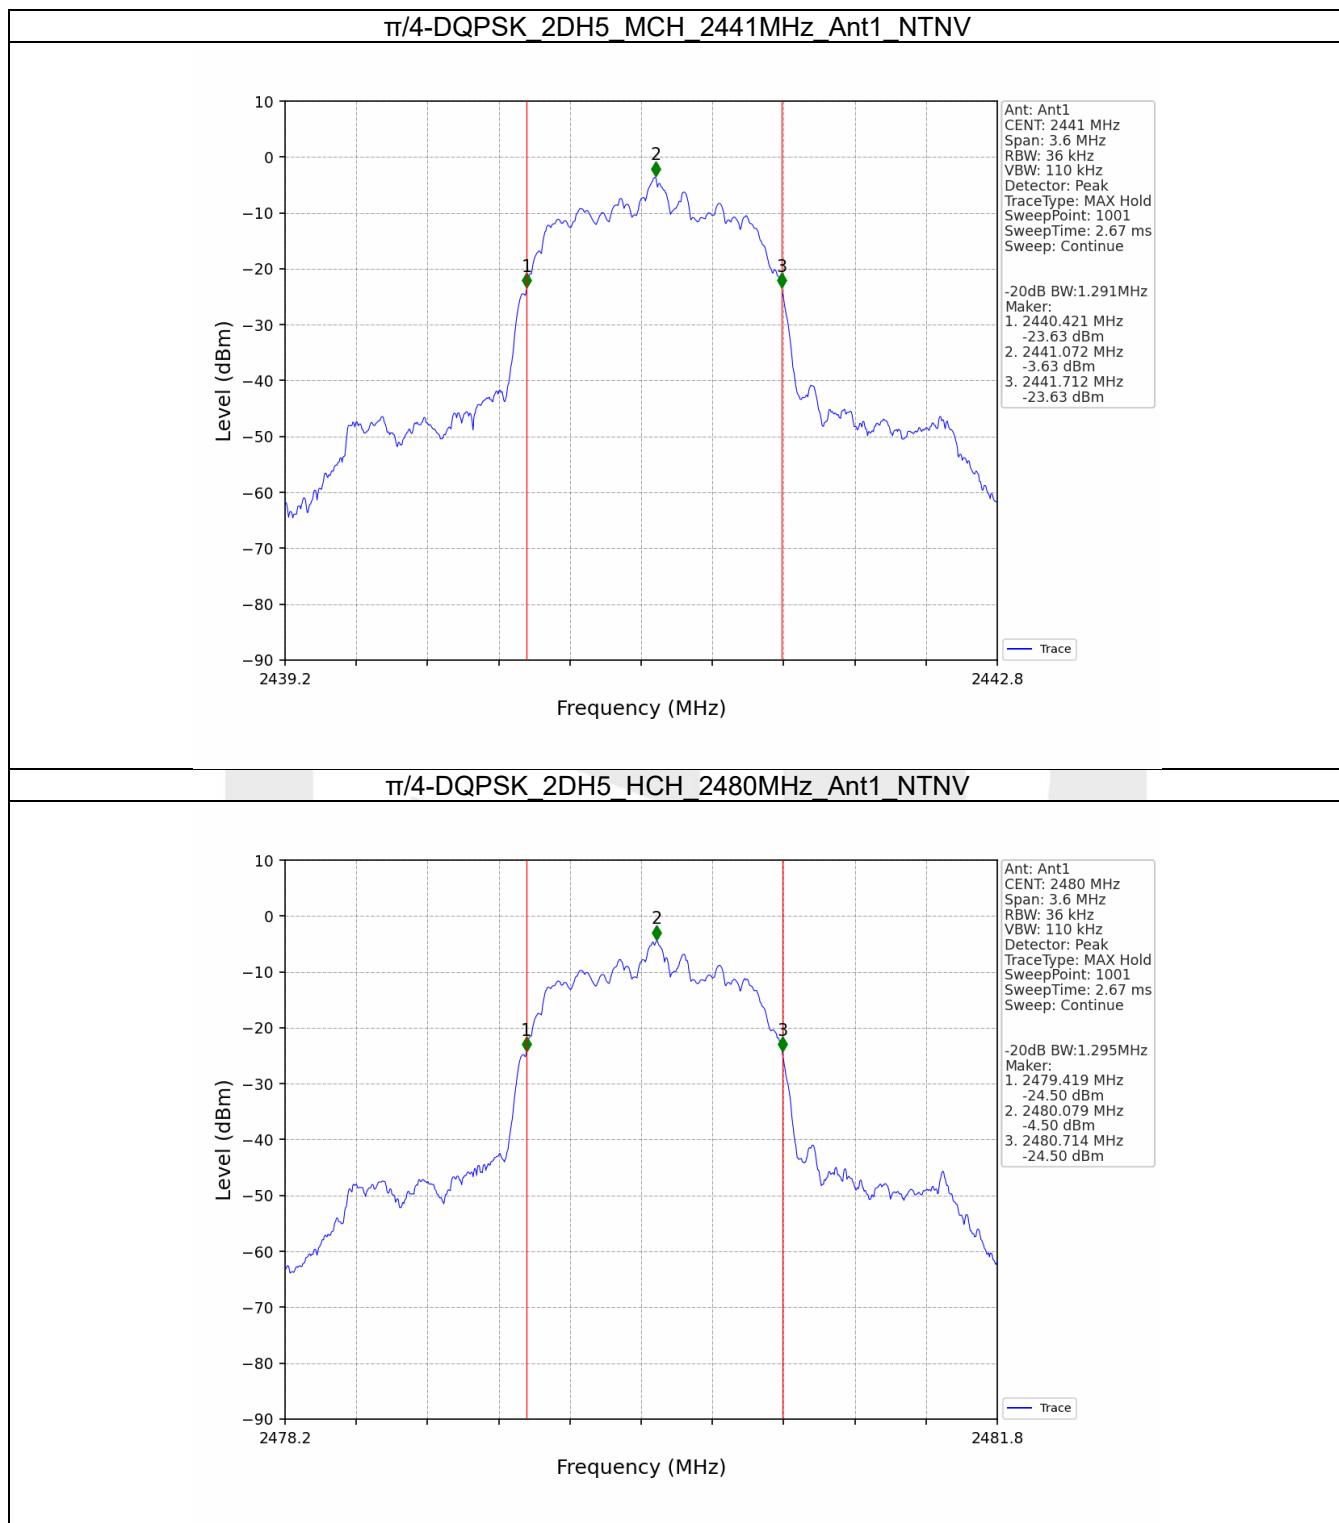

3. Maximum Conducted Output Power


3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	0.89	≤ 30	Pass
		2441	DH5	0.90	≤ 30	Pass
		2480	DH5	0.54	≤ 30	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	0.77	≤ 20.97	Pass
		2441	2DH5	0.61	≤ 20.97	Pass
		2480	2DH5	0.06	≤ 20.97	Pass


3.2 Test Graph


3.2.1 Power

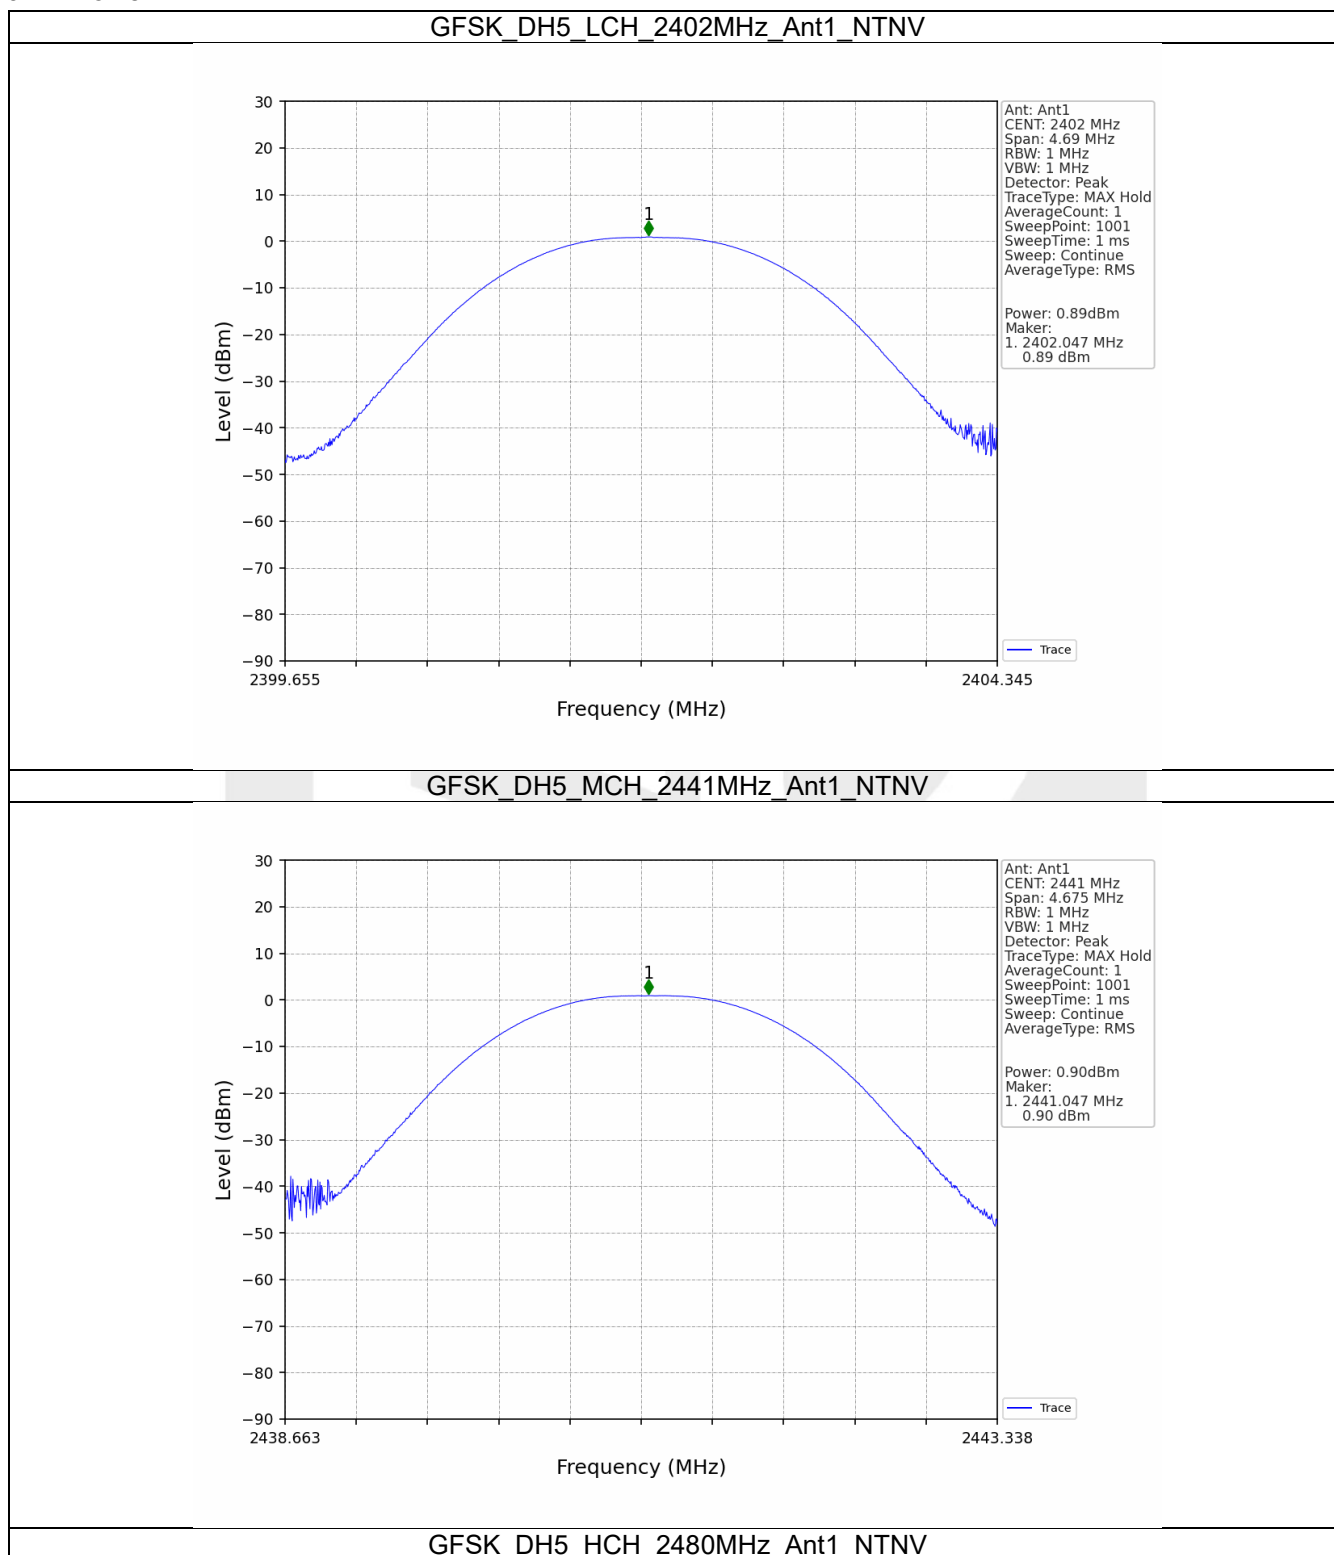

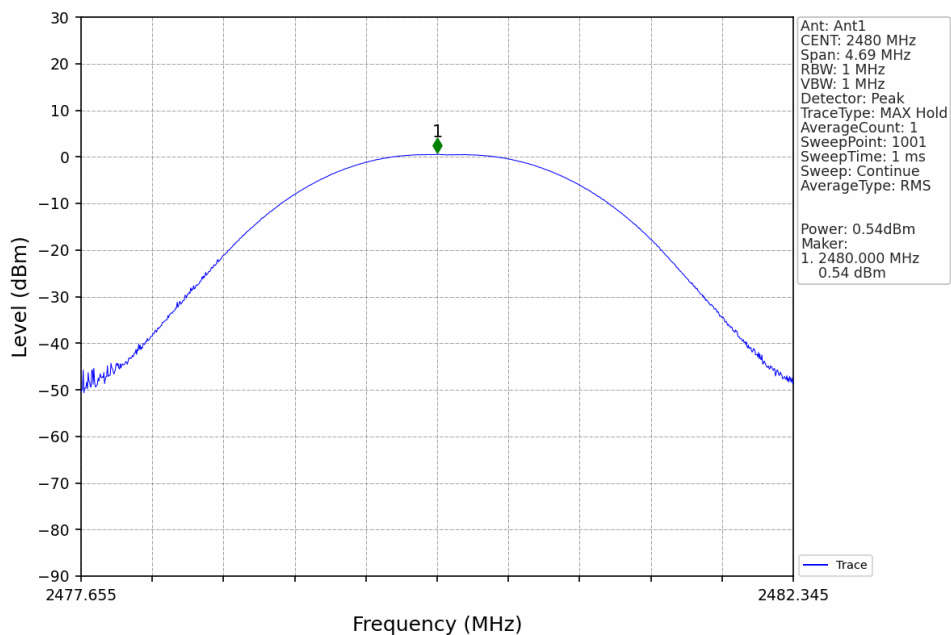

$\pi/4$ -DQPSK 2DH5 LCH 2402MHz Ant1 NTN

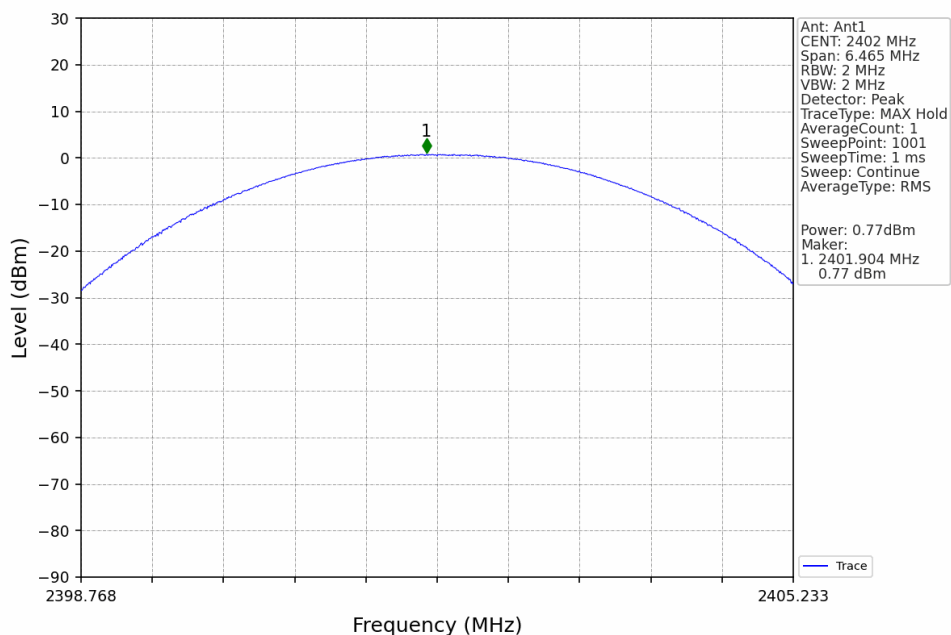

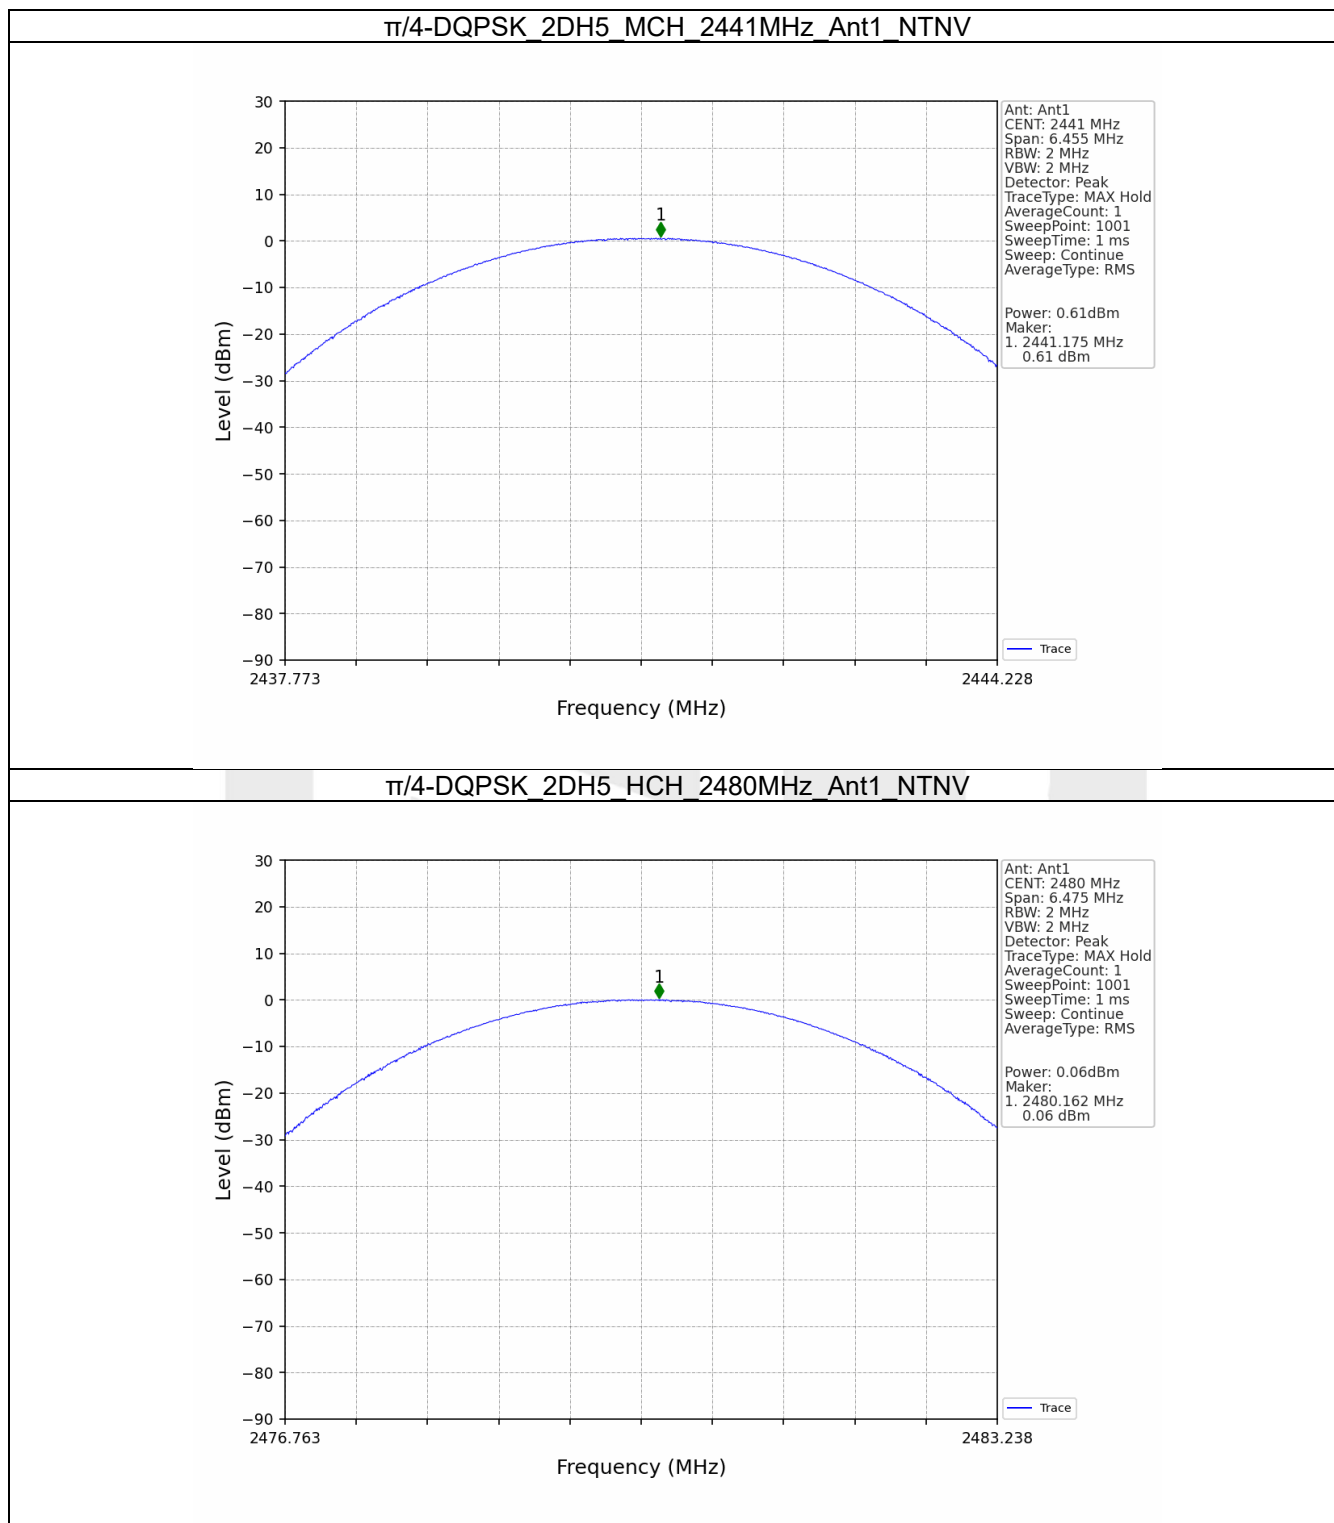

4. Carrier Frequency Separation


4.1 Test Result

4.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.026	0.938	≥ 0.938	Pass
$\pi/4$ -DQPSK	SISO	HOPP	2DH5	0.991	1.295	≥ 0.863	Pass

4.2 Test Graph

4.2.1 Ant1

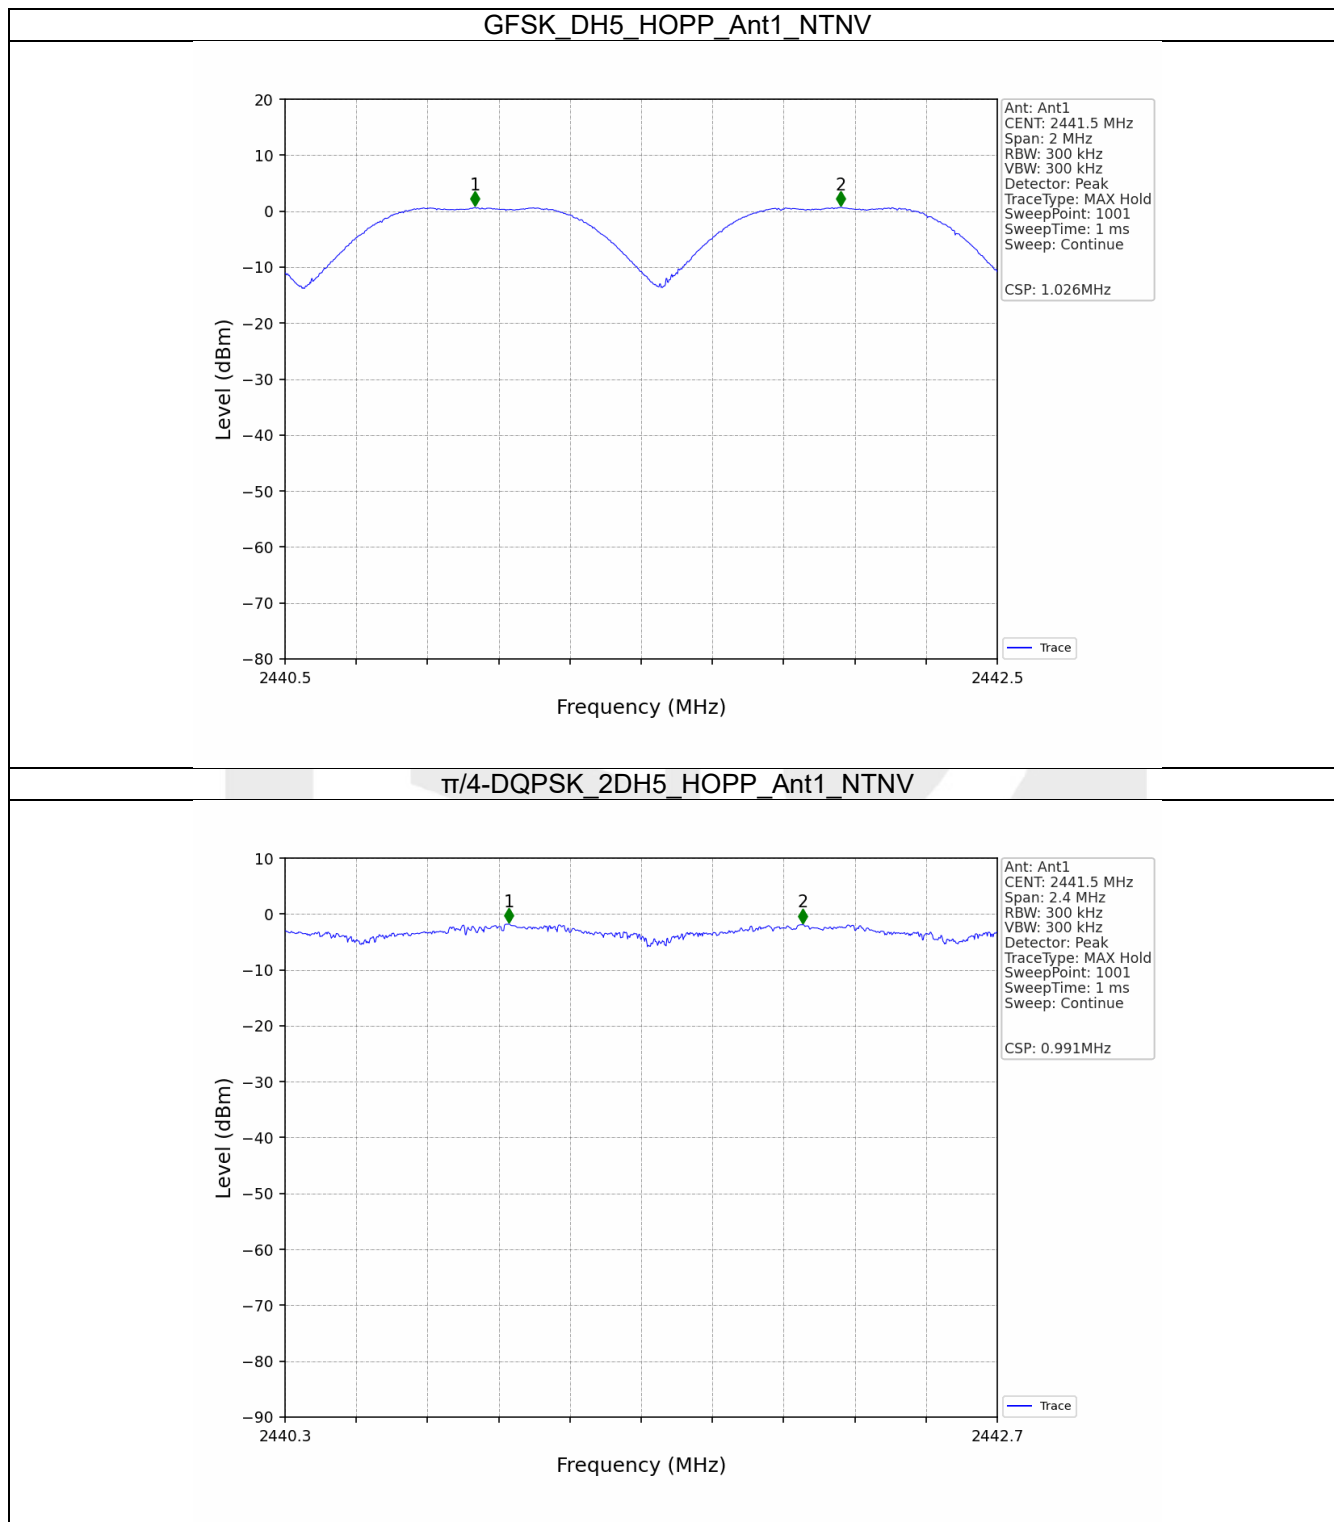

5. Number of Hopping Frequencies

5.1 Test Result


5.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
$\pi/4$ -DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass



5.2 Test Graph

5.2.1 HoppNum

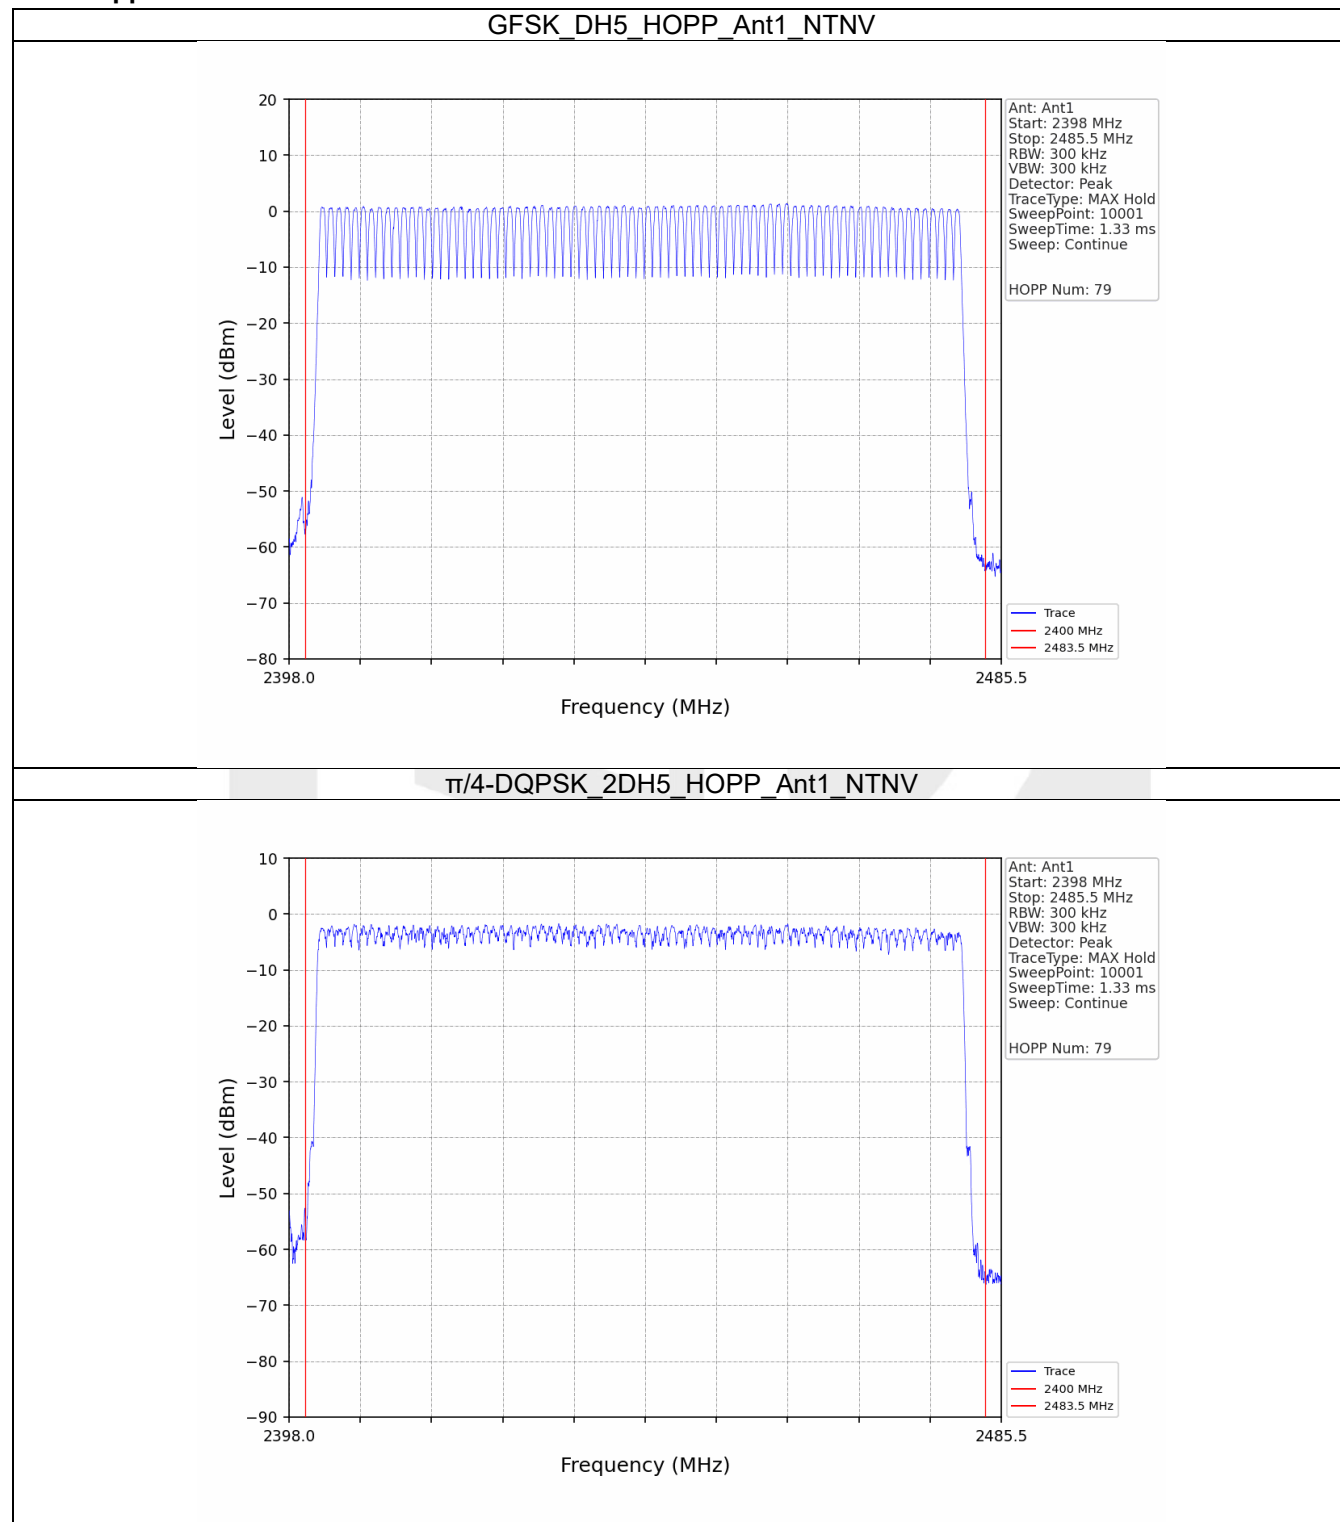

6. Time of Occupancy (Dwell Time)


6.1 Test Result


6.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.384	31.600	320	122.880	<=400	Pass
			DH3	1.638	31.600	161	263.718	<=400	Pass
			DH5	2.888	31.600	111	320.568	<=400	Pass
$\pi/4$ -DQPSK	SISO	HOPP	2DH1	0.396	31.600	320	126.720	<=400	Pass
			2DH3	1.648	31.600	172	283.456	<=400	Pass
			2DH5	2.896	31.600	101	292.496	<=400	Pass


6.2 Test Graph


6.2.1 Ant1

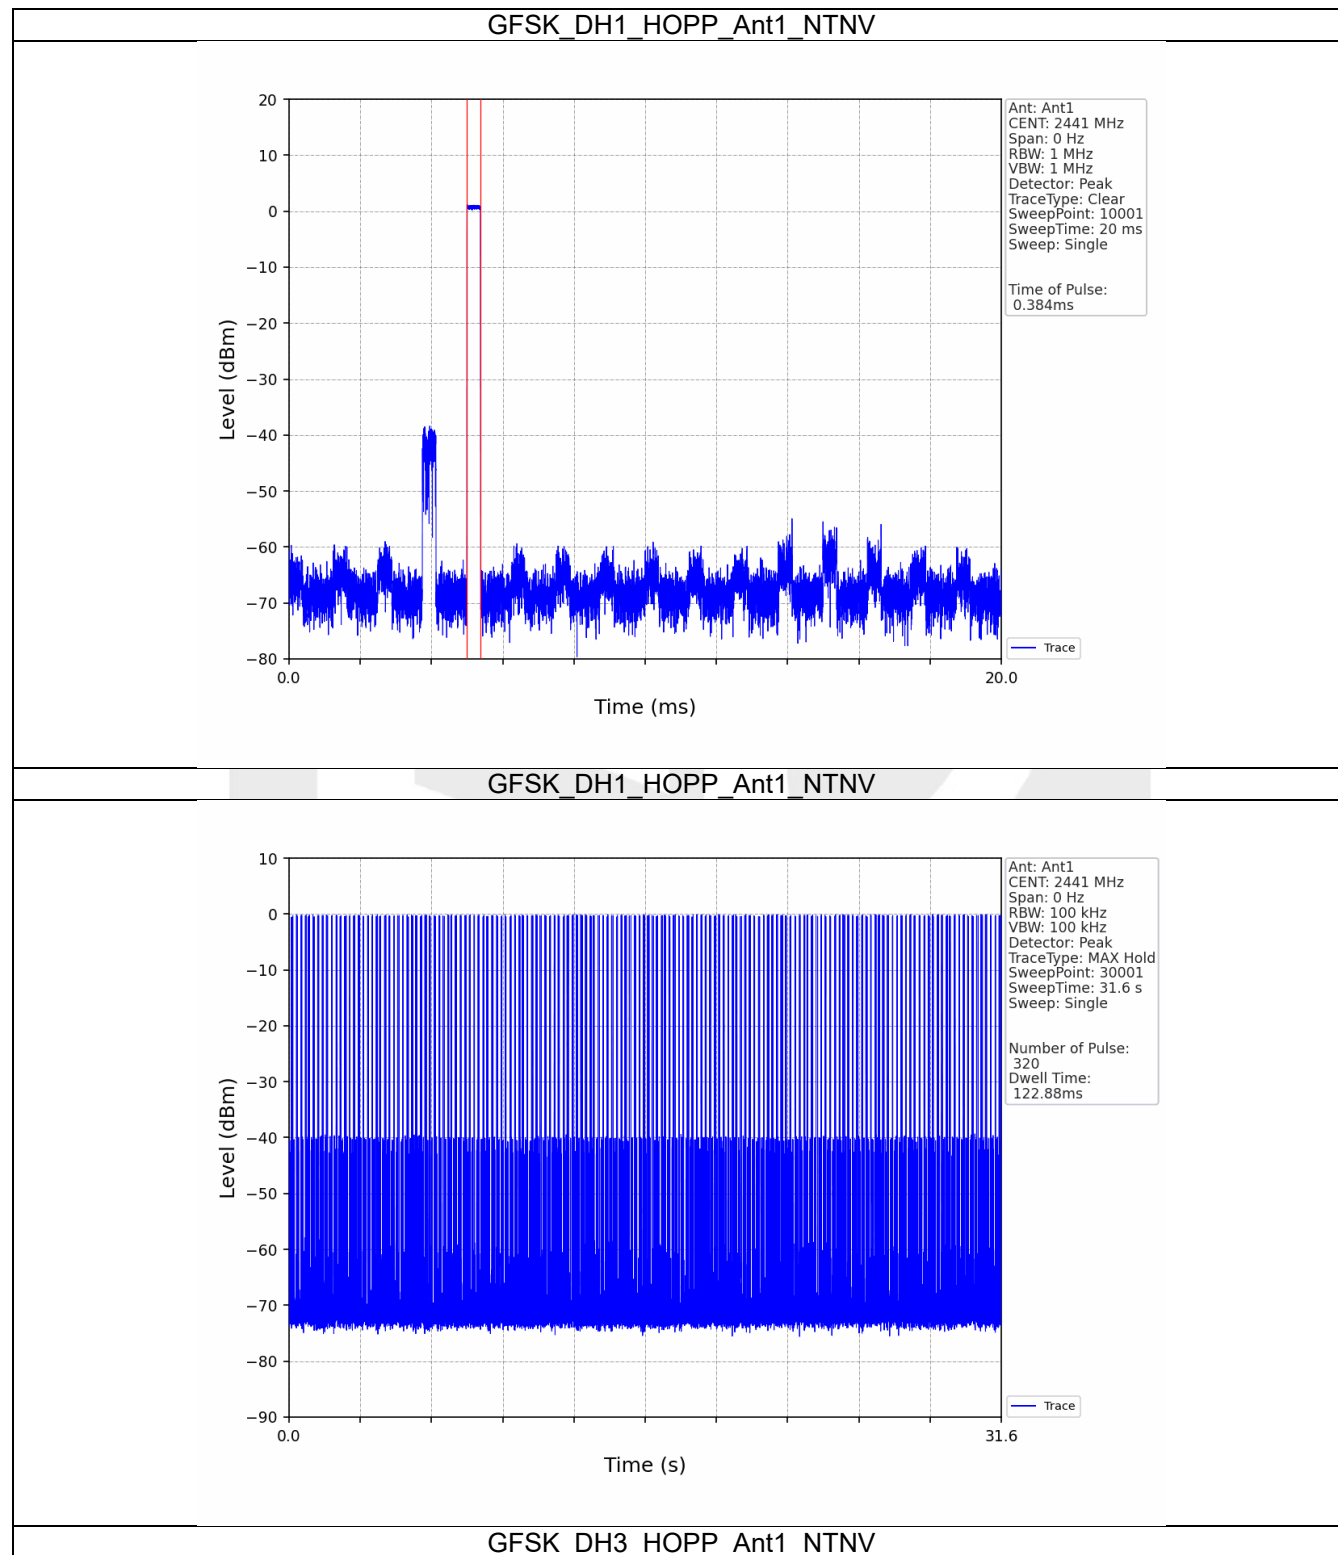


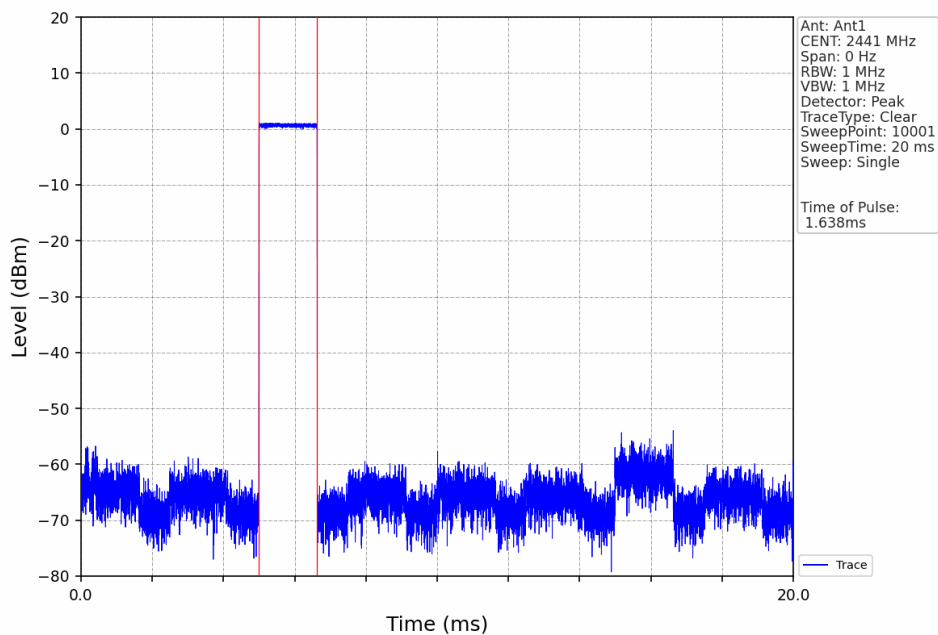



GFSK_DH3_HOPP_Ant1_NTNV

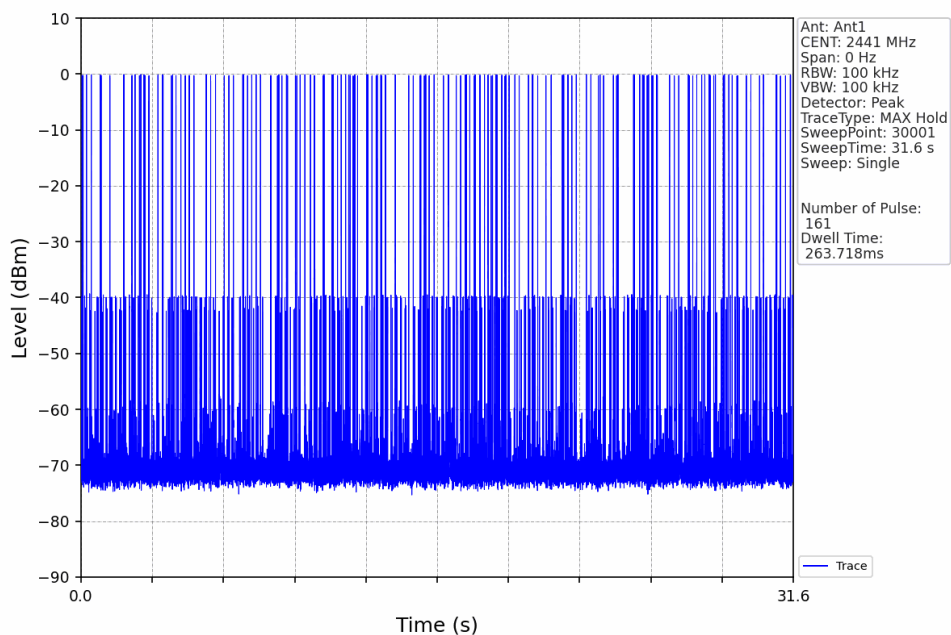

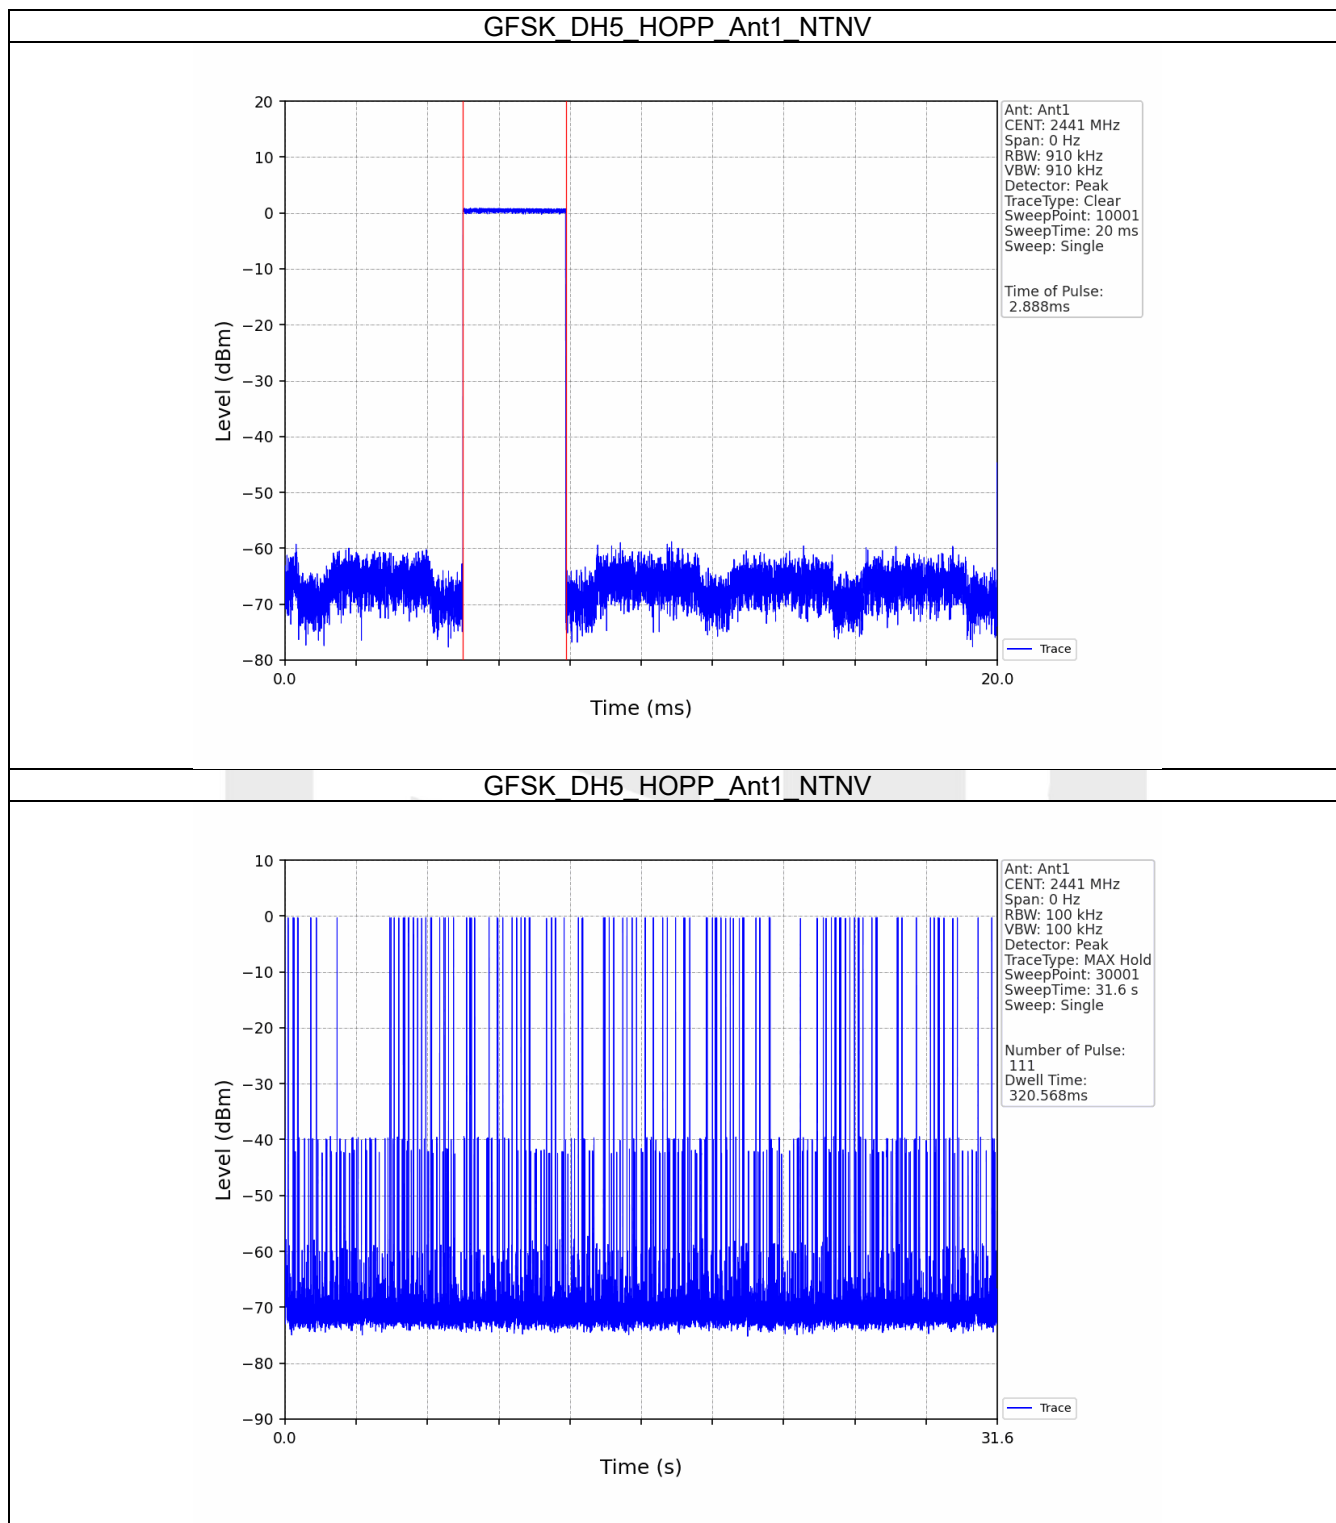

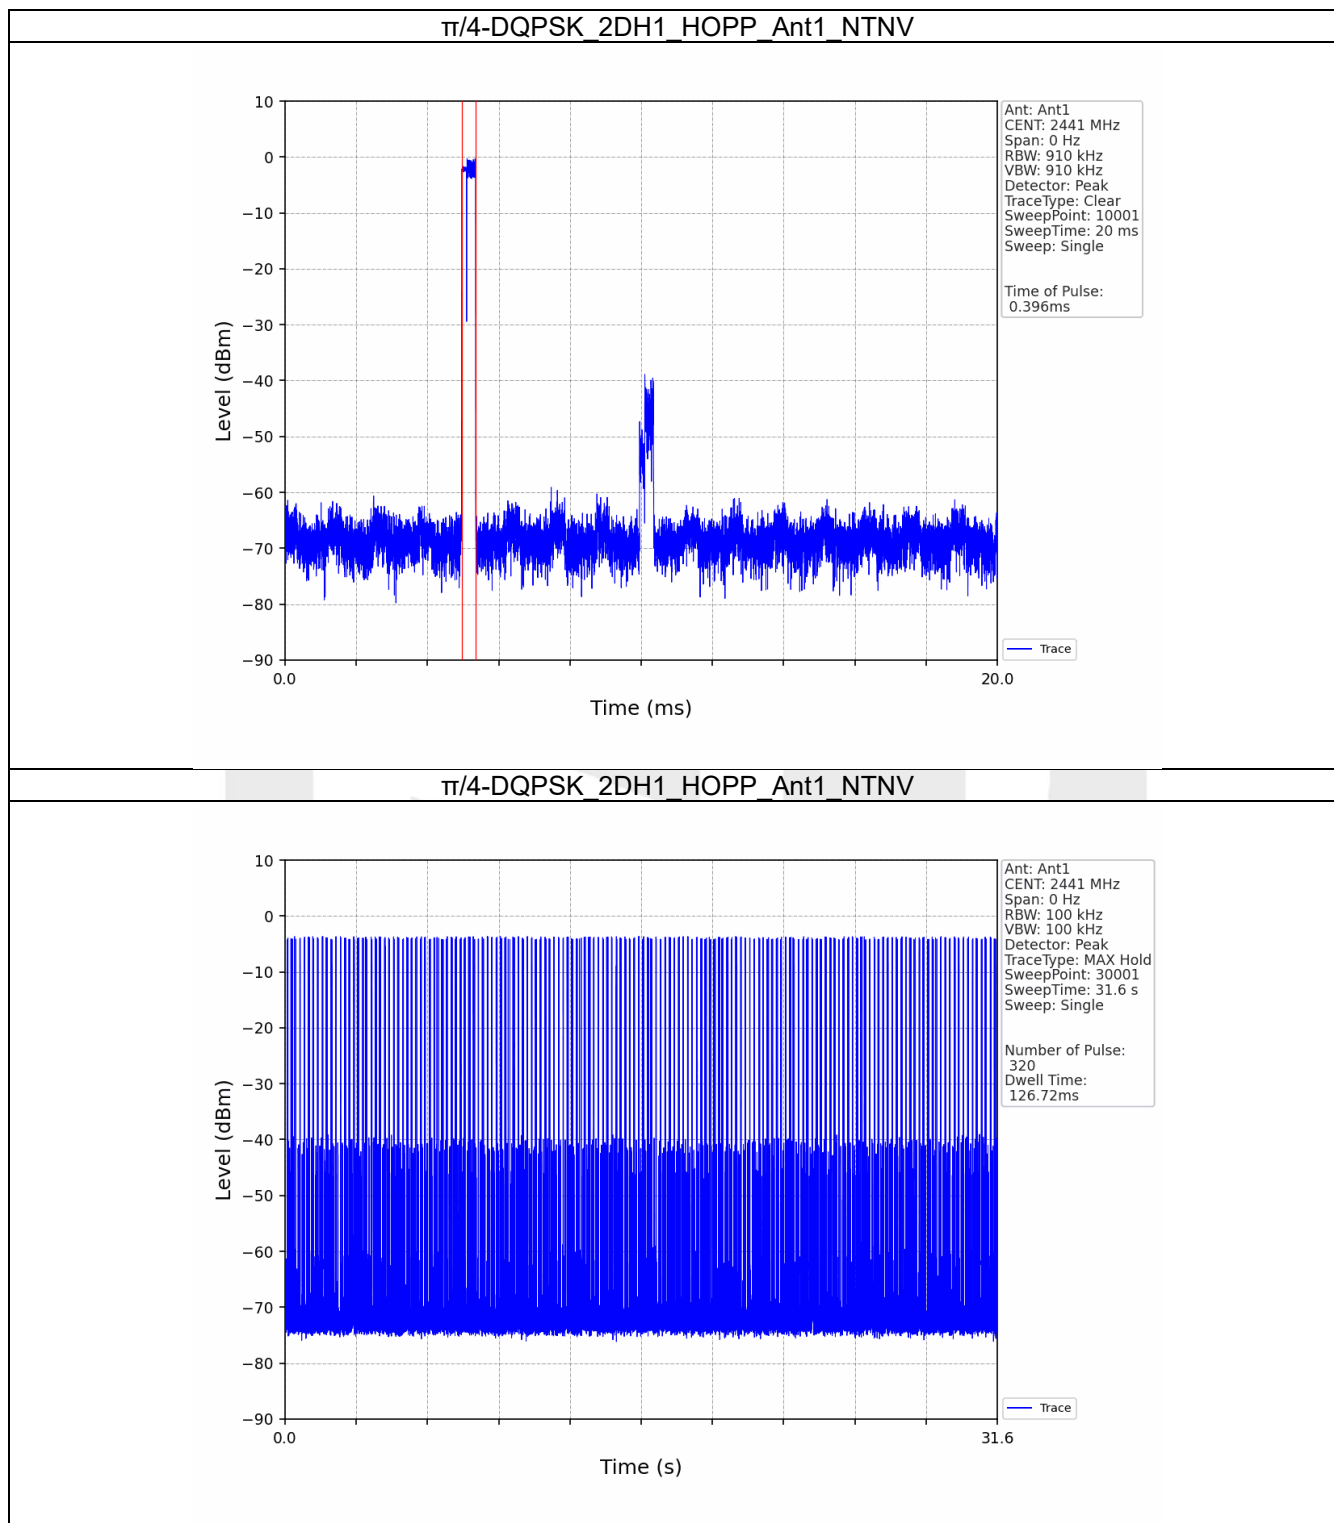

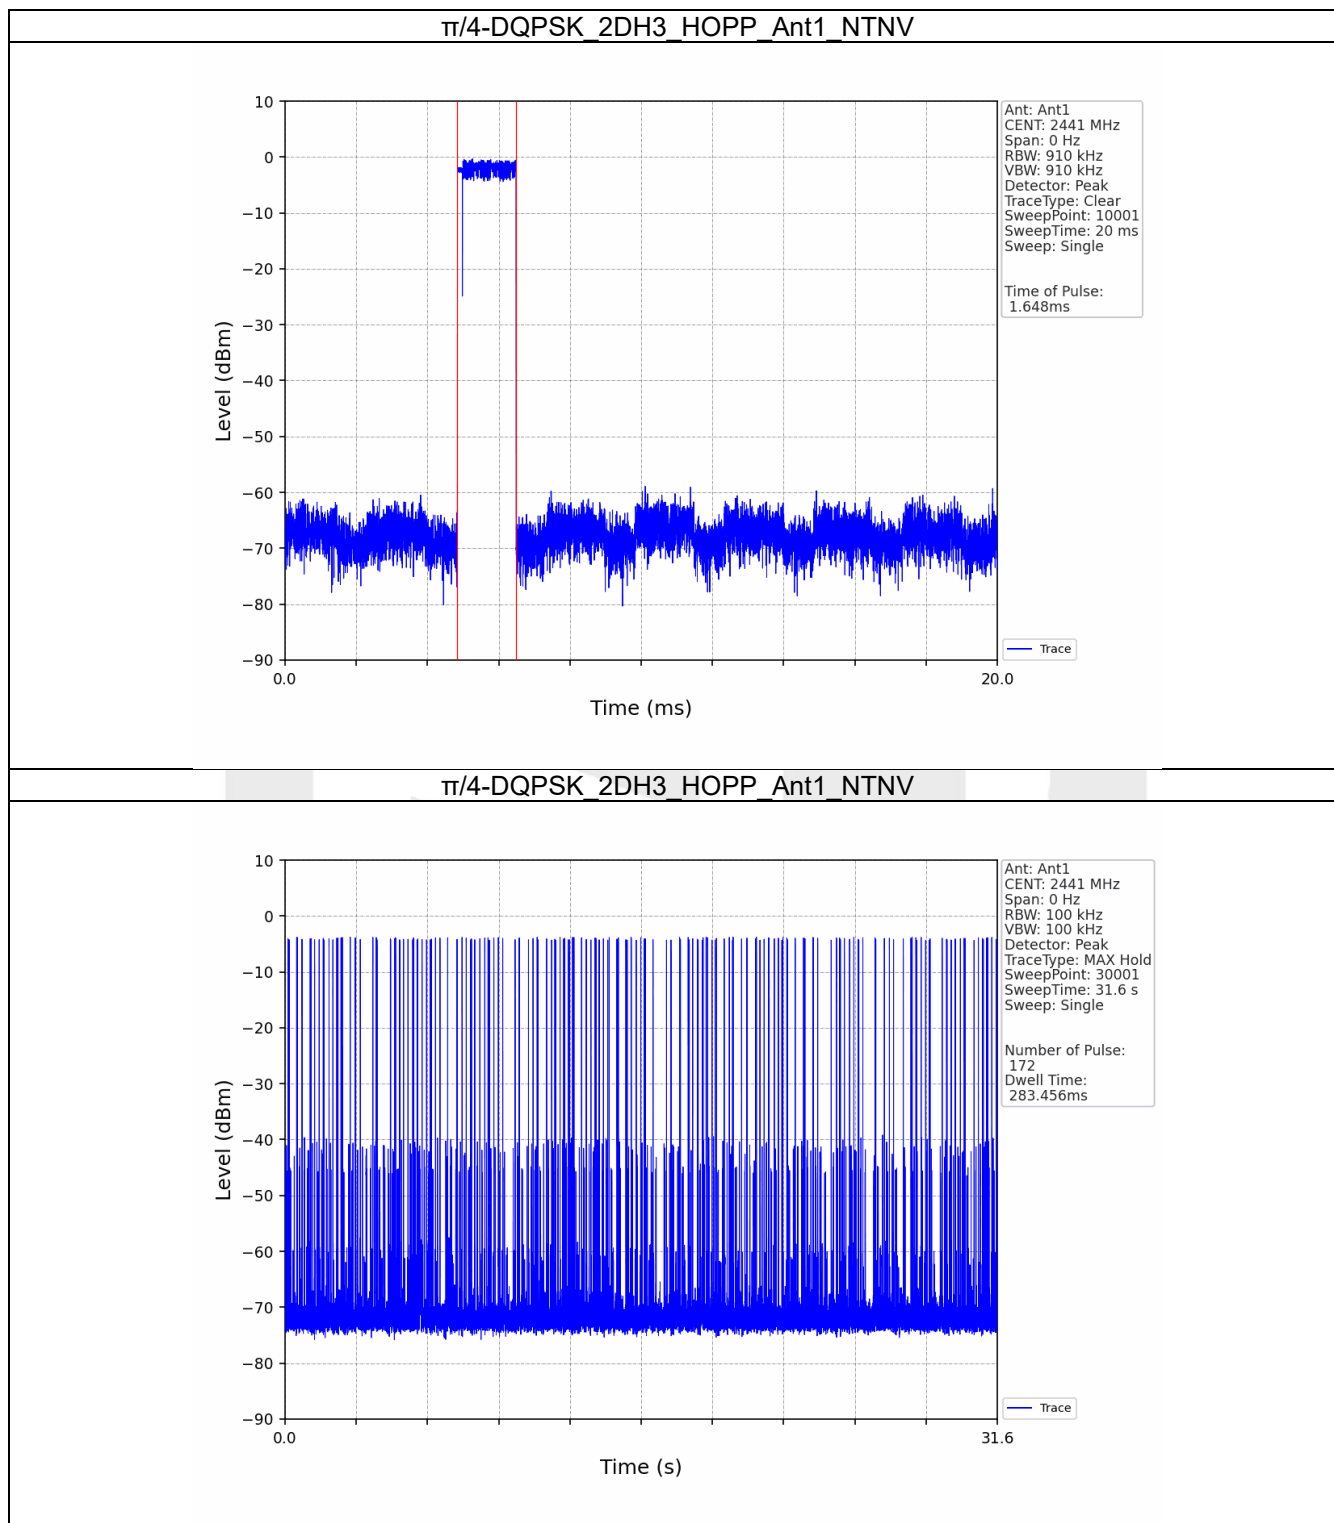

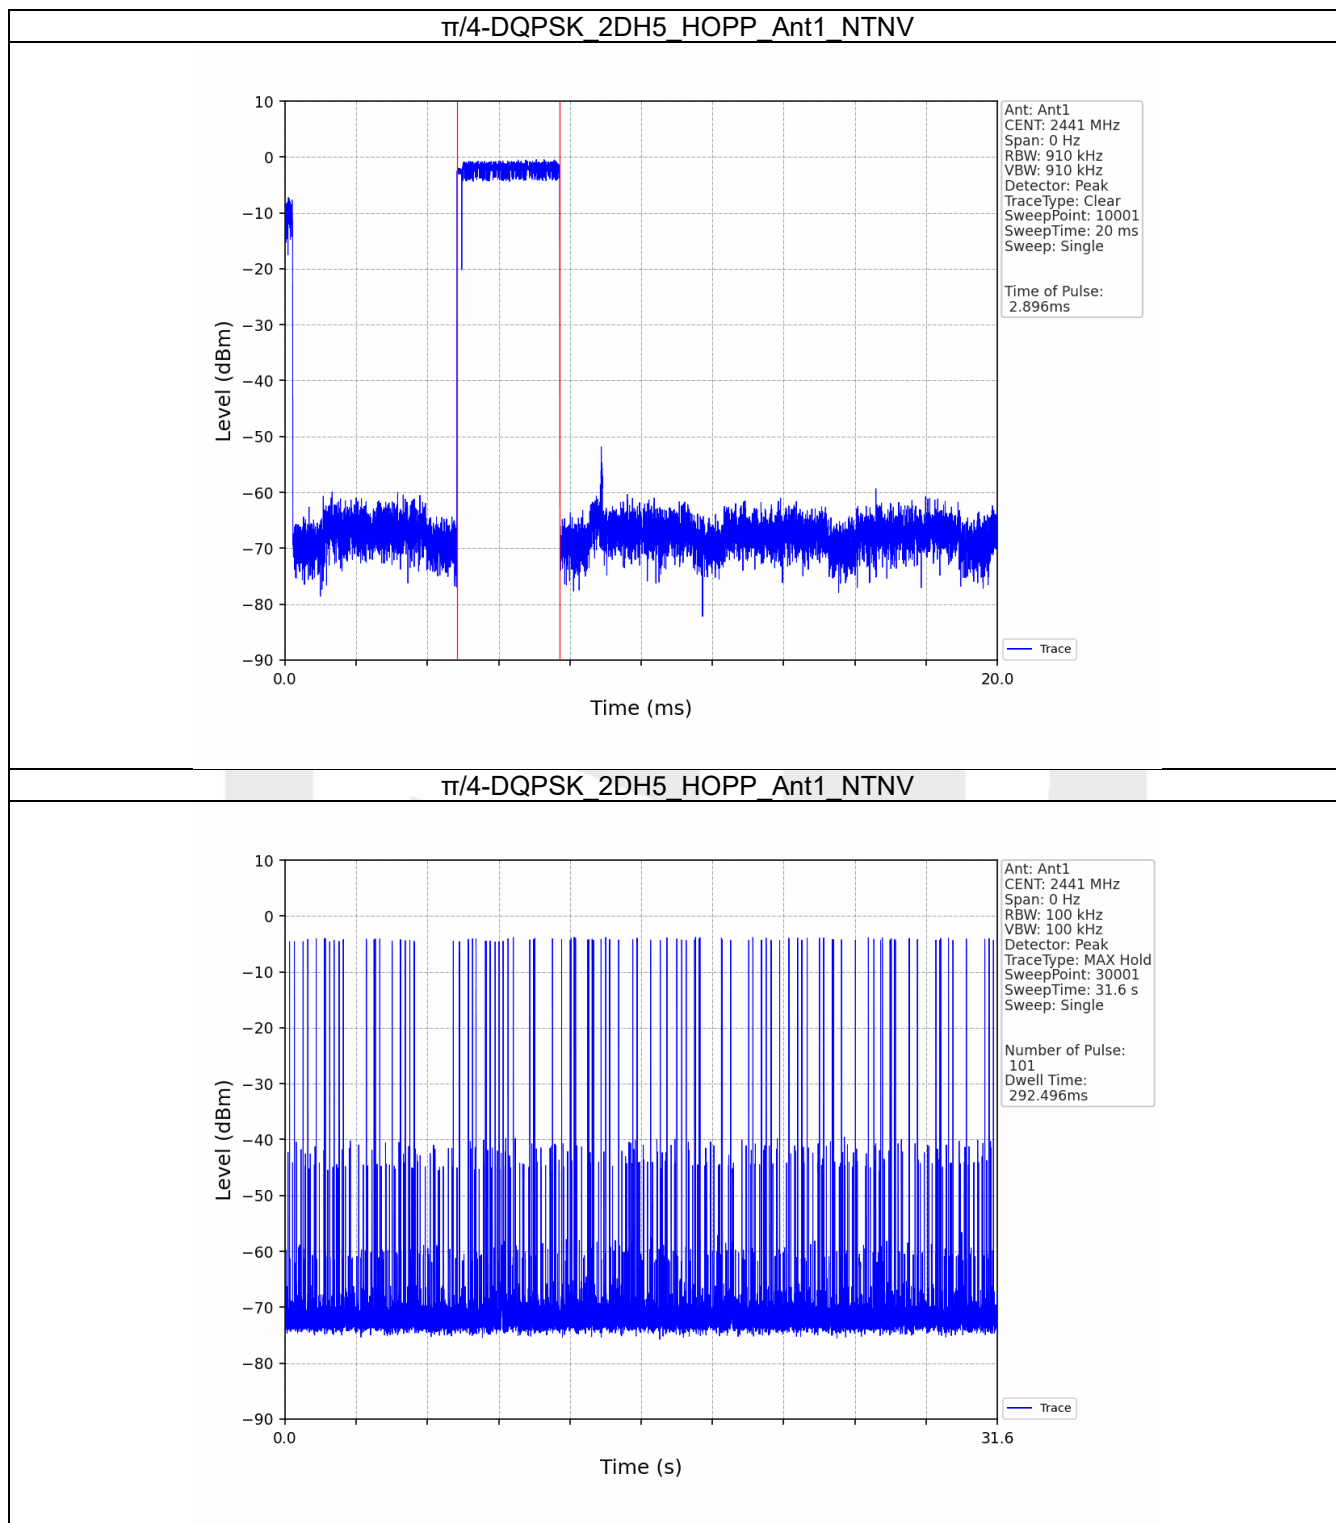

7. Unwanted Emissions In Non-restricted Frequency Bands

7.1 Test Result

7.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	0.50
		2441	DH5	1	0.56
		2480	DH5	1	0.00
		HOPP	DH5	1	1.12
					1.12
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	-1.94
		2441	2DH5	1	-2.26
		2480	2DH5	1	-3.02
		HOPP	2DH5	1	-1.93
					-1.93

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.50	-19.50	Pass
		2441	DH5	1	0.56	-19.44	Pass
		2480	DH5	1	0.00	-20.00	Pass
		HOPP	DH5	1	1.12	-18.88	Pass
					1.12	-18.88	Pass
$\pi/4$ -DQPSK	SISO	2402	2DH5	1	-1.94	-21.94	Pass
		2441	2DH5	1	-2.26	-22.26	Pass
		2480	2DH5	1	-3.02	-23.02	Pass
		HOPP	2DH5	1	-1.93	-21.93	Pass
					-1.93	-21.93	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


7.2 Test Graph


7.2.1 Ref

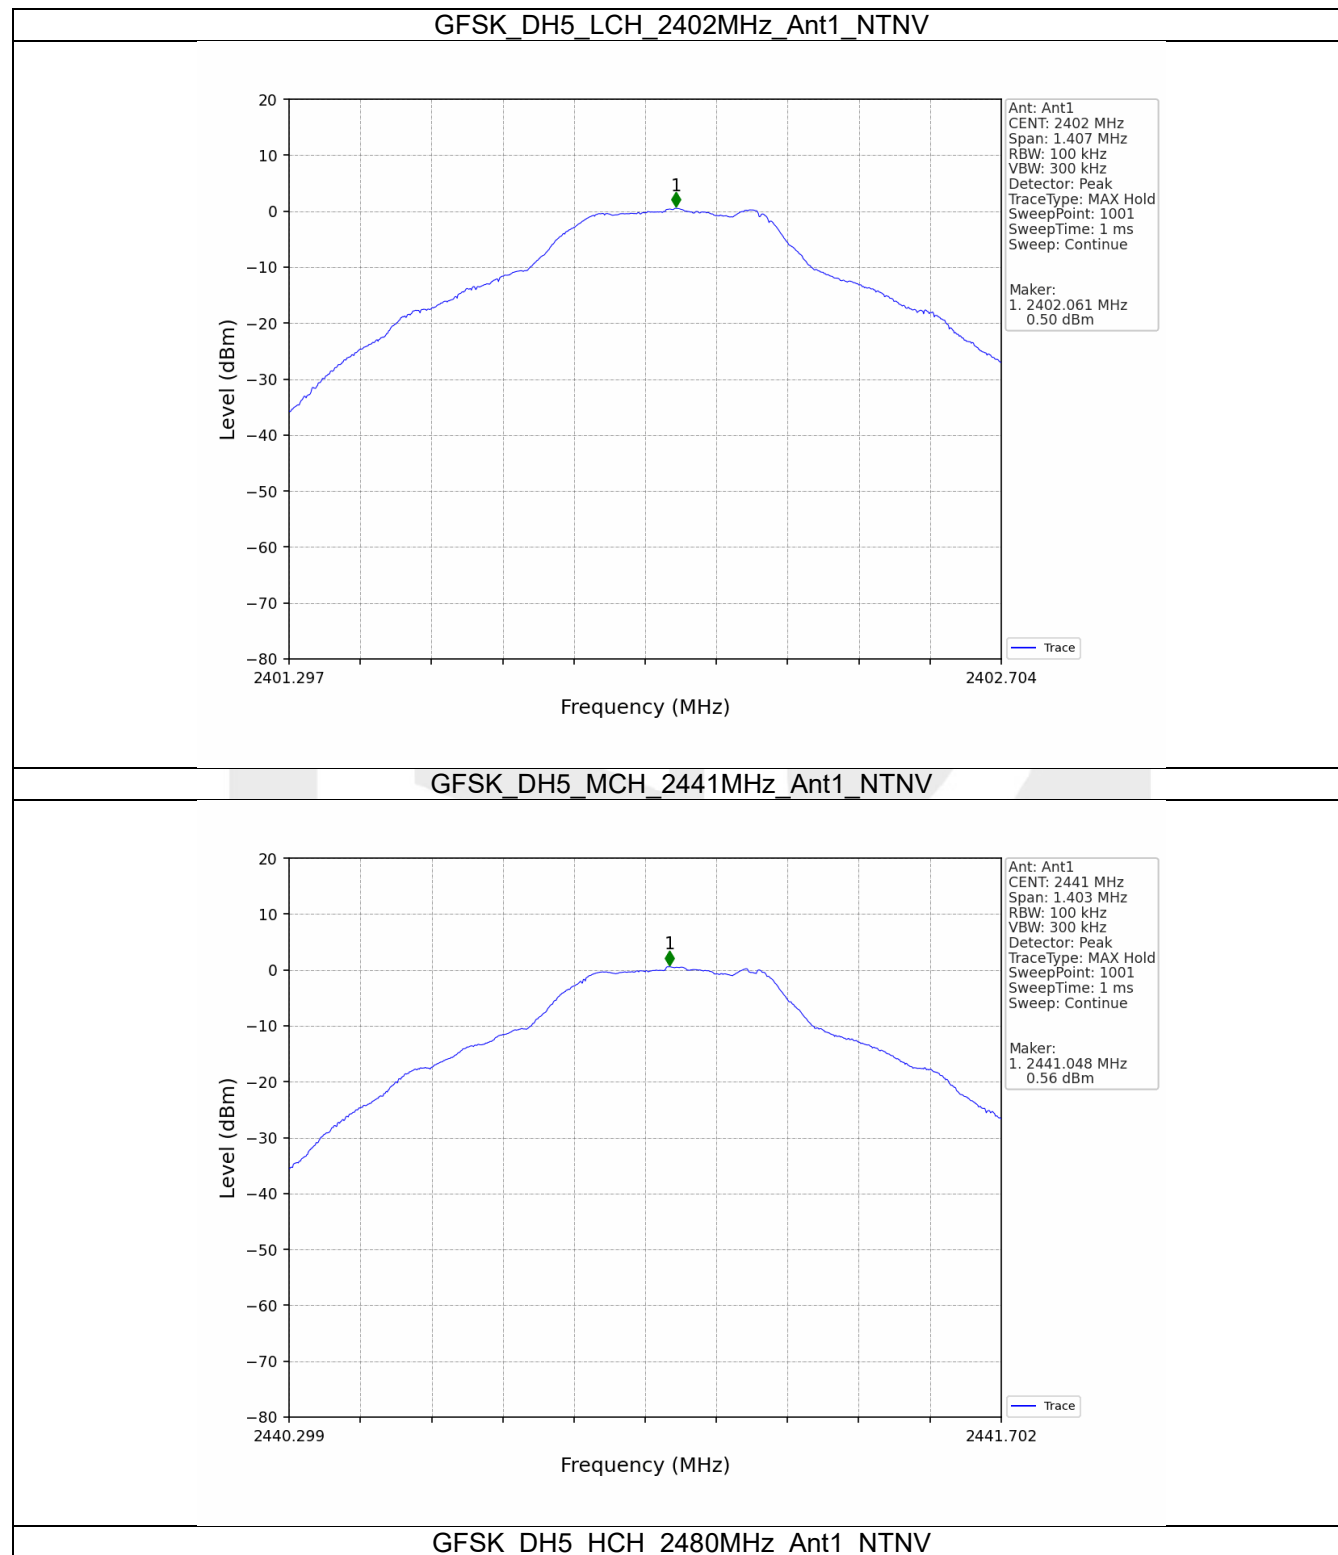

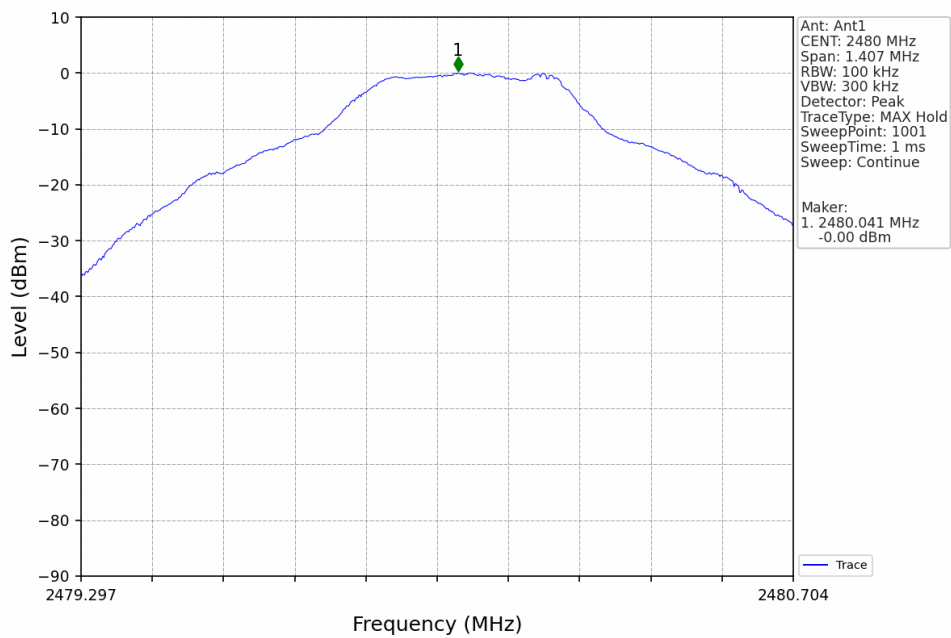


GFSK_DH5_HOPP_Ant1_NTNV

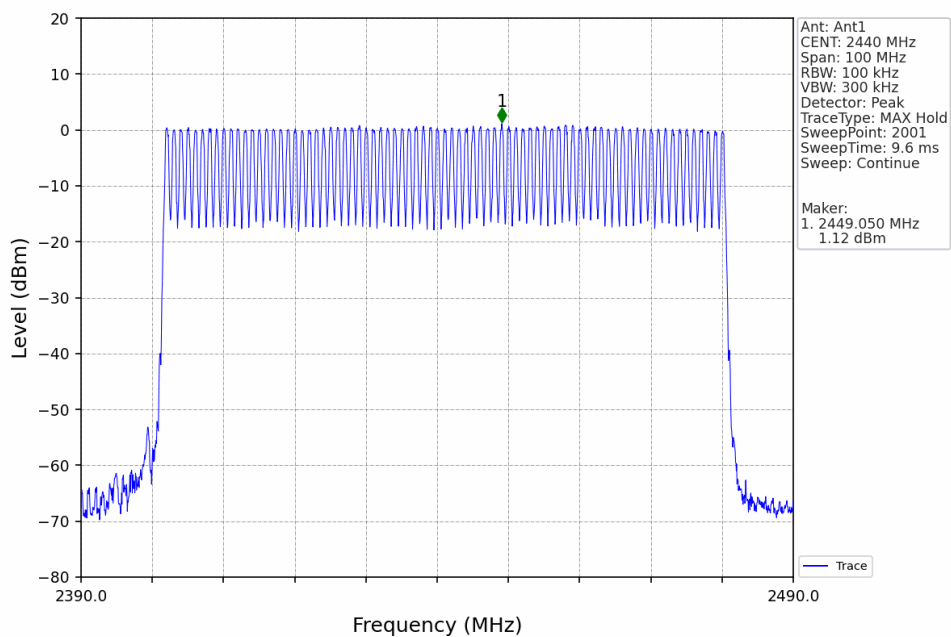


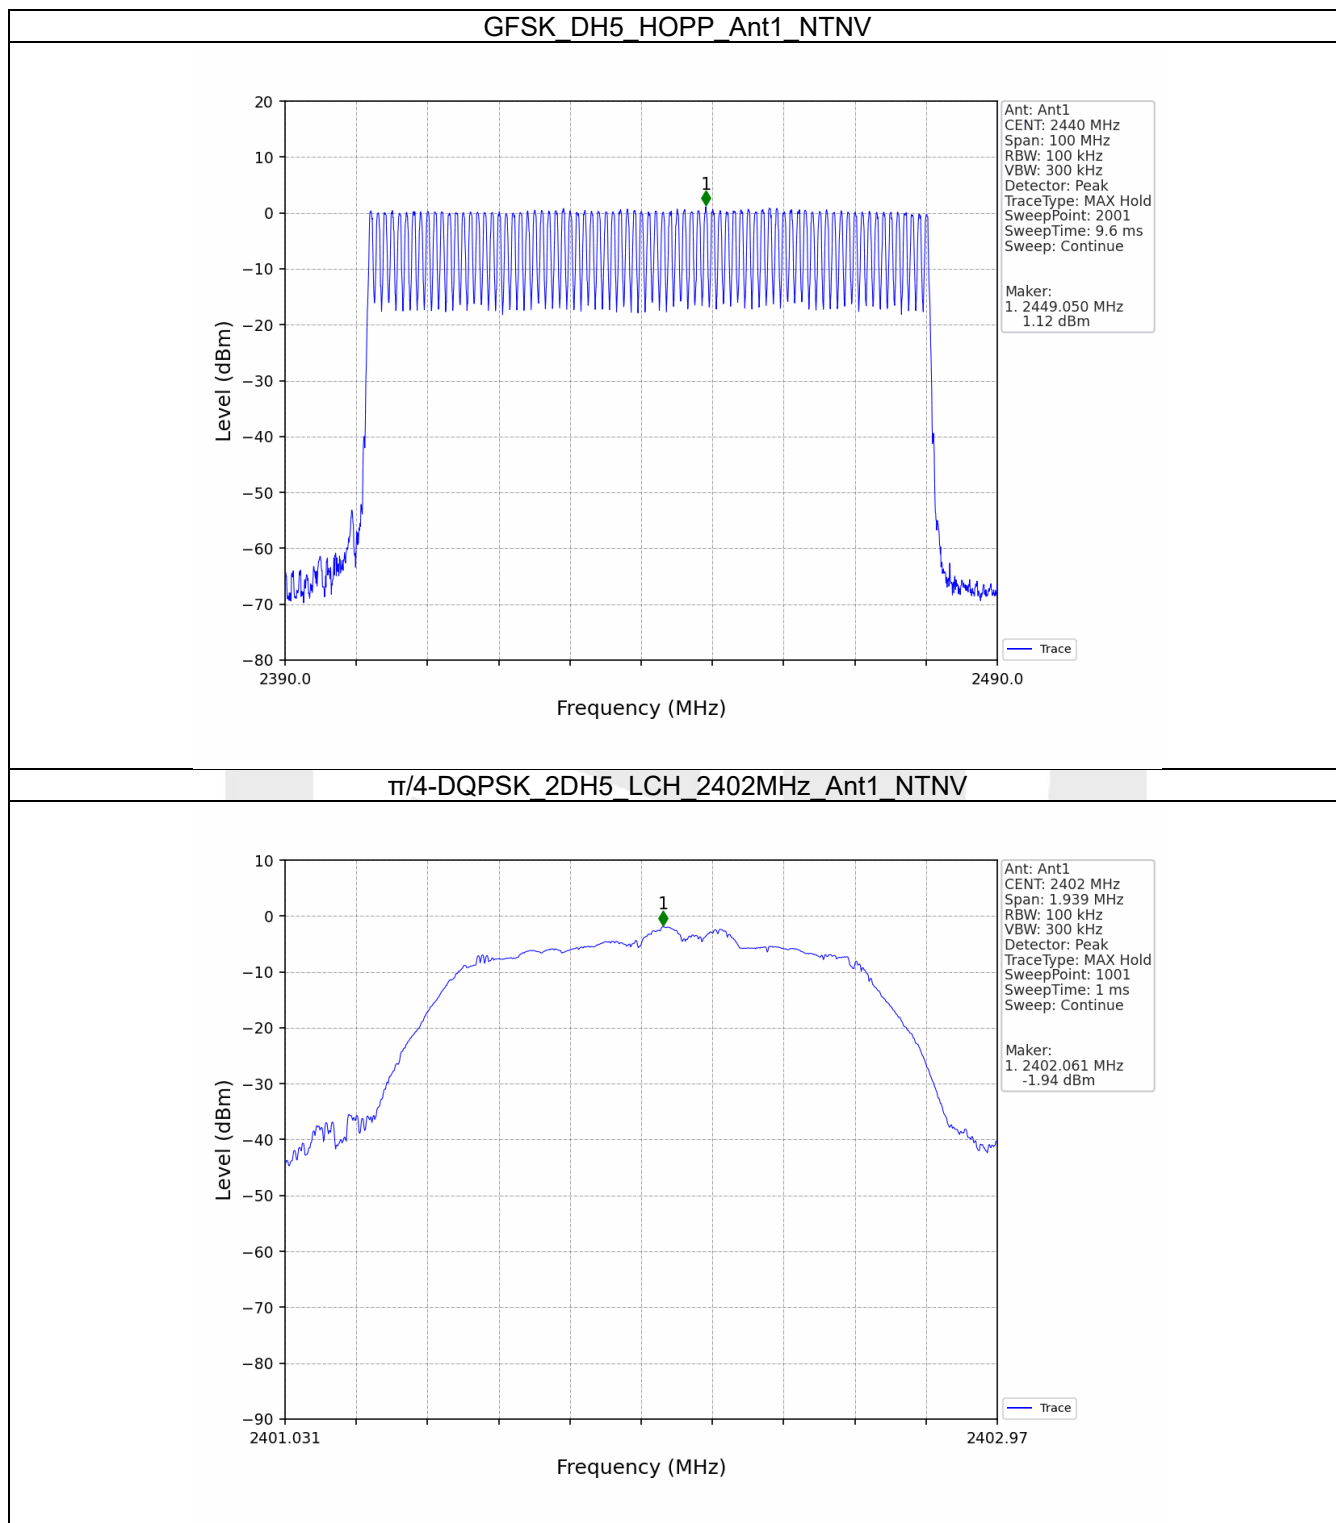


$\pi/4$ -DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

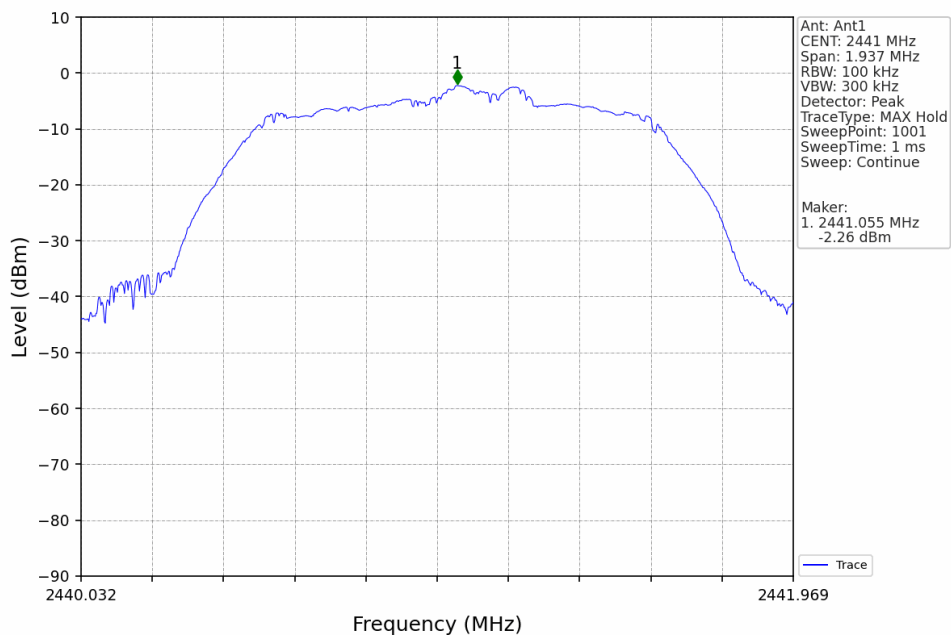



$\pi/4$ -DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

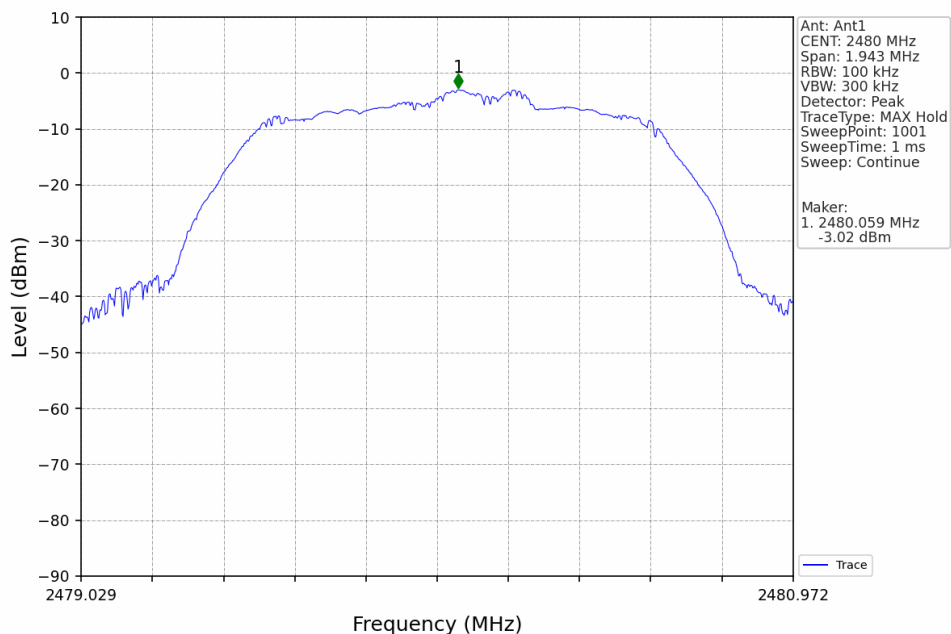

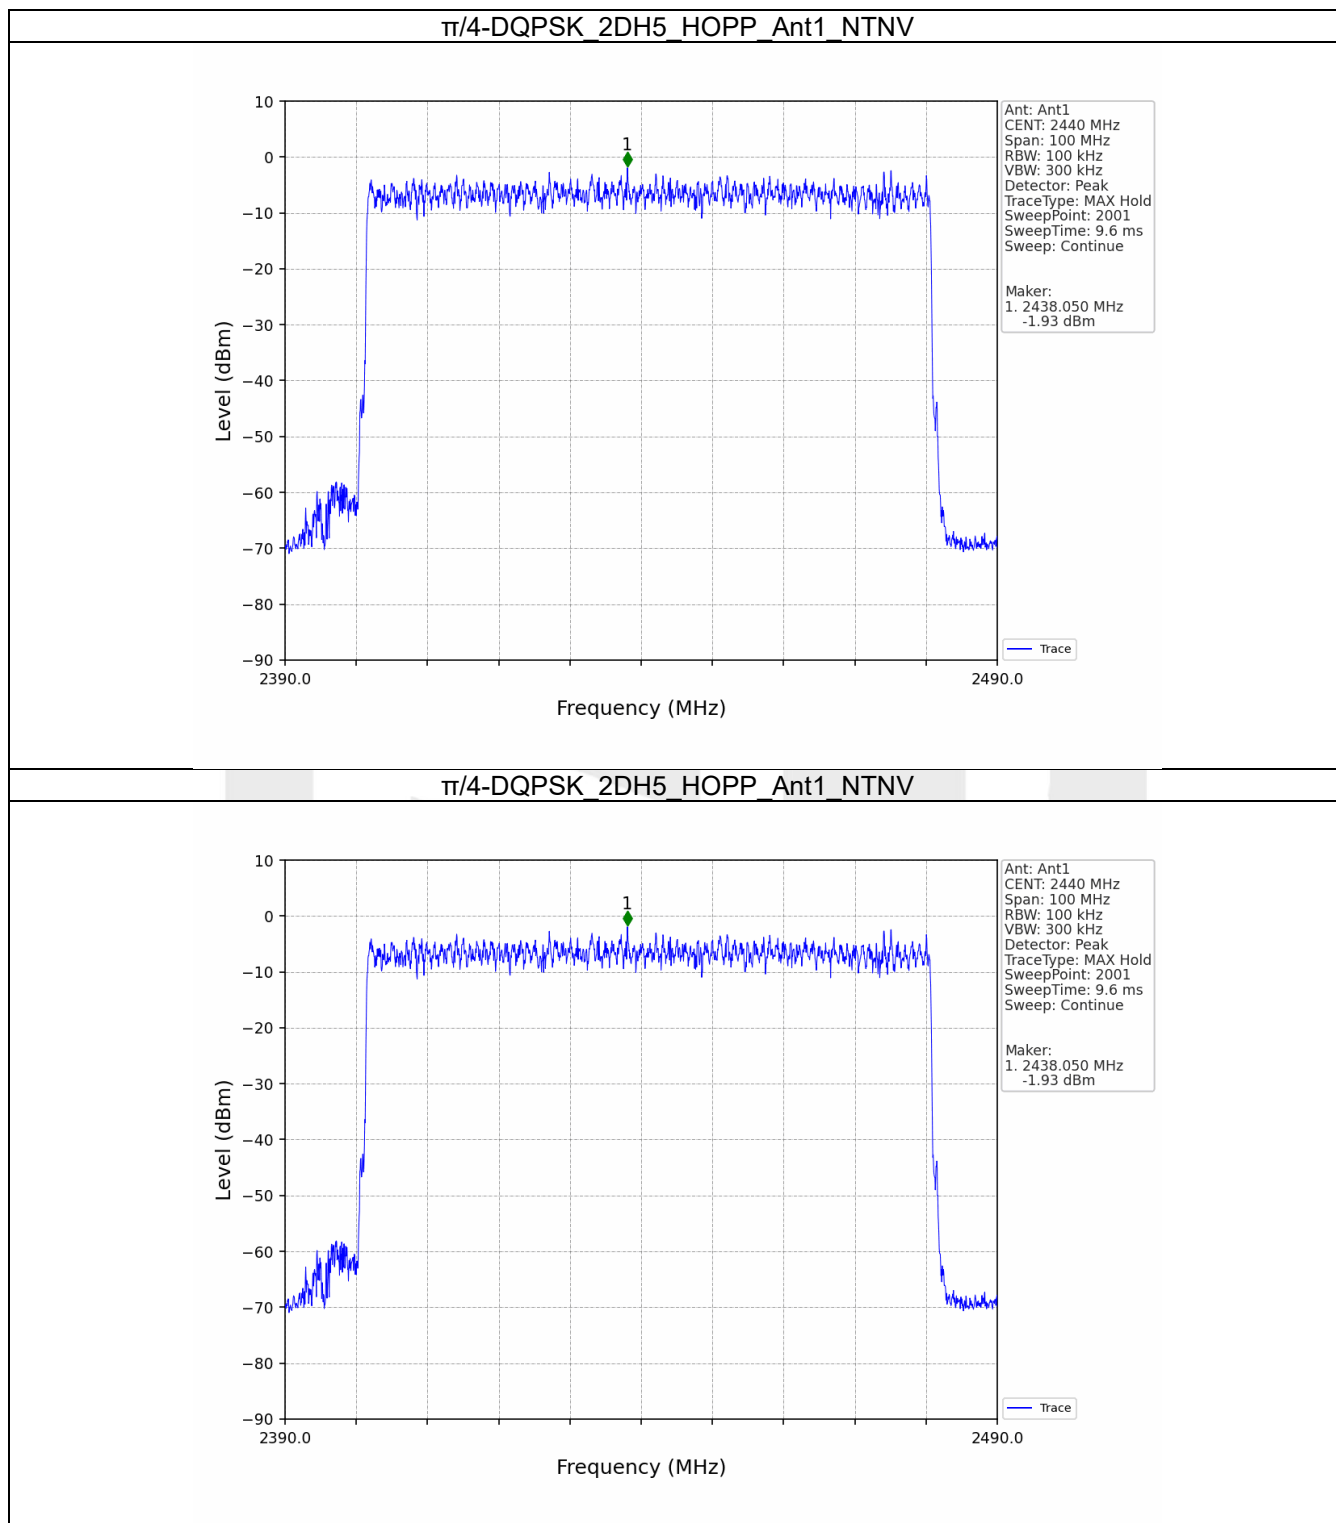



7.2.2 CSE

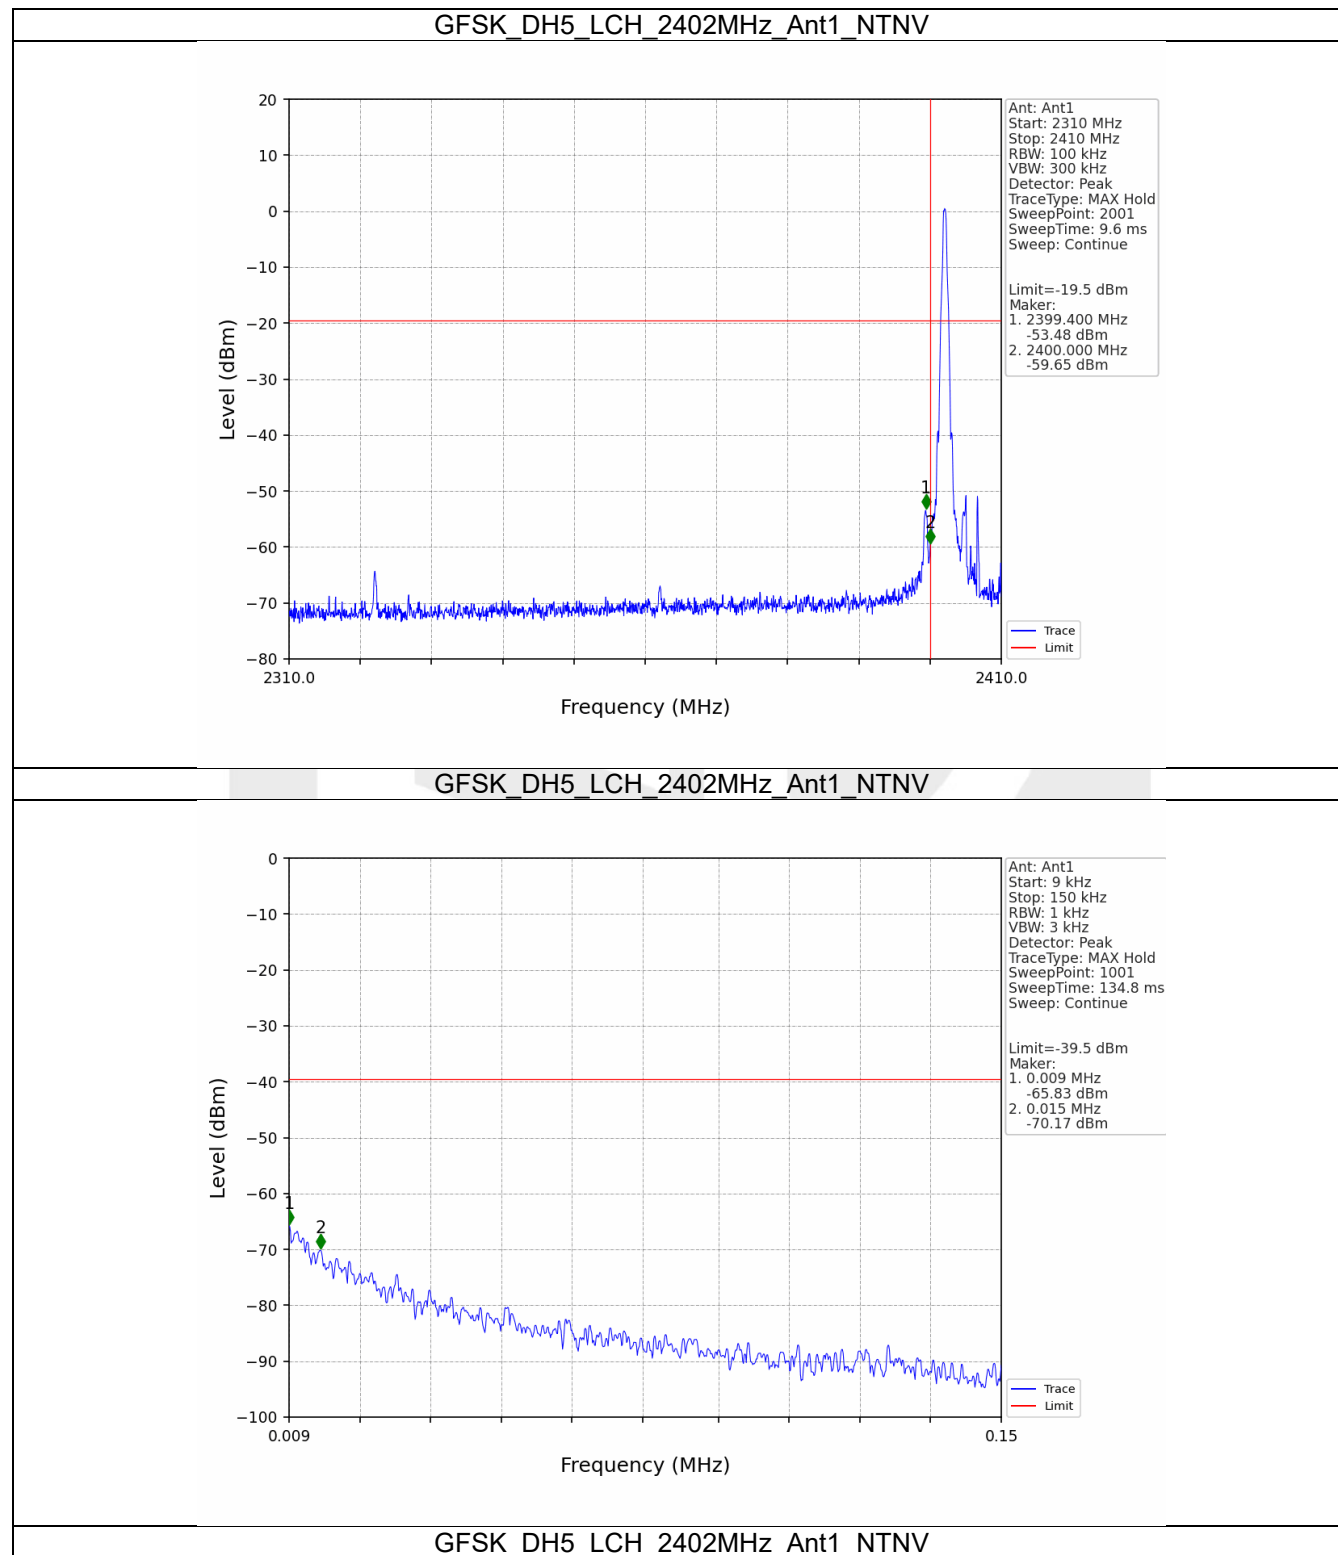


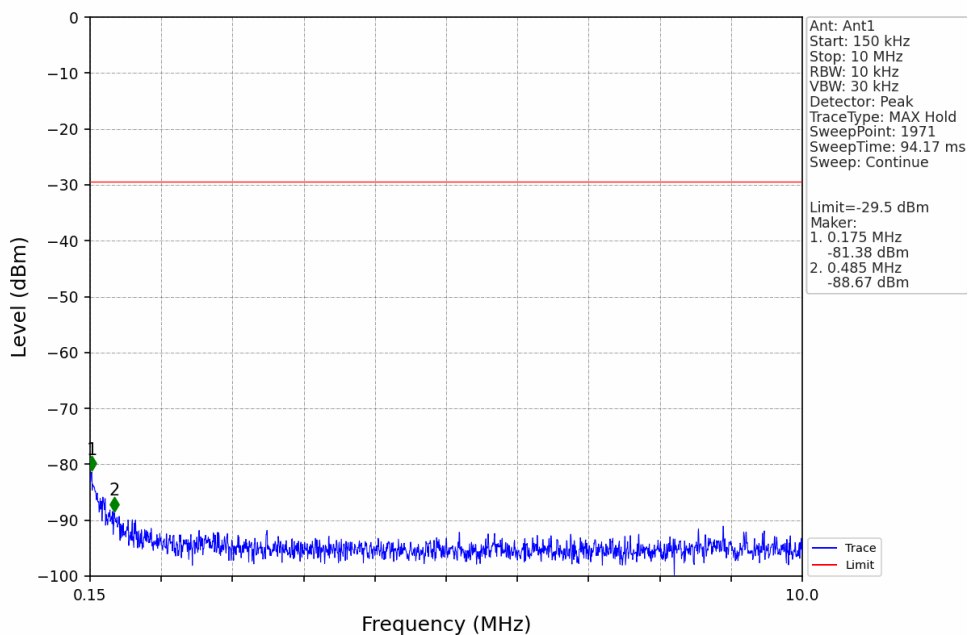



GFSK DH5 LCH 2402MHz Ant1 NTN

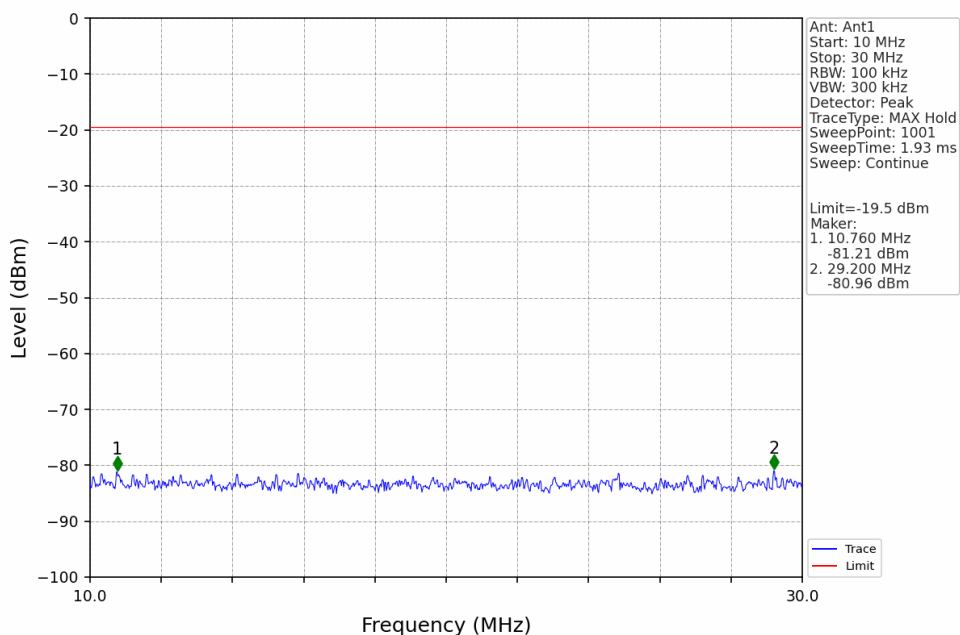


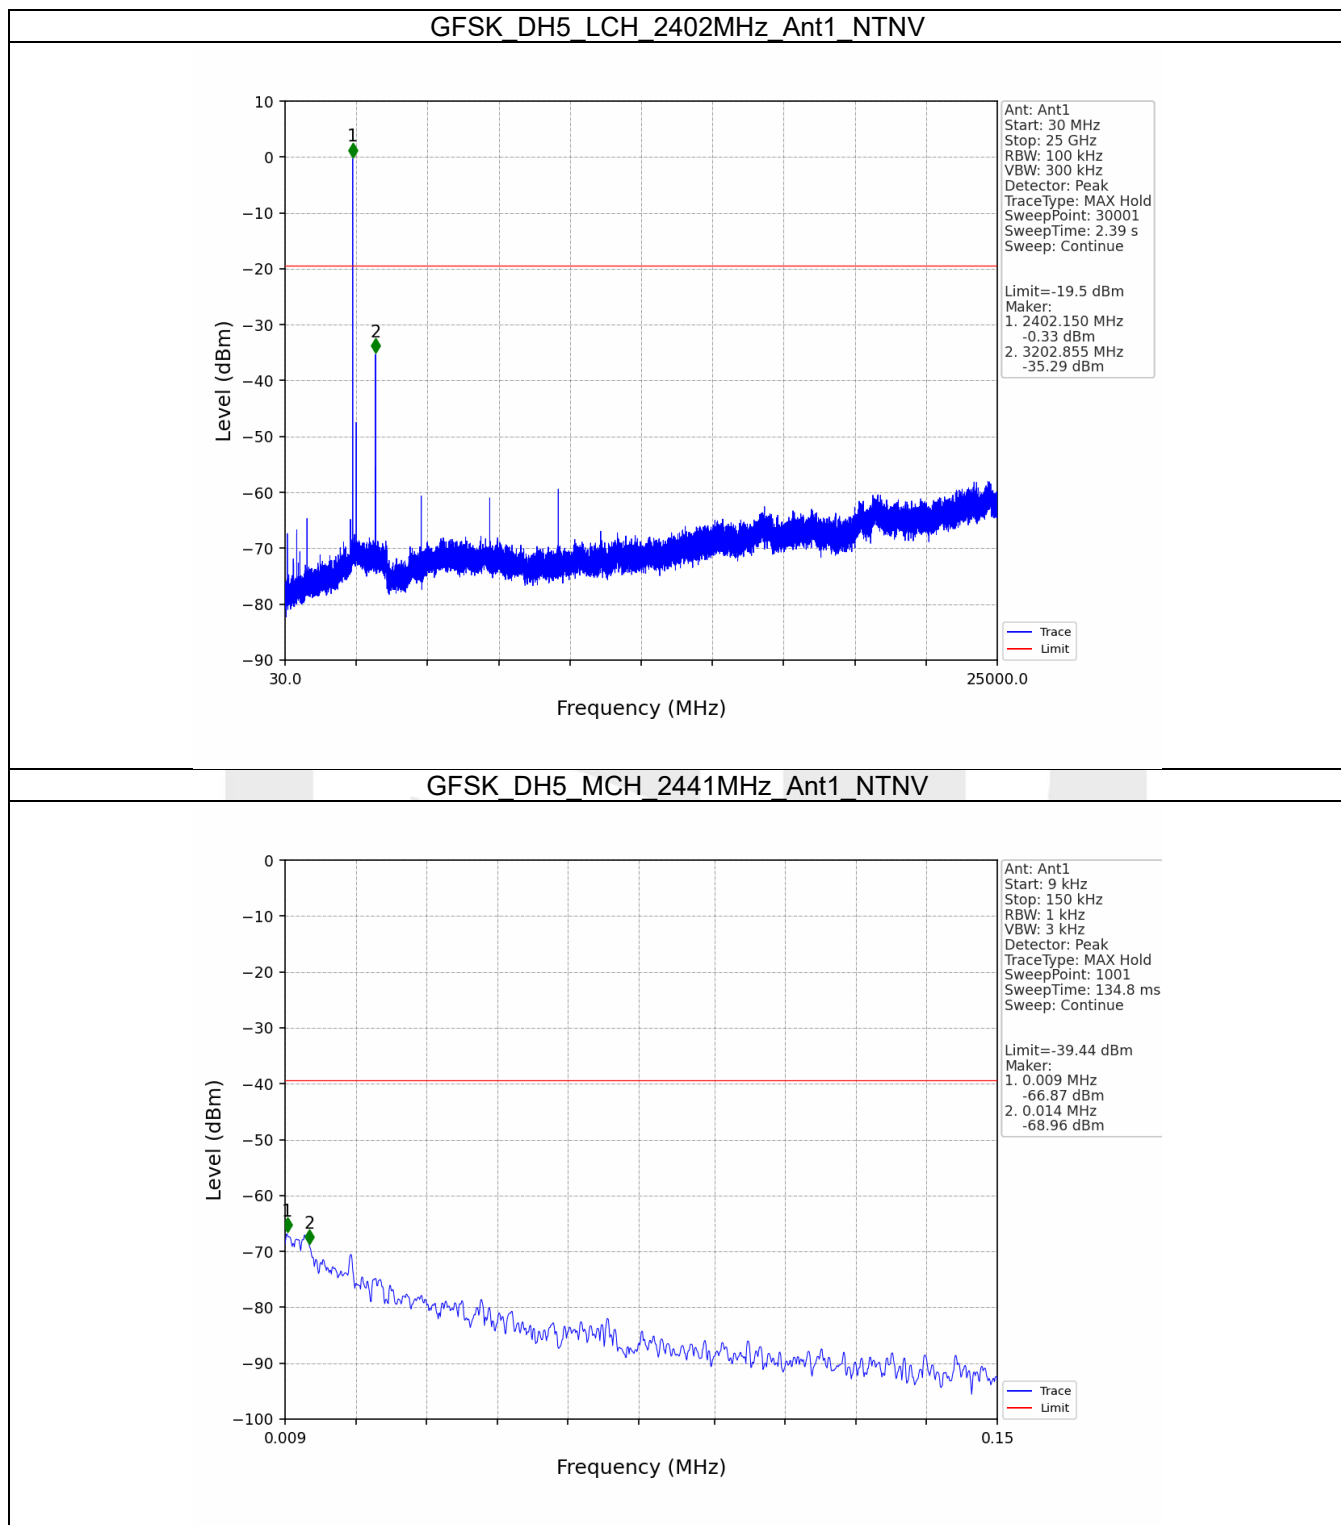


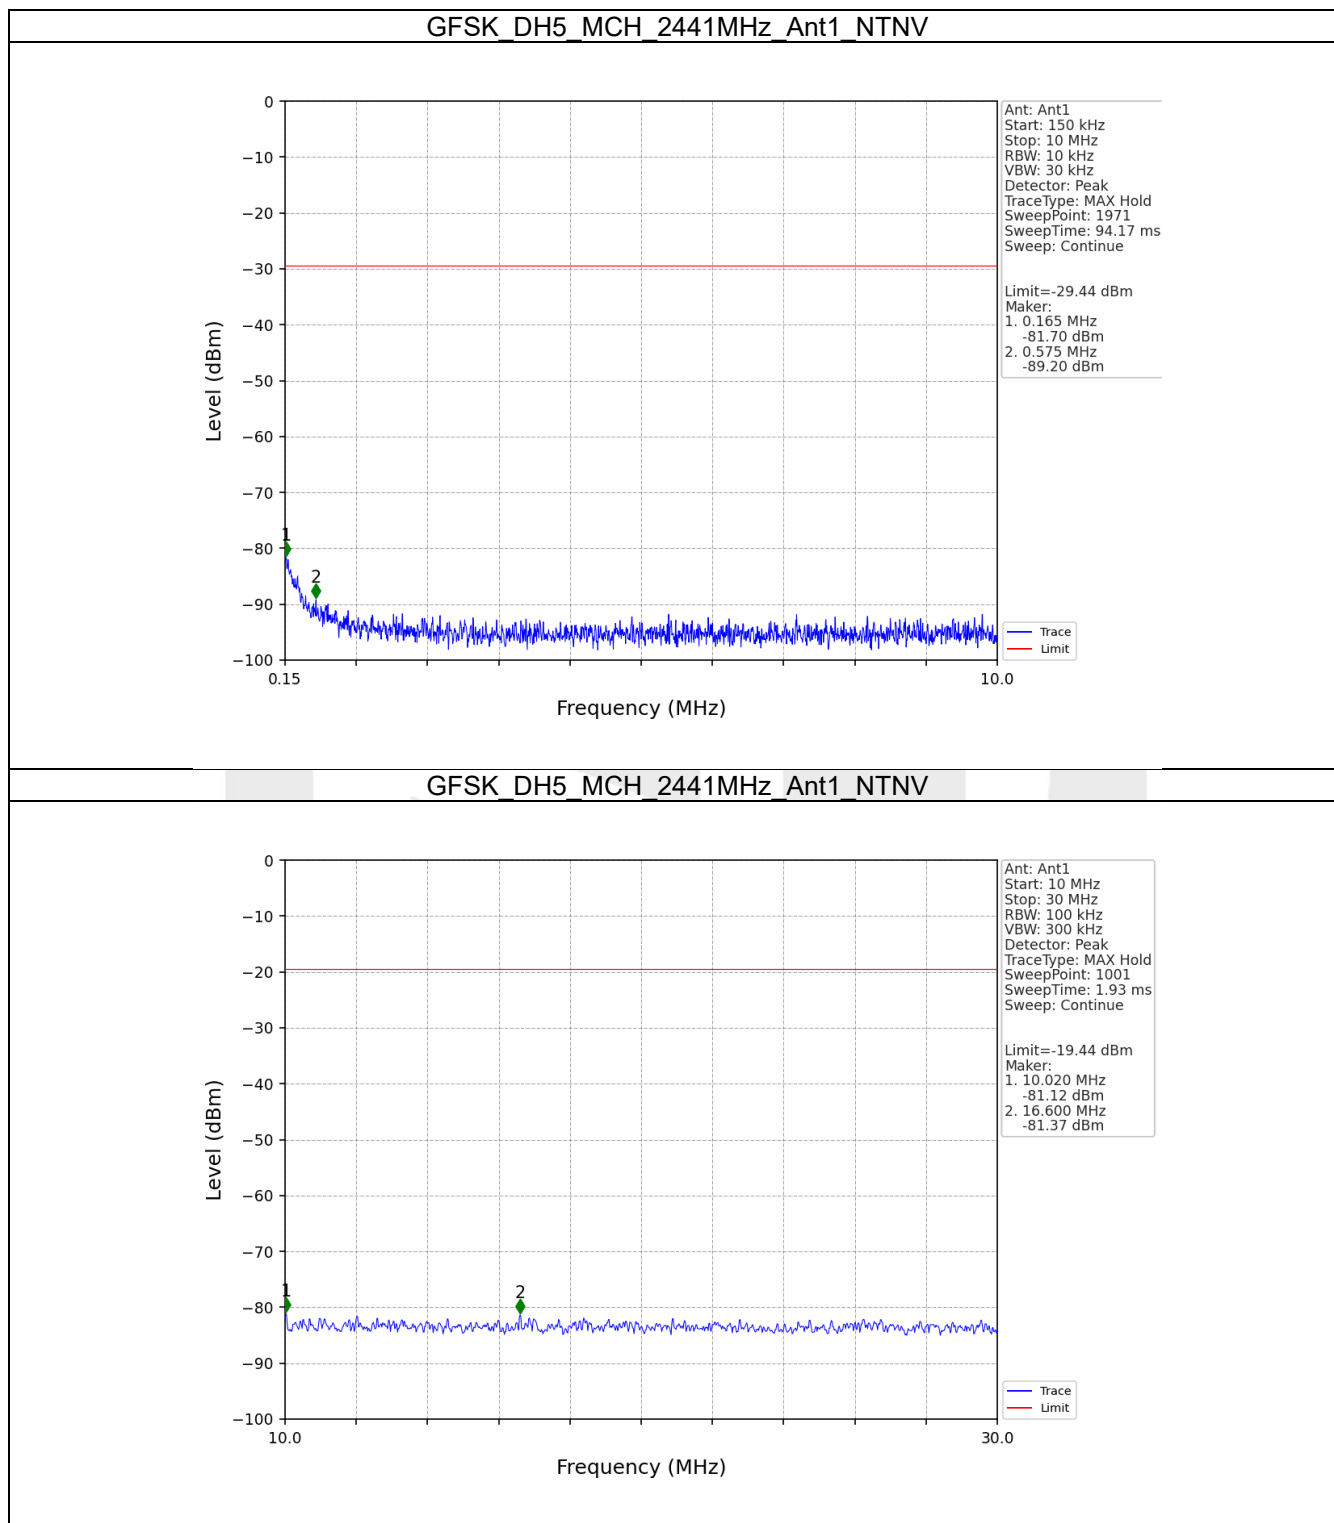


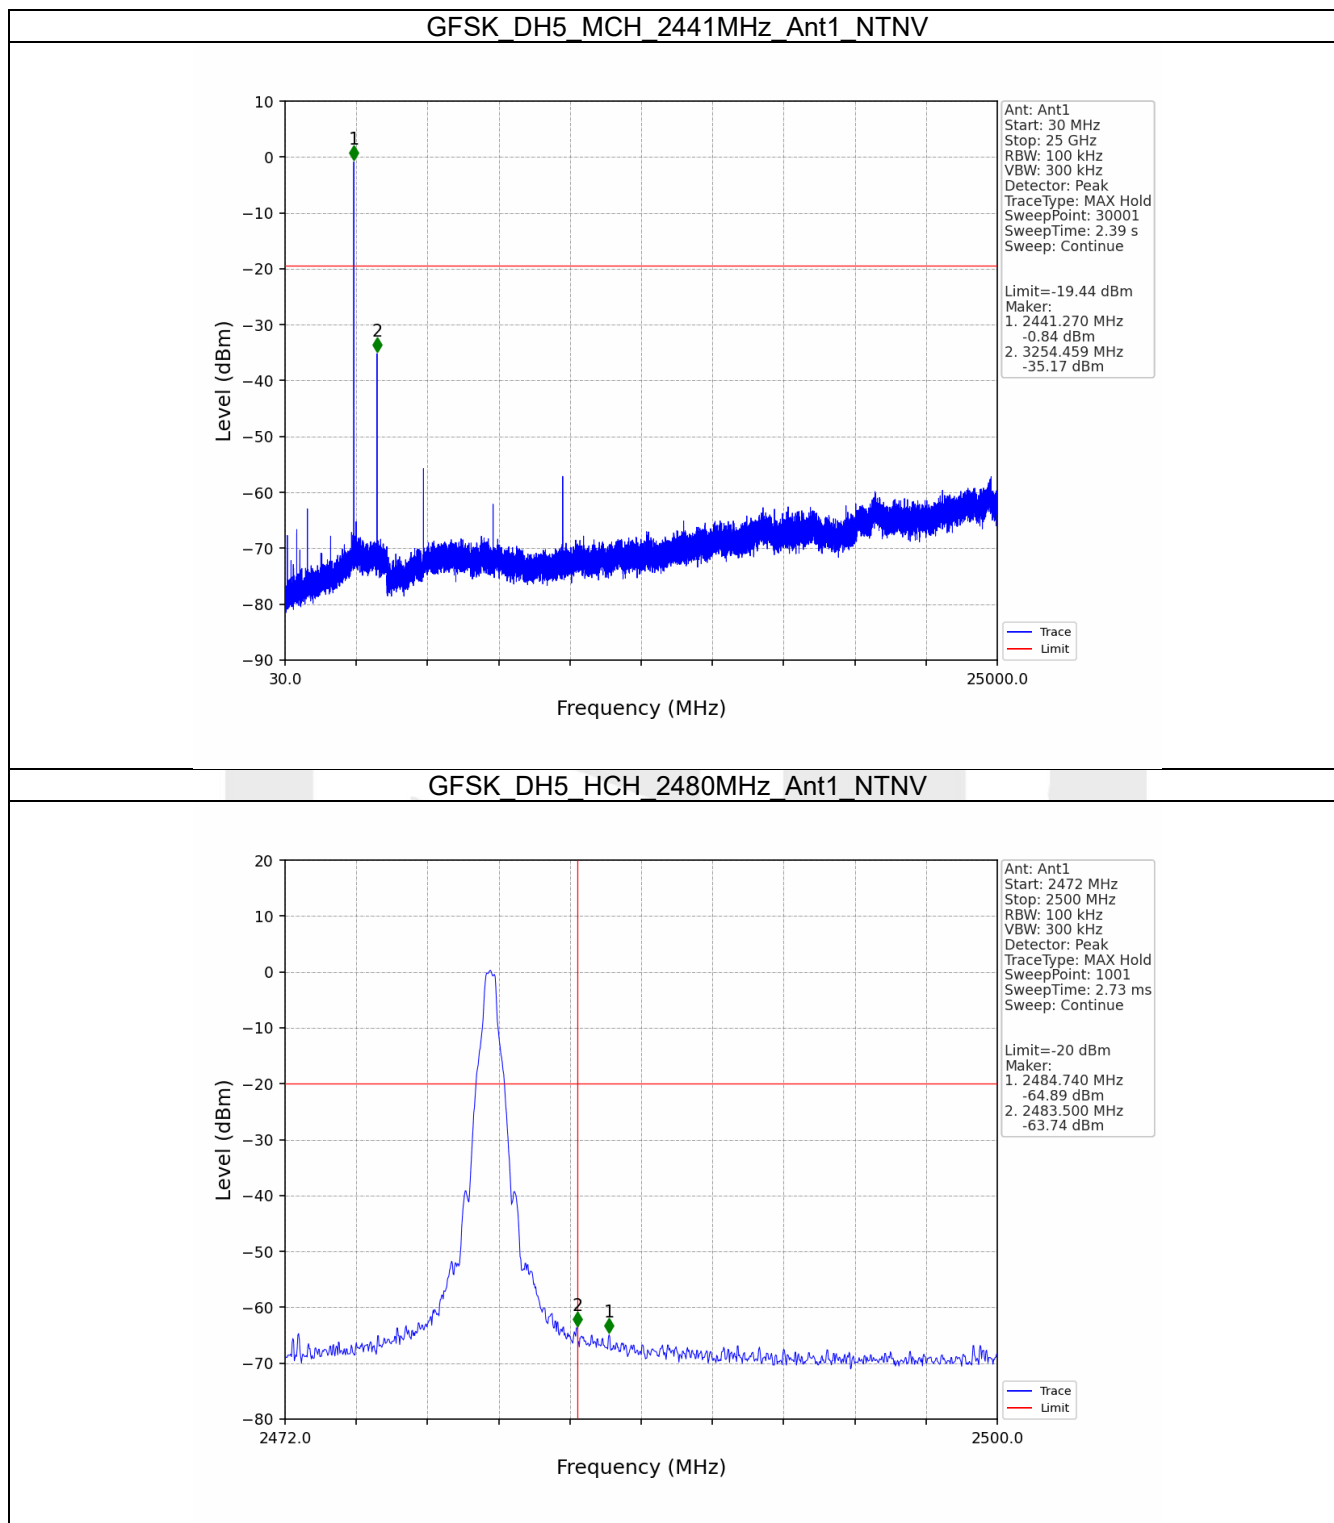


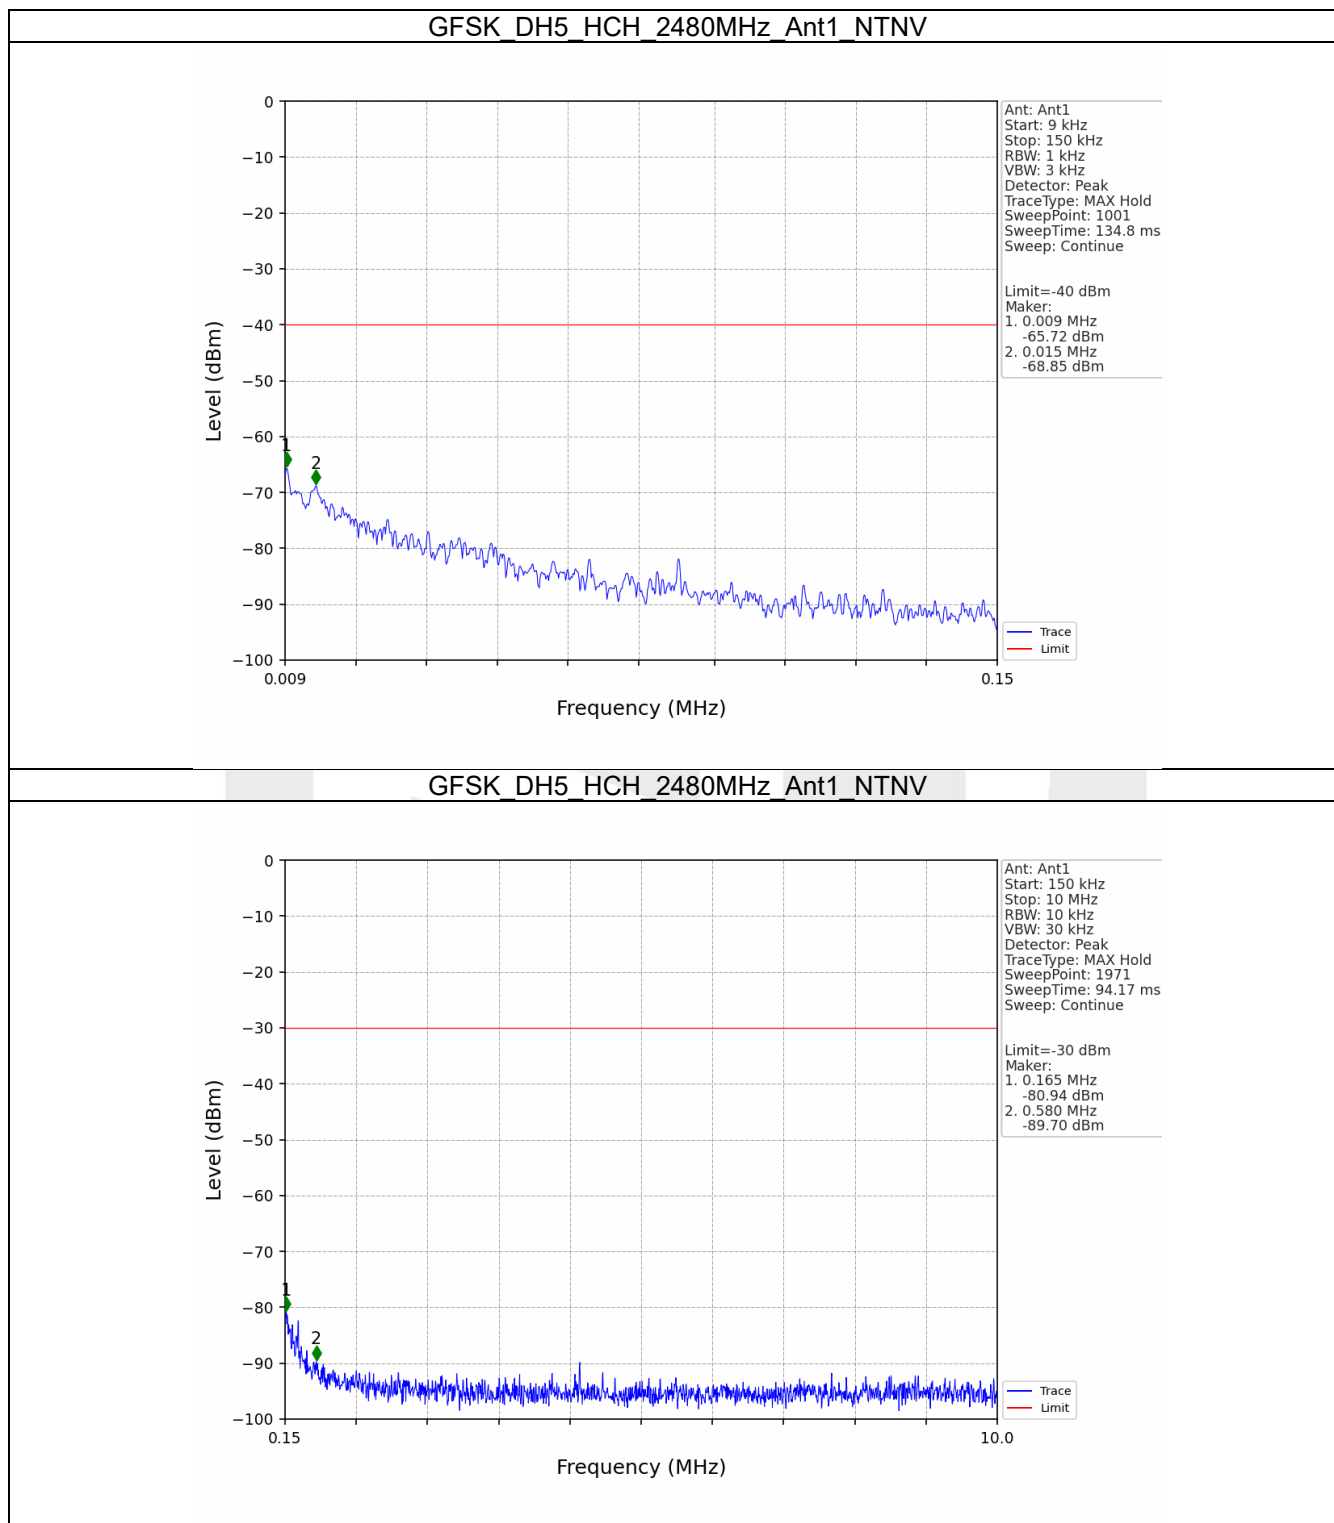


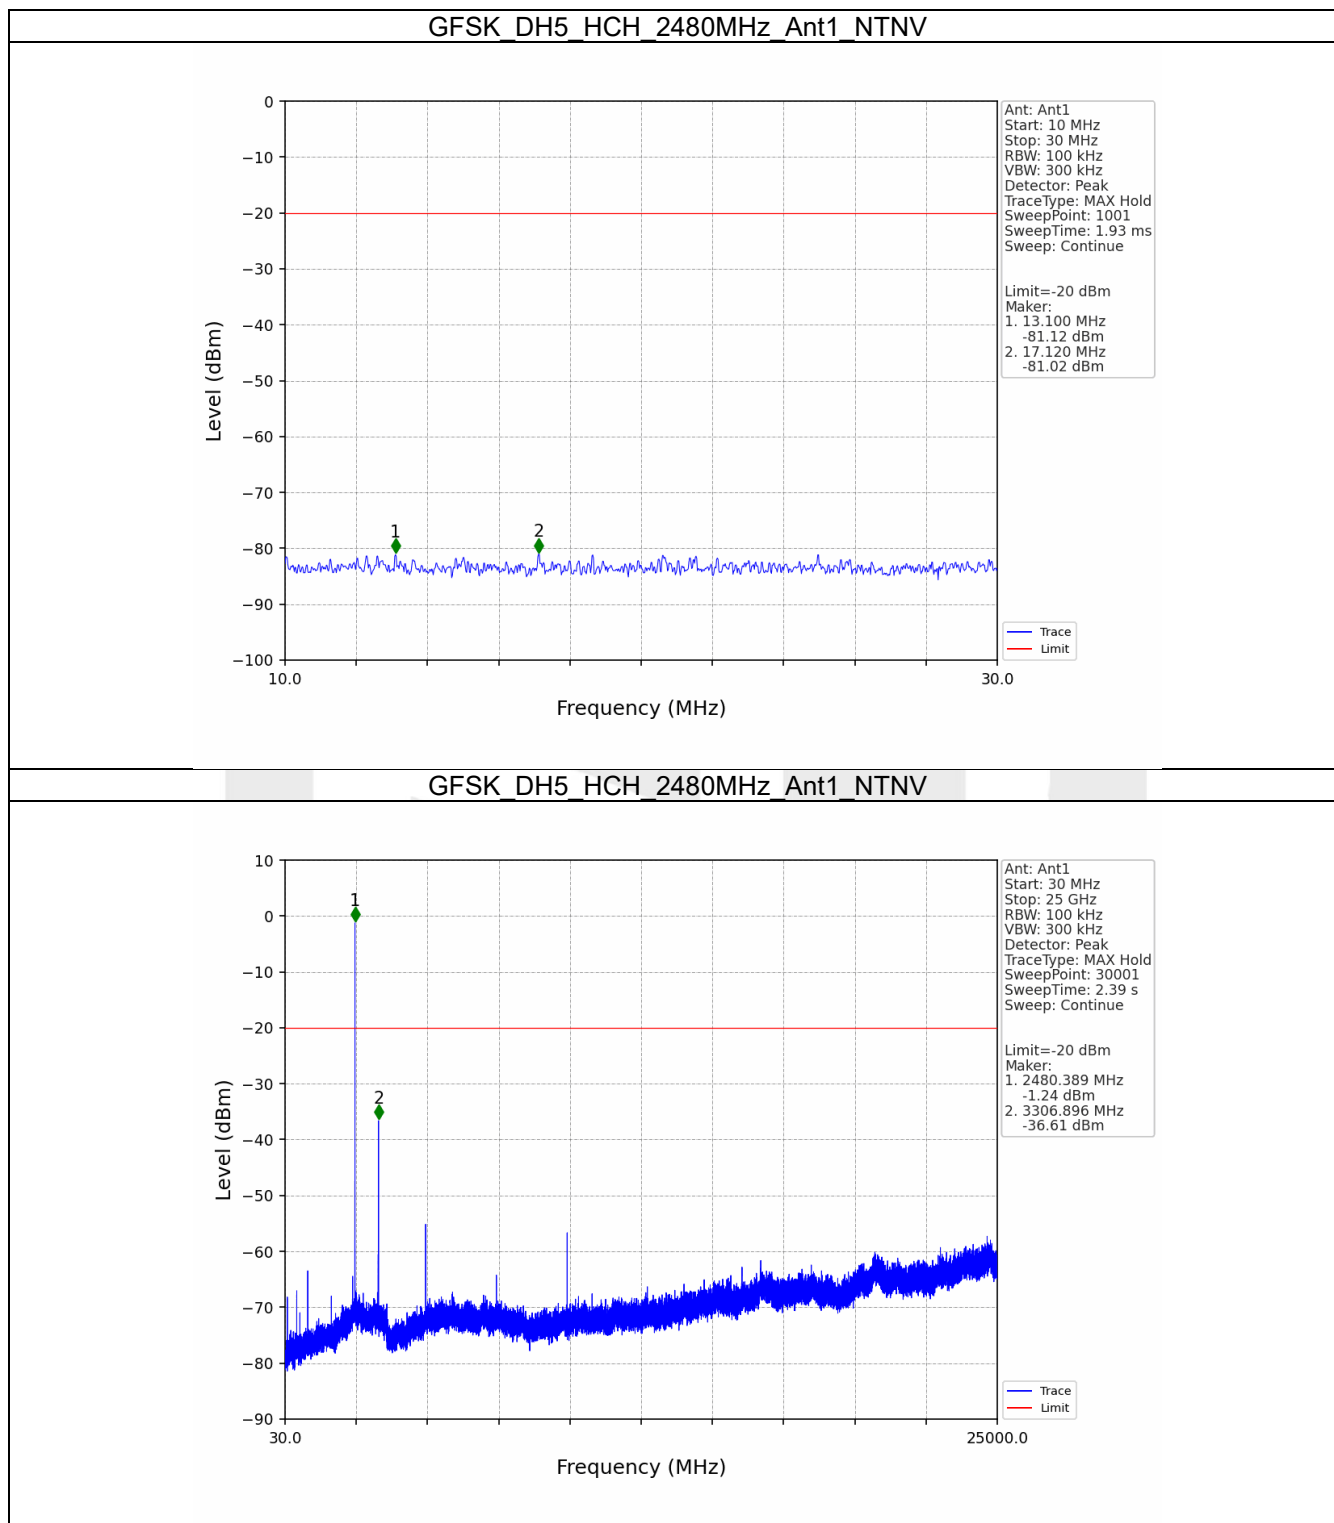


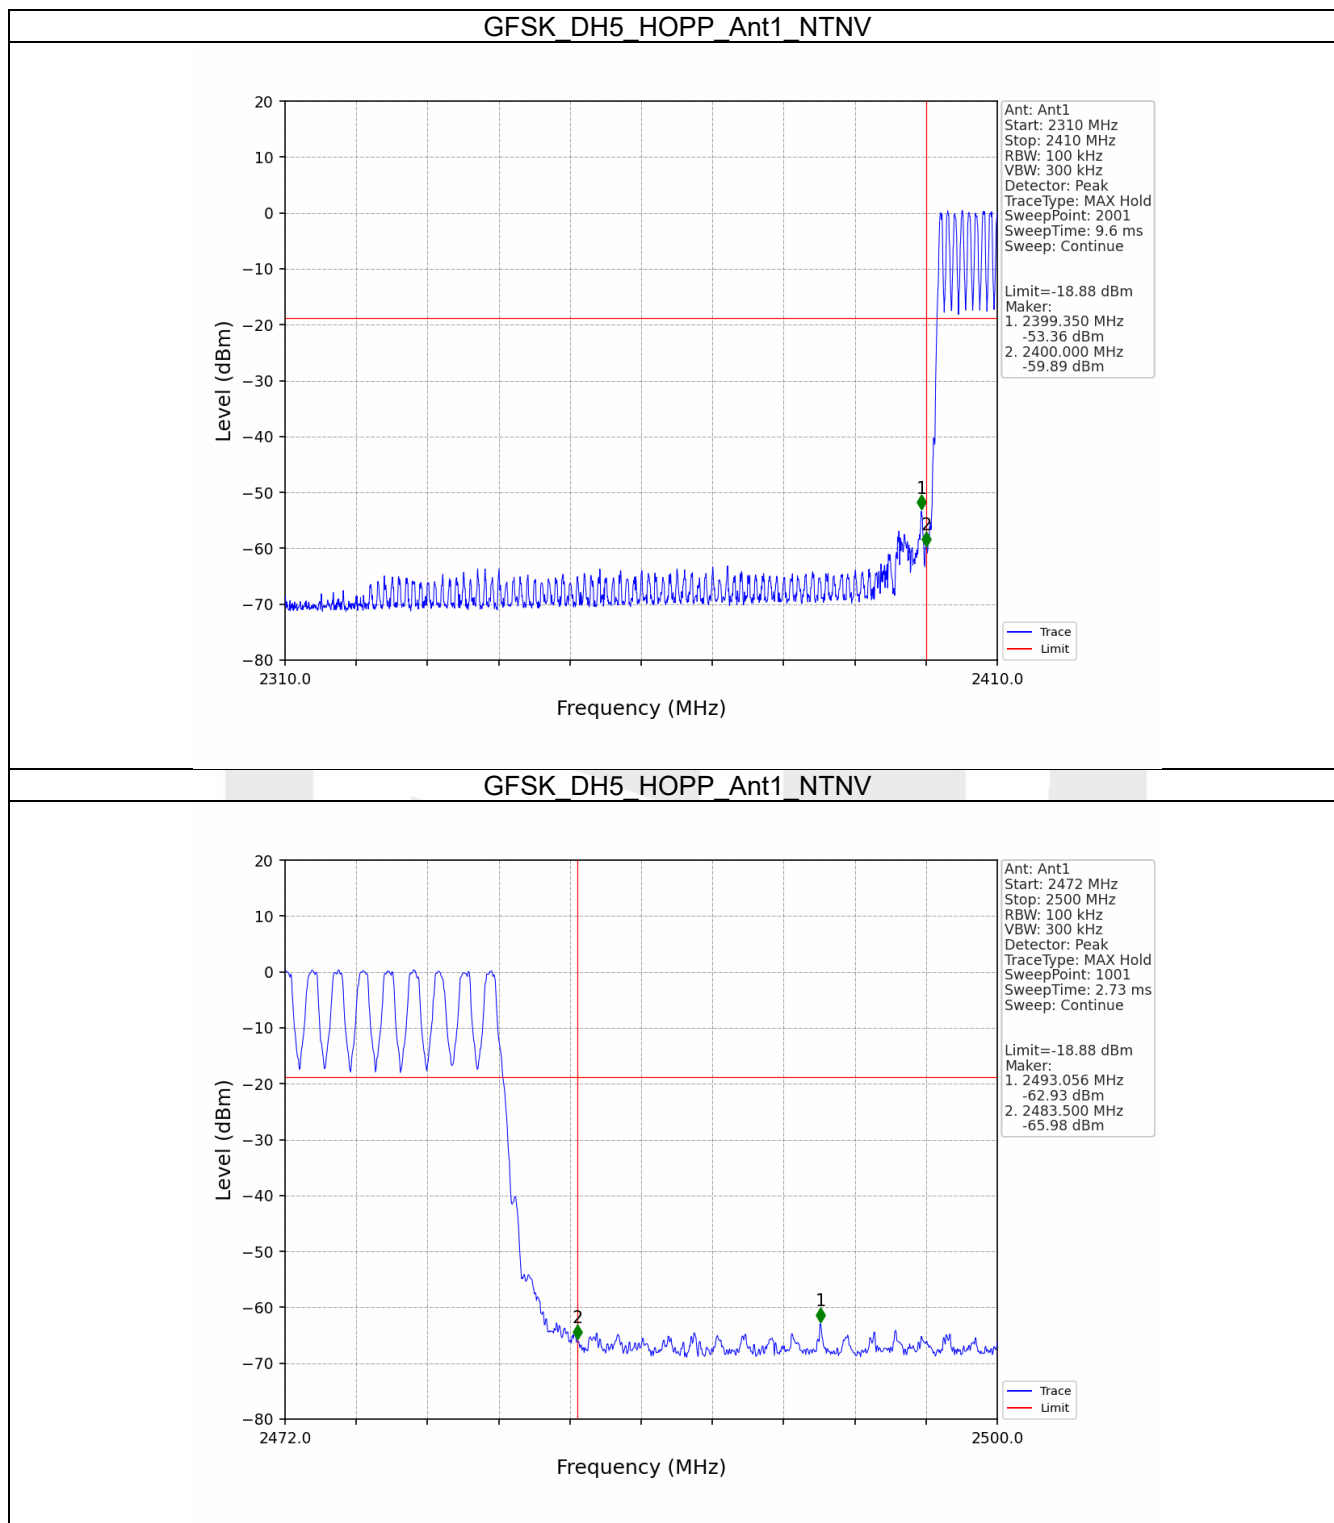


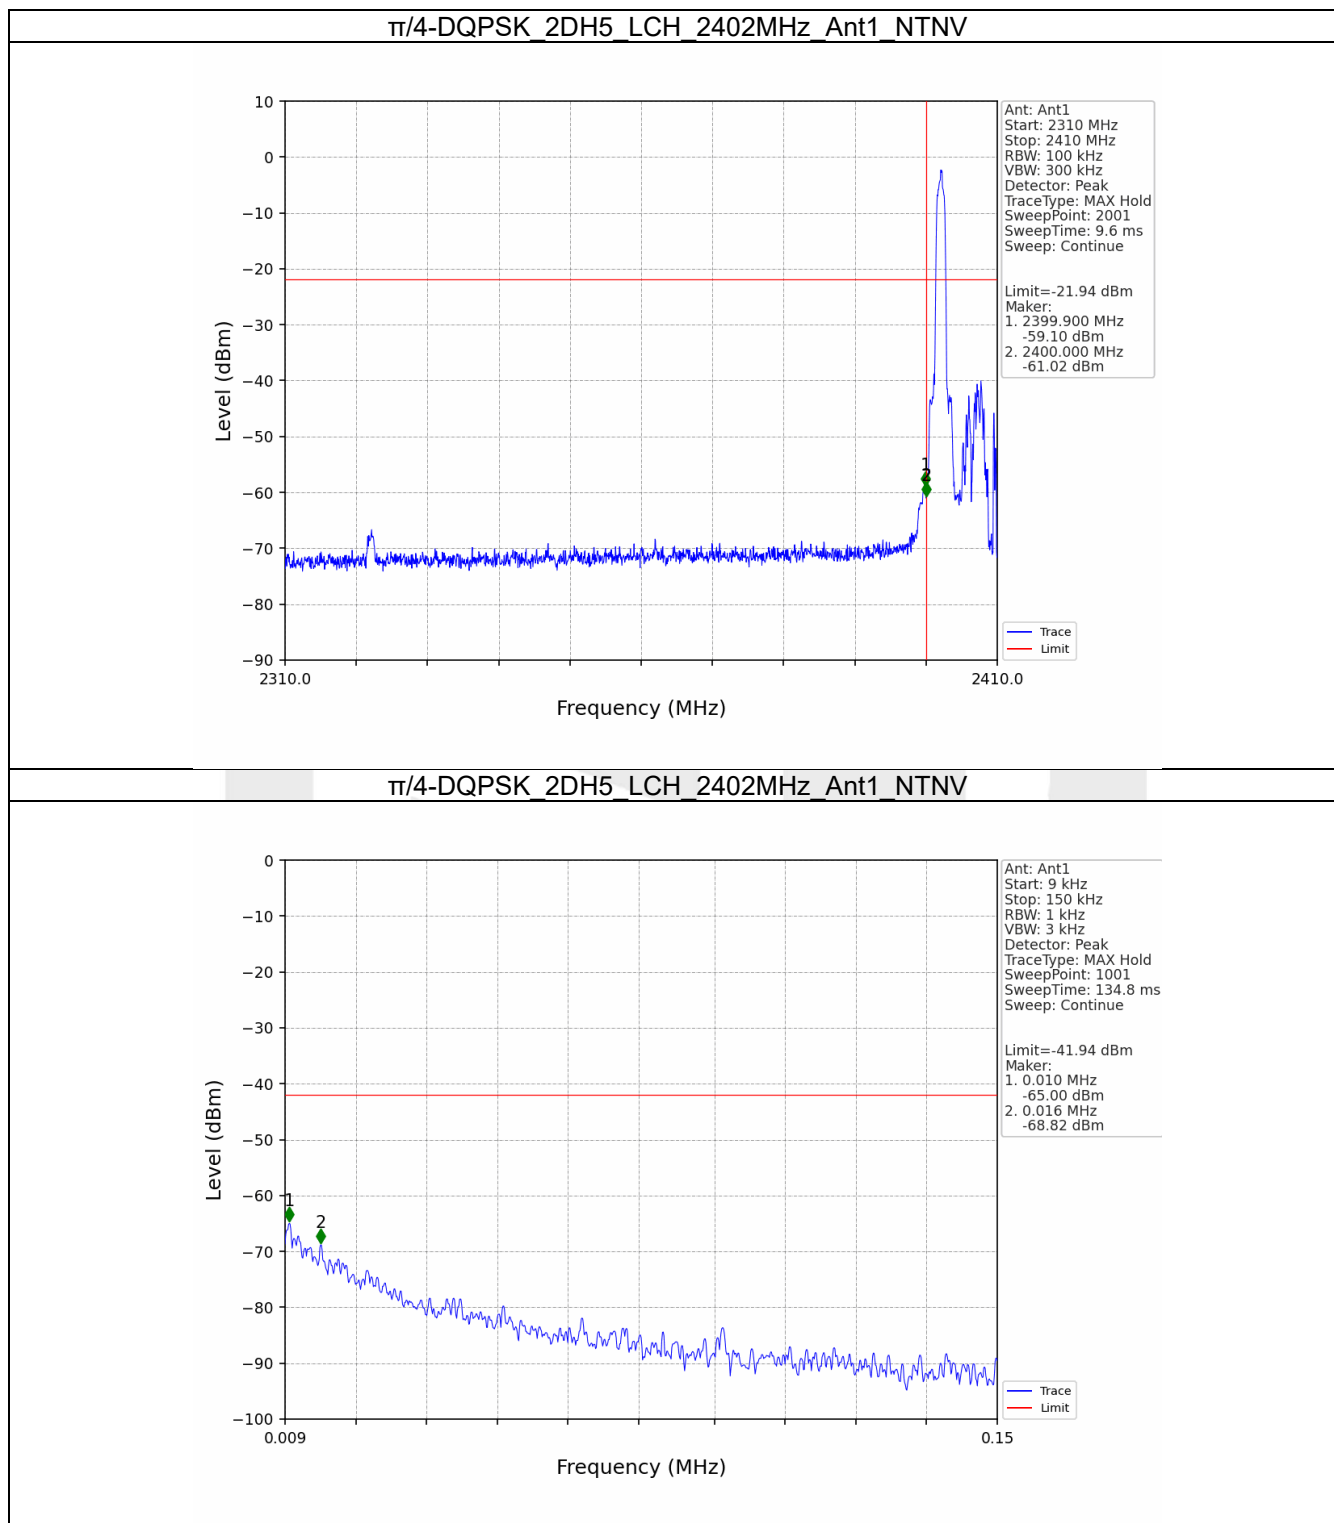


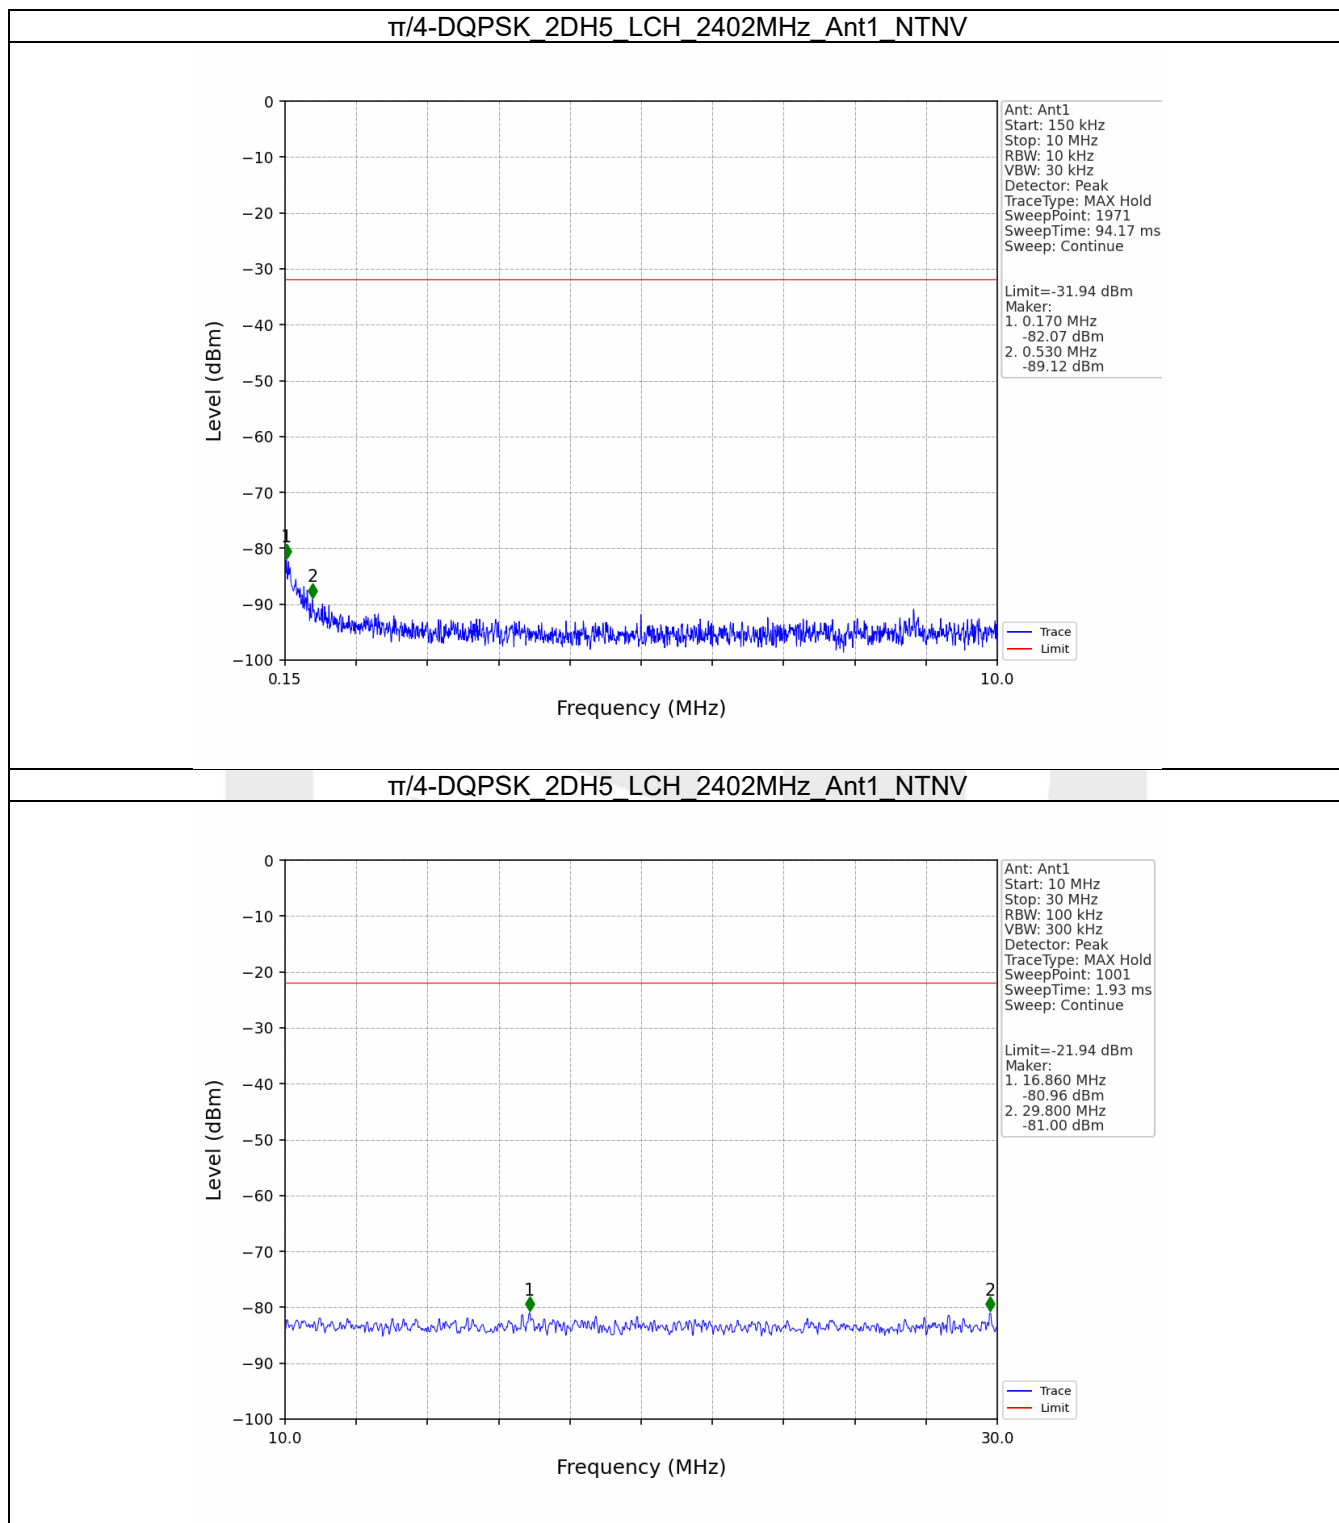


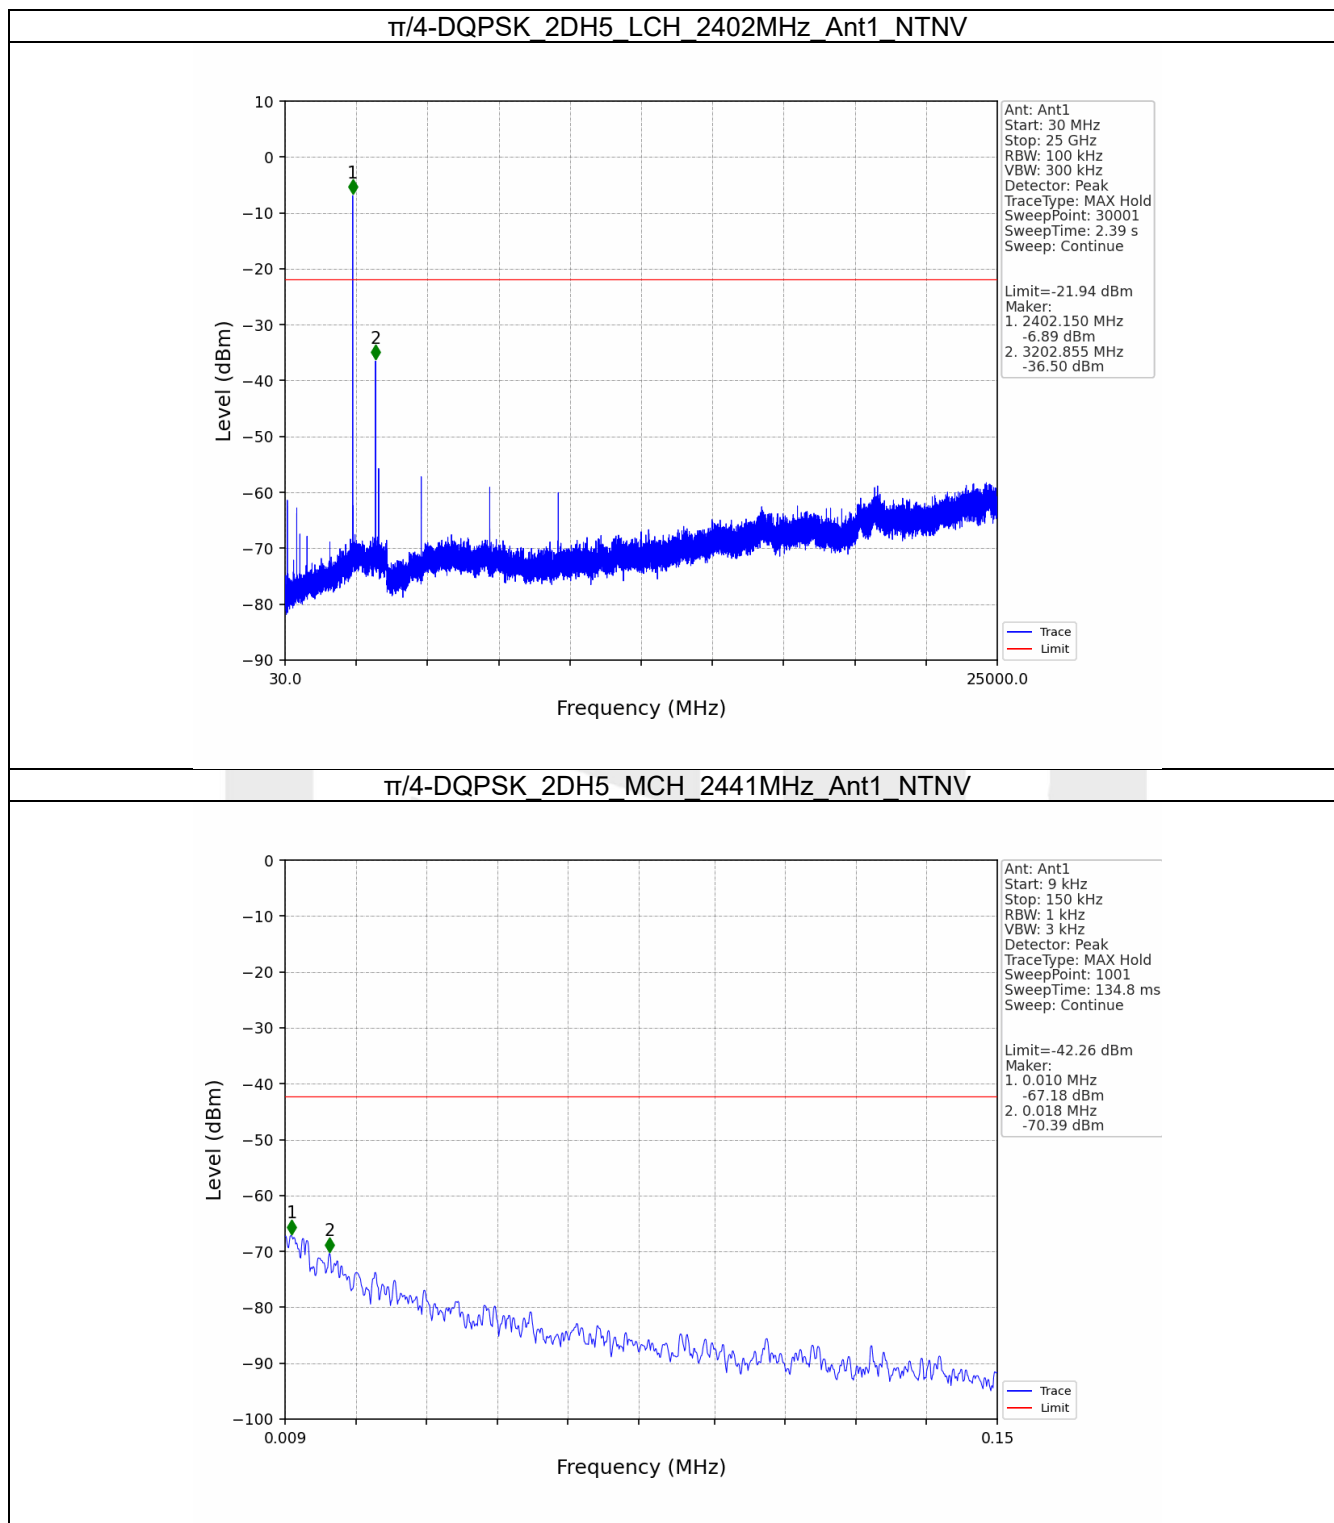


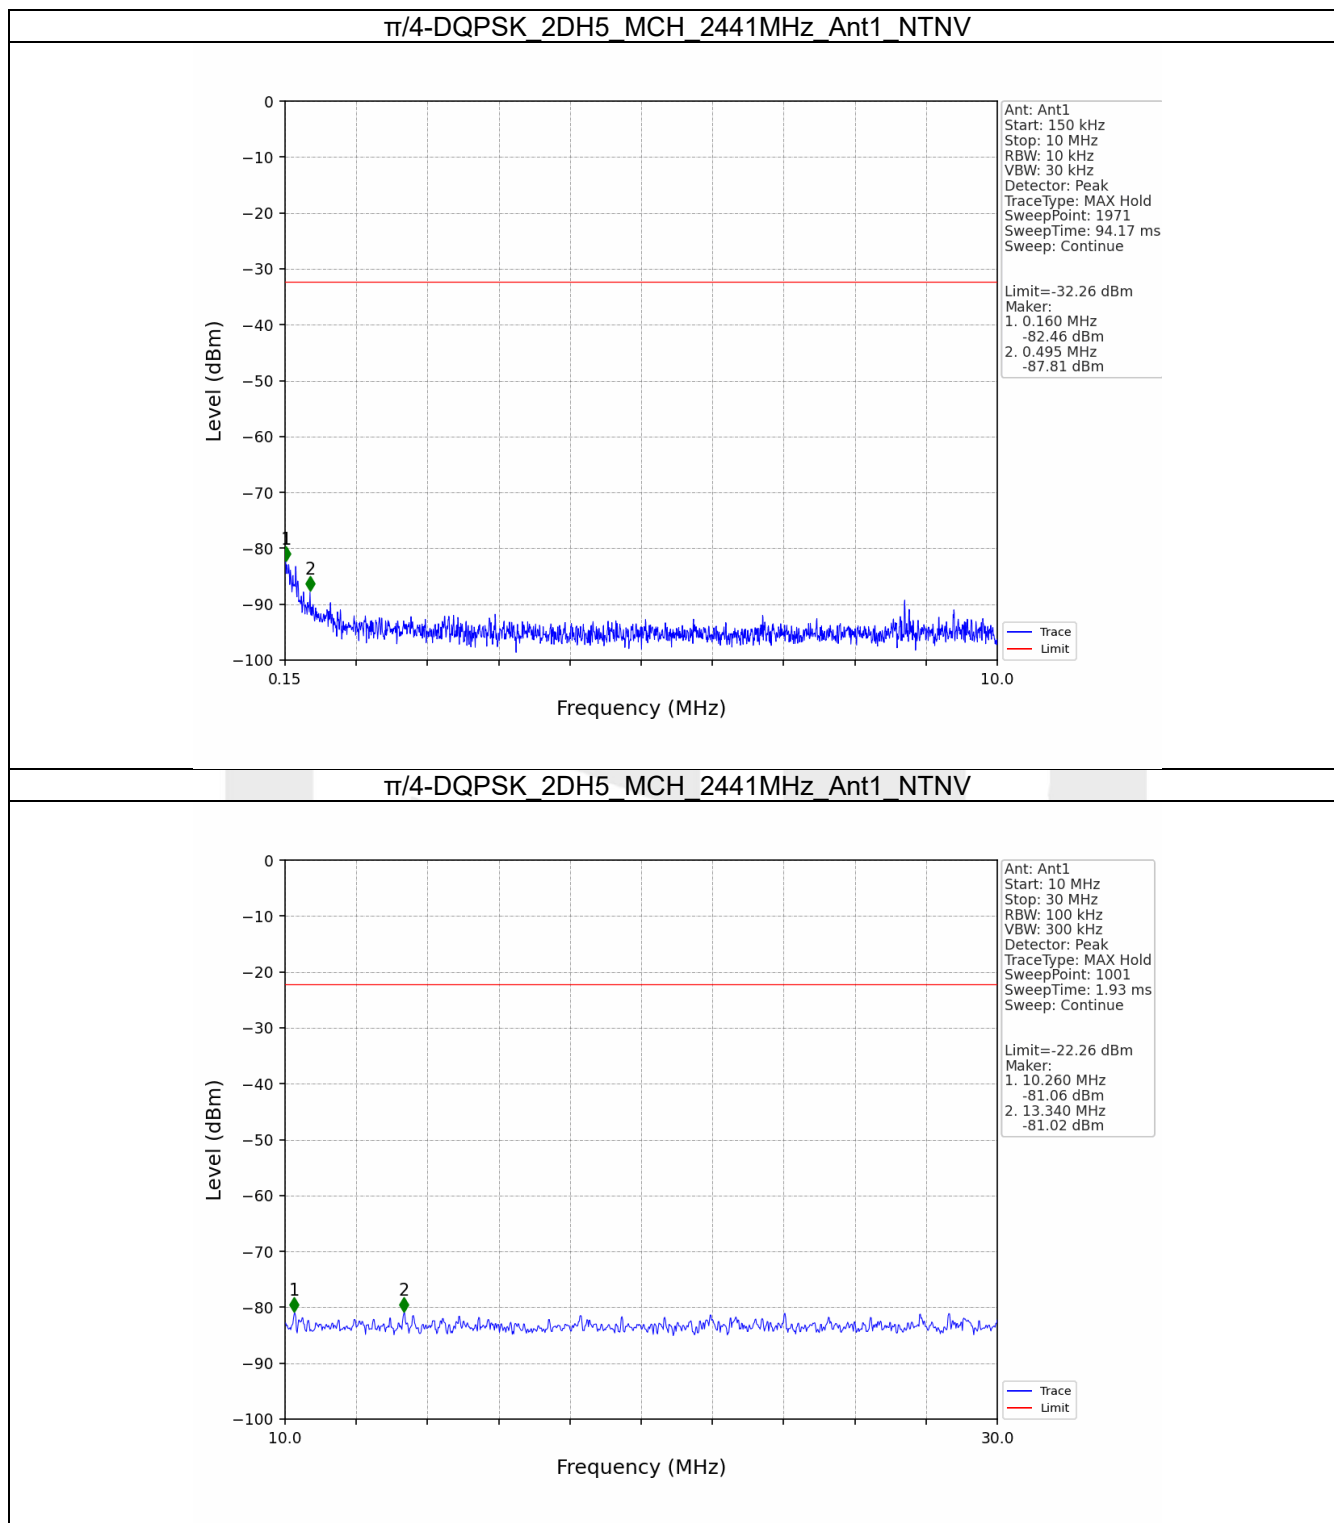

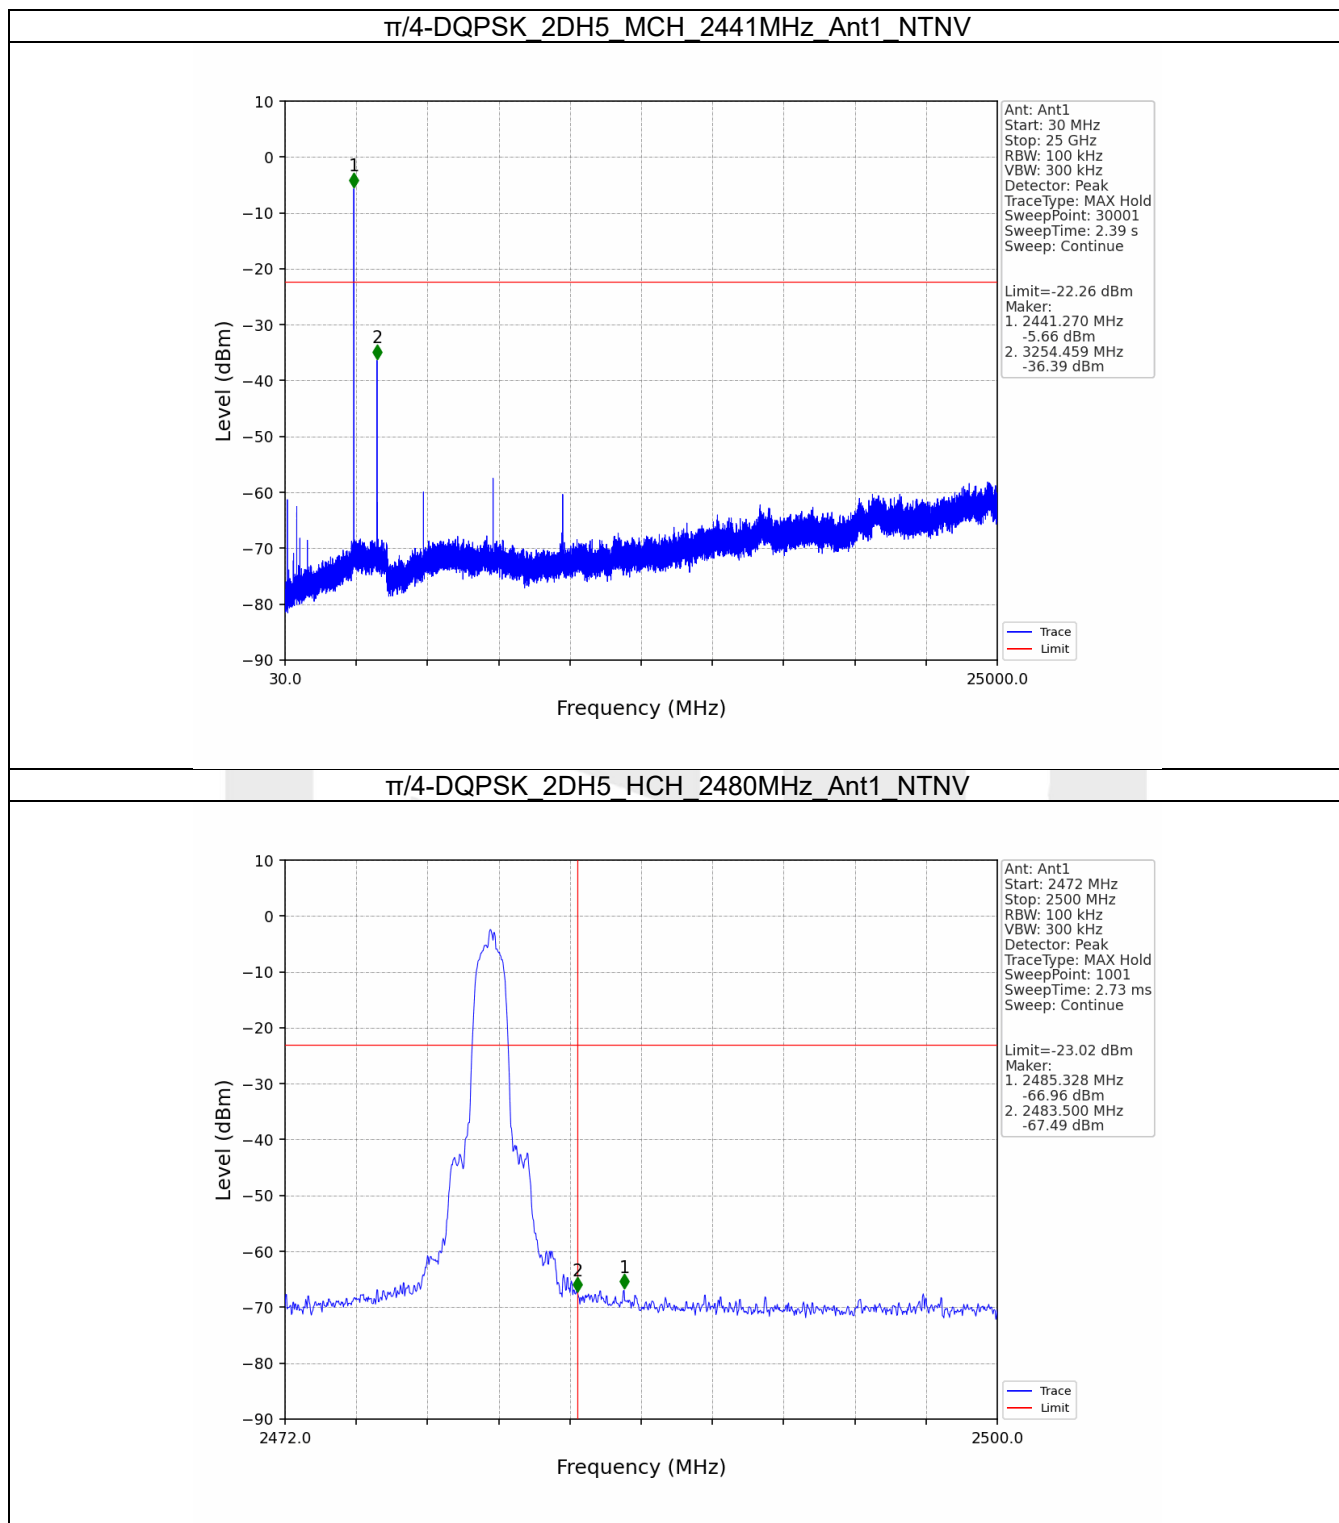

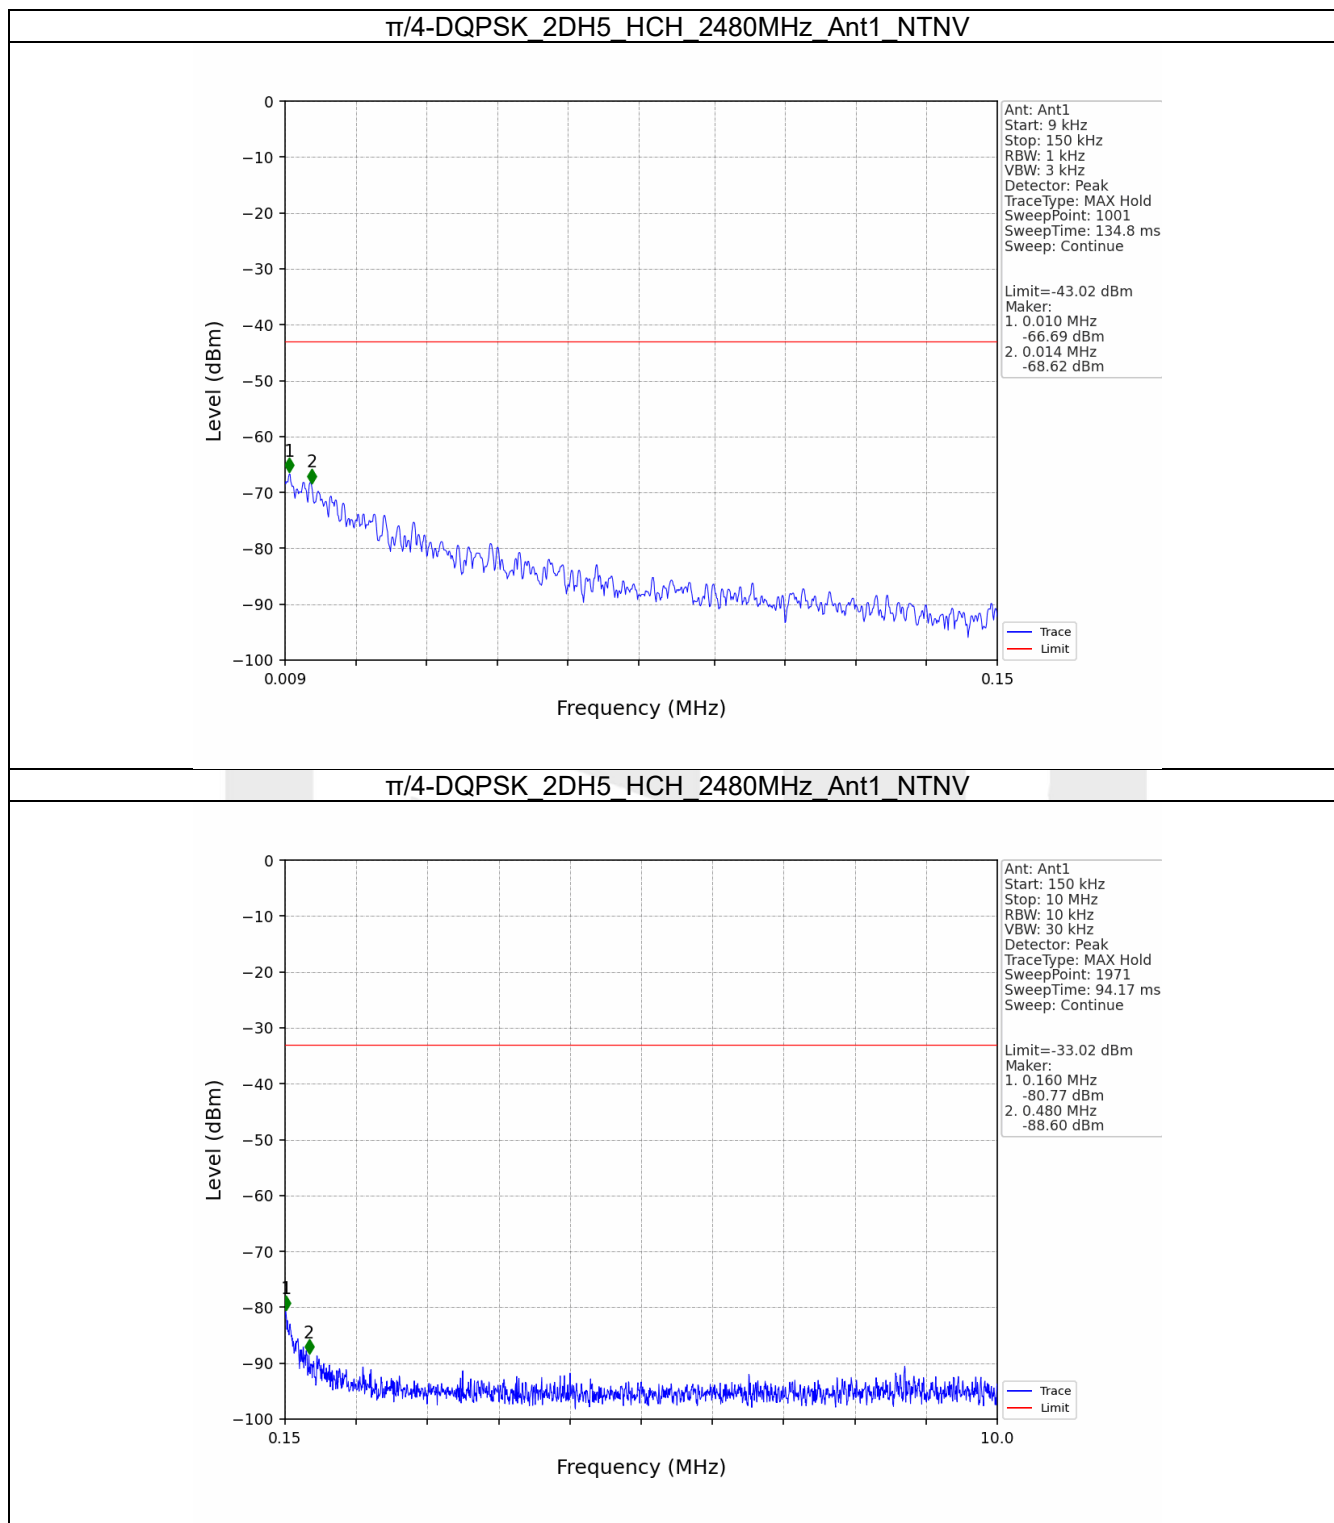

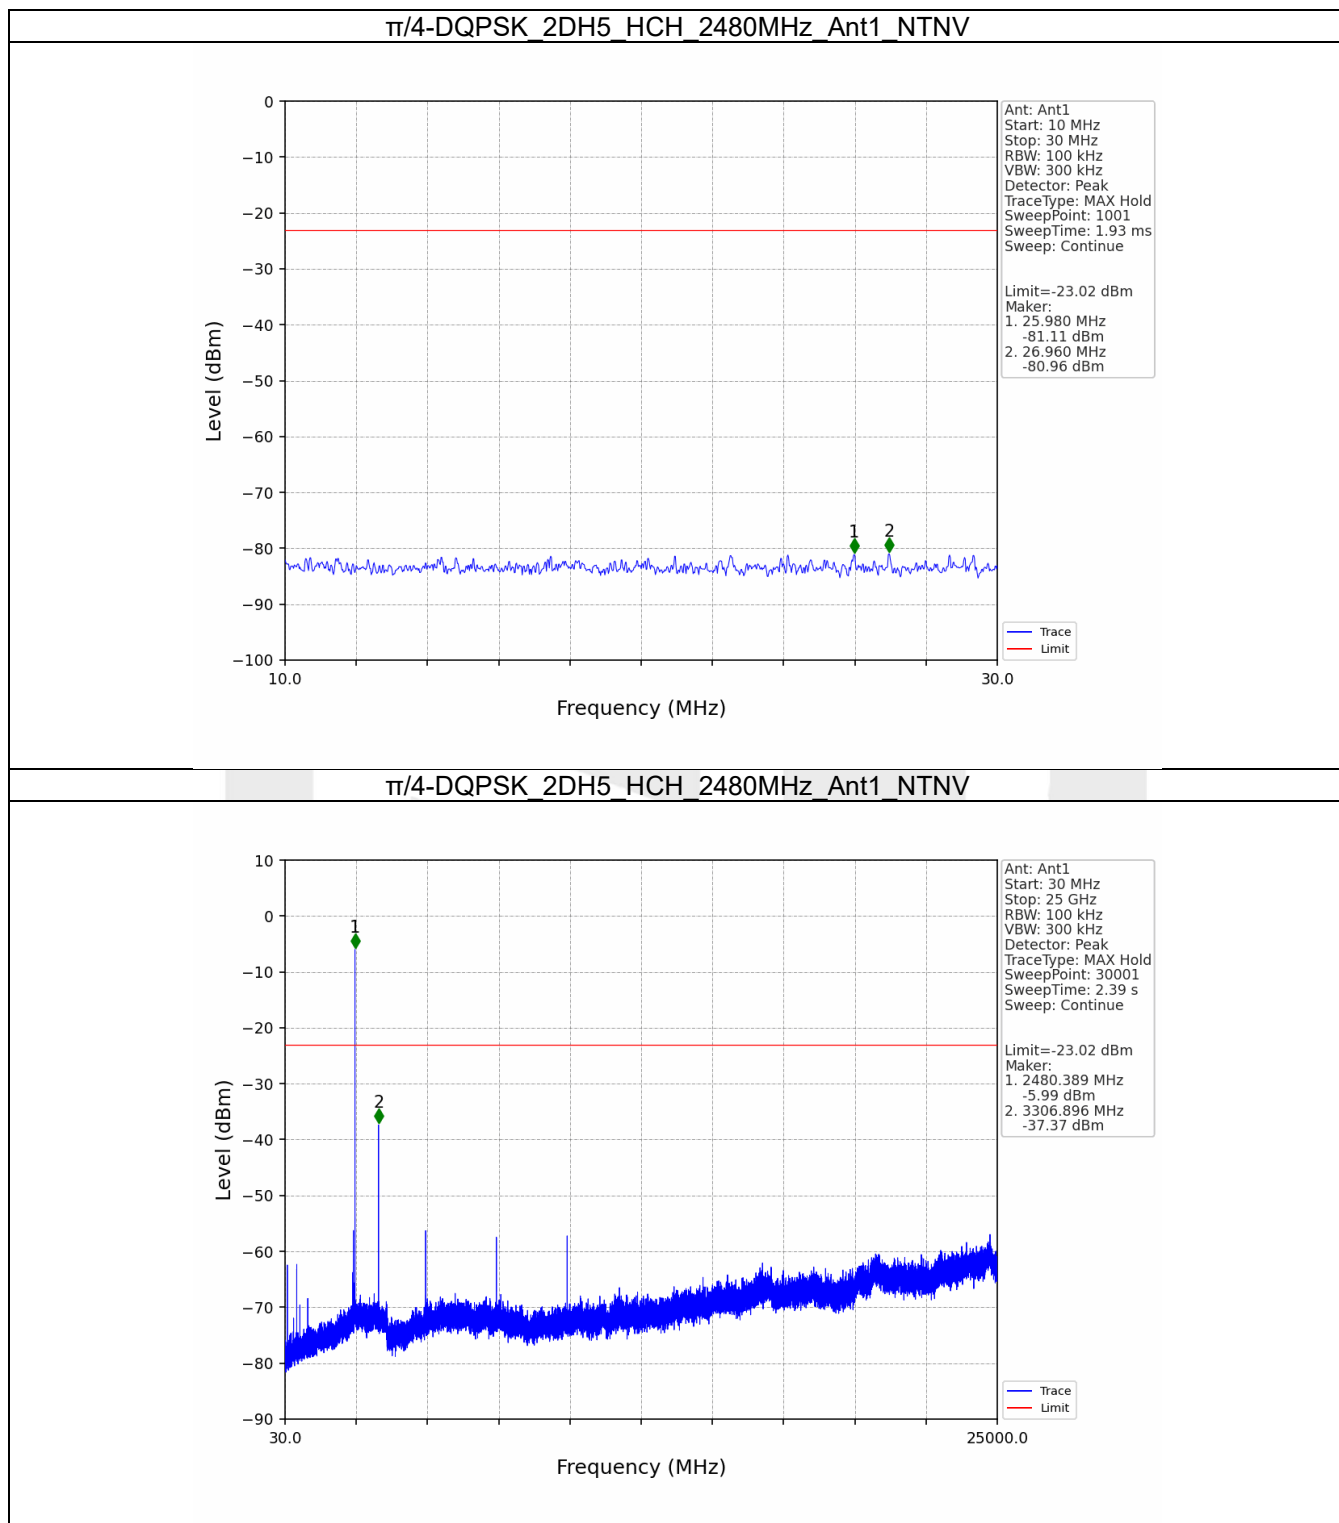

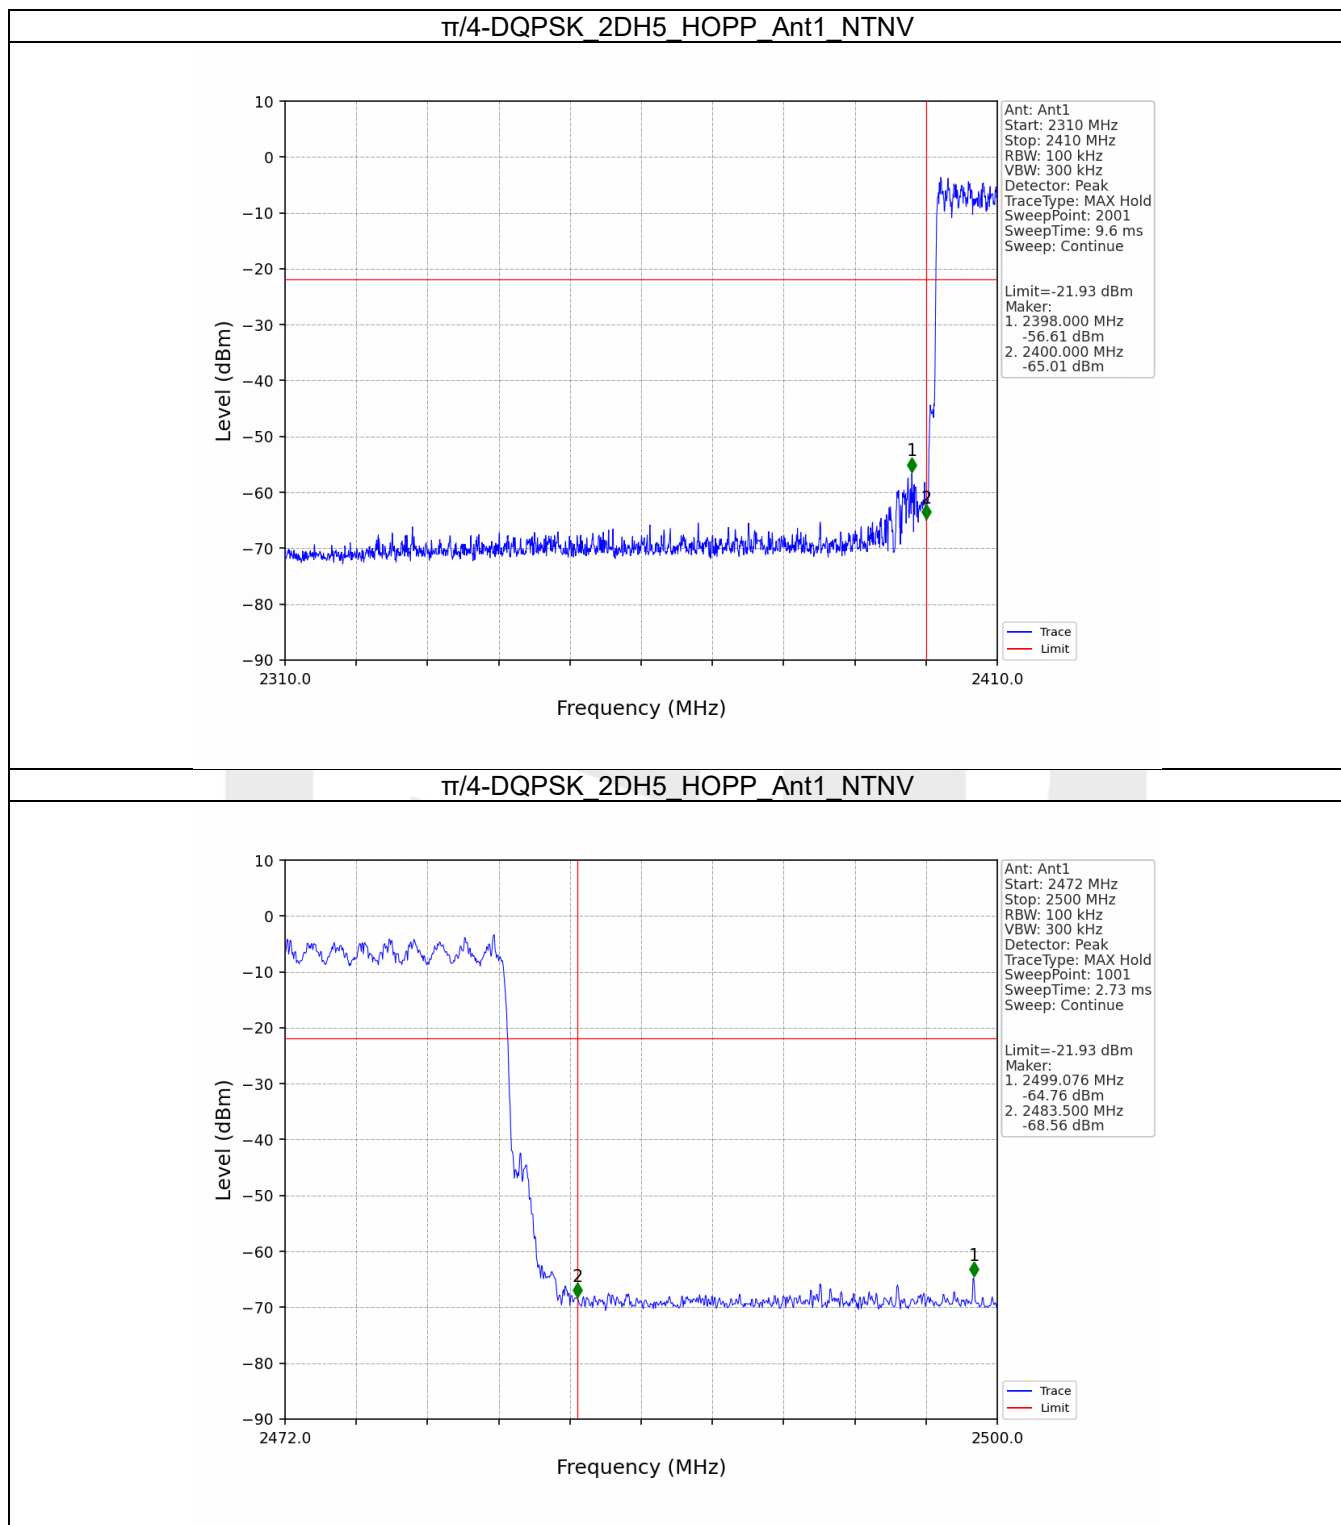

----- End of Report -----