



September 2016

# Multilayer Antenna

For 2400-2484MHz

# ANT016008LCS2442MA1

---

**1.6x0.8mm [EIA 0603]\***

\* Dimensions Code JIS[EIA]



# Multilayer Antenna

## For 2400-2484MHz


Conformity to RoHS Directive

# ANT016008LCS2442MA1


## ■ SHAPES AND DIMENSIONS

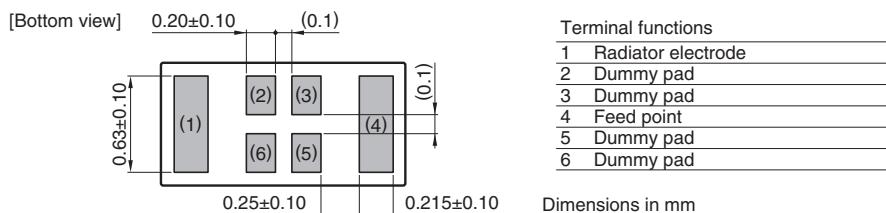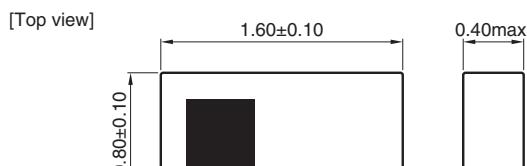

## ■ RECOMMENDED LAND PATTERN

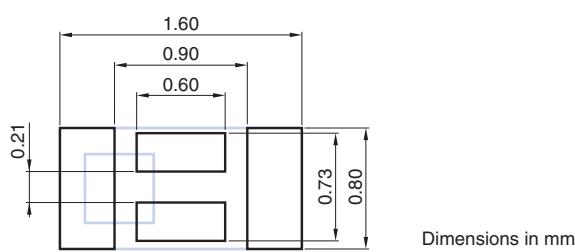

## ■ SOLDER RESIST PATTERN

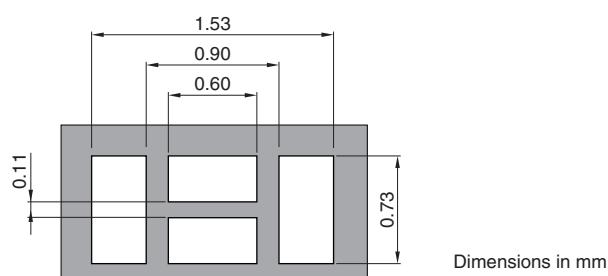


○ RoHS Directive Compliant Product: See the following for more details.<https://product.tdk.com/info/en/environment/rohs/index.html>


- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

## ANT016008LCS2442MA1

## ■ EVALUATION BOARD

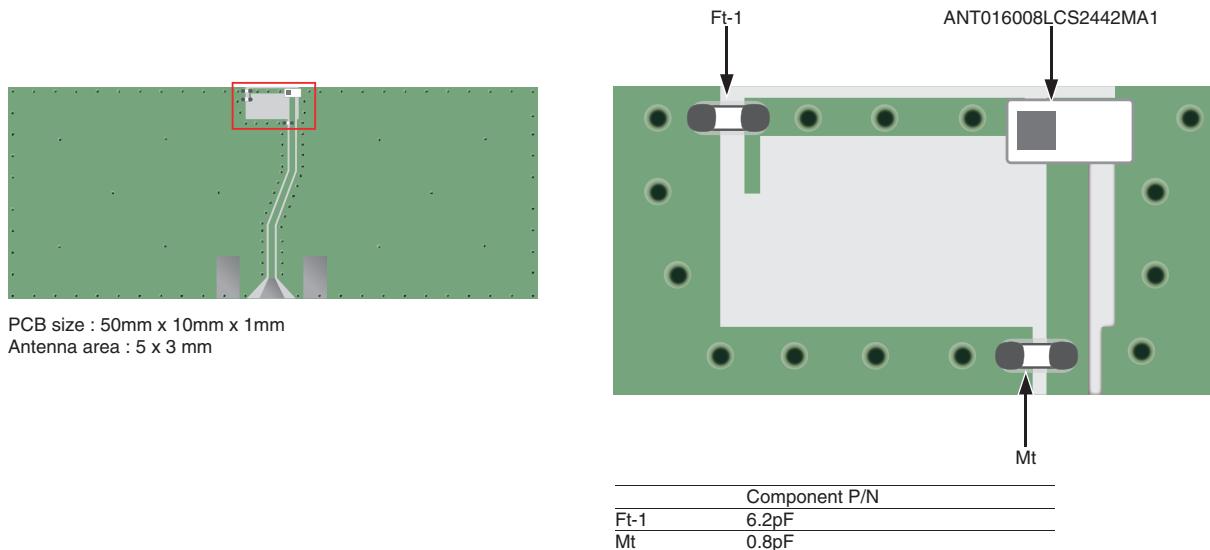

## □ Measurement condition for Radiation Pattern

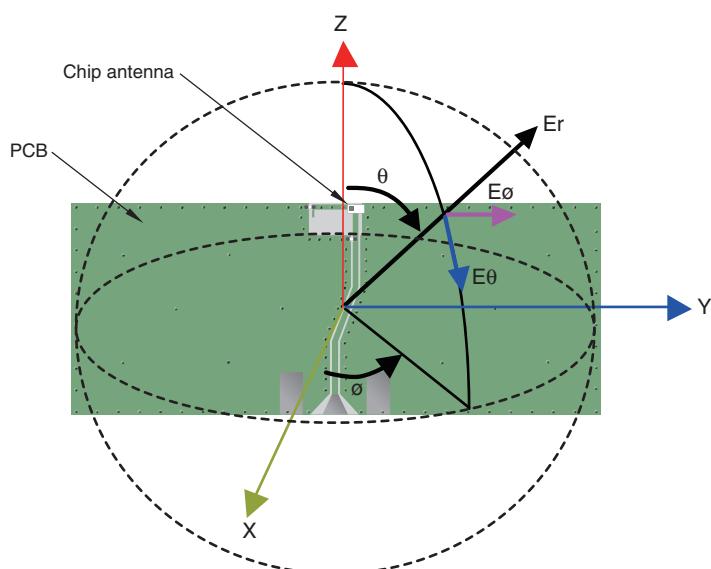

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

# ANT016008LCS2442MA1

## ■ ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Typ.	Max.
VSWR	2400 to 2484	—	1.60	3.0
Polarization			Linear	
PCB size (mm)			50×20	
Antenna keep-out area (mm)			5×3	
Characteristic Impedance (Ω)			50 (Nominal)	


• This is typical antenna performance with the standard PCB.

## ■ TEMPERATURE RANGE

Operating temperature (°C)	Storage temperature (°C)
-40 to +85	-40 to +85

## ■ FREQUENCY CHARACTERISTICS

### □ EFFICIENCY AND VSWR



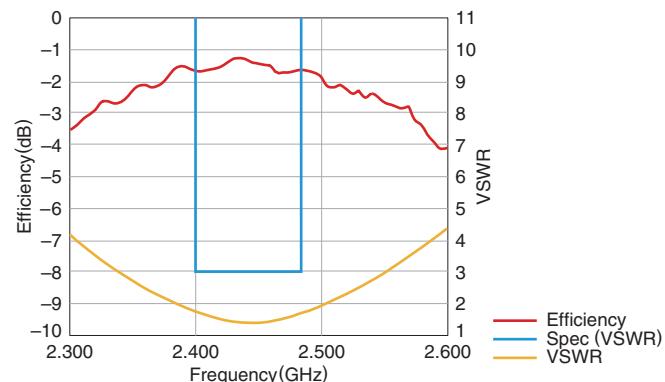


• Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.

## ANT016008LCS2442MA1

## ■ RADIATION PATTERNS


## □ 2.4GHz BAND

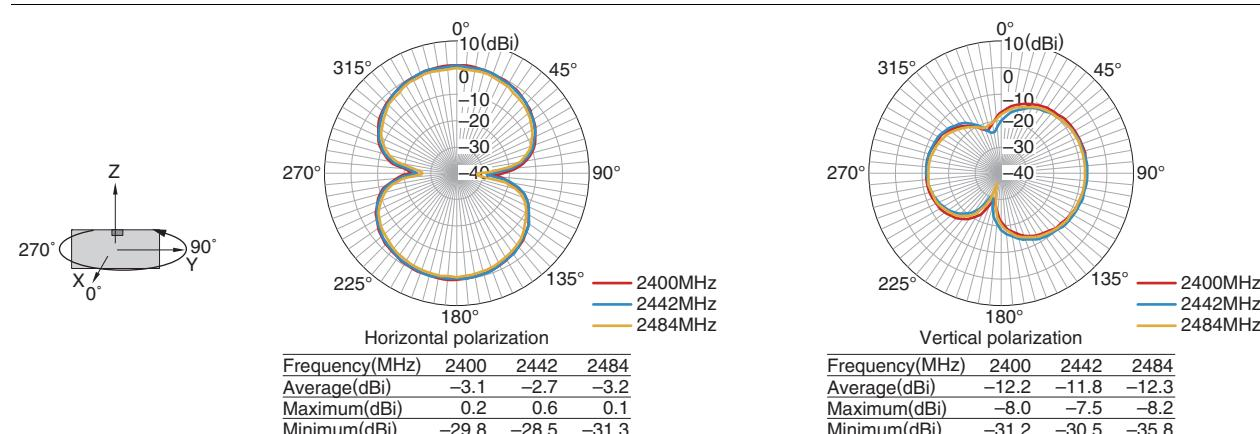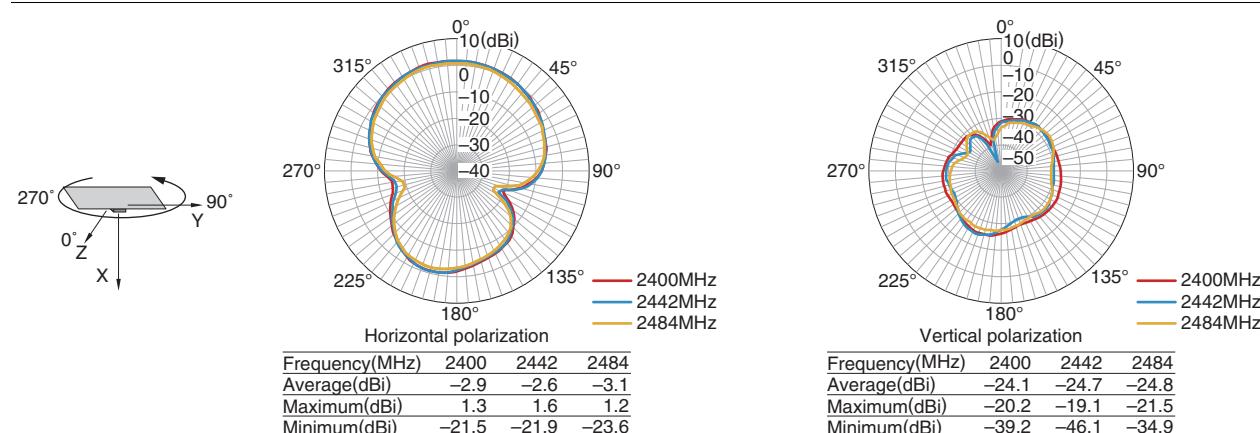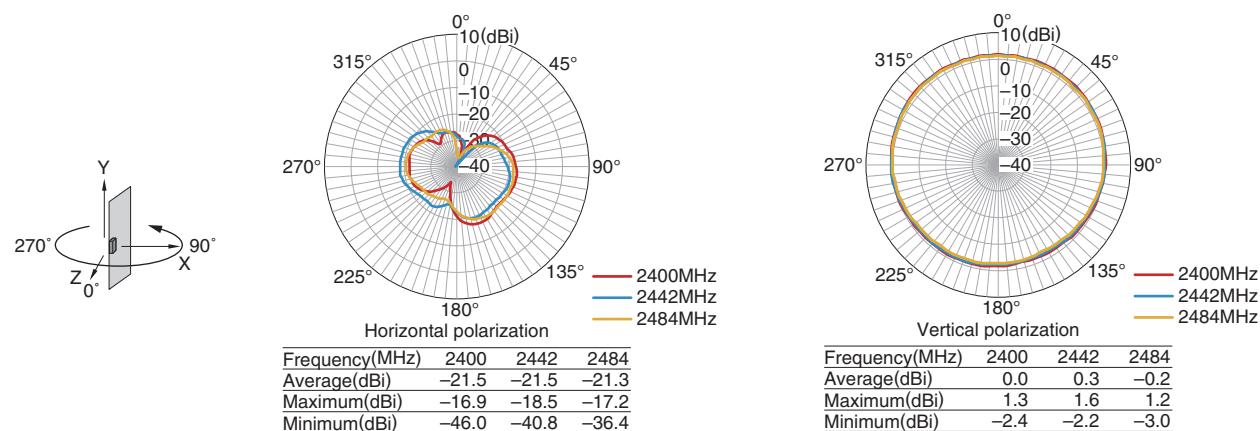

• Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.

• All specifications are subject to change without notice.  
• Before using these products, be sure to request the delivery specifications.

## ■ RECOMMENDED REFLOW PROFILE

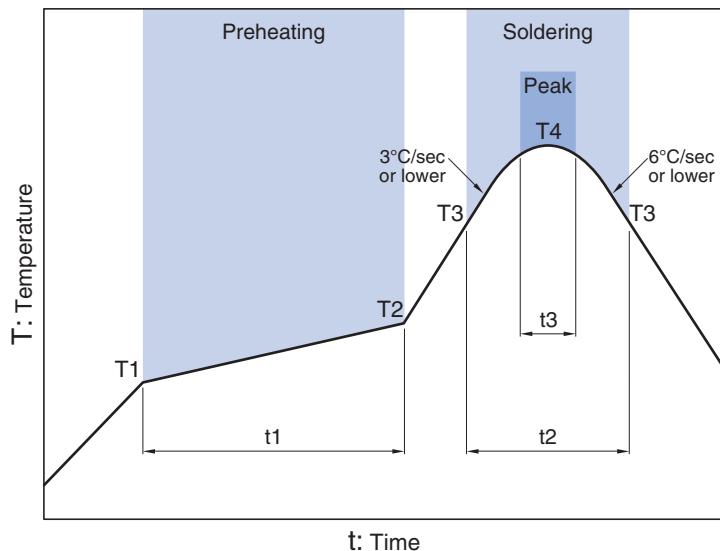

Preheating			Soldering		Peak	
			Critical zone (T3 to T4)			
Temp.	Time		Temp.	Time	Temp.	Time
$T_1$ 150°C	$T_2$ 200°C	$t_1$ 60 to 120sec	$T_3$ 217°C	$t_2$ 60 to 120sec	$T_4$ 240 to 260°C	$t_3^*$ 30sec max.


\*  $t_3$  : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

## ANT016008LCS2442MA1

## ■ PACKAGING STYLE


## □ REEL DIMENSIONS

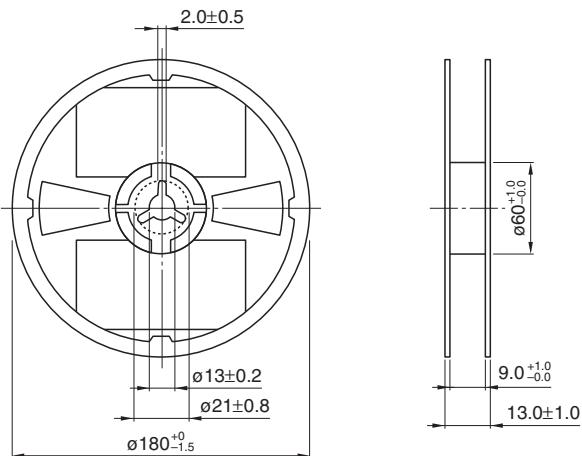

Dimensions in mm

## □ TAPE DIMENSIONS

Material of carrier the tape: PS

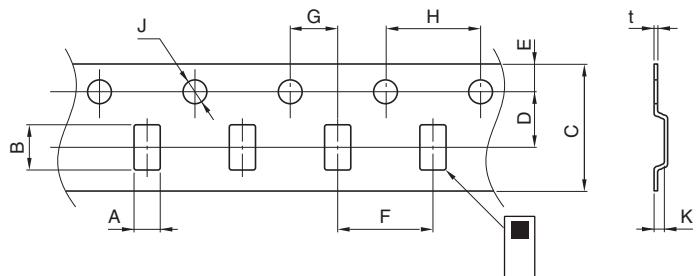

Dimensions in mm

A	B	C	D	E	F	G	H	J	K	t
0.97±0.05	1.8±0.05	8.0±0.2	3.5±0.05	1.75±0.1	4.0±0.1	2.0±0.05	4.0±0.1	1.5+0.1/-0	0.55max.	0.25±0.05

## ■ PACKAGE QUANTITY

Standard package quantity (pieces/reel)
--

4,000

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

#### REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

(1) Aerospace/Aviation equipment	(8) Public information-processing equipment
(2) Transportation equipment (cars, electric trains, ships, etc.)	(9) Military equipment
(3) Medical equipment	(10) Electric heating apparatus, burning equipment
(4) Power-generation control equipment	(11) Disaster prevention/crime prevention equipment
(5) Atomic energy-related equipment	(12) Safety equipment
(6) Seabed equipment	(13) Other applications that are not considered general-purpose applications
(7) Transportation control equipment	

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.