

TEST REPORT

Product : Eilik AI Station
Trade mark : Eilik AI Station
Model/Type reference : Ei-AI-Base
Serial Number : N/A
Report Number : EED32R80798701
FCC ID : 2BLNC-EIKSTATION
Date of Issue : Aug. 13, 2025
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS


Prepared for:

Shenzhen Zhuneng Technology Co., Ltd.
405-1, Honglang North, Zhongli Venture Community, No. 49, Dabao
Road, Xin'an Street, Baoan District

Prepared by:


Centre Testing International Group Co., Ltd.
Hongwei Industrial Park, Zone 70, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:



Keven Tan

Reviewed by:



Frazer Li

Approved by:



Aaron Ma

Date:

Aug. 13, 2025



Check No.:8835210525

1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST CONFIGURATION	5
3.4 TEST ENVIRONMENT	6
3.5 DESCRIPTION OF SUPPORT UNITS	6
3.6 TEST LOCATION	6
3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	7
4 EQUIPMENT LIST	8
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	15
6 PHOTOGRAPHS OF TEST SETUP	26
7 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	28

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	NOTE
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	NOTE
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	NOTE
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.247(d)	NOTE
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	NOTE
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS
Remark: NOTE: The test data refer to the module's (FCC ID: 2AL6KBL-M8821CS1) report of GTS20191209006-2-23.		

3 General Information

3.1 Client Information

Applicant:	Shenzhen Zhuneng Technology Co., Ltd.
Address of Applicant:	405-1, Honglang North, Zhongli Venture Community, No. 49, Dabao Road, Xin'an Street, Baoan District
Manufacturer:	Shenzhen Zhuneng Technology Co., Ltd.
Address of Manufacturer:	405-1, Honglang North, Zhongli Venture Community, No. 49, Dabao Road, Xin'an Street, Baoan District
Factory:	Kpower Technology Co.,Ltd.
Address of Factory:	No.8, Changhong 4th Road, Zhangkeng Village, Hengli Town, Dongguan City, Guangdong Province

3.2 General Description of EUT

Product Name:	Eilik AI Station		
Model No.:	Ei-AI-Base		
Test Model No.:	Ei-AI-Base		
Trade mark:	Eilik AI Station		
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location		
Operation Frequency:	2402MHz~2480MHz		
Modulation Type:	GFSK		
Transfer Rate:	☒ 1Mbps ☒ 2Mbps		
Number of Channel:	40		
Antenna Type:	Dual-frequency copper tube antenna		
Antenna Gain:	2.7dBi		
Power Supply:	Adapter:	DC 12V	
Test Voltage:	DC 12V		
Sample Received Date:	May 22, 2025		
Sample tested Date:	Jun. 12, 2025 to Jul. 23, 2025		

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency(MHz)
The lowest channel (CH0)	2402
The middle channel (CH19)	2440
The highest channel (CH39)	2480

3.3 Test Configuration

EUT Test Software Settings:				
Test Software:		Cmd.exe		
EUT Power Grade:		Default (Power level is built-in set parameters and cannot be changed and selected)		
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.				
Test Mode	Modulation	Rate	Channel	Frequency(MHz)
Mode a	GFSK	1Mbps	CH0	2402
Mode b	GFSK	1Mbps	CH19	2440
Mode c	GFSK	1Mbps	CH39	2480
Mode d	GFSK	2Mbps	CH0	2402
Mode e	GFSK	2Mbps	CH19	2440
Mode f	GFSK	2Mbps	CH39	2480

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Dell	P77F	FCC&CE	CTI

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz-150kHz)
		3.1dB (150kHz-30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-07-2025	06-06-2026
ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESC17	100938-003	09/07/2024	09/06/2025
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/14/2025	05/13/2026
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	05/23/2025	05/22/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	06/19/2024 05/26/2025	06/18/2025 05/25/2026
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	01/13/2024	01/12/2027
Cable line	Fulai(6M)	SF106	5220/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5216/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5217/6A	01/13/2024	01/12/2027


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-04-2025	01-03-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-14-2025	01-13-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-14-2025	01-13-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-12-2025	04-11-2026
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-12-2025	04-11-2026
Horn Antenna	ETS-LINDGREN	3117	57407	07-03-2024 06-29-2025	07-02-2025 06-28-2026
Preamplifier	EMCI	EMC001330	980563	03-03-2025	03-02-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-18-2024 07-07-2025	07-17-2025 07-06-2026
Preamplifier	Tonscend	EMC051845SE	980380	12-05-2024	12-04-2025
Communication test set	R&S	CMW500	102898	01-04-2025	01-03-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-31-2025	03-30-2026
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2024	01-08-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2024	01-08-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2024	01-08-2027

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is Dual-frequency copper tube antenna. The best case gain of the antenna is 2.7dBi.	


5.2 Conducted Emissions

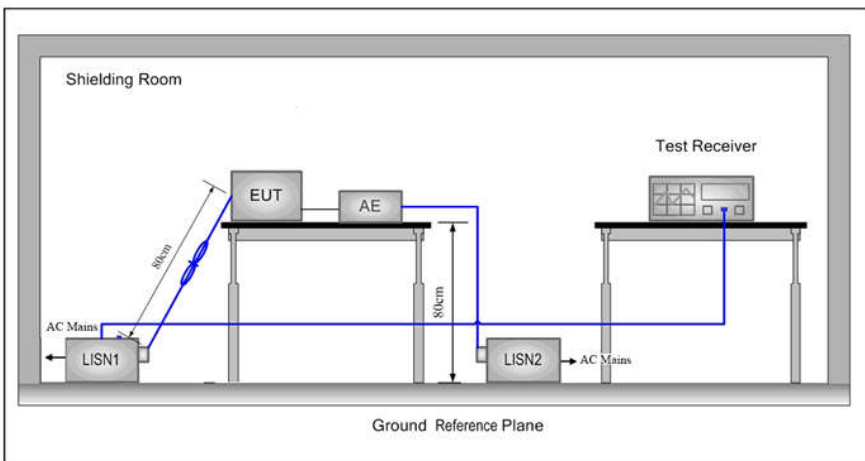Test Requirement:	47 CFR Part 15C Section 15.207																
Test Method:	ANSI C63.10: 2013																
Test Frequency Range:	150kHz to 30MHz																
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test Setup:																	
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.																
Test Mode:	All modes were tested, only the worst case mode a was recorded in the report.																

Test Results:	Pass
---------------	------

Measurement Data

Live line:

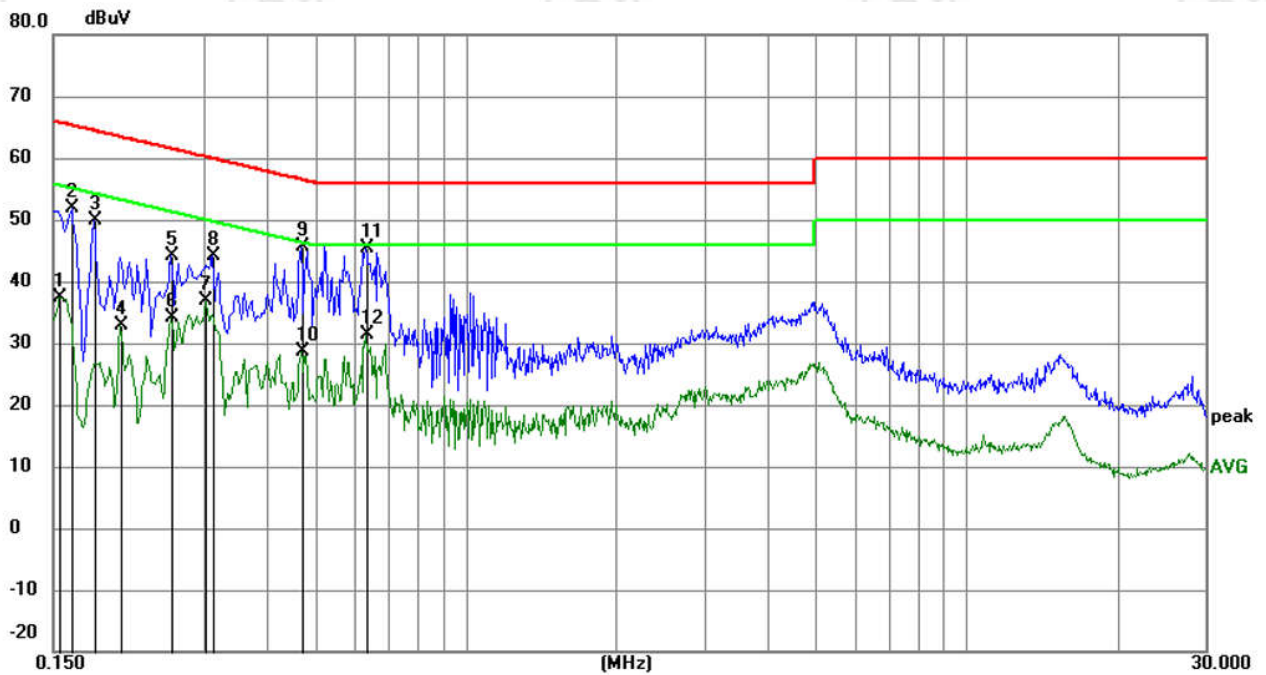


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	27.07	10.28	37.35	55.75	-18.40	AVG	
2		0.1635	41.50	10.26	51.76	65.28	-13.52	QP	
3		0.1815	39.61	10.24	49.85	64.42	-14.57	QP	
4		0.2040	22.69	10.21	32.90	53.45	-20.55	AVG	
5		0.2580	34.08	10.16	44.24	61.50	-17.26	QP	
6		0.2580	23.88	10.16	34.04	51.50	-17.46	AVG	
7		0.3030	26.69	10.13	36.82	50.16	-13.34	AVG	
8		0.3120	34.11	10.13	44.24	59.92	-15.68	QP	
9		0.4695	35.47	10.08	45.55	56.52	-10.97	QP	
10		0.4695	18.56	10.08	28.64	46.52	-17.88	AVG	
11	*	0.6315	35.27	10.11	45.38	56.00	-10.62	QP	
12		0.6315	21.39	10.11	31.50	46.00	-14.50	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:
80.0 dBuV

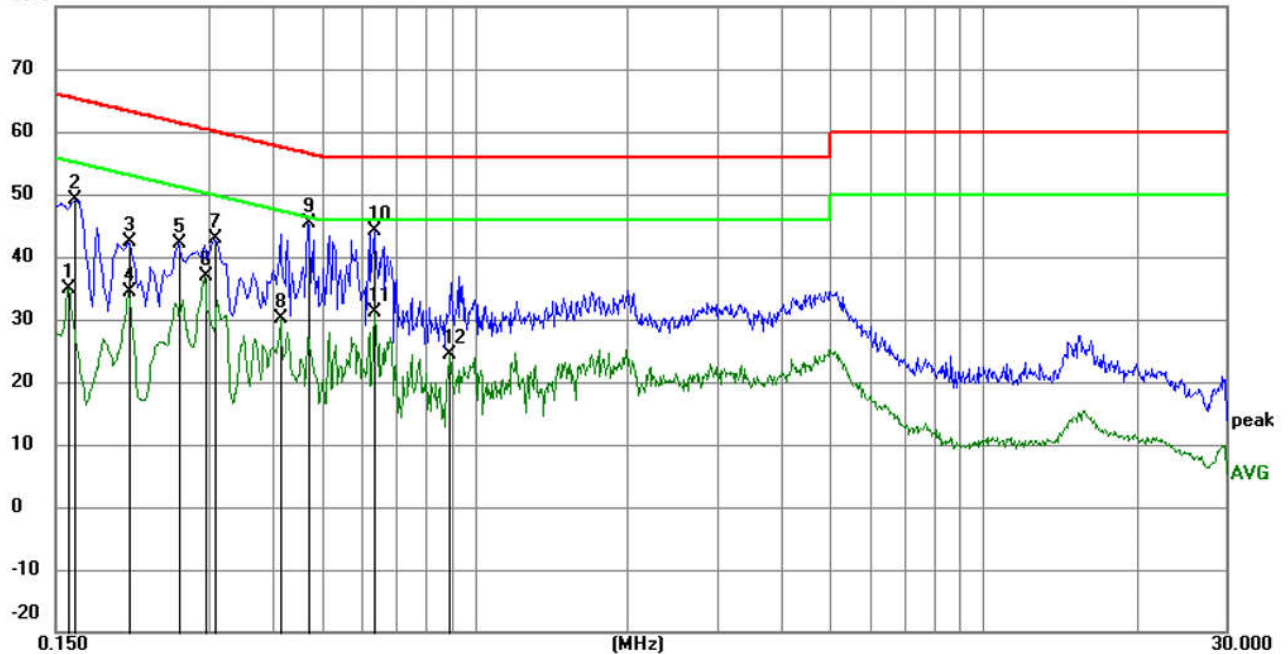




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	24.58	10.27	34.85	55.52	-20.67	AVG	
2		0.1635	38.82	10.26	49.08	65.28	-16.20	QP	
3		0.2085	32.27	10.20	42.47	63.26	-20.79	QP	
4		0.2085	24.06	10.20	34.26	53.26	-19.00	AVG	
5		0.2625	32.03	10.16	42.19	61.35	-19.16	QP	
6		0.2940	26.73	10.13	36.86	50.41	-13.55	AVG	
7		0.3075	32.63	10.13	42.76	60.04	-17.28	QP	
8		0.4155	20.11	10.09	30.20	47.54	-17.34	AVG	
9	*	0.4695	35.30	10.08	45.38	56.52	-11.14	QP	
10		0.6360	33.92	10.11	44.03	56.00	-11.97	QP	
11		0.6360	21.06	10.11	31.17	46.00	-14.83	AVG	
12		0.8925	14.31	10.17	24.48	46.00	-21.52	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

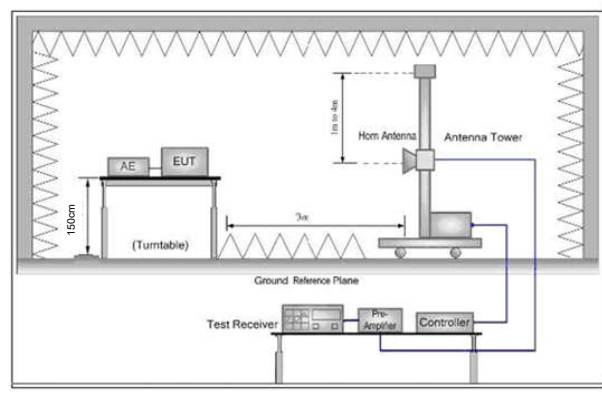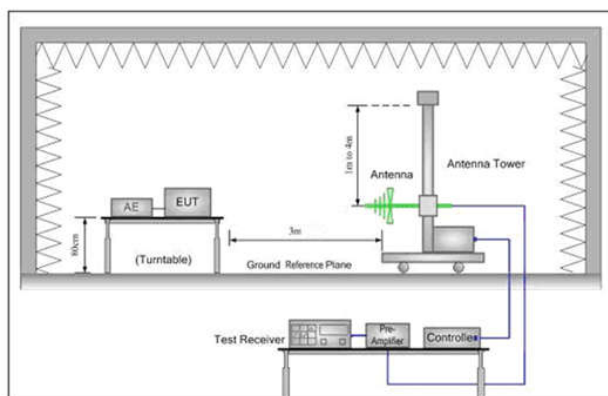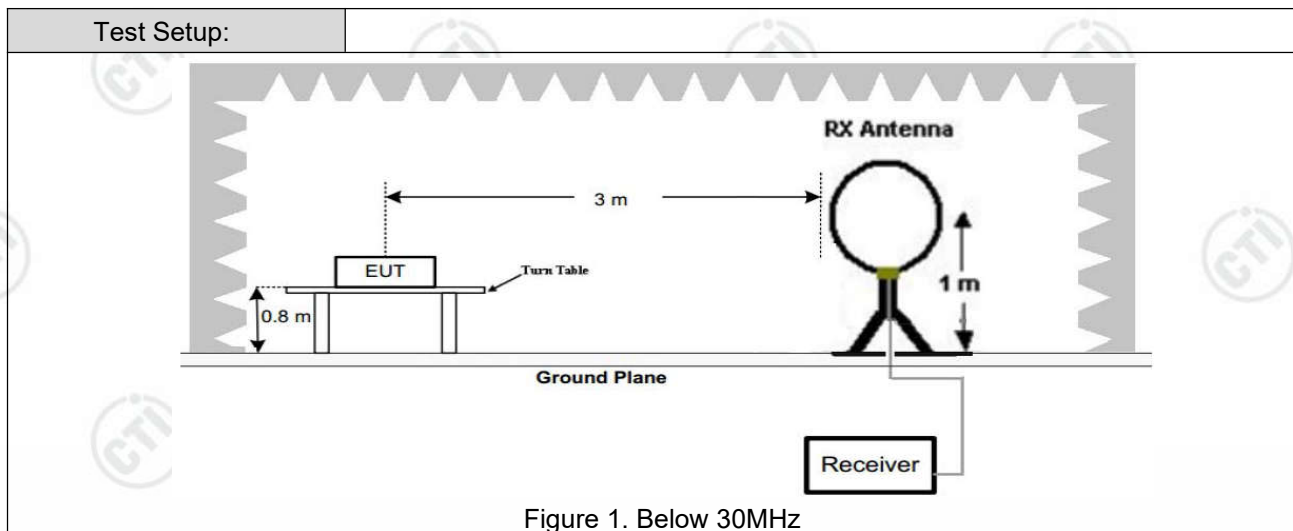

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both


	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 5.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case highest channel of GFSK 1M was recorded in the report.

Test Graph

Horizontal:

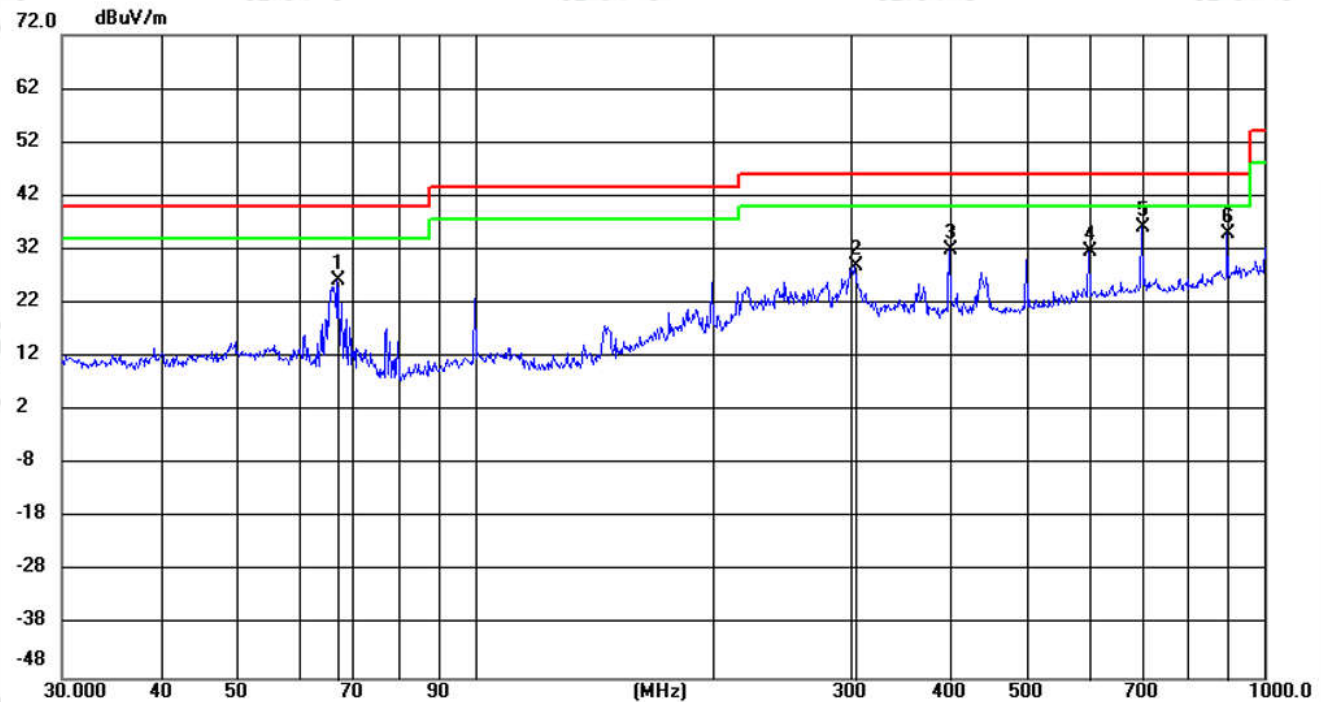


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		67.1902	14.75	11.41	26.16	40.00	-13.84	QP	199	7
2		303.2245	12.23	16.68	28.91	46.00	-17.09	QP	100	250
3		400.0108	12.40	19.59	31.99	46.00	-14.01	QP	100	34
4		600.0571	8.35	23.35	31.70	46.00	-14.30	QP	100	76
5	*	700.0406	12.01	24.23	36.24	46.00	-9.76	QP	199	121
6		899.9896	7.74	27.31	35.05	46.00	-10.95	QP	199	59

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Test Graph

Vertical:

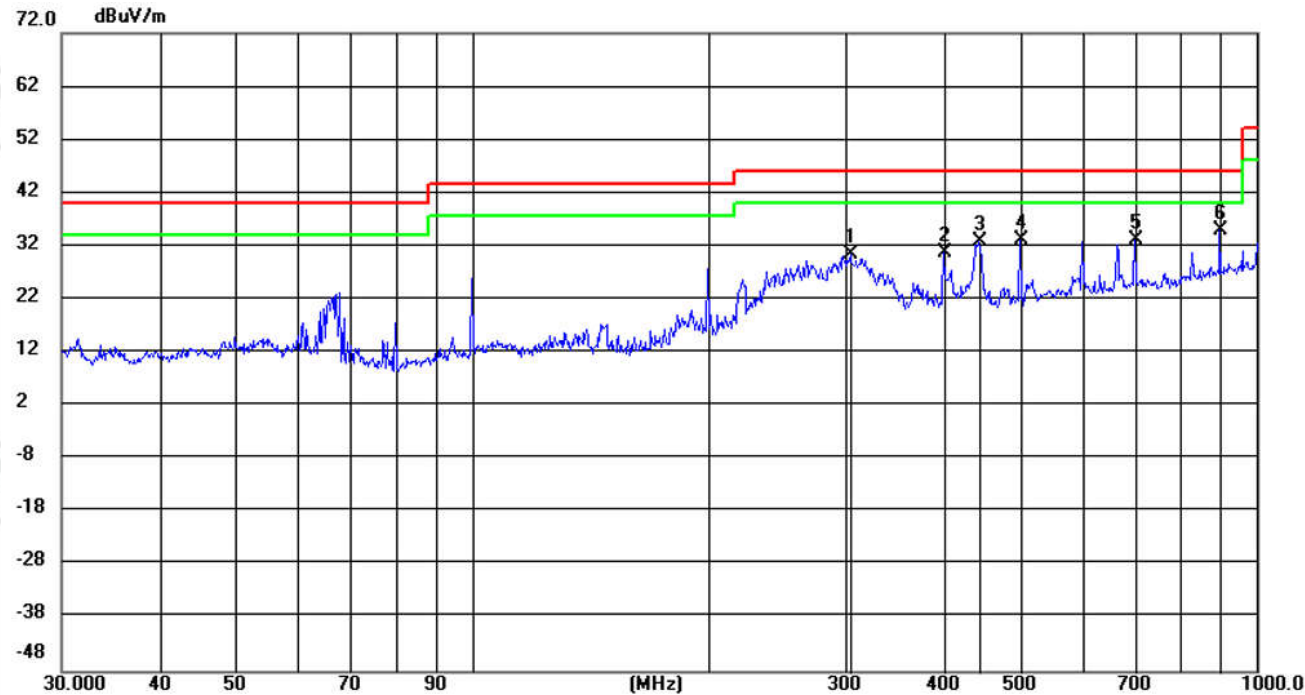

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		303.6502	13.72	16.69	30.41	46.00	-15.59	QP	200	352
2		400.0109	11.28	19.59	30.87	46.00	-15.13	QP	100	163
3		443.2166	12.70	20.11	32.81	46.00	-13.19	QP	100	163
4		500.0380	12.30	20.81	33.11	46.00	-12.89	QP	100	70
5		700.0406	8.81	24.23	33.04	46.00	-12.96	QP	100	330
6	*	899.9896	7.76	27.31	35.07	46.00	-10.93	QP	100	7

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Radiated Spurious Emission above 1GHz:

During the test, the Radiated Spurious Emission from above 1GHz was performed in all modes, only the worst case BLE 1M was recorded in the report.

Mode:			Bluetooth LE GFSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1127.8752	11.40	37.24	48.64	74.00	25.36	Pass	H	PK
2	1741.1161	14.12	36.26	50.38	74.00	23.62	Pass	H	PK
3	3203.4636	-14.44	54.93	40.49	74.00	33.51	Pass	H	PK
4	4839.6226	-8.50	50.33	41.83	74.00	32.17	Pass	H	PK
5	8000.1333	-1.36	48.25	46.89	74.00	27.11	Pass	H	PK
6	11845.7897	2.53	45.64	48.17	74.00	25.83	Pass	H	PK
7	1154.8103	11.50	37.03	48.53	74.00	25.47	Pass	V	PK
8	1911.7941	14.80	35.62	50.42	74.00	23.58	Pass	V	PK
9	3189.1626	-14.49	58.46	43.97	74.00	30.03	Pass	V	PK
10	4925.4284	-8.15	50.05	41.90	74.00	32.10	Pass	V	PK
11	8000.1333	-1.36	50.32	48.96	74.00	25.04	Pass	V	PK
12	11944.5963	3.07	45.52	48.59	74.00	25.41	Pass	V	PK

Mode:			Bluetooth LE GFSK Transmitting			Channel:		2440 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1120.1413	11.30	37.69	48.99	74.00	25.01	Pass	H	PK
2	1750.8501	14.08	36.83	50.91	74.00	23.09	Pass	H	PK
3	3495.9831	-13.89	53.51	39.62	74.00	34.38	Pass	H	PK
4	4879.9253	-8.36	49.73	41.37	74.00	32.63	Pass	H	PK
5	6644.793	-3.97	47.42	43.45	74.00	30.55	Pass	H	PK
6	9721.4481	1.28	43.89	45.17	74.00	28.83	Pass	H	PK
7	1162.9442	11.48	37.12	48.60	74.00	25.40	Pass	V	PK
8	1694.5796	14.05	36.71	50.76	74.00	23.24	Pass	V	PK
9	3199.5633	-14.46	60.02	45.56	74.00	28.44	Pass	V	PK
10	4786.9691	-8.61	50.57	41.96	74.00	32.04	Pass	V	PK
11	6383.4756	-4.36	47.53	43.17	74.00	30.83	Pass	V	PK
12	9593.3896	1.35	44.36	45.71	74.00	28.29	Pass	V	PK

Mode:			Bluetooth LE GFSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1140.8094	11.43	36.71	48.14	74.00	25.86	Pass	H	PK
2	1637.9092	14.00	36.18	50.18	74.00	23.82	Pass	H	PK
3	3800.2033	-12.44	53.66	41.22	74.00	32.78	Pass	H	PK
4	4959.8807	-8.05	52.46	44.41	74.00	29.59	Pass	H	PK
5	6799.5033	-3.57	46.59	43.02	74.00	30.98	Pass	H	PK
6	10149.1766	1.54	43.87	45.41	74.00	28.59	Pass	H	PK
7	1185.2123	11.49	36.84	48.33	74.00	25.67	Pass	V	PK
8	1633.6422	13.91	36.63	50.54	74.00	23.46	Pass	V	PK
9	3187.2125	-14.50	60.37	45.87	74.00	28.13	Pass	V	PK
10	4902.0268	-8.28	49.90	41.62	74.00	32.38	Pass	V	PK
11	7968.9313	-1.38	50.12	48.74	74.00	25.26	Pass	V	PK
12	10600.3067	2.11	42.98	45.09	74.00	28.91	Pass	V	PK


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark	21.3°C57.9%/		


Test Graph

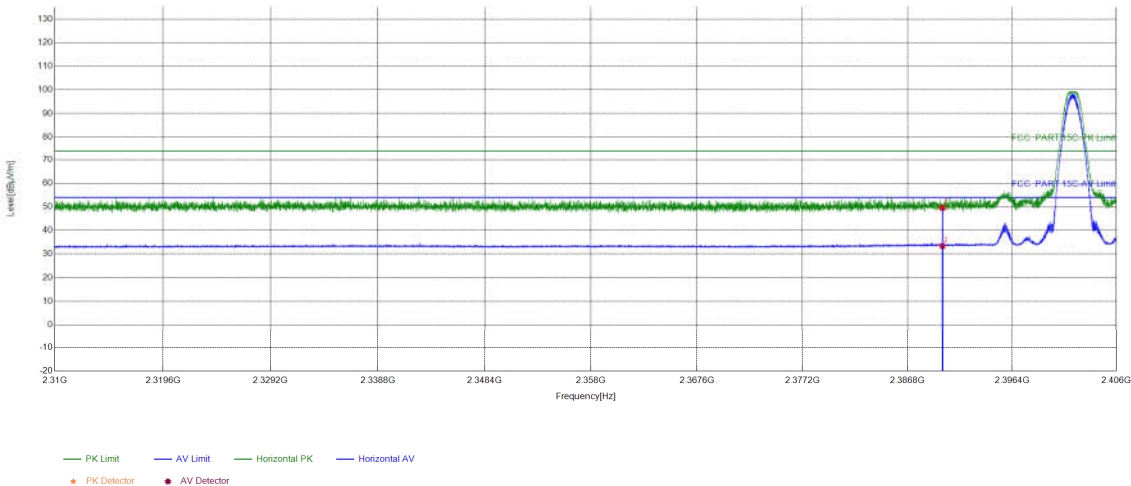

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.58	49.54	74.00	24.46	PASS	Horizontal	PK
2	2390	15.96	17.43	33.39	54.00	20.61	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark	21.3°C57.9%/		


Test Graph

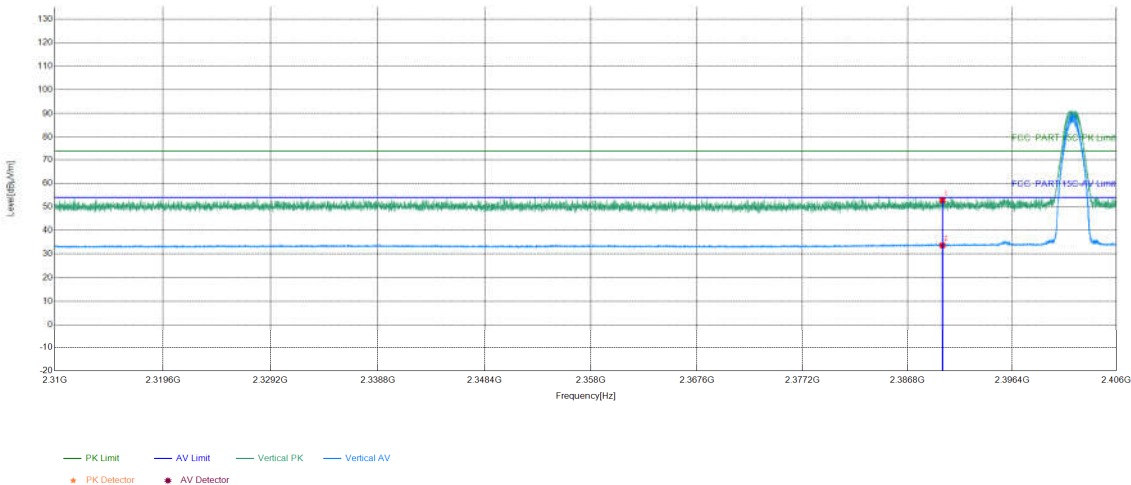

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.81	52.77	74.00	21.23	PASS	Vertical	PK
2	2390	15.96	17.71	33.67	54.00	20.33	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark	21.3°C57.9%/		


Test Graph

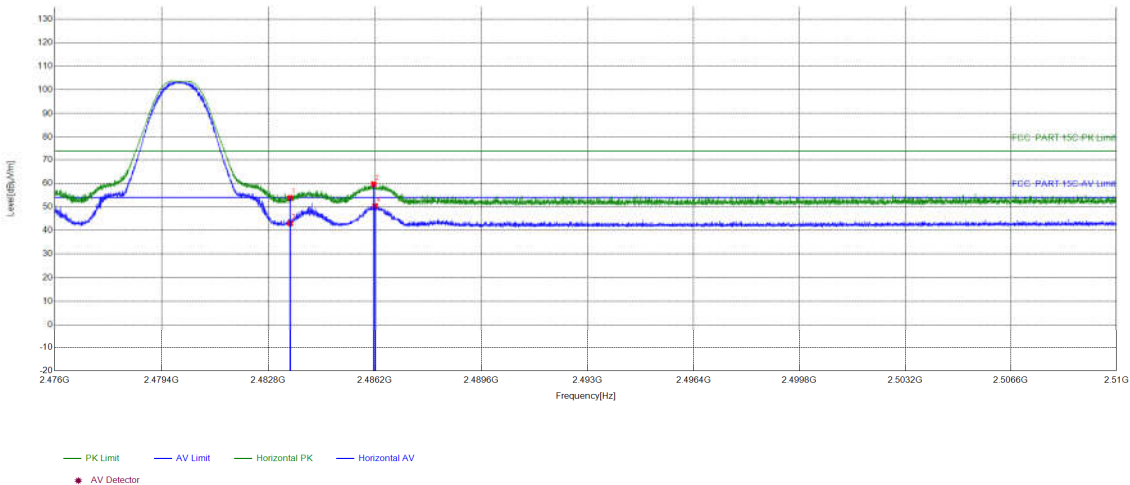

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.56	53.85	74.00	20.15	PASS	Horizontal	PK
2	2486.167	16.24	43.36	59.60	74.00	14.40	PASS	Horizontal	PK
3	2483.5	16.29	26.71	43.00	54.00	11.00	PASS	Horizontal	AV
4	2486.211	16.24	34.14	50.38	54.00	3.62	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark	21.3°C57.9%/		

Test Graph

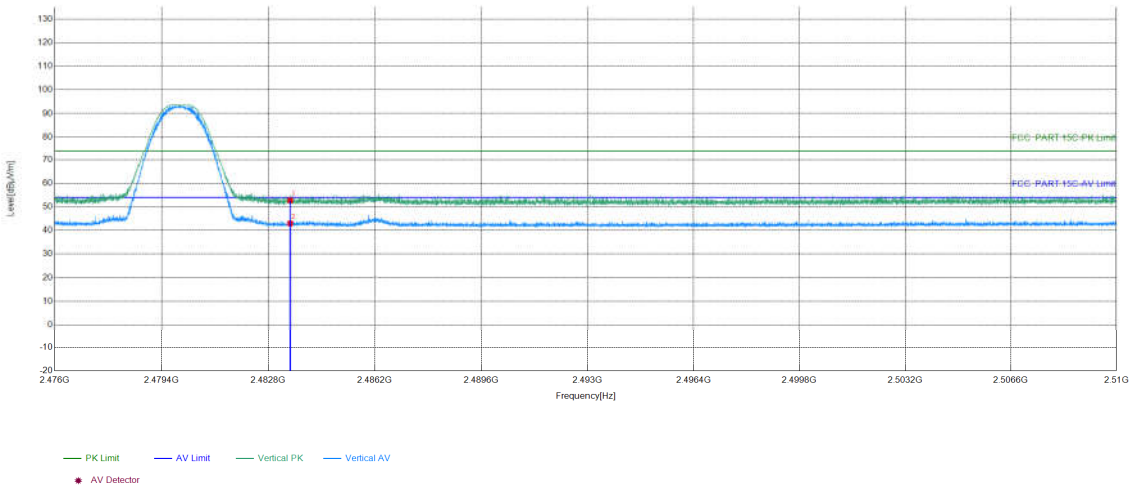

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.48	52.77	74.00	21.23	PASS	Vertical	PK
2	2483.5	16.29	26.70	42.99	54.00	11.01	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***