



TEST REPORT

Product Name: ProStar13 Wifi Easy DTF Printer
FCC ID: 2BLZ6-PROSTAR13
Trademark: CALCA
Model Number: ProStar13 WiFi
Prepared For: HANGZHOU BIAOGUANG E-COMMERCE CO., LTD.
Address: ROOM 1002, BUILDING 1, YUZHICHENG, NANYUAN, YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA
Manufacturer: HANGZHOU BIAOGUANG E-COMMERCE CO., LTD.
Address: ROOM 1002, BUILDING 1, YUZHICHENG, NANYUAN, YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 31, 2024
Sample tested Date: May. 31, 2024 to Jun. 18, 2024
Issue Date: Jun. 18, 2024
Report No.: CTB240618009RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	30
8.1 Block Diagram Of Test Setup	30
8.2 Limit	30
8.3 Test procedure	30
8.4 Test Result	31
9. CONDUCTED OUTPUT POWER	39
9.1 Block Diagram Of Test Setup	39
9.2 Limit	39
9.3 Test procedure	39
9.4 Test Result	40
10. 6DB OCCUPIED BANDWIDTH	41
10.1 Block Diagram Of Test Setup	41
10.2 Limit	41
10.3 Test procedure	41
10.4 Test Result	42
11. POWER SPECTRAL DENSITY	47
11.1 Block Diagram Of Test Setup	47

11.2	Limit	47
11.3	Test procedure	47
11.4	Test Result	48
12.	ANTENNA REQUIREMENT	53
13.	EUT TEST SETUP PHOTOGRAPHS	54

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240618009RFX	Jun. 18, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59℃
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	ProStar13 WiFi
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 14.158dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: External antenna
Antenna Gain:	WiFi (2.4G): 2.92dBi
Ratings:	AC 110V~220V, 50/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_ 7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-N MS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-N	/	/	2025/6/28

			MS-20			
11	Coaxial cable	ETS	RFC-SNS-100-S MS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100- NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

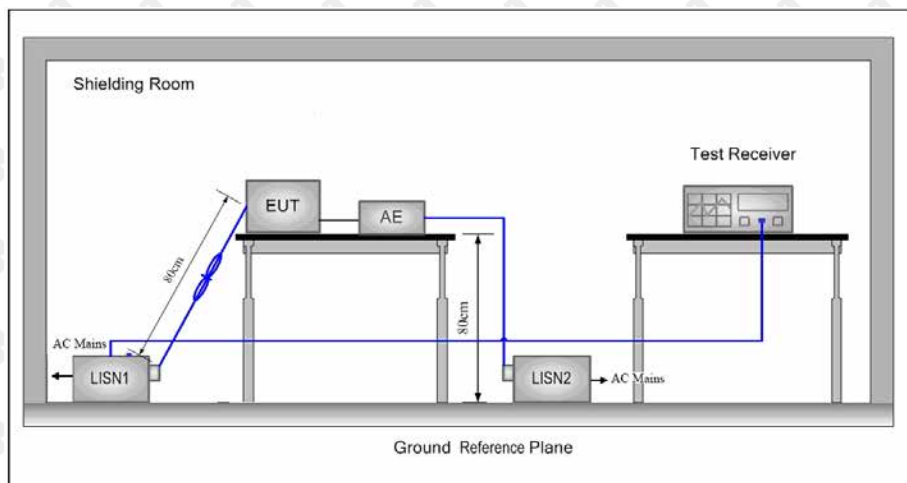

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

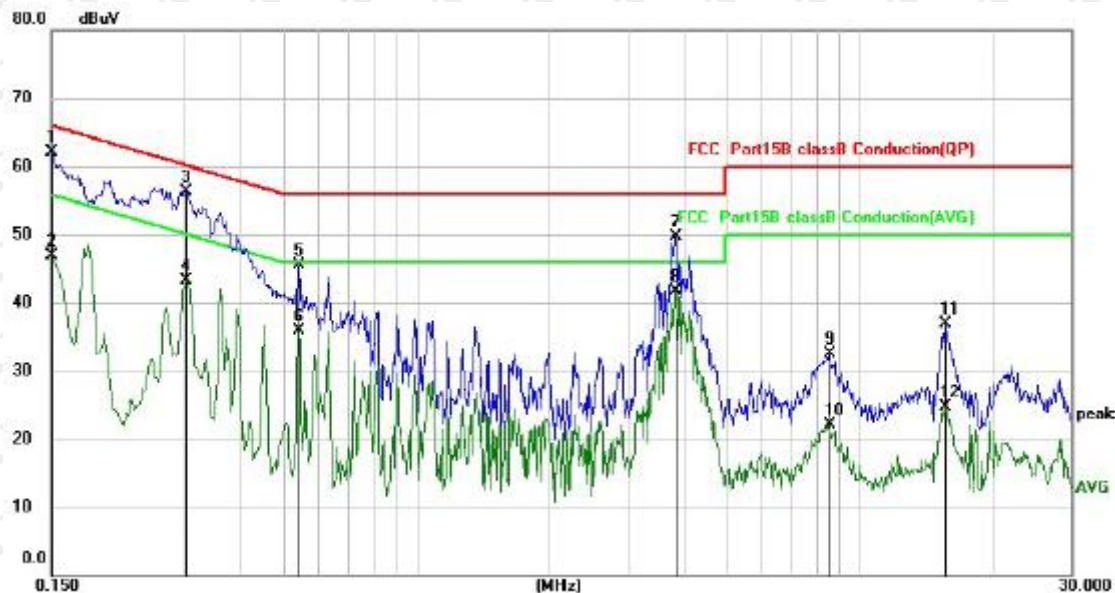

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	52.20	9.95	62.15	66.00	-3.85	QP
2		0.1500	36.90	9.95	46.85	56.00	-9.15	AVG
3	*	0.3034	46.41	9.96	56.37	60.15	-3.78	QP
4		0.3034	33.37	9.96	43.33	50.15	-6.82	AVG
5		0.5420	35.41	10.00	45.41	56.00	-10.59	QP
6		0.5420	25.97	10.00	35.97	46.00	-10.03	AVG
7		3.8340	39.50	10.27	49.77	56.00	-6.23	QP
8		3.8340	31.37	10.27	41.64	46.00	-4.36	AVG
9		8.5337	22.02	10.55	32.57	60.00	-27.43	QP
10		8.5337	11.60	10.55	22.15	50.00	-27.85	AVG
11		15.5859	26.08	10.74	36.82	60.00	-23.18	QP
12		15.5859	13.96	10.74	24.70	50.00	-25.30	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

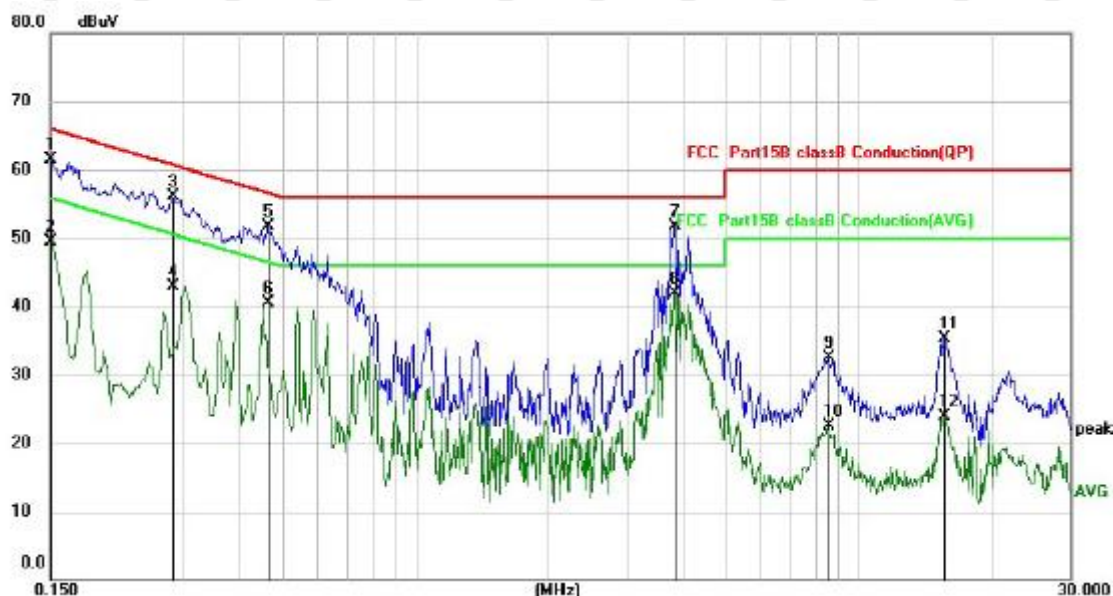

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	51.46	9.95	61.41	66.00	-4.59	QP
2		0.1500	39.50	9.95	49.45	56.00	-6.55	AVG
3		0.2818	46.11	9.96	56.07	60.76	-4.69	QP
4		0.2818	32.99	9.96	42.95	50.76	-7.81	AVG
5		0.4660	41.72	9.99	51.71	56.58	-4.87	QP
6		0.4660	30.44	9.99	40.43	46.58	-6.15	AVG
7		3.8340	41.43	10.27	51.70	56.00	-4.30	QP
8	*	3.8340	31.66	10.27	41.93	46.00	-4.07	AVG
9		8.5337	21.91	10.55	32.46	60.00	-27.54	QP
10		8.5337	12.05	10.55	22.60	50.00	-27.40	AVG
11		15.5859	24.60	10.74	35.34	60.00	-24.66	QP
12		15.5859	13.24	10.74	23.98	50.00	-26.02	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

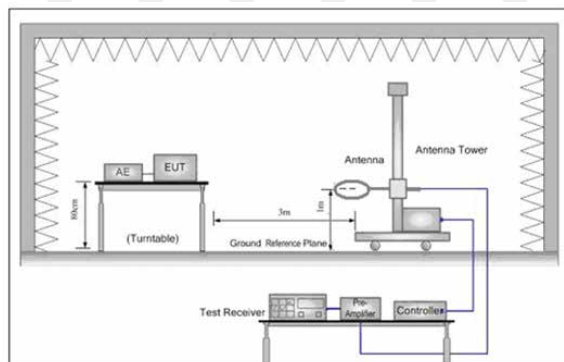


Figure 1. Below 30MHz

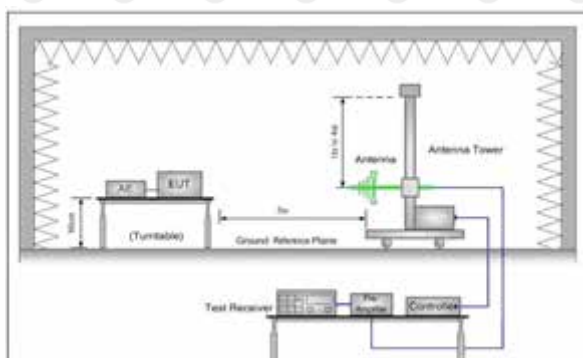


Figure 2. 30MHz to 1GHz

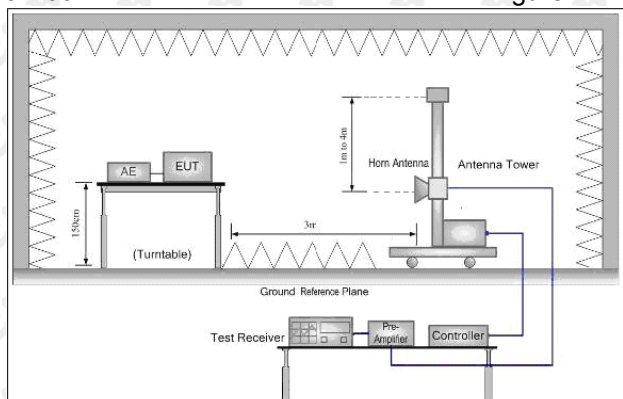


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	145.3505	41.40	-3.74	37.66	43.50	-5.84	QP
2	*	208.2146	47.02	-7.38	39.64	43.50	-3.86	QP
3		252.5048	42.44	-6.79	35.65	46.00	-10.35	QP
4		374.6225	37.20	-2.81	34.39	46.00	-11.61	QP
5	!	565.6295	39.46	1.74	41.20	46.00	-4.80	QP
6		1000.000	33.54	7.87	41.41	54.00	-12.59	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	46.0970	40.95	-5.91	35.04	40.00	-4.96	QP
2	!	147.9214	41.29	-3.42	37.87	43.50	-5.63	QP
3	!	208.2147	45.01	-7.38	37.63	43.50	-5.87	QP
4	!	374.6225	43.68	-2.81	40.87	46.00	-5.13	QP
5	*	565.6295	41.20	1.74	42.94	46.00	-3.06	QP
6	!	876.7827	35.41	6.77	42.18	46.00	-3.82	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.75	-3.64	61.11	74	-12.89	peak
4824	48.44	-3.64	44.80	54	-9.20	AVG
7236	59.39	-0.95	58.44	74	-15.56	peak
7236	46.49	-0.95	45.54	54	-8.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.02	-3.64	61.38	74	-12.62	peak
4824	47.08	-3.64	43.44	54	-10.56	AVG
7236	58.78	-0.95	57.83	74	-16.17	peak
7236	44.55	-0.95	43.60	54	-10.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.99	-3.51	60.48	74	-13.52	peak
4874	49.54	-3.51	46.03	54	-7.97	AVG
7311	58.71	-0.82	57.89	74	-16.11	peak
7311	45.11	-0.82	44.29	54	-9.71	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.68	-3.51	62.17	74	-11.83	peak
4874	46.75	-3.51	43.24	54	-10.76	AVG
7311	58.73	-0.82	57.91	74	-16.09	peak
7311	44.48	-0.82	43.66	54	-10.34	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	64.79	-3.43	61.36	74	-12.64	peak
4924	47.17	-3.43	43.74	54	-10.26	AVG
7386	59.05	-0.75	58.30	74	-15.70	peak
7386	44.19	-0.75	43.44	54	-10.56	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	63.77	-3.43	60.34	74	-13.66	peak
4924	46.91	-3.43	43.48	54	-10.52	AVG
7386	56.72	-0.75	55.97	74	-18.03	peak
7386	42.80	-0.75	42.05	54	-11.95	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.87	-3.64	60.23	74	-13.77	peak
4824	48.49	-3.64	44.85	54	-9.15	AVG
7236	59.02	-0.95	58.07	74	-15.93	peak
7236	44.47	-0.95	43.52	54	-10.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	67.11	-3.64	63.47	74	-10.53	peak
4824	47.11	-3.64	43.47	54	-10.53	AVG
7236	56.51	-0.95	55.56	74	-18.44	peak
7236	43.58	-0.95	42.63	54	-11.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.96	-3.51	62.45	74	-11.55	peak
4874	49.43	-3.51	45.92	54	-8.08	AVG
7311	58.64	-0.82	57.82	74	-16.18	peak
7311	45.26	-0.82	44.44	54	-9.56	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.12	-3.51	61.61	74	-12.39	peak
4874	47.99	-3.51	44.48	54	-9.52	AVG
7311	58.48	-0.82	57.66	74	-16.34	peak
7311	42.83	-0.82	42.01	54	-11.99	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.04	-3.43	58.61	74	-15.39	peak
4924	48.54	-3.43	45.11	54	-8.89	AVG
7386	57.98	-0.75	57.23	74	-16.77	peak
7386	44.99	-0.75	44.24	54	-9.76	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.76	-3.43	61.33	74	-12.67	peak
4924	46.88	-3.43	43.45	54	-10.55	AVG
7386	56.64	-0.75	55.89	74	-18.11	peak
7386	41.82	-0.75	41.07	54	-12.93	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.49	-5.81	51.68	74	-22.32	peak
2390	/	-5.81	/	54	/	AVG
2399	64.37	-5.84	58.53	74	-15.47	peak
2399	48.48	-5.84	42.64	54	-11.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.20	-5.81	51.39	74	-22.61	peak
2390	/	-5.81	/	54	/	AVG
2399	63.39	-5.84	57.55	74	-16.45	peak
2399	46.33	-5.84	40.49	54	-13.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.35	-5.65	51.70	74	-22.30	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.02	-5.65	51.37	74	-22.63	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.58	-5.81	52.77	74	-21.23	peak
2390	/	-5.81	/	54	/	AVG
2399	62.09	-5.84	56.25	74	-17.75	peak
2399	47.13	-5.84	41.29	54	-12.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.46	-5.81	51.65	74	-22.35	peak
2390	/	-5.81	/	54	/	AVG
2399	63.21	-5.84	57.37	74	-16.63	peak
2399	46.29	-5.84	40.45	54	-13.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.84	-5.65	52.19	74	-21.81	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.48	-5.65	51.83	74	-22.17	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

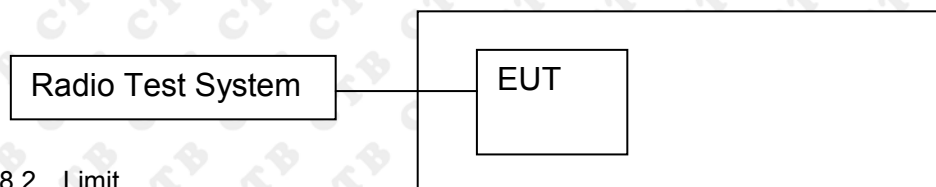


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

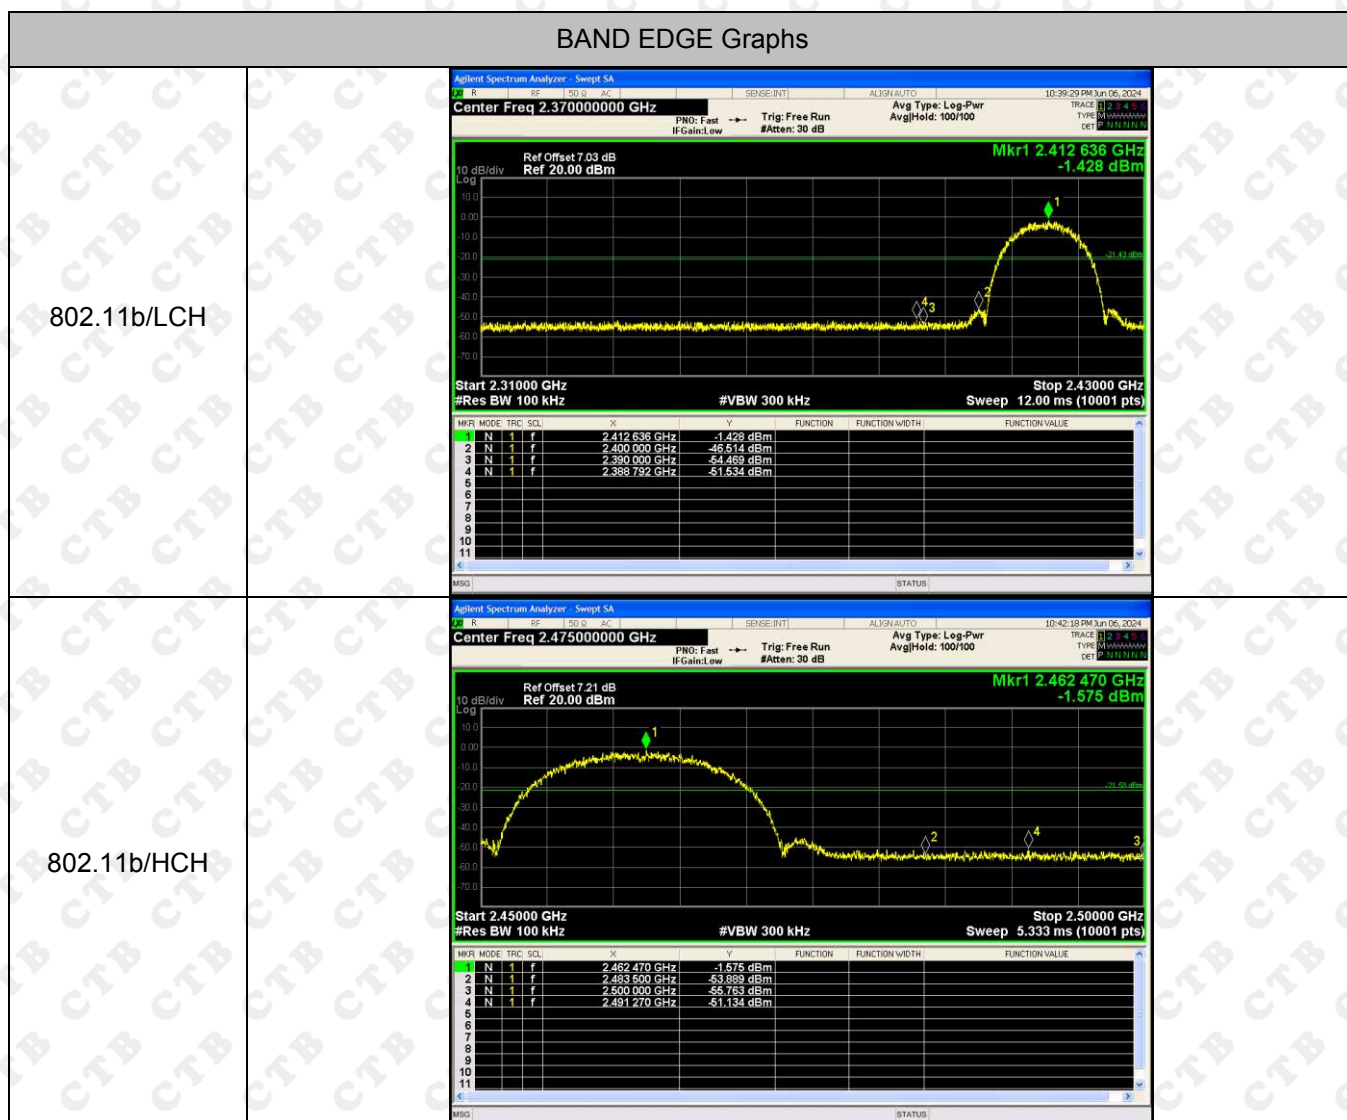

BAND EDGE Graphs

802.11g/LCH

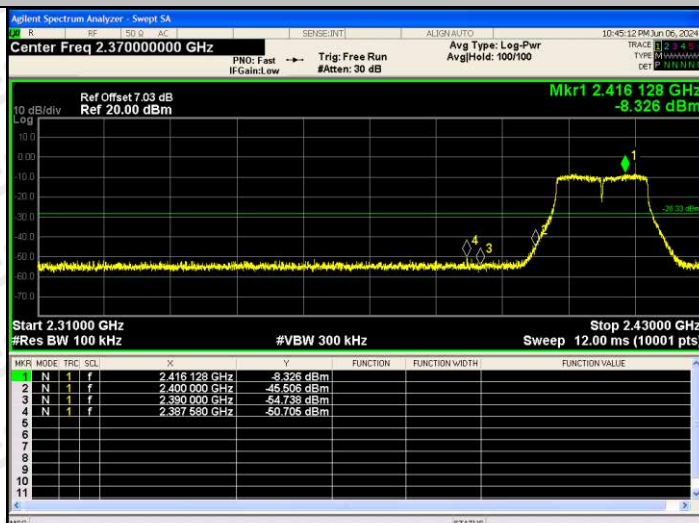


802.11g/HCH




BAND EDGE Graphs

802.11n(HT20)/L
CH

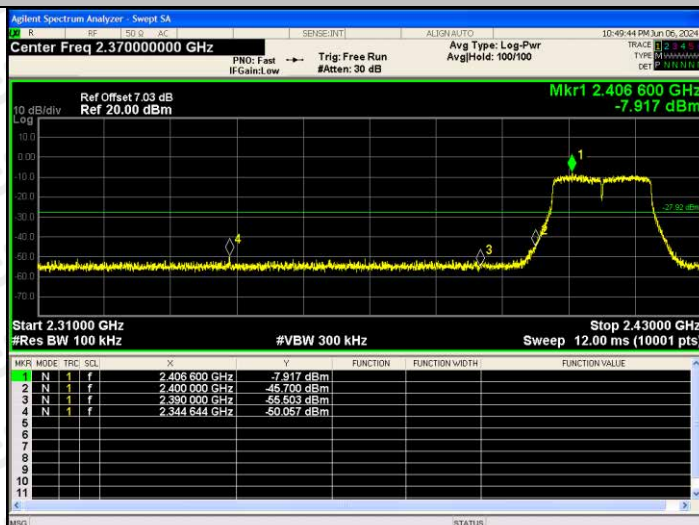


802.11n(HT20)/H
CH

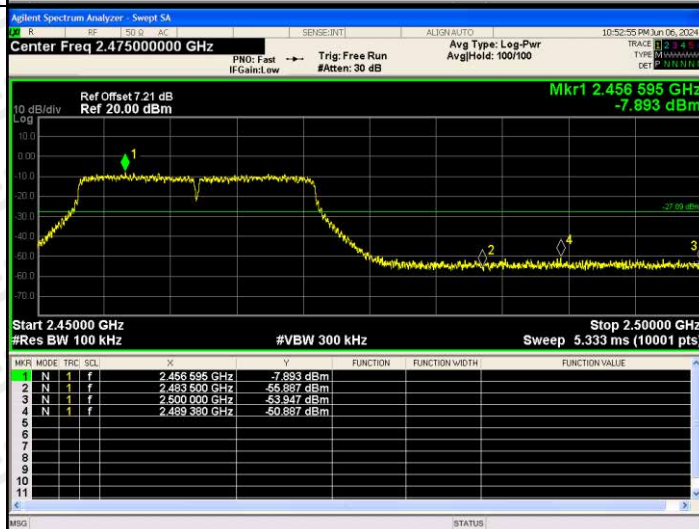

BAND EDGE Graphs


802.11n(HT40)/L
CH

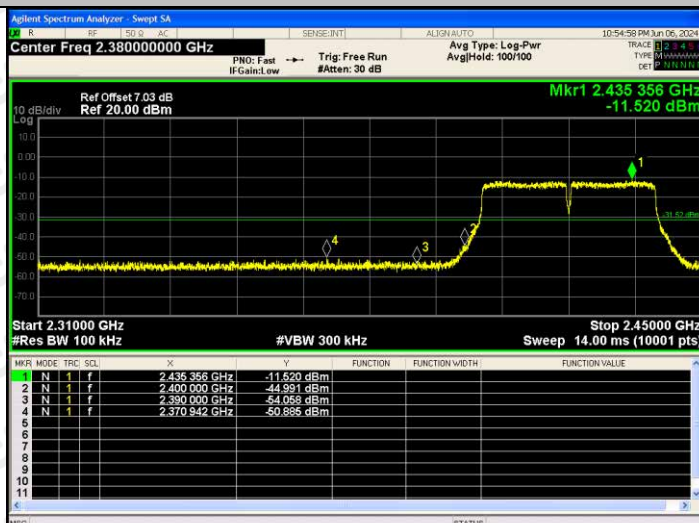


802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs



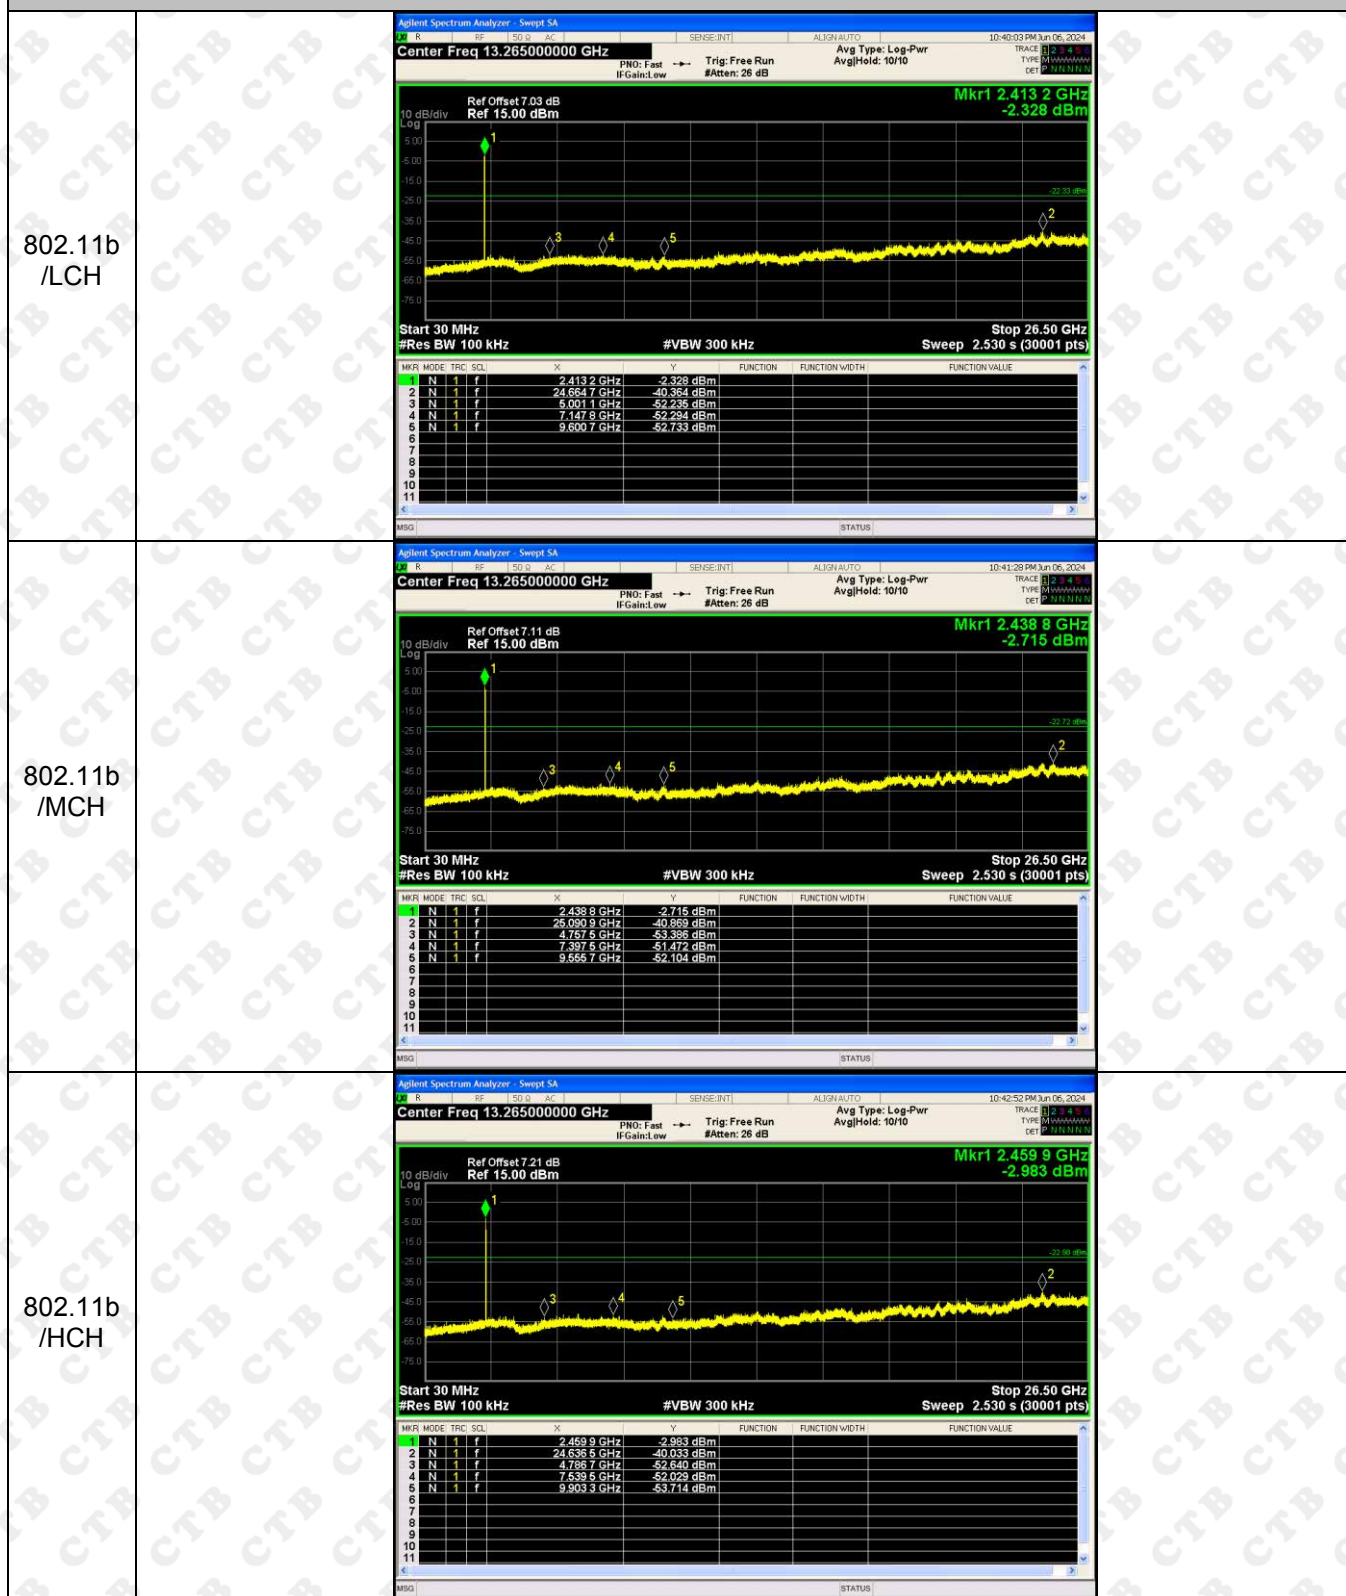


RF Conducted Spurious Emissions Graphs

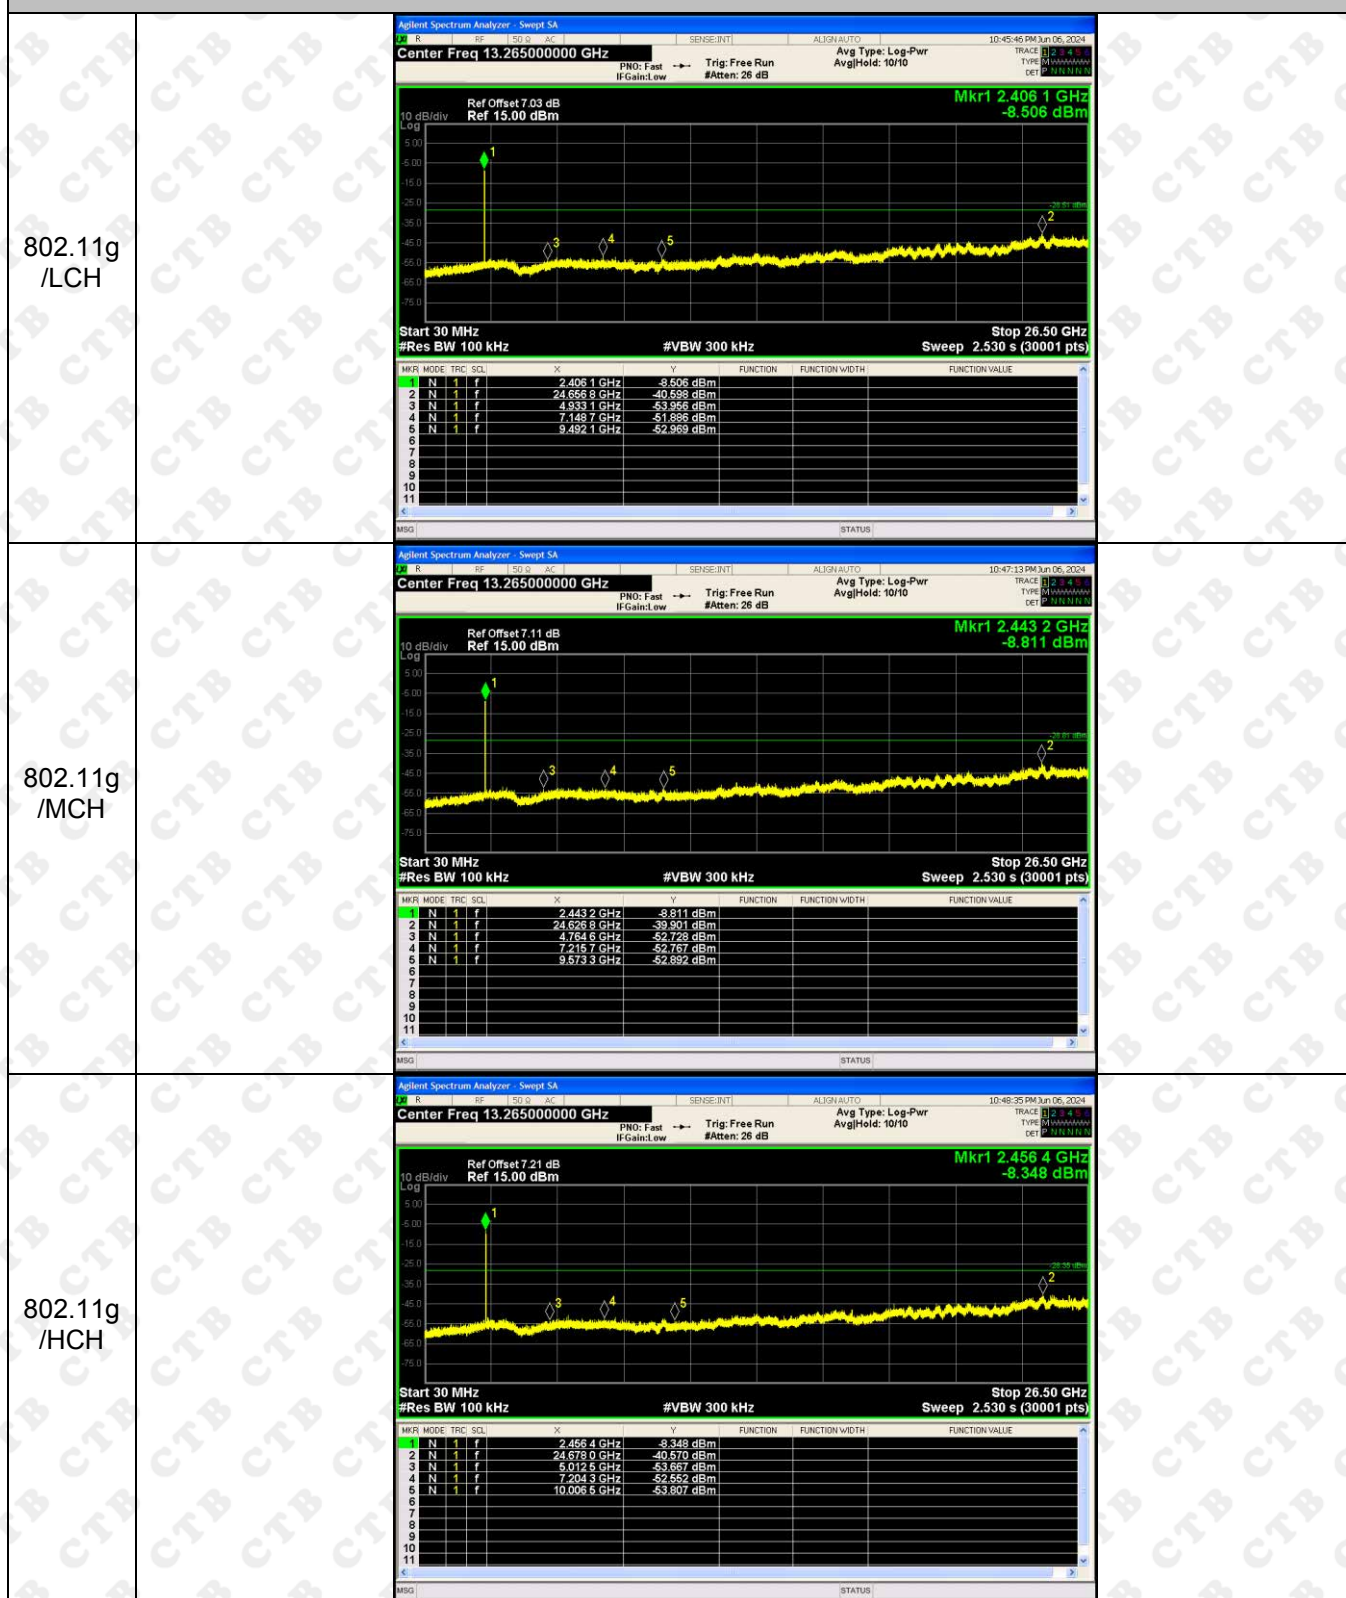

RF Conducted Spurious Emissions Graphs

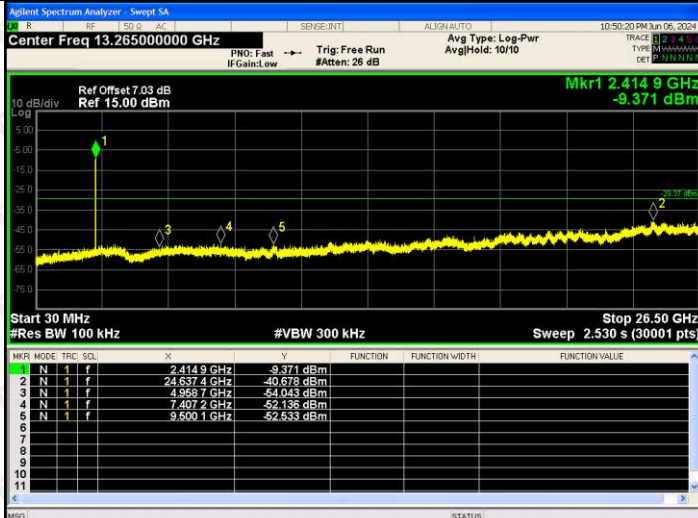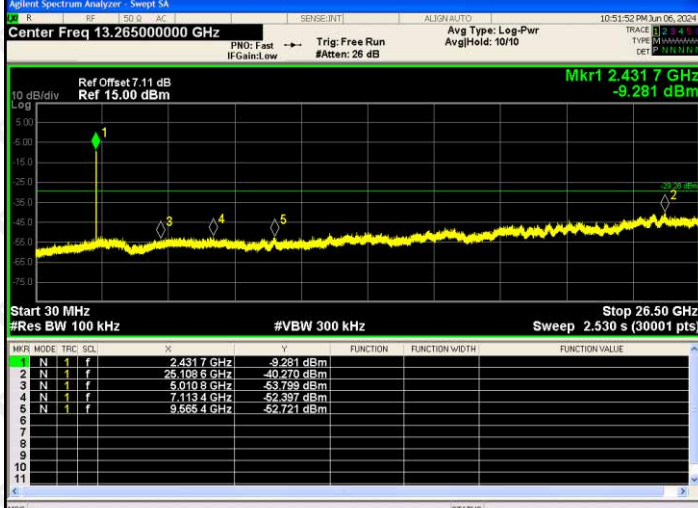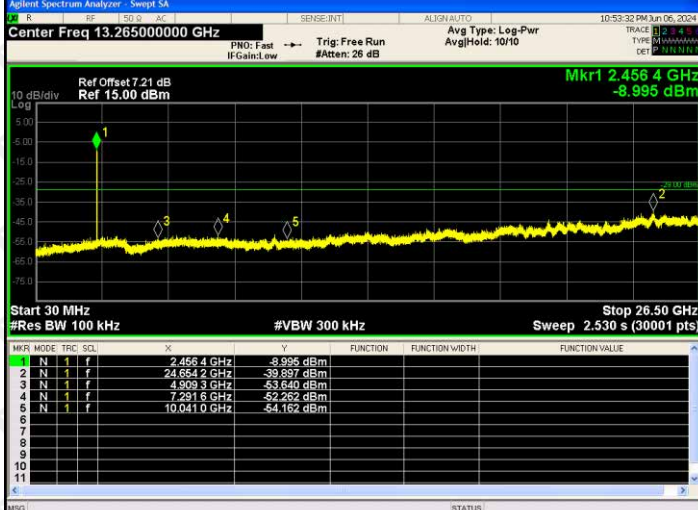802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4149 GHz</td><td>-9.371 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6374 GHz</td><td>-40.678 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9587 GHz</td><td>-54.043 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4072 GHz</td><td>-52.136 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6001 GHz</td><td>-52.633 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4149 GHz	-9.371 dBm				2	N	1	f	24.6374 GHz	-40.678 dBm				3	N	1	f	4.9587 GHz	-54.043 dBm				4	N	1	f	7.4072 GHz	-52.136 dBm				5	N	1	f	9.6001 GHz	-52.633 dBm				
MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4149 GHz	-9.371 dBm																																																			
2	N	1	f	24.6374 GHz	-40.678 dBm																																																			
3	N	1	f	4.9587 GHz	-54.043 dBm																																																			
4	N	1	f	7.4072 GHz	-52.136 dBm																																																			
5	N	1	f	9.6001 GHz	-52.633 dBm																																																			
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4317 GHz</td><td>-9.281 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.1086 GHz</td><td>-40.270 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0108 GHz</td><td>-53.799 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1134 GHz</td><td>-52.397 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6684 GHz</td><td>-52.721 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4317 GHz	-9.281 dBm				2	N	1	f	25.1086 GHz	-40.270 dBm				3	N	1	f	5.0108 GHz	-53.799 dBm				4	N	1	f	7.1134 GHz	-52.397 dBm				5	N	1	f	9.6684 GHz	-52.721 dBm				
MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4317 GHz	-9.281 dBm																																																			
2	N	1	f	25.1086 GHz	-40.270 dBm																																																			
3	N	1	f	5.0108 GHz	-53.799 dBm																																																			
4	N	1	f	7.1134 GHz	-52.397 dBm																																																			
5	N	1	f	9.6684 GHz	-52.721 dBm																																																			
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4564 GHz</td><td>-8.995 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6542 GHz</td><td>-39.897 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9093 GHz</td><td>-53.640 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2916 GHz</td><td>-52.282 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>10.0410 GHz</td><td>-54.162 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4564 GHz	-8.995 dBm				2	N	1	f	24.6542 GHz	-39.897 dBm				3	N	1	f	4.9093 GHz	-53.640 dBm				4	N	1	f	7.2916 GHz	-52.282 dBm				5	N	1	f	10.0410 GHz	-54.162 dBm				
MNR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4564 GHz	-8.995 dBm																																																			
2	N	1	f	24.6542 GHz	-39.897 dBm																																																			
3	N	1	f	4.9093 GHz	-53.640 dBm																																																			
4	N	1	f	7.2916 GHz	-52.282 dBm																																																			
5	N	1	f	10.0410 GHz	-54.162 dBm																																																			

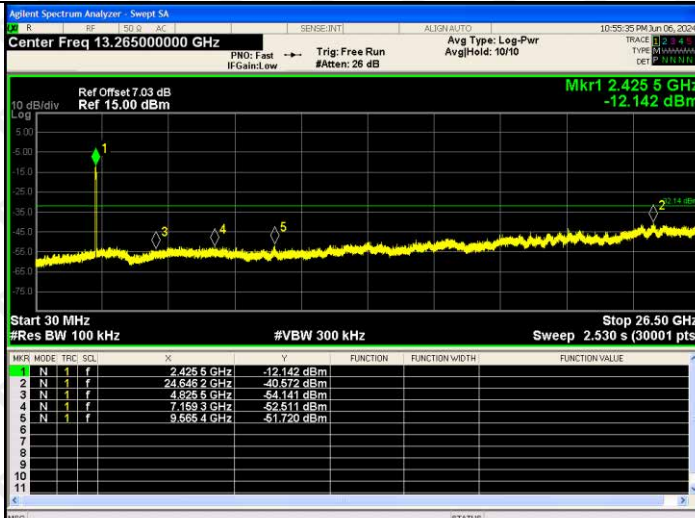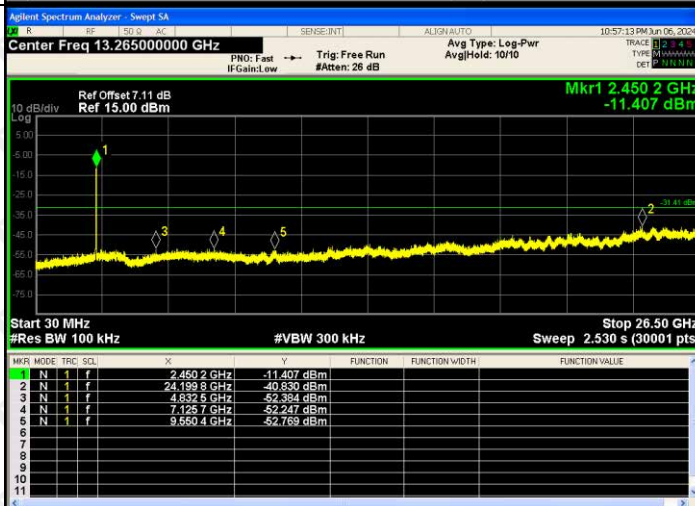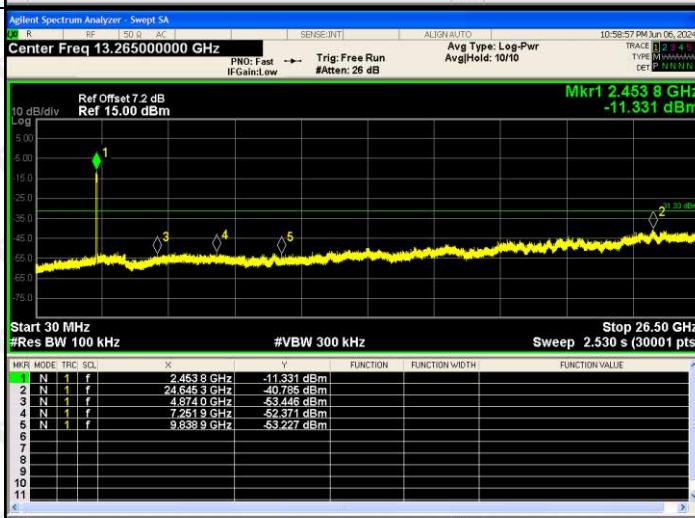802.11n (HT40)/ LCH	 <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.425 5 GHz</td><td>-12.142 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.645 2 GHz</td><td>-40.672 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.625 5 GHz</td><td>-54.141 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.159 3 GHz</td><td>-52.511 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.655 4 GHz</td><td>-51.720 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	-12.142 dBm				2	N	1	f	24.645 2 GHz	-40.672 dBm				3	N	1	f	4.625 5 GHz	-54.141 dBm				4	N	1	f	7.159 3 GHz	-52.511 dBm				5	N	1	f	9.655 4 GHz	-51.720 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.425 5 GHz	-12.142 dBm																																																		
2	N	1	f	24.645 2 GHz	-40.672 dBm																																																		
3	N	1	f	4.625 5 GHz	-54.141 dBm																																																		
4	N	1	f	7.159 3 GHz	-52.511 dBm																																																		
5	N	1	f	9.655 4 GHz	-51.720 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.450 2 GHz</td><td>-11.407 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.199 8 GHz</td><td>-40.830 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.832 5 GHz</td><td>-52.384 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.125 7 GHz</td><td>-52.247 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.650 4 GHz</td><td>-52.769 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.450 2 GHz	-11.407 dBm				2	N	1	f	24.199 8 GHz	-40.830 dBm				3	N	1	f	4.832 5 GHz	-52.384 dBm				4	N	1	f	7.125 7 GHz	-52.247 dBm				5	N	1	f	9.650 4 GHz	-52.769 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.450 2 GHz	-11.407 dBm																																																		
2	N	1	f	24.199 8 GHz	-40.830 dBm																																																		
3	N	1	f	4.832 5 GHz	-52.384 dBm																																																		
4	N	1	f	7.125 7 GHz	-52.247 dBm																																																		
5	N	1	f	9.650 4 GHz	-52.769 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.453 8 GHz</td><td>-11.331 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.645 3 GHz</td><td>-40.795 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.674 0 GHz</td><td>-53.445 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.251 9 GHz</td><td>-53.371 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.838 9 GHz</td><td>-53.227 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.453 8 GHz	-11.331 dBm				2	N	1	f	24.645 3 GHz	-40.795 dBm				3	N	1	f	4.674 0 GHz	-53.445 dBm				4	N	1	f	7.251 9 GHz	-53.371 dBm				5	N	1	f	9.838 9 GHz	-53.227 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.453 8 GHz	-11.331 dBm																																																		
2	N	1	f	24.645 3 GHz	-40.795 dBm																																																		
3	N	1	f	4.674 0 GHz	-53.445 dBm																																																		
4	N	1	f	7.251 9 GHz	-53.371 dBm																																																		
5	N	1	f	9.838 9 GHz	-53.227 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm]	Limit[dBm]
802.11b	LCH	13.97	30
	MCH	14.158	30
	HCH	14.009	30
802.11g	LCH	12.92	30
	MCH	13.253	30
	HCH	12.969	30
802.11n(HT20)	LCH	13.113	30
	MCH	13.303	30
	HCH	13.167	30
802.11n(HT40)	LCH	12.96	30
	MCH	13.158	30
	HCH	13.256	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

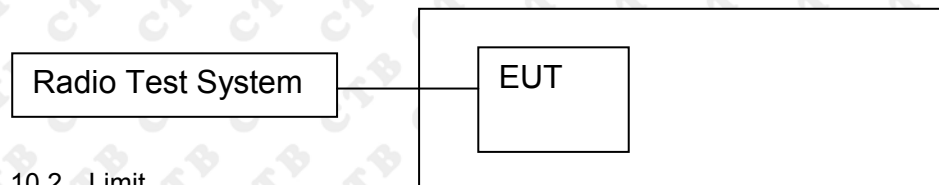

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.666	500	PASS
	MCH	10.67	500	PASS
	HCH	10.061	500	PASS
802.11g	LCH	16.55	500	PASS
	MCH	16.561	500	PASS
	HCH	16.56	500	PASS
802.11n(HT20)	LCH	17.793	500	PASS
	MCH	17.712	500	PASS
	HCH	17.721	500	PASS
802.11n(HT40)	LCH	36.453	500	PASS
	MCH	36.509	500	PASS
	HCH	36.466	500	PASS

Graphs

Page 43 of 55


802.11g/LCH

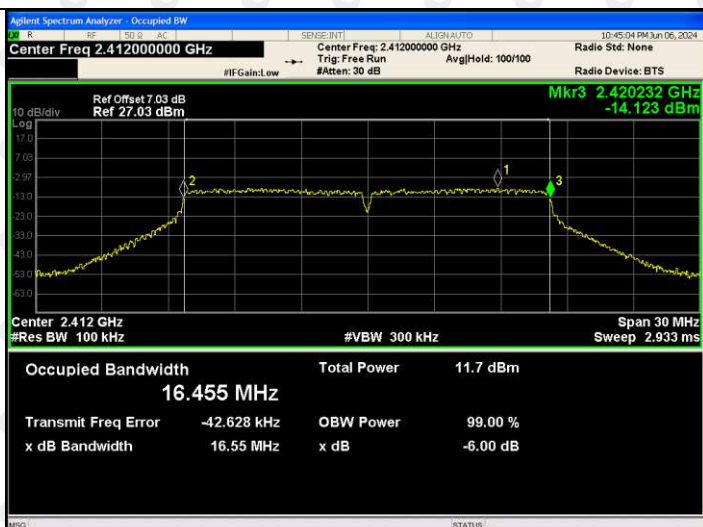



802.11g/MCH



802.11g/HCH

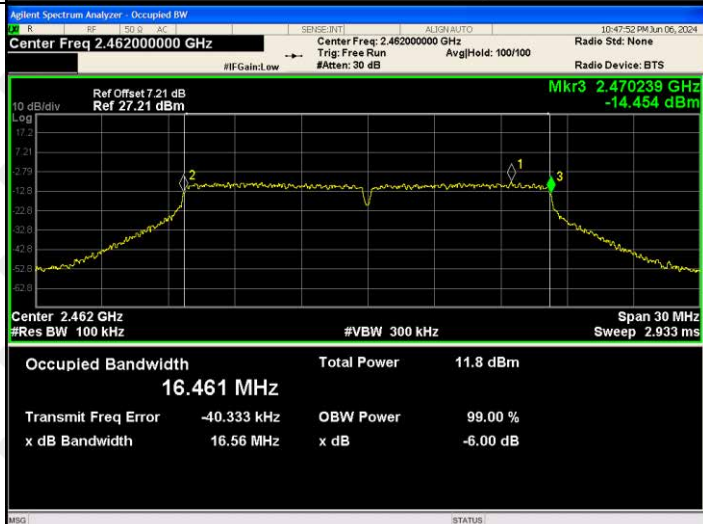


802.11n(HT20)/LC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Occupied Bandwidth 17.650 MHz Total Power 11.5 dBm Transmit Freq Error -25.153 kHz OBW Power 99.00 % x dB Bandwidth 17.79 MHz x dB -6.00 dB
802.11n(HT20)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Occupied Bandwidth 17.639 MHz Total Power 11.7 dBm Transmit Freq Error -16.269 kHz OBW Power 99.00 % x dB Bandwidth 17.71 MHz x dB -6.00 dB
802.11n(HT20)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Occupied Bandwidth 17.636 MHz Total Power 11.6 dBm Transmit Freq Error -32.171 kHz OBW Power 99.00 % x dB Bandwidth 17.72 MHz x dB -6.00 dB

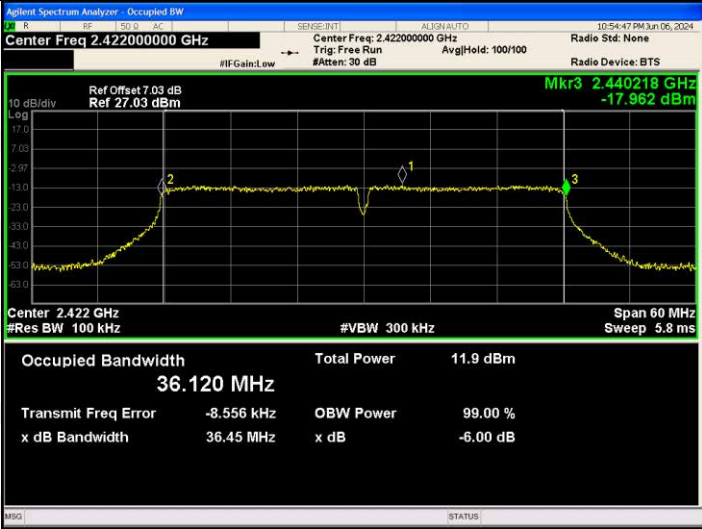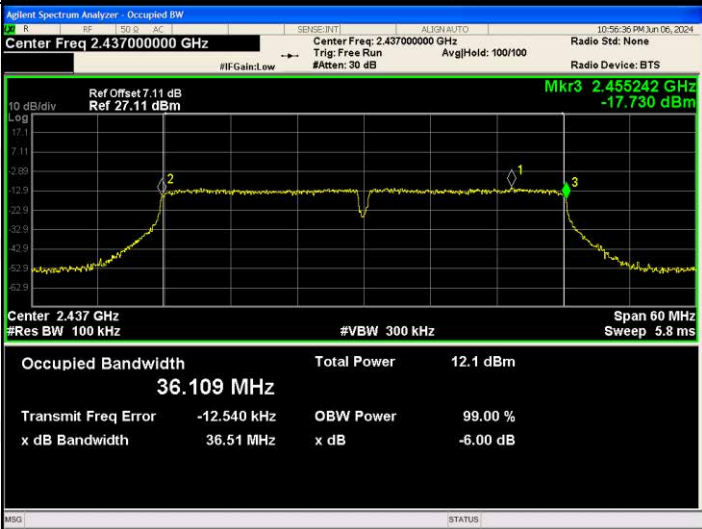802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Occupied Bandwidth 36.120 MHz Total Power 11.9 dBm Transmit Freq Error -8.556 kHz OBW Power 99.00 % x dB Bandwidth 36.45 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Occupied Bandwidth 36.109 MHz Total Power 12.1 dBm Transmit Freq Error -12.540 kHz OBW Power 99.00 % x dB Bandwidth 36.51 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Occupied Bandwidth 36.112 MHz Total Power 12.1 dBm Transmit Freq Error -23.640 kHz OBW Power 99.00 % x dB Bandwidth 36.47 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

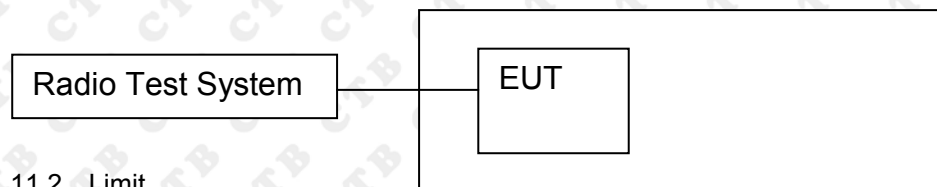

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(dBm)
802.11b	LCH	-17.126	8
	MCH	-16.963	8
	HCH	-17.238	8
802.11g	LCH	-18.847	8
	MCH	-18.478	8
	HCH	-18.955	8
802.11n(HT20)	LCH	-19.481	8
	MCH	-19.065	8
	HCH	-18.814	8
802.11n(HT40)	LCH	-20.951	8
	MCH	-20.659	8
	HCH	-21.651	8

Test Graph

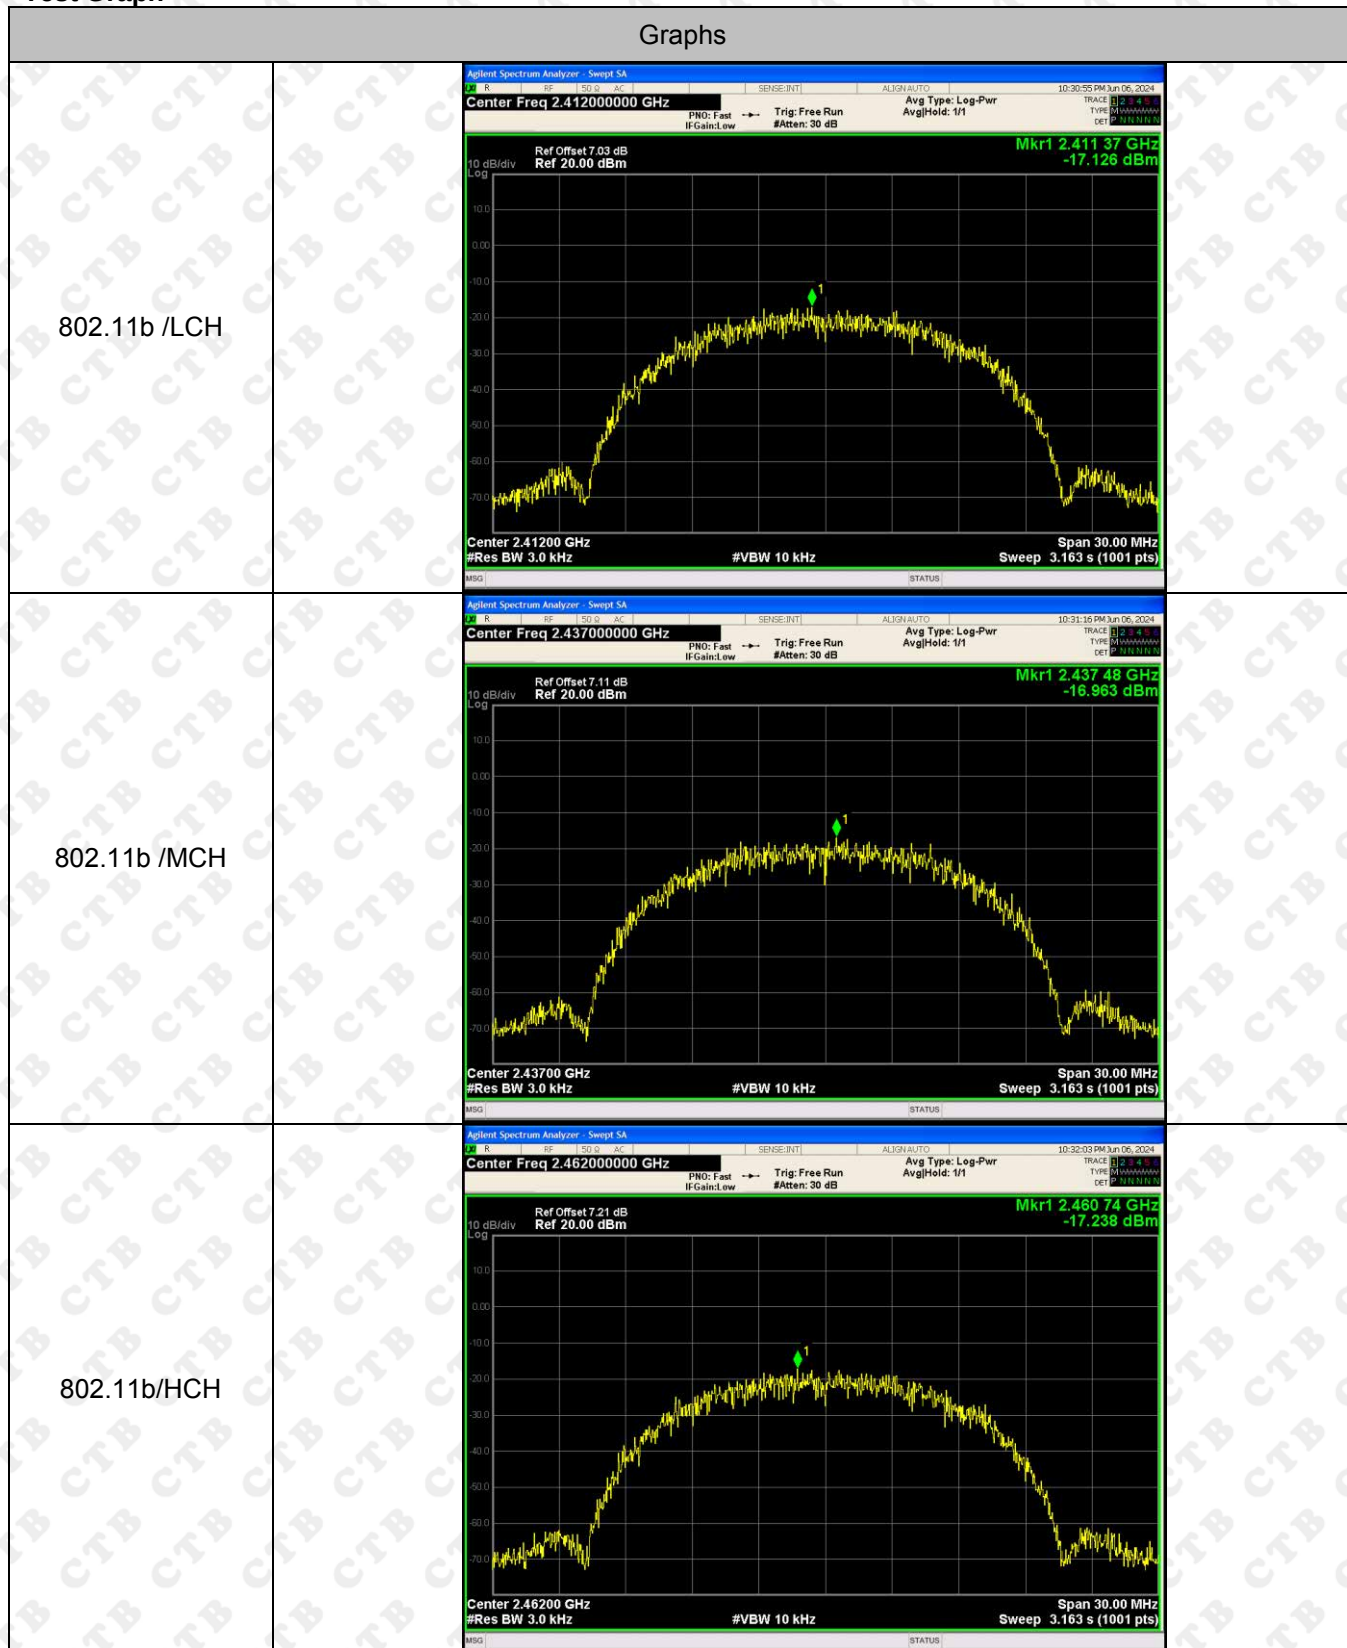

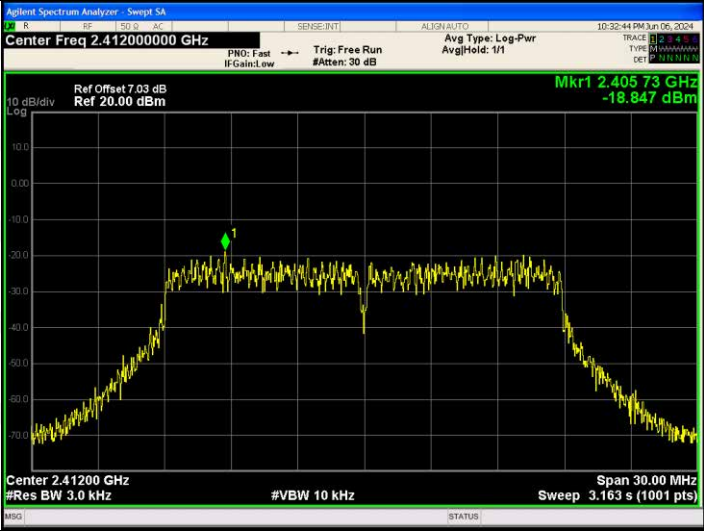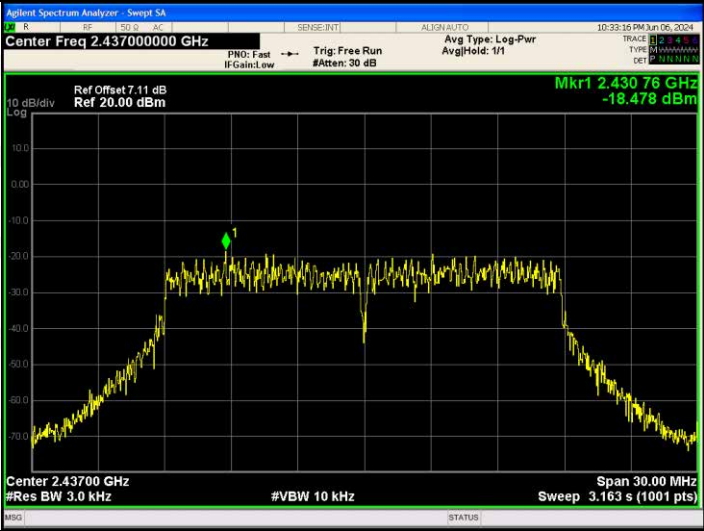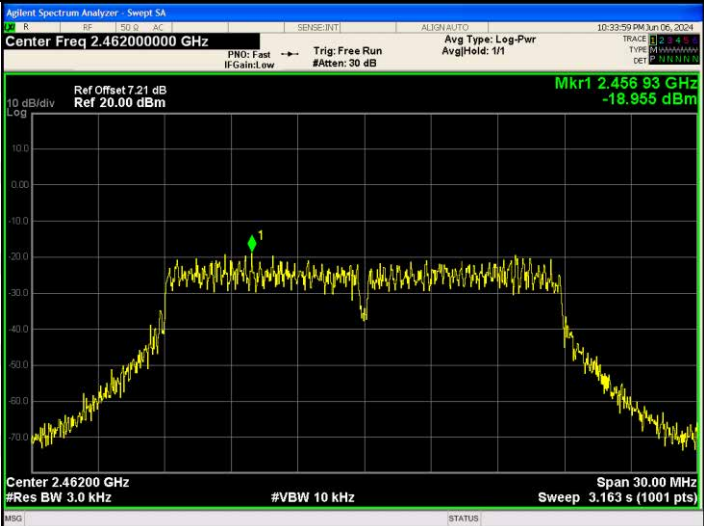802.11g/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40573 GHz -18.847 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43076 GHz -18.478 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.45693 GHz -18.955 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

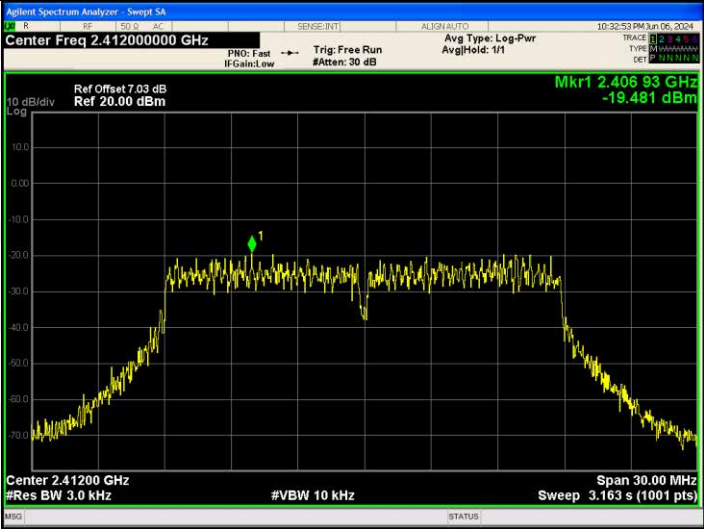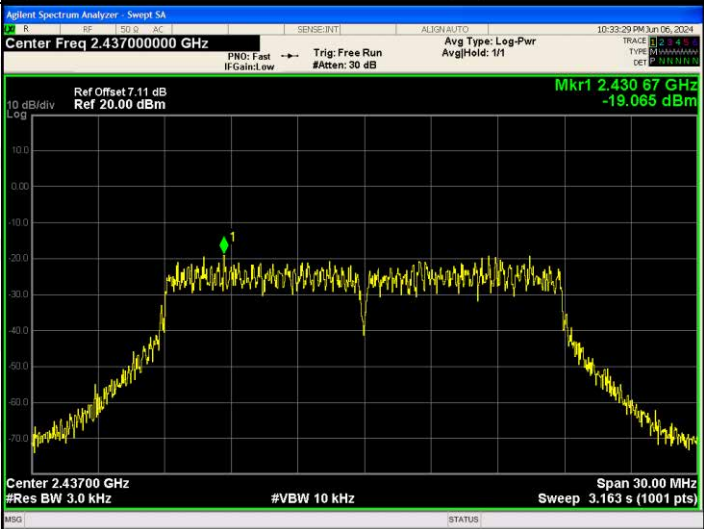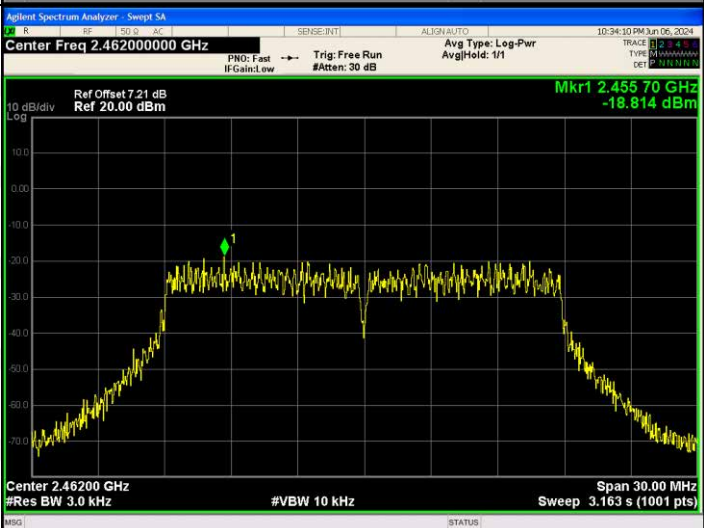802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40893 GHz -19.481 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43067 GHz -19.065 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.45570 GHz -18.814 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

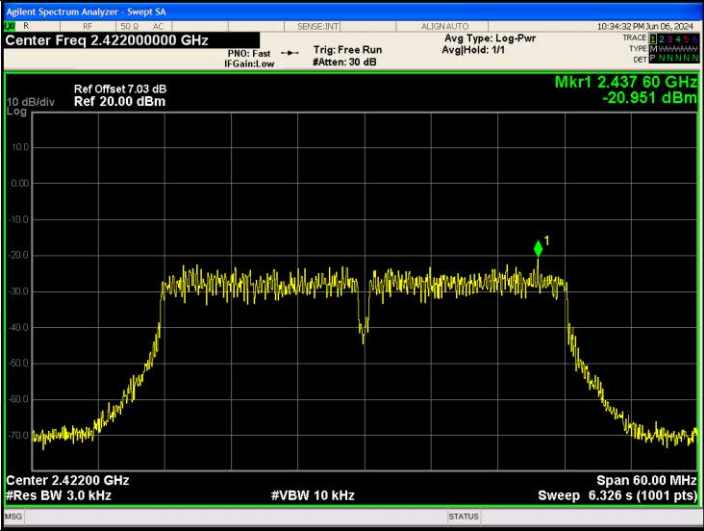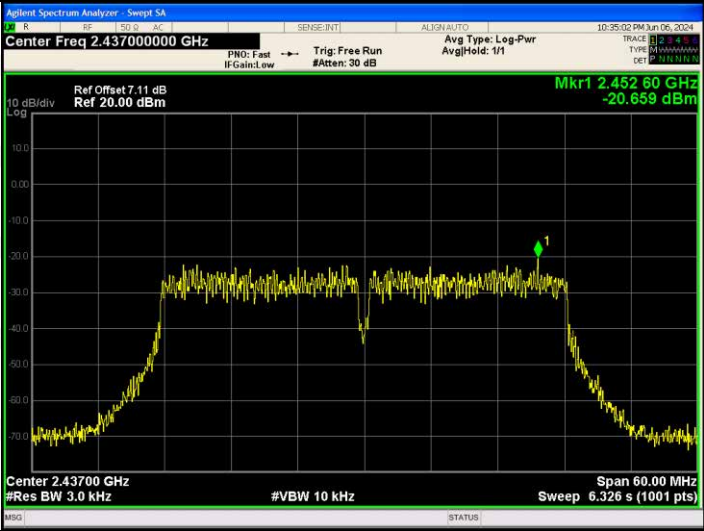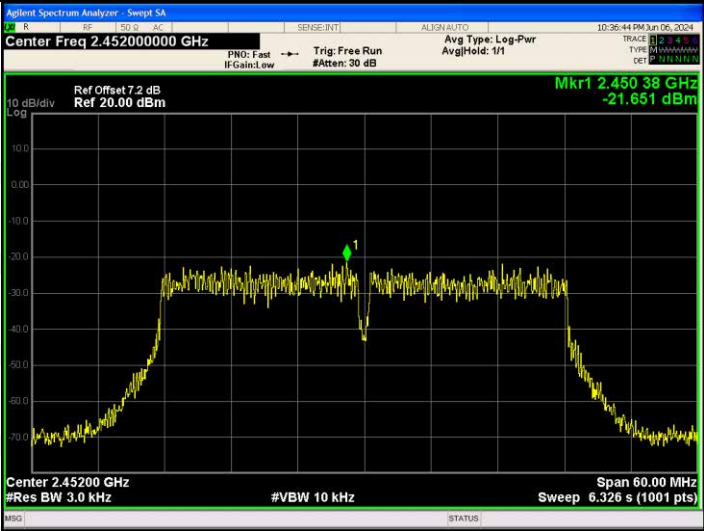802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is 2.92dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

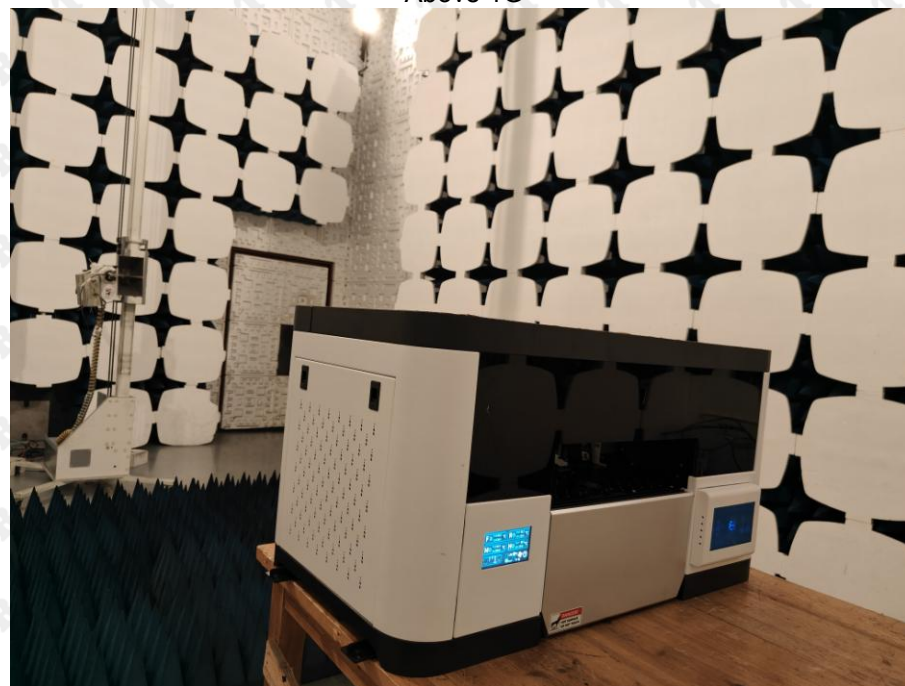

Conducted Emission



***** END OF REPORT *****