

# TEST REPORT

**Application No.:**

BTEK241125107A04-T10

**Applicant:**

UNIVENT Engineering PTE LTD

**Address of Applicant:**

100 PECK SEAH STREET #10-18 PS100 SINGAPORE (079333)

**Manufacturer:**

Dongguan iglory co.ltd

**Address of Manufacturer:**

No. 65 ZhengWei 4th Road,DongKeng Town,DongGuan City,GuangDong Province

**Equipment Under Test (EUT):****EUT Name:** CLEMM SOURCE**Test Model.:** CEB-10WR**Adding Model(s):** /**Trade Mark:** CLEMM**FCC ID:** 2BMEY-CEB10WR**Standard(s) :** 47 CFR PART 1, Subpart I, Section 1.1310  
47 CFR PART 2, Subpart J, Section 2.1093**Date of Receipt Sample(s):** 2024-12-18**Date of Test:** 2024-12-18 to 2024-12-31**Date of Issue:** 2025-01-02

<b>Test Result:</b>	Pass*
---------------------	-------

\* In the configuration tested, the EUT complied with the standards specified above.



Lion Cai/ Approved & Authorized  
EMC Laboratory Manager



Revision Record			
Version	Issue Date	Revisions	Remarks
V0	2025-01-02	Initial	Valid

Authorized for issue by			
		Karl Liu	
		Karl Liu / File Editor	
		June Li	
		June Li /Reviewer	

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



## 2 Contents

	Page
<b>1 Cover Page</b>	1
<b>2 Contents</b>	3
<b>3 General Information</b>	4
3.1 Details of E.U.T	4
3.2 Description of EUT Test Mode	4
3.3 Description of Support Units	4
3.4 Test Location	4
3.5 Deviation from Standards	4
3.6 Abnormalities from Standard Conditions	4
<b>4 Test Requirement</b>	5
4.1 Equipment List	6
4.2 Assessment Result	6
4.2 Test Set-up Photo	10



### 3 General Information

#### 3.1 Details of E.U.T.

Power Supply	Type-C Input/output:5V=2.4A, 9V=2.22A, 12V=1.67A USB-A output: DC 5V=3A, 9V=2A, 12V=1.5A Wireless Output: 10W MAX Capacity: 10000mA 37Wh DC 3.7V from battery
Modulation Type	FSK
Operating frequency	Wireless Charging:112-205kHz
Antenna Type	Induction Coil Antenna
Hardware Version	V1.0
Software Version	V1.0
Sample number	BTEK241125107A04-1-1/3
Model(s) Difference Statement	<input checked="" type="checkbox"/> Single Model. <input type="checkbox"/> Multi-Models.

#### 3.2 Description of EUT Test Mode

Test Mode List			
Test Mode	Description	Remark	
01	Wireless output:10W Load 1%	Keep the EUT Wireless output:10W	
02	Wireless output:10W Load 50%		
03	Wireless output:10W Load 99%		

Remark:1.Only show the Test Mode 01 worst case in the test report

#### 3.3 Description of Support Units

Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	HUAWEI	HW-100400C00	/
WPC charging load	EESON	2S	/

#### 3.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.,  
A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District,  
Shenzhen, Guangdong, China 518104

Tel:0755-2334 4200 Fax: 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

#### 3.5 Deviation from Standards

None

#### 3.6 Abnormalities from Standard Conditions

None



## 4 Test Requirement

KDB 680106 D01 Wireless Power Transfer v04

According to KDB 680106 D01:


Requirements of KDB 680106 D01	Description
1. Power transfer frequency is less than 1 MHz	112kHz-205kHz
2. Output power from each primary coil is less than or equal to 15 watts	Maximum 10W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	One radiated Coil
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)	No, Mobile and portable exposure conditions
6. The aggregate H-field strengths anywhere at or beyond 20 cm surrounding the device, and 20cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes, The H-field measurements for each edge/top surface of the host/client pair at every 2cm, starting from as close as possible out to 20cm were also evaluated for portable use condition.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz \* = Plane-wave equivalent power density



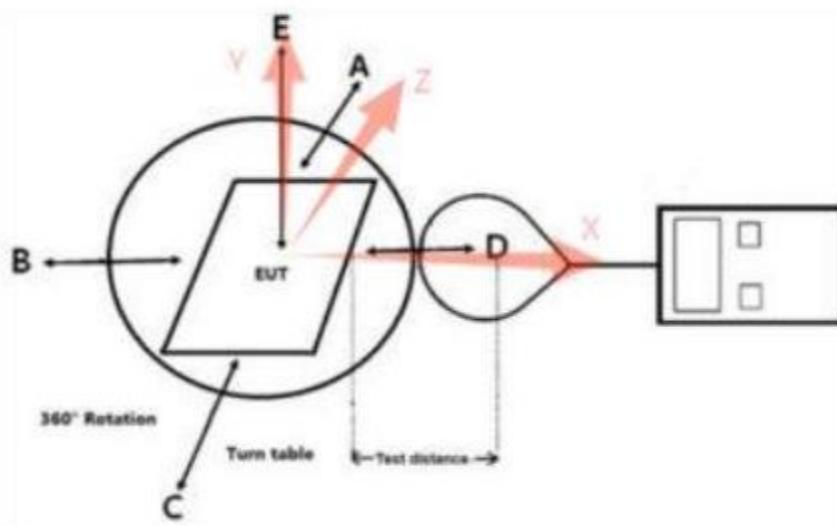

Note: The distance of the points A/B/C/D/E/F is 0,2,4,6,8,10,12,14,16,18, 20cm.

The values tested by the probe are X, Y, and Z on three axes perpendicular to the Edge of the device. Top and bottom side coincident with the axis(Y) of the main coil.

#### For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

#### For portable exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

## 4.1 Equipment List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Exposure Level Tester	Narda	ELT-400	N-0219	2024-06-10	2025-06-09
B-Field Probe	Narda	100cm <sup>2</sup>	M-0753	2024-06-10	2025-06-09

## 4.2 Assessment Result

Passed  Not Applicable

Duty cycle=100%



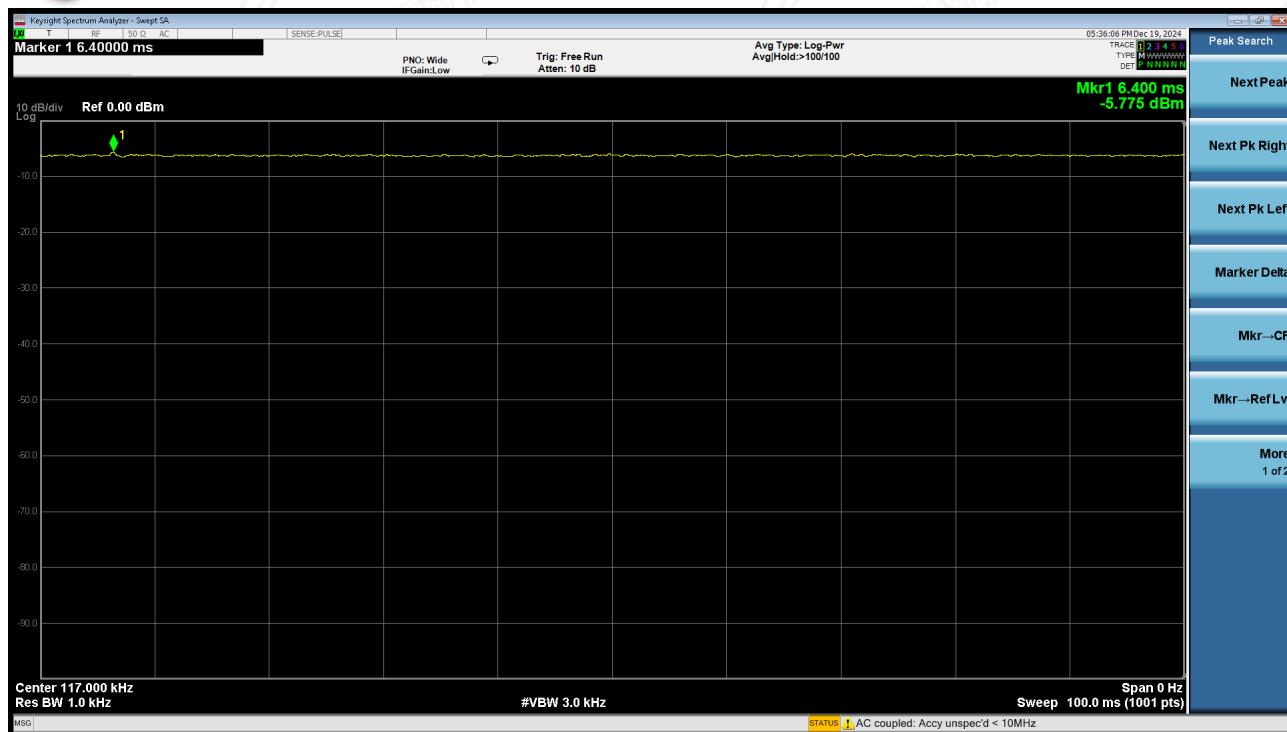


Note: All test modes were pre-tested, but we only recorded the worst case in this report.


#### For portable exposure condition:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 99% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) According to Calibration information and specification about ETL-400 Probe, The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 6.25cm.
- (6) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
- (7) Use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

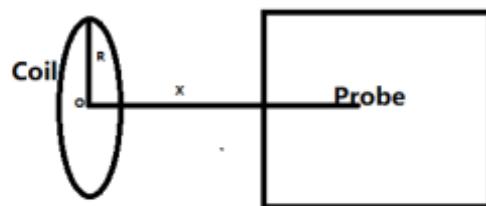

**Top & Bottom Side:**


$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

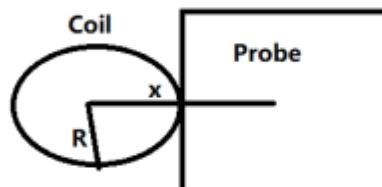**Front, left, right & rear Side:**


$$B = \frac{\mu_0 * I * N}{2 * x}$$

**B(Unit:A/m):** means H-field value;

$\mu_0$  is space permeability;  $\mu_0=4\pi*10^{-7}$ ;

**I(Unit:A):** A current element passing through a radiated coil I;

**R(Unit:m):** means the Radius of radiated coil, According to provided Antenna specification:

$R=40/2=20\text{mm}=0.02\text{m}$ ;

**Test Distance(Unit:m):** The distance from the sensing element of the probe to the edge of the device surface.

**x(Unit:m):** means the center of the coil to the sensing elements of the probe. (For top & bottom side:  $x=\text{test distance}$ ; For other side:  $x=\text{test distance}+R$ )

**N:** Number of turns, according to providing "Antenna specification" files:  $N=10$ .

(8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

3.1 Validation results for the numerical calculation model

- a) Measure with probe directed contact(test distace:6.25cm)
- b) Using Biot-Savart formula to calculate estimated results at test distace of 8cm and 10 cm;
- c) measure at test distace of 8 cm and 10cm;
- d) Compares the estimated results and measured result, the varation should not be greater than 30%;

Conclusion: The numerical calculation model is valid.



## Worst case at mode 1

Test Distance	Measured E-Field Strength Values (A/m)																	
	Test Position A			Test Position B			Test Position C			Test Position D			Test Position E			Test Position F		
	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.	Mea.	Est.	Var.
10	0.038	0.0524	15.95	0.035	0.0524	19.91	0.037	0.0492	14.18	0.031	0.0429	16.07	0.043	0.0572	14.14	0.047	0.0570	9.60
8	0.043	0.0678	22.36	0.0520	0.0605	7.54	0.065	0.0639	0.83	0.032	0.0536	25.21	0.053	0.0743	16.73	0.084	0.0838	0.11
6.25	0.0825	/	/	0.0975	/	/	0.118	/	/	0.0619	/	/	0.0997	/	/	0.1684	/	/

Note :Mea.-Measured H-field(A/m); Est.-Estimated H-field(A/m);  
Var.-Variation between measured and estimated value(%);

Note: All test modes were pre-tested, but we only recorded the worst case in this report.


Test Distance	Charging Battery Level	Unit	Measured E-Field Strength Values (A/m)						FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
20	100%	A/m	0.0217	0.0222	0.0261	0.0243	0.0281	0.0225	0.815	1.63
18	100%	A/m	0.0283	0.0265	0.0258	0.0223	0.0351	0.0315	0.815	1.63
16	100%	A/m	0.0321	0.0239	0.0278	0.0236	0.0372	0.0341	0.815	1.63
14	100%	A/m	0.0312	0.0321	0.0308	0.0278	0.0331	0.0342	0.815	1.63
12	100%	A/m	0.0322	0.0330	0.0310	0.0270	0.0360	0.0350	0.815	1.63
10	100%	A/m	0.0380	0.0350	0.0370	0.0310	0.0430	0.0330	0.815	1.63
8	100%	A/m	0.0430	0.0350	0.0650	0.0320	0.0530	0.0470	0.815	1.63
6	100%	A/m	0.0873	0.1016	0.1270	0.0625	0.1035	0.1706	0.815	1.63
4	100%	A/m	0.1581	0.1730	0.2181	0.0853	0.0735	0.1285	0.815	1.63
2	100%	A/m	0.2732	0.3071	0.2835	0.2801	0.2869	0.3199	0.815	1.63
0	100%	A/m	0.4695	0.7896	0.7608	0.7576	0.9040	0.5702	0.815	1.63


Note :1.Meа.-Measured H-field(A/m); Est.-Estimated H-field(A/m);




2.All test modes were pre-tested, but we only recorded the worst case in this report.




## 4.2 Test Set-up Photo

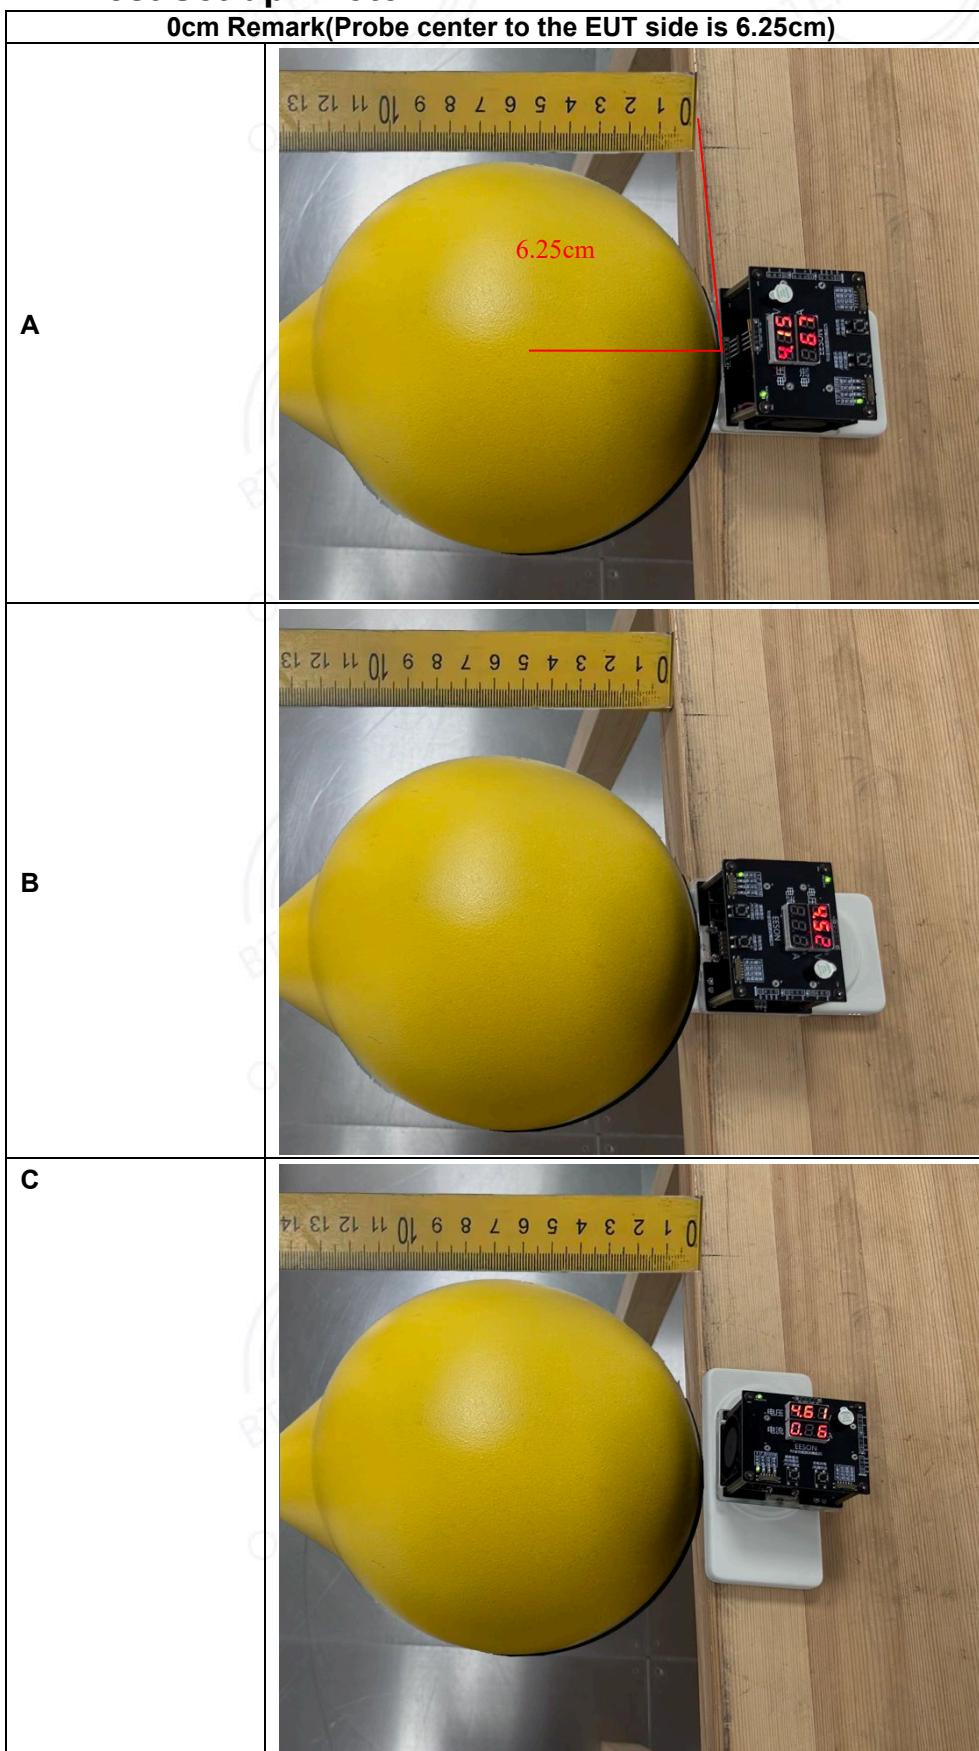

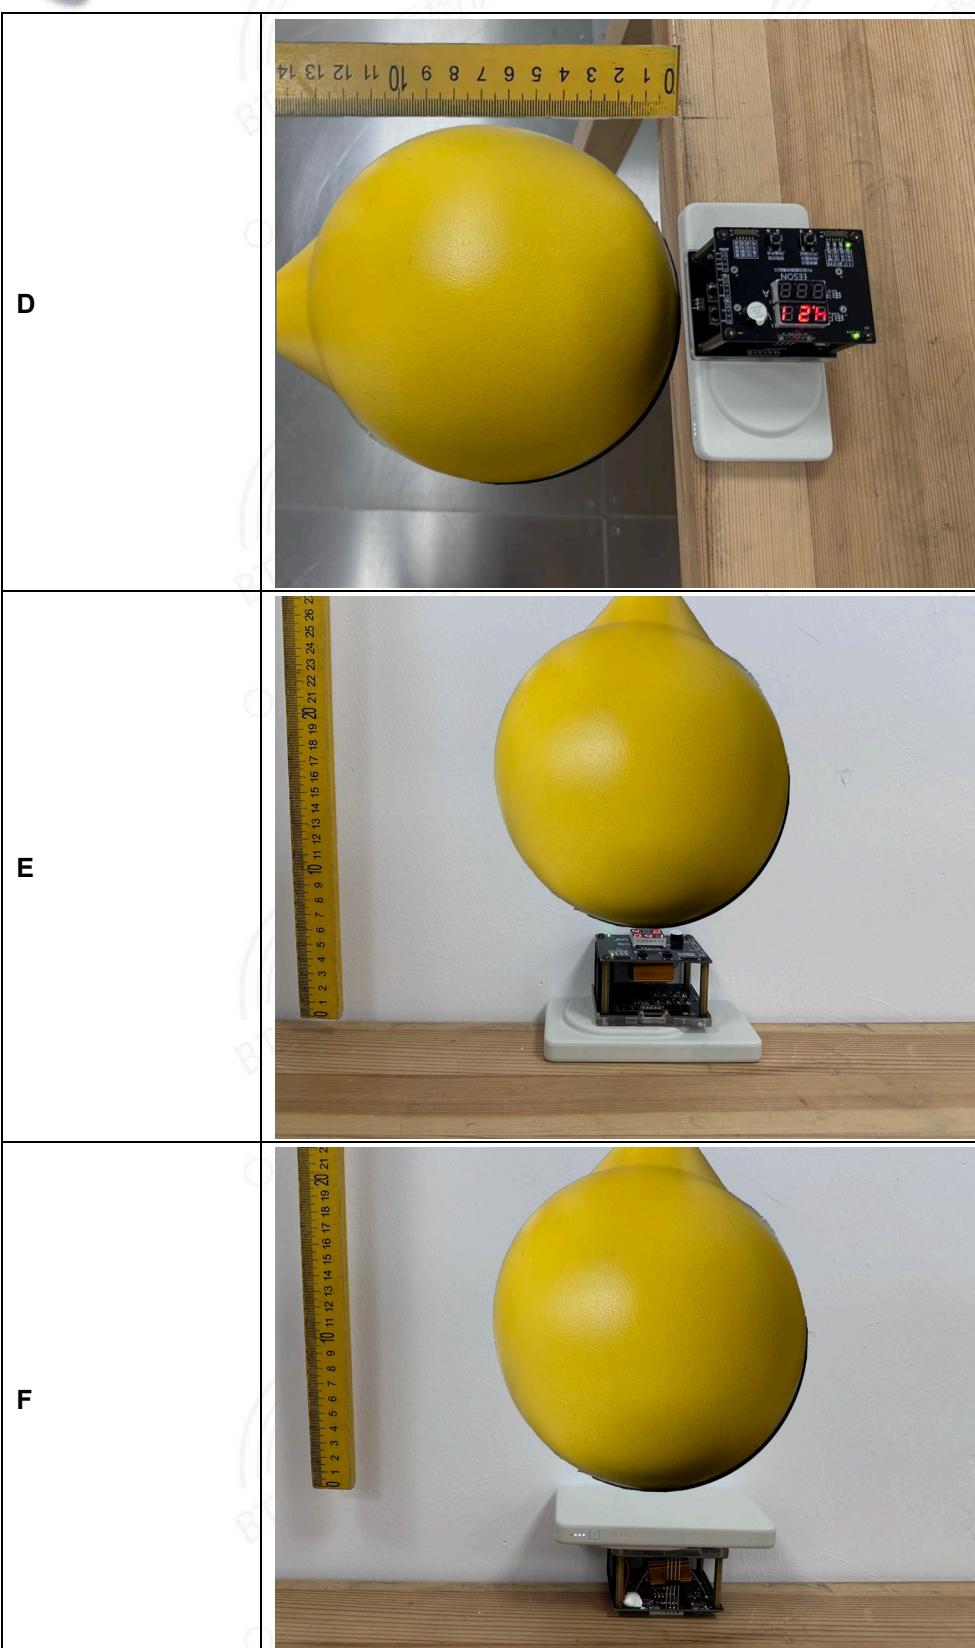

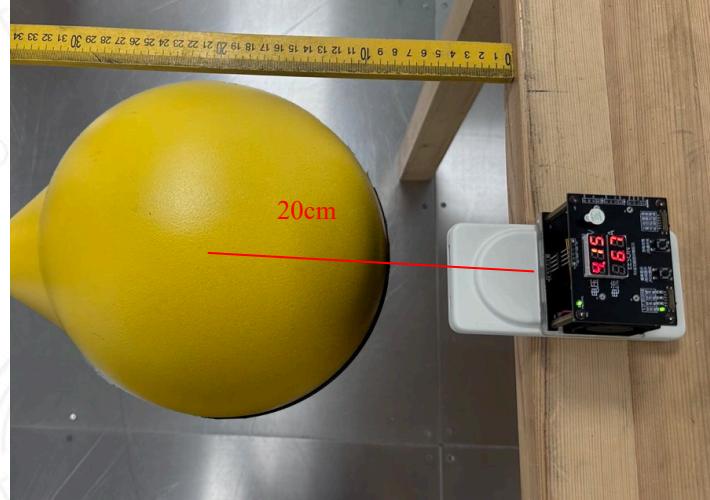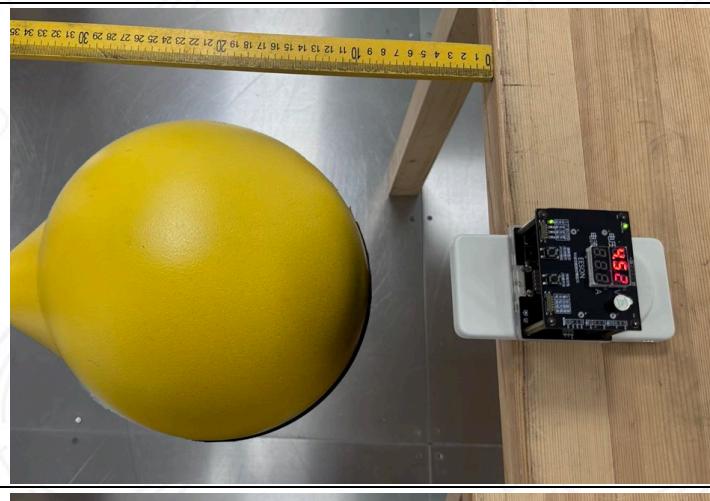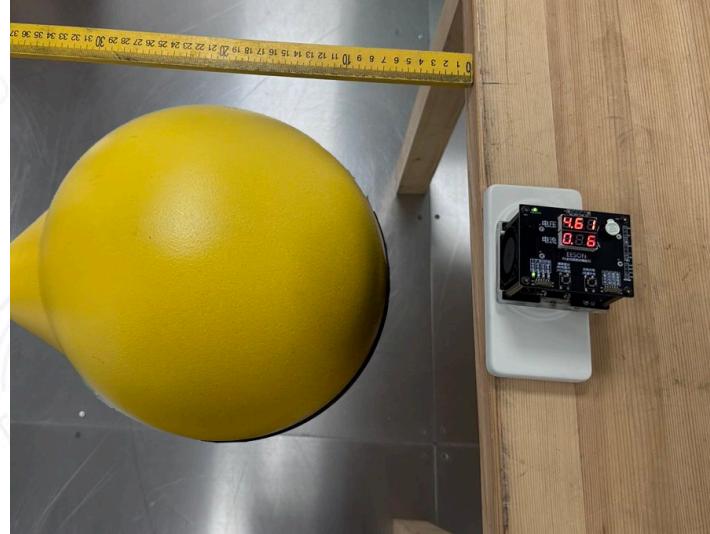20cm Remark(Probe center to the EUT side is 20cm)	
A	
B	
C	



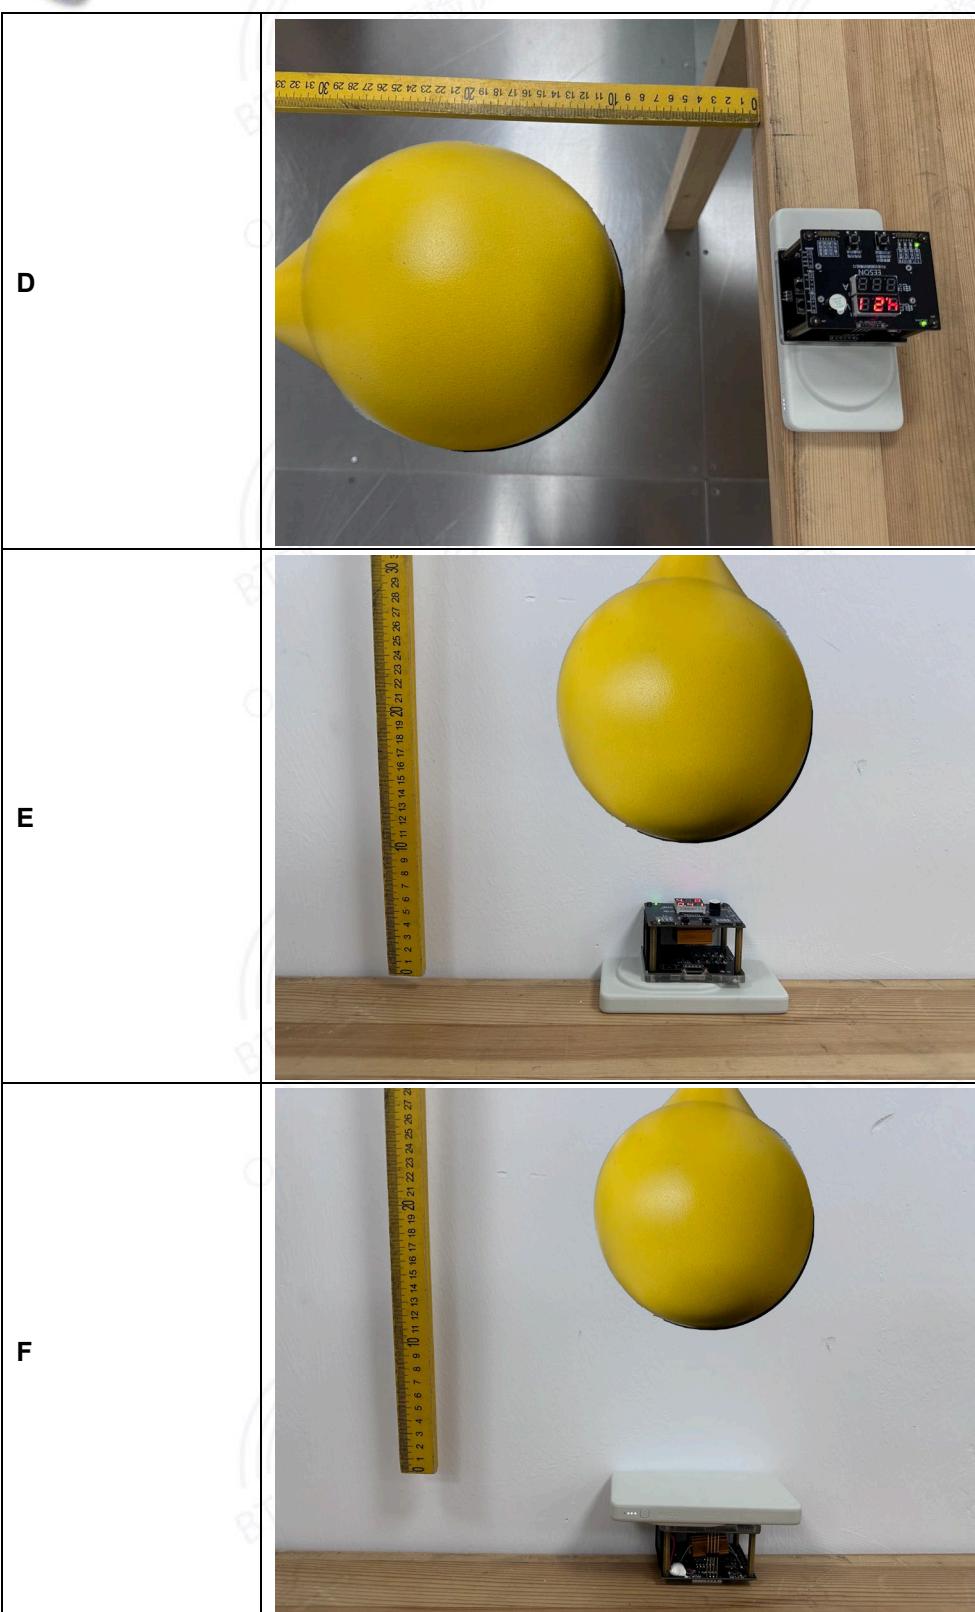

- End of the Report -

