



承 认 书

SPECIFICATION FOR APPROVAL

客户:

CUSTOMER: _____

客户料号:

CUST P/N: _____

智德料号:

ZD P/N: _____ ZD-ZB-A11-80-K

产品名称: _____

产品型号:

DESC: _____ 20.5-0.08*80P-10TS-80mm-42.5CC

日期:

DATE: _____ 2024/5/27

版本:

Version: _____ A.0

拟 制	审 核	批 准	客 户 承 认
PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE


深圳市智德电子有限公司

Shenzhen Zhide Electronics Co., LTD

工厂地址: 深圳市平湖镇上木古金力工业园A栋六楼

Factory address: Sixth Floor, Building A, Mugu Jinli Industrial Park, Pinghu Town, Shenzhen

TEL: 13316968872**E-mail: 914996326@qq.com**



Version Change Histonry


[illegible]

产品型号 20.5-0.08*80P-10TS-80mm-42.5CC

A.0

ZD ZB A11 80 K

一. 线圈尺寸

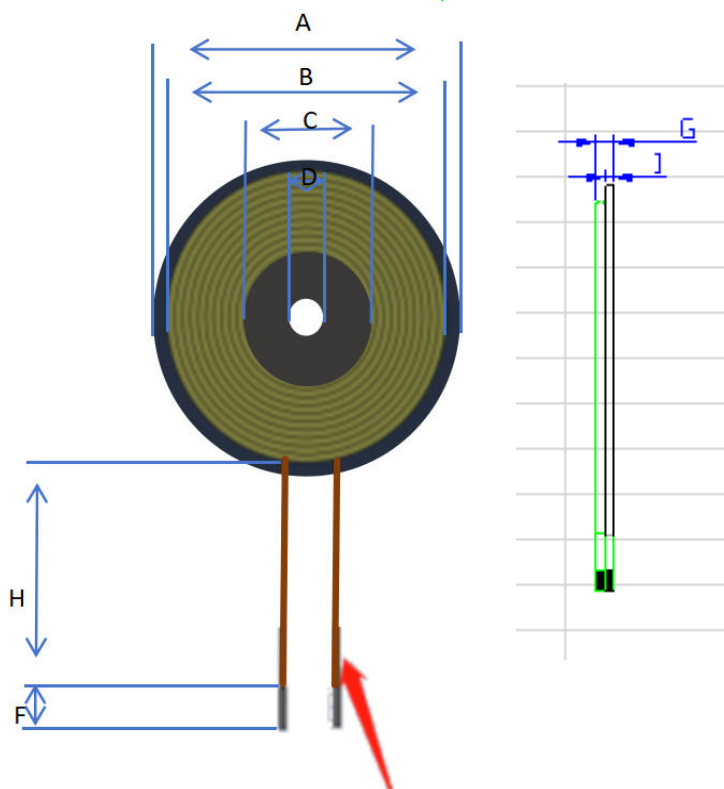

A	42.5 ± 0.5
B	40 ± 0.5
C	20.5 ± 0.3
D	5.3 ± 0.3
E	
F	3 ± 1.5
G	2.2 ± 0.5
H	80 ± 3
I	
J	1 ± 0.2
K	

二. 原理图



三. 绕线参数

S/N	terminal		Wire diameter	Number of turns	Winding direction
1	S	F	0.08*80P	10TS	anticlockwise

四. 电气参数

S/N	terminal	Standard	Test condition	Testing instrument	Electric sensation	DCR
1	S~F	100K/1.0V	Coil + diskette	LCP	$7.2 \pm 10\% \mu\text{H}$	0.06Ω
Working temperature resistance		Receiving current				
150度		2A				

- 1 如图1所示每孔6PCS，一盘40*6=240PCS产品。
- 3 如图3所示每箱装5盘，一箱1200PCS.




图1



图2



图3

