

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT FCC ID: 2BMLZ-F36-A3DA

Product: 4G Tablet

Trade Mark: N/A

Model No.: F36-A3DA

Family Model: X9, X9+, X9 Ultra, X9pro, X9 FE+,
X9 FE, X9 mini, X9 MAX, Tab
S10ultra, Tab S11ultra, K25 ultra,
i16 Pro Max

Report No.: S24103103202006

Issue Date: Dec. 20, 2024

Prepared for

HENGXING WEIYE TECHNOLOGY CO., LIMITED

ROOM 1602 16/F LUCKY CENTRE NO 165-171 WAN CHAI ROAD WAN CHAI HK

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan
District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : HENGXING WEIYE TECHNOLOGY CO., LIMITED

Address..... : ROOM 1602 16/F LUCKY CENTRE NO 165-171 WAN CHAI ROAD WAN CHAI HK

Manufacturer's Name..... : SHENZHEN TENG HAO DA INDUSTRIAL Co.,Ltd

Address..... : Floor 5 No.4 Buliding LeZhuJiao Industrial Park Hangcheng Street Baoan District Shen Zhen,China

Product name..... : 4G Tablet

Model and/or type reference .. : F36-A3DA

Trade Mark..... : N/A

Family Model..... : X9, X9+, X9 Ultra, X9pro, X9 FE+, X9 FE, X9 mini, X9 MAX, Tab S10ultra, Tab S11ultra, K25 ultra, i16 Pro Max

Test Sample Number..... S241031032001

Standards..... : FCC CFR 47 Part 22H, Part 24E, Part 27

Test procedure ANSI C63.26:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... Nov. 03, 2024 ~ Dec. 20, 2024

Date of Issue Dec. 20, 2024

Test Result..... **Pass**

Prepared By : Joe Yan
Joe Yan
(Project Engineer)

Reviewed By : Aaron Cheng
Aaron Cheng
(Supervisor)

Approved By : Alex Li
Alex Li
(Manager)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION.....	7
2.2 EUT EXERCISE	7
2.3 CONFIGURATION OF EUT SYSTEM.....	7
2.4 TEST SETUP	8
3.TEST AND MEASUREMENT EQUIPMENT	9
4. OUTPUT POWER.....	11
4.1 OUTPUT POWER MEASUREMENT	11
5. OCCUPIED BANDWIDTH	13
6. BANEDGE AND EMISSION MASK.....	14
7. OUT OF BAND EMISSIONS	16
7.1 MEASUREMENT METHOD	16
8. RADIATED MEASUREMENT	17
8.1. RADIATED POWER (ERP & EIRP).....	17
8.2 LTE BAND 2.....	18
8.3 LTE BAND 4.....	20
8.4 LTE BAND 5.....	22
8.5 LTE BAND 7.....	24

8.6 LTE BAND 12	26
8.7 LTE BAND 41	28
9. SPURIOUS RADIATION EMISSION	30
9.1 LTE BAND 2.....	32
9.2 LTE BAND 4.....	34
9.3 LTE BAND 5.....	36
9.4 LTE BAND 7.....	38
9.5 LTE BAND 12	40
9.6 LTE BAND 41	42
10. FREQUENCY STABILITY	44
10.1 LTE BAND 2	45
10.2 LTE BAND 4	47
10.3 LTE BAND 5	49
10.4 LTE BAND 7	51
10.5 LTE BAND 12	53
10.6 LTE BAND 41	55
11. PEAK-TO-AVERAGE RATIO.....	57
11.1 Description of the PAR Measurement.....	57
11.2 Measuring Instruments	57
11.3 Test Procedures.....	57
11.4 Test Setup.....	58

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	4G Tablet
Trade Mark	N/A
Model Name	F36-A3DA
Family Model	X9, X9+, X9 Ultra, X9pro, X9 FE+, X9 FE, X9 mini, X9 MAX, Tab S10ultra, Tab S11ultra, K25 ultra, i16 Pro Max
Model Difference	All models are the same circuit and RF module, except for model names.
FCC ID:	2BMLZ-F36-A3DA
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2, 4, 5, 7,12 TDD Band 41
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, LTE TDD Band 41 Uplink& Downlink: 2540MHz-2650MHz,
Type of Modulation:	QPSK/16QAM/64QAM(Only Downlink)
Power Class	Class 3
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	FPC Antenna
Antenna gain:	Band 2: 0.6dBi, Band 4: 0.7dBi, Band 5: 0.2dBi, Band 7: 0.5dBi, Band 12: -0.1dBi, Band 41: 0.5dBi
Adapter	Model NO: X15 INPUT: AC 100-240V~50-60Hz Max 0.35A OUTPUT: DC 5.0V---2A
Battery	DC 3.8V, 5000mAh, 19Wh
Power supply	DC 3.8V from Battery or DC 5V from Adapter.
Extreme Vol. Limits:	DC 3.23V to DC 4.37V (Nominal DC 3.8V) (Note 1)
HW Version	N/A
SW Version	N/A

** Note1: The High Voltage DC 4.37V and Low Voltage 3.23V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2BMLZ-F36-A3DA** filing to comply with the FCC Part 22H&24E&27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2/4/5/7/12/41

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	4G Tablet	F36-A3DA	FCC ID: 2BMLZ-F36-A3DA	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

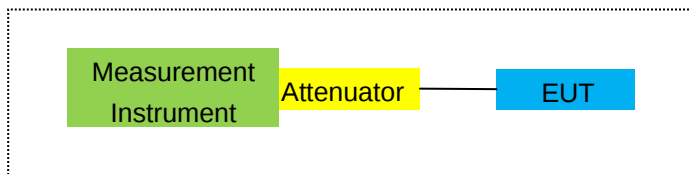

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

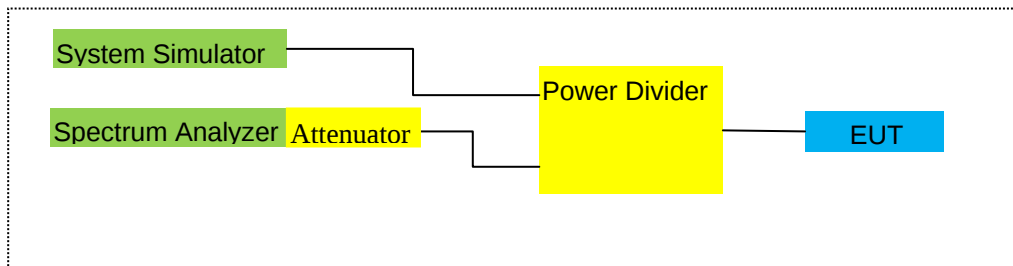

For Frequency Stability

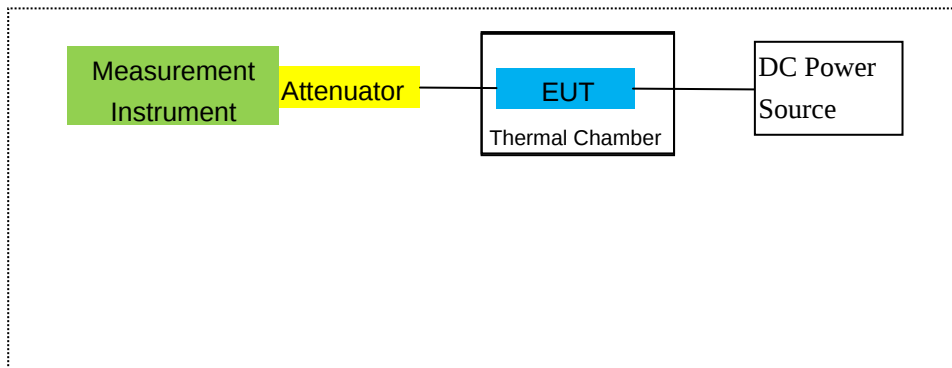

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2024.04.25	2025.04.24	1 year
2	Test Receiver	R&S	ESPI	101318	2024.04.26	2025.04.25	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12	2025.05.11	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
7	Amplifier	EM	EM-30180	060538	2024.04.26	2025.04.25	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2024.03.12	2025.03.11	1 year
9	Power Meter	R&S	NRVS	100696	2024.04.26	2025.04.25	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2024.04.26	2025.04.25	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
15	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year
16	LISN	EMCO	3816/2	00042990	2024.04.25	2025.04.24	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2024.03.12	2025.03.11	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2024.03.12	2025.03.11	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Spectrum Analyzer	agilent	e4440a	us44300399	2024.03.12	2025.03.11	1 year
23	test receiver	R&S	ESCI	a0304218	2024.03.12	2025.03.11	1 year
24	Communication Tester	R&S	CMU200	A0304247	2024.03.12	2025.03.11	1 year
25	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2024.03.12	2025.03.11	1 year

26	DC Power Source	N/A	PS-6005D	2017040292 3	2024.04.25	2027.04.24	3 year
----	-----------------	-----	----------	-----------------	------------	------------	--------

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFTest	MTS 8200	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	raditeq	RadiMation	2023.1.3	RadiatedTest
4	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".³

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

Band 2/4/5/7/12/41

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53.

FCC: §22.359

LIMITS

FCC: §22.917, §24.238, §27.53

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

(c)(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

Band 2/4/5/7/12/41

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53.

LIMITS

1. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.
2. The Band 7/41 emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

Band 2/4/5/7/12/41

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50

LIMITS:

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

90.635(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

Band 2/4/5/7/12/41

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
						Average	Average		
						(dBm)	(mW)		
1.4MHz Band QPSK	6/0	1850.7	-2.38	3.76	28.24	22.10	162.181	Horizontal	Pass
		1880	-1.87	3.91	28.22	22.44	175.388	Horizontal	Pass
		1909.3	-2.54	3.93	28.20	21.73	148.936	Horizontal	Pass
3.0MHz Band QPSK	15/0	1851.5	-2.93	3.77	28.23	21.53	142.233	Horizontal	Pass
		1880	-2.56	3.91	28.24	21.77	150.314	Horizontal	Pass
		1908.5	-1.39	3.94	28.25	22.92	195.884	Horizontal	Pass
5.0MHz Band QPSK	25/0	1852.5	-2.20	3.77	28.31	22.34	171.396	Horizontal	Pass
		1880	-1.53	3.91	28.22	22.78	189.671	Horizontal	Pass
		1907.5	-2.14	3.94	28.20	22.12	162.930	Horizontal	Pass
10.0MHz Band QPSK	50/0	1855	-2.27	3.79	28.33	22.27	168.655	Horizontal	Pass
		1880	-2.34	3.95	28.22	21.93	155.955	Horizontal	Pass
		1905	-1.86	3.97	28.19	22.36	172.187	Horizontal	Pass
15.0MHz Band QPSK	75/0	1857.5	-2.29	3.79	28.34	22.26	168.267	Horizontal	Pass
		1880	-1.28	3.95	28.22	22.99	199.067	Horizontal	Pass
		1902.5	-2.23	3.97	28.18	21.98	157.761	Horizontal	Pass
20.0MHz Band QPSK	100/0	1860	-2.72	3.81	28.35	21.82	152.055	Horizontal	Pass
		1880	-2.49	3.96	28.22	21.77	150.314	Horizontal	Pass
		1900	-1.67	4.00	28.16	22.49	177.419	Horizontal	Pass
1.4MHz Band QPSK	6/0	1850.7	-2.19	3.76	28.24	22.29	169.434	Vertical	Pass
		1880	-3.12	3.91	28.22	21.19	131.522	Vertical	Pass
		1909.3	-3.38	3.93	28.20	20.89	122.744	Vertical	Pass
3.0MHz Band QPSK	15/0	1851.5	-4.08	3.77	28.23	20.38	109.144	Vertical	Pass
		1880	-2.79	3.91	28.24	21.54	142.561	Vertical	Pass
		1908.5	-3.22	3.94	28.25	21.09	128.529	Vertical	Pass
5.0MHz Band QPSK	25/0	1852.5	-3.33	3.77	28.31	21.21	132.130	Vertical	Pass
		1880	-2.42	3.91	28.22	21.89	154.525	Vertical	Pass
		1907.5	-4.54	3.94	28.20	19.72	93.756	Vertical	Pass
10.0MHz Band QPSK	50/0	1855	-2.07	3.79	28.33	22.47	176.604	Vertical	Pass
		1880	-2.84	3.95	28.22	21.43	138.995	Vertical	Pass
		1905	-3.09	3.97	28.19	21.13	129.718	Vertical	Pass
15.0MHz Band QPSK	75/0	1857.5	-2.05	3.79	28.34	22.50	177.828	Vertical	Pass
		1880	-2.22	3.95	28.22	22.05	160.325	Vertical	Pass
		1902.5	-3.21	3.97	28.18	21.00	125.893	Vertical	Pass
20.0MHz Band QPSK	100/0	1860	-2.36	3.81	28.35	22.18	165.196	Vertical	Pass
		1880	-3.12	3.96	28.22	21.14	130.017	Vertical	Pass
		1900	-2.87	4.00	28.16	21.29	134.586	Vertical	Pass

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	1850.7	-3.77	3.76	28.24	20.71	117.761	Horizontal	Pass
		1880	-3.28	3.91	28.22	21.03	126.765	Horizontal	Pass
		1909.3	-2.18	3.93	28.20	22.09	161.808	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1851.5	-2.85	3.77	28.23	21.61	144.877	Horizontal	Pass
		1880	-2.70	3.91	28.24	21.63	145.546	Horizontal	Pass
		1908.5	-2.96	3.94	28.25	21.35	136.458	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1852.5	-1.92	3.77	28.31	22.62	182.810	Horizontal	Pass
		1880	-2.08	3.91	28.22	22.23	167.109	Horizontal	Pass
		1907.5	-3.04	3.94	28.20	21.22	132.434	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1855	-2.01	3.79	28.33	22.53	179.061	Horizontal	Pass
		1880	-2.09	3.95	28.22	22.18	165.196	Horizontal	Pass
		1905	-2.22	3.97	28.19	22.00	158.489	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1857.5	-2.28	3.79	28.34	22.27	168.655	Horizontal	Pass
		1880	-2.44	3.95	28.22	21.83	152.405	Horizontal	Pass
		1902.5	-3.24	3.97	28.18	20.97	125.026	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1860	-1.86	3.81	28.35	22.68	185.353	Horizontal	Pass
		1880	-1.81	3.96	28.22	22.45	175.792	Horizontal	Pass
		1900	-1.77	4.00	28.16	22.39	173.380	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1850.7	-3.36	3.76	28.24	21.12	129.420	Vertical	Pass
		1880	-3.82	3.91	28.22	20.49	111.944	Vertical	Pass
		1909.3	-3.75	3.93	28.20	20.52	112.720	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1851.5	-4.13	3.77	28.23	20.33	107.895	Vertical	Pass
		1880	-4.05	3.91	28.24	20.28	106.660	Vertical	Pass
		1908.5	-4.89	3.94	28.25	19.42	87.498	Vertical	Pass
5.0MHz Band 16 QAM	25/0	1852.5	-4.63	3.77	28.31	19.91	97.949	Vertical	Pass
		1880	-4.27	3.91	28.22	20.04	100.925	Vertical	Pass
		1907.5	-3.35	3.94	28.20	20.91	123.310	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1855	-3.58	3.79	28.33	20.96	124.738	Vertical	Pass
		1880	-3.93	3.95	28.22	20.34	108.143	Vertical	Pass
		1905	-3.68	3.97	28.19	20.54	113.240	Vertical	Pass
15.0MHz Band 16 QAM	75/0	1857.5	-2.15	3.79	28.34	22.40	173.780	Vertical	Pass
		1880	-2.92	3.95	28.22	21.35	136.458	Vertical	Pass
		1902.5	-3.92	3.97	28.18	20.29	106.905	Vertical	Pass
20.0MHz Band 16 QAM	100/0	1860	-2.89	3.81	28.35	21.65	146.218	Vertical	Pass
		1880	-3.56	3.96	28.22	20.70	117.490	Vertical	Pass
		1900	-3.33	4.00	28.16	20.83	121.060	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	1710.7	-1.69	3.12	27.58	22.77	189.234	Horizontal	Pass
		1732.5	-1.85	3.27	27.61	22.49	177.419	Horizontal	Pass
		1754.3	-2.68	3.29	27.63	21.66	146.555	Horizontal	Pass
3.0MHz Band QPSK	15/0	1711.5	-2.43	3.13	27.61	22.05	160.325	Horizontal	Pass
		1732.5	-1.23	3.27	27.61	23.11	204.644	Horizontal	Pass
		1753.5	-2.79	3.30	27.62	21.53	142.233	Horizontal	Pass
5.0MHz Band QPSK	25/0	1712.5	-1.58	3.13	27.63	22.92	195.884	Horizontal	Pass
		1732.5	-1.44	3.27	27.61	22.90	194.984	Horizontal	Pass
		1752.5	-1.43	3.30	27.60	22.87	193.642	Horizontal	Pass
10.0MHz Band QPSK	50/0	1715	-2.93	3.15	27.64	21.56	143.219	Horizontal	Pass
		1732.5	-1.20	3.31	27.61	23.10	204.174	Horizontal	Pass
		1750	-1.46	3.33	27.59	22.80	190.546	Horizontal	Pass
15.0MHz Band QPSK	75/0	1717.5	-1.85	3.15	27.65	22.65	184.077	Horizontal	Pass
		1732.5	-1.83	3.31	27.61	22.47	176.604	Horizontal	Pass
		1747.5	-1.13	3.33	27.57	23.11	204.644	Horizontal	Pass
20.0MHz Band QPSK	100/0	1720	-2.66	3.17	27.66	21.83	152.405	Horizontal	Pass
		1732.5	-0.92	3.32	27.61	23.37	217.270	Horizontal	Pass
		1745	-2.28	3.36	27.56	21.92	155.597	Horizontal	Pass
1.4MHz Band QPSK	6/0	1710.7	-3.32	3.12	27.58	21.14	130.017	Vertical	Pass
		1732.5	-2.42	3.27	27.61	21.92	155.597	Vertical	Pass
		1754.3	-1.17	3.29	27.63	23.17	207.491	Vertical	Pass
3.0MHz Band QPSK	15/0	1711.5	-1.87	3.13	27.61	22.61	182.390	Vertical	Pass
		1732.5	-1.99	3.27	27.61	22.35	171.791	Vertical	Pass
		1753.5	-2.16	3.30	27.62	22.16	164.437	Vertical	Pass
5.0MHz Band QPSK	25/0	1712.5	-2.13	3.13	27.63	22.37	172.584	Vertical	Pass
		1732.5	-2.46	3.27	27.61	21.88	154.170	Vertical	Pass
		1752.5	-2.33	3.30	27.60	21.97	157.398	Vertical	Pass
10.0MHz Band QPSK	50/0	1715	-2.27	3.15	27.64	22.22	166.725	Vertical	Pass
		1732.5	-2.03	3.31	27.61	22.27	168.655	Vertical	Pass
		1750	-2.54	3.33	27.59	21.72	148.594	Vertical	Pass
15.0MHz Band QPSK	75/0	1717.5	-3.69	3.15	27.65	20.81	120.504	Vertical	Pass
		1732.5	-3.78	3.31	27.61	20.52	112.720	Vertical	Pass
		1747.5	-2.20	3.33	27.57	22.04	159.956	Vertical	Pass
20.0MHz Band QPSK	100/0	1720	-2.59	3.17	27.66	21.90	154.882	Vertical	Pass
		1732.5	-2.81	3.32	27.61	21.48	140.605	Vertical	Pass
		1745	-3.57	3.36	27.56	20.63	115.611	Vertical	Pass

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	1710.7	-1.88	3.12	27.58	22.58	181.134	Horizontal	Pass
		1732.5	-2.76	3.27	27.61	21.58	143.880	Horizontal	Pass
		1754.3	-2.09	3.29	27.63	22.25	167.880	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1711.5	-2.10	3.13	27.61	22.38	172.982	Horizontal	Pass
		1732.5	-2.82	3.27	27.61	21.52	141.906	Horizontal	Pass
		1753.5	-3.02	3.30	27.62	21.30	134.896	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1712.5	-2.40	3.13	27.63	22.10	162.181	Horizontal	Pass
		1732.5	-2.69	3.27	27.61	21.65	146.218	Horizontal	Pass
		1752.5	-2.24	3.30	27.60	22.06	160.694	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1715	-1.94	3.15	27.64	22.55	179.887	Horizontal	Pass
		1732.5	-2.44	3.31	27.61	21.86	153.462	Horizontal	Pass
		1750	-1.87	3.33	27.59	22.39	173.380	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1717.5	-3.88	3.15	27.65	20.62	115.345	Horizontal	Pass
		1732.5	-2.60	3.31	27.61	21.70	147.911	Horizontal	Pass
		1747.5	-3.22	3.33	27.57	21.02	126.474	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1720	-1.65	3.17	27.66	22.84	192.309	Horizontal	Pass
		1732.5	-1.70	3.32	27.61	22.59	181.552	Horizontal	Pass
		1745	-1.79	3.36	27.56	22.41	174.181	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1710.7	-3.05	3.12	27.58	21.41	138.357	Vertical	Pass
		1732.5	-3.56	3.27	27.61	20.78	119.674	Vertical	Pass
		1754.3	-2.90	3.29	27.63	21.44	139.316	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1711.5	-4.11	3.13	27.61	20.37	108.893	Vertical	Pass
		1732.5	-3.64	3.27	27.61	20.70	117.490	Vertical	Pass
		1753.5	-3.07	3.30	27.62	21.25	133.352	Vertical	Pass
5.0MHz Band 16 QAM	25/0	1712.5	-4.15	3.13	27.63	20.35	108.393	Vertical	Pass
		1732.5	-2.94	3.27	27.61	21.40	138.038	Vertical	Pass
		1752.5	-3.15	3.30	27.60	21.15	130.317	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1715	-2.94	3.15	27.64	21.55	142.889	Vertical	Pass
		1732.5	-3.28	3.31	27.61	21.02	126.474	Vertical	Pass
		1750	-4.52	3.33	27.59	19.74	94.189	Vertical	Pass
15.0MHz Band 16 QAM	75/0	1717.5	-3.95	3.15	27.65	20.55	113.501	Vertical	Pass
		1732.5	-4.50	3.31	27.61	19.80	95.499	Vertical	Pass
		1747.5	-2.30	3.33	27.57	21.94	156.315	Vertical	Pass
20.0MHz Band 16 QAM	100/0	1720	-3.53	3.17	27.66	20.96	124.738	Vertical	Pass
		1732.5	-3.64	3.32	27.61	20.65	116.145	Vertical	Pass
		1745	-2.88	3.36	27.56	21.32	135.519	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	824.7	7.56	2.01	19.68	2.15	23.08	203.236	Horizontal	Pass
		836.5	7.50	2.01	19.77	2.15	23.11	204.644	Horizontal	Pass
		848.3	7.04	2.02	19.82	2.15	22.69	185.780	Horizontal	Pass
3.0MHz Band QPSK	15/0	825.5	7.57	2.01	19.70	2.15	23.11	204.644	Horizontal	Pass
		836.5	7.63	2.01	19.77	2.15	23.24	210.863	Horizontal	Pass
		847.5	7.98	2.02	19.81	2.15	23.62	230.144	Horizontal	Pass
5.0MHz Band QPSK	25/0	826.5	7.51	2.01	19.71	2.15	23.06	202.302	Horizontal	Pass
		836.5	7.97	2.01	19.77	2.15	23.58	228.034	Horizontal	Pass
		846.5	7.24	2.02	19.79	2.15	22.86	193.197	Horizontal	Pass
10.0MHz Band QPSK	50/0	829	7.61	2.01	19.73	2.15	23.18	207.970	Horizontal	Pass
		836.5	7.43	2.01	19.77	2.15	23.04	201.372	Horizontal	Pass
		844	7.36	2.02	19.78	2.15	22.97	198.153	Horizontal	Pass
1.4MHz Band QPSK	6/0	824.7	6.81	2.01	19.68	2.15	22.33	171.002	Vertical	Pass
		836.5	6.63	2.01	19.77	2.15	22.24	167.494	Vertical	Pass
		848.3	6.61	2.02	19.82	2.15	22.26	168.267	Vertical	Pass
3.0MHz Band QPSK	15/0	825.5	6.52	2.01	19.70	2.15	22.06	160.694	Vertical	Pass
		836.5	5.68	2.01	19.77	2.15	21.29	134.586	Vertical	Pass
		847.5	6.40	2.02	19.81	2.15	22.04	159.956	Vertical	Pass
5.0MHz Band QPSK	25/0	826.5	6.91	2.01	19.71	2.15	22.46	176.198	Vertical	Pass
		836.5	6.46	2.01	19.77	2.15	22.07	161.065	Vertical	Pass
		846.5	6.17	2.02	19.79	2.15	21.79	151.008	Vertical	Pass
10.0MHz Band QPSK	50/0	829	5.77	2.01	19.73	2.15	21.34	136.144	Vertical	Pass
		836.5	6.71	2.01	19.77	2.15	22.32	170.608	Vertical	Pass
		844	6.41	2.02	19.78	2.15	22.02	159.221	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	824.7	6.24	2.01	19.68	2.15	21.76	149.968	Horizontal	Pass
		836.5	6.68	2.01	19.77	2.15	22.29	169.434	Horizontal	Pass
		848.3	6.36	2.02	19.82	2.15	22.01	158.855	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	825.5	7.26	2.01	19.70	2.15	22.80	190.546	Horizontal	Pass
		836.5	6.87	2.01	19.77	2.15	22.48	177.011	Horizontal	Pass
		847.5	5.89	2.02	19.81	2.15	21.53	142.233	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	826.5	7.93	2.01	19.71	2.15	23.48	222.844	Horizontal	Pass
		836.5	7.62	2.01	19.77	2.15	23.23	210.378	Horizontal	Pass
		846.5	7.19	2.02	19.79	2.15	22.81	190.985	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	829	7.01	2.01	19.73	2.15	22.58	181.134	Horizontal	Pass
		836.5	7.96	2.01	19.77	2.15	23.57	227.510	Horizontal	Pass
		844	7.40	2.02	19.78	2.15	23.01	199.986	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	824.7	5.13	2.01	19.68	2.15	20.65	116.145	Vertical	Pass
		836.5	6.61	2.01	19.77	2.15	22.22	166.725	Vertical	Pass
		848.3	6.08	2.02	19.82	2.15	21.73	148.936	Vertical	Pass
3.0MHz Band 16 QAM	15/0	825.5	6.10	2.01	19.70	2.15	21.64	145.881	Vertical	Pass
		836.5	5.77	2.01	19.77	2.15	21.38	137.404	Vertical	Pass
		847.5	6.87	2.02	19.81	2.15	22.51	178.238	Vertical	Pass
5.0MHz Band 16 QAM	25/0	826.5	6.16	2.01	19.71	2.15	21.71	148.252	Vertical	Pass
		836.5	6.70	2.01	19.77	2.15	22.31	170.216	Vertical	Pass
		846.5	6.11	2.02	19.79	2.15	21.73	148.936	Vertical	Pass
10.0MHz Band 16 QAM	50/0	829	5.11	2.01	19.73	2.15	20.68	116.950	Vertical	Pass
		836.5	5.69	2.01	19.77	2.15	21.30	134.896	Vertical	Pass
		844	6.85	2.02	19.78	2.15	22.46	176.198	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

ERP(dBm)=EIRP-2.15

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP	Max. EIRP Average (mW)	Polarization Of Max. ERP	
						Average (dBm)			
5.0MHz Band QPSK	25/0	2502.5	-0.76	4.54	27.75	22.45	175.792	Horizontal	Pass
		2535	-0.22	4.69	27.72	22.81	190.985	Horizontal	Pass
		2567.5	-0.14	4.71	27.71	22.86	193.197	Horizontal	Pass
10.0MHz Band QPSK	50/0	2505	-0.31	4.55	27.76	22.90	194.984	Horizontal	Pass
		2535	-0.20	4.69	27.72	22.83	191.867	Horizontal	Pass
		2565	-1.68	4.72	27.70	21.30	134.896	Horizontal	Pass
15.0MHz Band QPSK	75/0	2507.5	-0.40	4.55	27.77	22.82	191.426	Horizontal	Pass
		2535	-1.14	4.69	27.72	21.89	154.525	Horizontal	Pass
		2562.5	-0.74	4.72	27.69	22.23	167.109	Horizontal	Pass
20.0MHz Band QPSK	100/0	2510	-0.61	4.57	27.78	22.60	181.970	Horizontal	Pass
		2535	-0.75	4.73	27.72	22.24	167.494	Horizontal	Pass
		2560	-1.27	4.75	27.68	21.66	146.555	Horizontal	Pass
5.0MHz Band QPSK	25/0	2502.5	-1.05	4.54	27.75	22.16	164.437	Vertical	Pass
		2535	-0.91	4.69	27.72	22.12	162.930	Vertical	Pass
		2567.5	-1.41	4.71	27.71	21.59	144.212	Vertical	Pass
10.0MHz Band QPSK	50/0	2505	-2.67	4.55	27.76	20.54	113.240	Vertical	Pass
		2535	-2.07	4.69	27.72	20.96	124.738	Vertical	Pass
		2565	-1.51	4.72	27.70	21.47	140.281	Vertical	Pass
15.0MHz Band QPSK	75/0	2507.5	-1.04	4.55	27.77	22.18	165.196	Vertical	Pass
		2535	-1.25	4.69	27.72	21.78	150.661	Vertical	Pass
		2562.5	-0.99	4.72	27.69	21.98	157.761	Vertical	Pass
20.0MHz Band QPSK	100/0	2510	-1.33	4.57	27.78	21.88	154.170	Vertical	Pass
		2535	-1.62	4.73	27.72	21.37	137.088	Vertical	Pass
		2560	-2.07	4.75	27.68	20.86	121.899	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	25/0	2502.5	-1.72	4.54	27.75	21.49	140.929	Horizontal	Pass
		2535	-1.66	4.69	27.72	21.37	137.088	Horizontal	Pass
		2567.5	-1.92	4.71	27.71	21.08	128.233	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	2505	-1.96	4.55	27.76	21.25	133.352	Horizontal	Pass
		2535	-1.10	4.69	27.72	21.93	155.955	Horizontal	Pass
		2565	-1.82	4.72	27.70	21.16	130.617	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	2507.5	-2.20	4.55	27.77	21.02	126.474	Horizontal	Pass
		2535	-2.34	4.69	27.72	20.69	117.220	Horizontal	Pass
		2562.5	-0.68	4.72	27.69	22.29	169.434	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	2510	-1.84	4.57	27.78	21.37	137.088	Horizontal	Pass
		2535	-0.83	4.73	27.72	22.16	164.437	Horizontal	Pass
		2560	-0.97	4.75	27.68	21.96	157.036	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	2502.5	-1.42	4.54	27.75	21.79	151.008	Vertical	Pass
		2535	-3.25	4.69	27.72	19.78	95.060	Vertical	Pass
		2567.5	-2.51	4.71	27.71	20.49	111.944	Vertical	Pass
10.0MHz Band 16 QAM	50/0	2505	-2.42	4.55	27.76	20.79	119.950	Vertical	Pass
		2535	-1.60	4.69	27.72	21.43	138.995	Vertical	Pass
		2565	-1.78	4.72	27.70	21.20	131.826	Vertical	Pass
15.0MHz Band 16 QAM	75/0	2507.5	-1.27	4.55	27.77	21.95	156.675	Vertical	Pass
		2535	-1.48	4.69	27.72	21.55	142.889	Vertical	Pass
		2562.5	-2.49	4.72	27.69	20.48	111.686	Vertical	Pass
20.0MHz Band 16 QAM	100/0	2510	-3.38	4.57	27.78	19.83	96.161	Vertical	Pass
		2535	-2.31	4.73	27.72	20.68	116.950	Vertical	Pass
		2560	-1.87	4.75	27.68	21.06	127.644	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	699.7	7.91	1.91	19.21	2.15	23.06	202.302	Vertical	Pass
		707.5	7.73	1.91	19.26	2.15	22.93	196.336	Vertical	Pass
		715.3	7.96	1.93	19.34	2.15	23.22	209.894	Vertical	Pass
3.0MHz Band QPSK	15/0	700.5	7.94	1.91	19.21	2.15	23.09	203.704	Vertical	Pass
		707.5	7.87	1.91	19.26	2.15	23.07	202.768	Vertical	Pass
		714.5	7.82	1.93	19.34	2.15	23.08	203.236	Vertical	Pass
5.0MHz Band QPSK	25/0	701.5	7.51	1.91	19.23	2.15	22.68	185.353	Vertical	Pass
		707.5	7.39	1.91	19.26	2.15	22.59	181.552	Vertical	Pass
		713.5	6.71	1.92	19.33	2.15	21.97	157.398	Vertical	Pass
10.0MHz Band QPSK	50/0	704	7.47	1.91	19.25	2.15	22.66	184.502	Vertical	Pass
		707.5	7.04	1.91	19.26	2.15	22.24	167.494	Vertical	Pass
		711	7.42	1.92	19.32	2.15	22.67	184.927	Vertical	Pass
1.4MHz Band QPSK	6/0	699.7	6.37	1.91	19.21	2.15	21.52	141.906	Horizontal	Pass
		707.5	6.56	1.91	19.26	2.15	21.76	149.968	Horizontal	Pass
		715.3	6.03	1.93	19.34	2.15	21.29	134.586	Horizontal	Pass
3.0MHz Band QPSK	15/0	700.5	6.08	1.91	19.21	2.15	21.23	132.739	Horizontal	Pass
		707.5	6.56	1.91	19.26	2.15	21.76	149.968	Horizontal	Pass
		714.5	5.96	1.93	19.34	2.15	21.22	132.434	Horizontal	Pass
5.0MHz Band QPSK	25/0	701.5	7.91	1.91	19.23	2.15	23.08	203.236	Horizontal	Pass
		707.5	6.08	1.91	19.26	2.15	21.28	134.276	Horizontal	Pass
		713.5	6.73	1.92	19.33	2.15	21.99	158.125	Horizontal	Pass
10.0MHz Band QPSK	50/0	704	6.67	1.91	19.25	2.15	21.86	153.462	Horizontal	Pass
		707.5	6.56	1.91	19.26	2.15	21.76	149.968	Horizontal	Pass
		711	7.02	1.92	19.32	2.15	22.27	168.655	Horizontal	Pass

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	699.7	7.65	1.91	19.21	2.15	22.80	190.546	Vertical	Pass
		707.5	6.42	1.91	19.26	2.15	21.62	145.211	Vertical	Pass
		715.3	6.27	1.93	19.34	2.15	21.53	142.233	Vertical	Pass
3.0MHz Band 16 QAM	15/0	700.5	6.34	1.91	19.21	2.15	21.49	140.929	Vertical	Pass
		707.5	7.61	1.91	19.26	2.15	22.81	190.985	Vertical	Pass
		714.5	7.40	1.93	19.34	2.15	22.66	184.502	Vertical	Pass
5.0MHz Band 16 QAM	25/0	701.5	7.30	1.91	19.23	2.15	22.47	176.604	Vertical	Pass
		707.5	7.02	1.91	19.26	2.15	22.22	166.725	Vertical	Pass
		713.5	6.41	1.92	19.33	2.15	21.67	146.893	Vertical	Pass
10.0MHz Band 16 QAM	50/0	704	7.06	1.91	19.25	2.15	22.25	167.880	Vertical	Pass
		707.5	8.68	1.91	19.26	2.15	23.88	244.343	Vertical	Pass
		711	7.33	1.92	19.32	2.15	22.58	181.134	Vertical	Pass
1.4MHz Band 16 QAM	6/0	699.7	7.93	1.91	19.21	2.15	23.08	203.236	Horizontal	Pass
		707.5	7.98	1.91	19.26	2.15	23.18	207.970	Horizontal	Pass
		715.3	6.08	1.93	19.34	2.15	21.34	136.144	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	700.5	7.01	1.91	19.21	2.15	22.16	164.437	Horizontal	Pass
		707.5	6.11	1.91	19.26	2.15	21.31	135.207	Horizontal	Pass
		714.5	6.75	1.93	19.34	2.15	22.01	158.855	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	701.5	7.72	1.91	19.23	2.15	22.89	194.536	Horizontal	Pass
		707.5	7.26	1.91	19.26	2.15	22.46	176.198	Horizontal	Pass
		713.5	6.89	1.92	19.33	2.15	22.15	164.059	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	704	5.26	1.91	19.25	2.15	20.45	110.917	Horizontal	Pass
		707.5	7.49	1.91	19.26	2.15	22.69	185.780	Horizontal	Pass
		711	6.56	1.92	19.32	2.15	21.81	151.705	Horizontal	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

ERP(dBm)=EIRP-2.15

8.7 LTE BAND 41

Radiated Power (EIRP) for Band 41									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	25/0	2542.5	-1.09	4.54	27.75	22.12	162.930	Horizontal	Pass
		2595	-0.68	4.69	27.72	22.35	171.791	Horizontal	Pass
		2647.5	-0.69	4.71	27.71	22.31	170.216	Horizontal	Pass
10.0MHz Band QPSK	50/0	2545	-0.65	4.55	27.76	22.56	180.302	Horizontal	Pass
		2595	-1.38	4.69	27.72	21.65	146.218	Horizontal	Pass
		2645	-0.56	4.72	27.70	22.42	174.582	Horizontal	Pass
15.0MHz Band QPSK	75/0	2547.5	-0.72	4.55	27.77	22.50	177.828	Horizontal	Pass
		2595	-0.15	4.69	27.72	22.88	194.089	Horizontal	Pass
		2642.5	-0.45	4.72	27.69	22.52	178.649	Horizontal	Pass
20.0MHz Band QPSK	100/0	2550	-0.72	4.57	27.78	22.49	177.419	Horizontal	Pass
		2595	-0.83	4.73	27.72	22.16	164.437	Horizontal	Pass
		2640	-1.12	4.75	27.68	21.81	151.705	Horizontal	Pass
5.0MHz Band QPSK	25/0	2542.5	-0.81	4.54	27.75	22.40	173.780	Vertical	Pass
		2595	-1.04	4.69	27.72	21.99	158.125	Vertical	Pass
		2647.5	-1.26	4.71	27.71	21.74	149.279	Vertical	Pass
10.0MHz Band QPSK	50/0	2545	-0.75	4.55	27.76	22.46	176.198	Vertical	Pass
		2595	-1.34	4.69	27.72	21.69	147.571	Vertical	Pass
		2645	-1.29	4.72	27.70	21.69	147.571	Vertical	Pass
15.0MHz Band QPSK	75/0	2547.5	-1.70	4.55	27.77	21.52	141.906	Vertical	Pass
		2595	-0.93	4.69	27.72	22.10	162.181	Vertical	Pass
		2642.5	-1.23	4.72	27.69	21.74	149.279	Vertical	Pass
20.0MHz Band QPSK	100/0	2550	-1.81	4.57	27.78	21.40	138.038	Vertical	Pass
		2595	-1.59	4.73	27.72	21.40	138.038	Vertical	Pass
		2640	-0.56	4.75	27.68	22.37	172.584	Vertical	Pass

Radiated Power (EIRP) for Band 41									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	25/0	2542.5	-1.35	4.54	27.75	21.86	153.462	Horizontal	Pass
		2595	-1.79	4.69	27.72	21.24	133.045	Horizontal	Pass
		2647.5	-0.78	4.71	27.71	22.22	166.725	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	2545	-1.91	4.55	27.76	21.30	134.896	Horizontal	Pass
		2595	-1.11	4.69	27.72	21.92	155.597	Horizontal	Pass
		2645	-1.54	4.72	27.70	21.44	139.316	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	2547.5	-1.68	4.55	27.77	21.54	142.561	Horizontal	Pass
		2595	-1.01	4.69	27.72	22.02	159.221	Horizontal	Pass
		2642.5	-1.17	4.72	27.69	21.80	151.356	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	2550	-1.91	4.57	27.78	21.30	134.896	Horizontal	Pass
		2595	-1.26	4.73	27.72	21.73	148.936	Horizontal	Pass
		2640	-1.12	4.75	27.68	21.81	151.705	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	2542.5	-0.88	4.54	27.75	22.33	171.002	Vertical	Pass
		2595	-1.69	4.69	27.72	21.34	136.144	Vertical	Pass
		2647.5	-2.01	4.71	27.71	20.99	125.603	Vertical	Pass
10.0MHz Band 16 QAM	50/0	2545	-2.52	4.55	27.76	20.69	117.220	Vertical	Pass
		2595	-1.42	4.69	27.72	21.61	144.877	Vertical	Pass
		2645	-1.75	4.72	27.70	21.23	132.739	Vertical	Pass
15.0MHz Band 16 QAM	75/0	2547.5	-1.68	4.55	27.77	21.54	142.561	Vertical	Pass
		2595	-2.49	4.69	27.72	20.54	113.240	Vertical	Pass
		2642.5	-2.07	4.72	27.69	20.90	123.027	Vertical	Pass
20.0MHz Band 16 QAM	100/0	2550	-1.14	4.57	27.78	22.07	161.065	Vertical	Pass
		2595	-1.57	4.73	27.72	21.42	138.676	Vertical	Pass
		2640	-1.74	4.75	27.68	21.19	131.522	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691

LIMIT

§22.917 (e) and §24.238 and §90.691 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

LTE Band 2/4/5/7/12/41

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-48.39	4.04	33.51	-18.92	-13	-5.92	Horizontal
3701.4	-51.15	4.04	33.51	-21.68	-13	-8.68	Vertical
5552.1	-45.88	5.24	35.84	-15.28	-13	-2.28	Vertical
5552.1	-49.71	5.24	35.84	-19.11	-13	-6.11	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-47.30	4.04	33.56	-17.78	-13	-4.78	Horizontal
3760.0	-52.13	4.04	33.56	-22.61	-13	-9.61	Vertical
5640.0	-48.72	5.24	35.91	-18.05	-13	-5.05	Vertical
5640.0	-49.90	5.24	35.91	-19.23	-13	-6.23	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-45.76	4.04	34.00	-15.80	-13	-2.80	Horizontal
3818.6	-45.91	4.04	34.00	-15.95	-13	-2.95	Vertical
5727.9	-50.84	5.24	36.04	-20.04	-13	-7.04	Vertical
5727.9	-47.82	5.24	36.04	-17.02	-13	-4.02	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-46.27	4.07	33.54	-16.80	-13	-3.80	Horizontal
3720.0	-49.58	4.07	33.54	-20.11	-13	-7.11	Vertical
5580.0	-46.34	5.28	35.86	-15.76	-13	-2.76	Vertical
5580.0	-50.26	5.28	35.86	-19.68	-13	-6.68	Horizontal
208.5	-38.23	1.58	16.89	-22.91	-13	-9.91	Vertical
357.0	-41.46	1.76	17.26	-25.96	-13	-12.96	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-45.72	4.04	33.56	-16.20	-13	-3.20	Horizontal
3760.0	-46.48	4.04	33.56	-16.96	-13	-3.96	Vertical
5640.0	-50.91	5.24	35.91	-20.24	-13	-7.24	Vertical
5640.0	-49.93	5.24	35.91	-19.26	-13	-6.26	Horizontal
200.6	-43.89	1.46	16.27	-29.08	-13	-16.08	Vertical
344.7	-39.07	1.59	15.15	-25.51	-13	-12.51	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-49.42	4.04	34.00	-19.46	-13	-6.46	Horizontal
3800.0	-46.82	4.04	34.00	-16.86	-13	-3.86	Vertical
5700.0	-46.36	5.24	36.04	-15.56	-13	-2.56	Vertical
5700.0	-51.30	5.24	36.04	-20.50	-13	-7.50	Horizontal
212.0	-34.80	1.36	17.39	-18.76	-13	-5.76	Vertical
312.7	-40.93	1.66	15.39	-27.20	-13	-14.20	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

Over Limit= : P_{Mea}(dBm)-Limit(dBm)

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-48.38	4.02	29.80	-22.60	-13	-9.60	Horizontal
3421.4	-46.98	4.02	29.80	-21.20	-13	-8.20	Vertical
5132.1	-50.09	5.24	35.84	-19.49	-13	-6.49	Vertical
5132.1	-50.26	5.24	35.84	-19.66	-13	-6.66	Horizontal
197.8	-40.85	1.68	16.04	-26.49	-13	-13.49	Vertical
454.4	-34.43	1.78	17.74	-18.47	-13	-5.47	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-48.99	4.03	30.00	-23.02	-13	-10.02	Horizontal
3465.0	-43.26	4.03	30.00	-17.29	-13	-4.29	Vertical
5197.5	-46.69	5.25	35.86	-16.08	-13	-3.08	Vertical
5197.5	-48.23	5.25	35.86	-17.62	-13	-4.62	Horizontal
207.5	-41.81	1.72	17.69	-25.84	-13	-12.84	Vertical
345.7	-43.07	1.62	16.02	-28.66	-13	-15.66	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-47.89	4.05	30.01	-21.93	-13	-8.93	Horizontal
3508.6	-46.41	4.05	30.01	-20.45	-13	-7.45	Vertical
5262.9	-49.12	5.26	35.86	-18.52	-13	-5.52	Vertical
5262.9	-49.46	5.26	35.86	-18.86	-13	-5.86	Horizontal
182.9	-31.94	1.80	16.69	-17.05	-13	-4.05	Vertical
332.1	-39.52	1.75	16.66	-24.62	-13	-11.62	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-47.93	4.02	29.80	-22.15	-13	-9.15	Horizontal
3440.0	-47.81	4.02	29.80	-22.03	-13	-9.03	Vertical
5160.0	-51.19	5.24	35.84	-20.59	-13	-7.59	Vertical
5160.0	-49.55	5.24	35.84	-18.95	-13	-5.95	Horizontal
182.5	-39.12	1.57	17.26	-23.43	-13	-10.43	Vertical
310.2	-34.39	1.78	16.35	-19.82	-13	-6.82	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-49.52	4.03	30.00	-23.55	-13	-10.55	Horizontal
3465.0	-49.59	4.03	30.00	-23.62	-13	-10.62	Vertical
5197.5	-47.48	5.25	35.86	-16.87	-13	-3.87	Vertical
5197.5	-47.83	5.25	35.86	-17.22	-13	-4.22	Horizontal
208.7	-40.67	1.44	17.95	-24.16	-13	-11.16	Vertical
269.5	-31.60	1.65	16.09	-17.16	-13	-4.16	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-44.25	2.91	27.68	-19.48	-13	-6.48	Horizontal
3490.0	-44.47	2.91	27.68	-19.70	-13	-6.70	Vertical
5235.0	-48.29	5.26	35.86	-17.69	-13	-4.69	Vertical
5235.0	-52.52	5.26	35.86	-21.92	-13	-8.92	Horizontal
184.8	-40.15	1.61	16.85	-24.91	-13	-11.91	Vertical
290.8	-39.99	1.61	15.19	-26.41	-13	-13.41	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

Over Limit= : P_{Mea}(dBm)-Limit(dBm)

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-46.35	2.78	27.50	-21.63	-13	-8.63	Horizontal
1649.4	-49.04	2.78	27.50	-24.32	-13	-11.32	Vertical
2474.1	-45.78	2.90	27.80	-20.88	-13	-7.88	Vertical
2474.1	-50.47	2.90	27.80	-25.57	-13	-12.57	Horizontal
179.0	-35.91	1.76	17.59	-20.08	-13	-7.08	Vertical
460.3	-39.79	1.63	15.87	-25.55	-13	-12.55	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-46.59	2.80	27.48	-21.91	-13	-8.91	Horizontal
1673.0	-45.25	2.80	27.48	-20.57	-13	-7.57	Vertical
2509.5	-42.61	2.91	27.70	-17.82	-13	-4.82	Vertical
2509.5	-49.92	2.91	27.70	-25.13	-13	-12.13	Horizontal
212.9	-40.25	1.61	15.68	-26.18	-13	-13.18	Vertical
431.5	-36.34	1.59	17.52	-20.42	-13	-7.42	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-48.75	2.82	27.43	-24.14	-13	-11.14	Horizontal
1696.6	-50.82	2.82	27.43	-26.21	-13	-13.21	Vertical
2544.9	-43.67	2.92	27.74	-18.85	-13	-5.85	Vertical
2544.9	-50.51	2.92	27.74	-25.69	-13	-12.69	Horizontal
192.7	-34.05	1.69	16.67	-19.06	-13	-6.06	Vertical
366.5	-33.83	1.70	17.18	-18.35	-13	-5.35	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-50.37	2.78	27.50	-25.65	-13	-12.65	Horizontal
1658.0	-41.56	2.78	27.50	-16.84	-13	-3.84	Vertical
2487.0	-52.48	2.90	27.80	-27.58	-13	-14.58	Vertical
2487.0	-48.06	2.90	27.80	-23.16	-13	-10.16	Horizontal
199.8	-42.44	1.71	15.57	-28.58	-13	-15.58	Vertical
363.9	-32.66	1.34	16.40	-17.60	-13	-4.60	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-41.28	2.80	27.48	-16.60	-13	-3.60	Horizontal
1673.0	-42.09	2.80	27.48	-17.41	-13	-4.41	Vertical
2509.5	-50.54	2.91	27.70	-25.75	-13	-12.75	Vertical
2509.5	-47.35	2.91	27.70	-22.56	-13	-9.56	Horizontal
212.0	-33.02	1.44	17.04	-17.42	-13	-4.42	Vertical
343.3	-41.93	1.76	17.62	-26.07	-13	-13.07	Horizontal
Test Results for High Channel 844MHz							
1688.0	-46.05	2.82	27.43	-21.44	-13	-8.44	Horizontal
1688.0	-47.62	2.82	27.43	-23.01	-13	-10.01	Vertical
2532.0	-50.14	2.92	27.74	-25.32	-13	-12.32	Vertical
2532.0	-46.94	2.92	27.74	-22.12	-13	-9.12	Horizontal
205.3	-34.84	1.74	17.70	-18.88	-13	-5.88	Vertical
393.0	-34.46	1.41	17.46	-18.40	-13	-5.40	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-64.01	5.23	35.81	-33.43	-25	-8.43	Horizontal
5005.0	-61.39	5.23	35.81	-30.81	-25	-5.81	Vertical
7507.5	-62.73	5.67	36.85	-31.55	-25	-6.55	Vertical
7507.5	-63.09	5.67	36.85	-31.91	-25	-6.91	Horizontal
196.5	-45.24	1.73	17.97	-29.00	-25	-4.00	Vertical
376.0	-47.37	1.38	15.11	-33.64	-25	-8.64	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-64.20	5.23	35.82	-33.61	-25	-8.61	Horizontal
5070.0	-62.30	5.23	35.82	-31.71	-25	-6.71	Vertical
7605.0	-63.31	5.67	36.85	-32.13	-25	-7.13	Vertical
7605.0	-59.97	5.67	36.85	-28.79	-25	-3.79	Horizontal
194.9	-51.75	1.77	16.17	-37.34	-25	-12.34	Vertical
422.9	-49.88	1.63	15.21	-36.30	-25	-11.30	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-60.39	5.24	35.83	-29.80	-25	-4.80	Horizontal
5135.0	-63.21	5.24	35.83	-32.62	-25	-7.62	Vertical
7702.5	-64.23	5.68	36.87	-33.04	-25	-8.04	Vertical
7702.5	-63.83	5.68	36.87	-32.64	-25	-7.64	Horizontal
183.2	-48.19	1.58	17.56	-32.21	-25	-7.21	Vertical
231.6	-50.42	1.45	16.58	-35.29	-25	-10.29	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-62.67	5.23	35.82	-32.08	-25	-7.08	Horizontal
5020.0	-61.77	5.23	35.82	-31.18	-25	-6.18	Vertical
7530.0	-61.94	5.67	36.86	-30.75	-25	-5.75	Vertical
7530.0	-60.18	5.67	36.86	-28.99	-25	-3.99	Horizontal
190.6	-47.33	1.63	15.76	-33.20	-25	-8.20	Vertical
282.1	-49.04	1.71	15.44	-35.31	-25	-10.31	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-62.39	5.23	35.82	-31.80	-25	-6.80	Horizontal
5070.0	-61.50	5.23	35.82	-30.91	-25	-5.91	Vertical
7605.0	-63.92	5.67	36.85	-32.74	-25	-7.74	Vertical
7605.0	-60.09	5.67	36.85	-28.91	-25	-3.91	Horizontal
209.0	-53.33	1.79	16.84	-38.27	-25	-13.27	Vertical
372.6	-49.43	1.71	17.64	-33.50	-25	-8.50	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-61.29	5.24	35.83	-30.70	-25	-5.70	Horizontal
5120.0	-63.38	5.24	35.83	-32.79	-25	-7.79	Vertical
7680.0	-60.07	5.70	36.88	-28.89	-25	-3.89	Vertical
7680.0	-59.53	5.70	36.88	-28.35	-25	-3.35	Horizontal
201.7	-48.48	1.79	16.84	-33.42	-25	-8.42	Vertical
340.6	-44.06	1.71	17.64	-28.13	-25	-3.13	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-48.77	2.60	27.2	-24.17	-13	-11.17	Horizontal
1399.4	-52.86	2.60	27.2	-28.26	-13	-15.26	Vertical
2099.1	-51.44	2.85	27.54	-26.75	-13	-13.75	Vertical
2099.1	-54.57	2.85	27.54	-29.88	-13	-16.88	Horizontal
Test Results For Mid Channel 707.5MHz							
1415	-54.23	2.61	27.28	-29.56	-13	-16.56	Horizontal
1415	-49.38	2.61	27.28	-24.71	-13	-11.71	Vertical
2122.5	-56.59	2.87	27.59	-31.87	-13	-18.87	Vertical
2122.5	-56.45	2.87	27.59	-31.73	-13	-18.73	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-54.25	2.63	27.28	-29.60	-13	-16.60	Horizontal
1430.6	-51.59	2.63	27.28	-26.94	-13	-13.94	Vertical
2145.9	-53.15	2.88	27.60	-28.43	-13	-15.43	Vertical
2145.9	-52.66	2.88	27.60	-27.94	-13	-14.94	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408	-47.31	2.61	27.26	-22.66	-13	-9.66	Horizontal
1408	-52.60	2.61	27.26	-27.95	-13	-14.95	Vertical
2112	-55.98	2.87	27.58	-31.27	-13	-18.27	Vertical
2112	-56.75	2.87	27.58	-32.04	-13	-19.04	Horizontal
Test Results for Mid Channel 707.5MHz							
1415	-51.09	2.61	27.28	-26.42	-13	-13.42	Horizontal
1415	-48.00	2.61	27.28	-23.33	-13	-10.33	Vertical
2122.5	-52.52	2.87	27.59	-27.80	-13	-14.80	Vertical
2122.5	-49.21	2.87	27.59	-24.49	-13	-11.49	Horizontal
Test Results for High Channel 711MHz							
1422	-50.32	2.62	27.28	-25.66	-13	-12.66	Horizontal
1422	-49.31	2.62	27.28	-24.65	-13	-11.65	Vertical
2133	-49.59	2.87	27.60	-24.86	-13	-11.86	Vertical
2133	-50.26	2.87	27.60	-25.53	-13	-12.53	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 41

QPSK EIRP POWER FOR LTE BAND 41 (5MHZ BANDWIDTH)

Test Results for Low Channel 2542.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit(dBm)	Margin(dBm)	Polarity
5145.0	-59.01	5.23	35.81	-28.43	-25	-3.43	Horizontal
5145.0	-59.80	5.23	35.81	-29.22	-25	-4.22	Vertical
7717.5	-59.73	5.67	36.85	-28.55	-25	-3.55	Vertical
7717.5	-62.42	5.67	36.85	-31.24	-25	-6.24	Horizontal
435.3	-43.43	1.38	15.98	-28.83	-25	-3.83	Vertical
465.8	-42.65	1.62	15.66	-28.61	-25	-3.61	Horizontal
Test Results for Mid Channel 2595MHz							
5190.0	-62.81	5.23	35.82	-32.22	-25	-7.22	Horizontal
5190.0	-59.56	5.23	35.82	-28.97	-25	-3.97	Vertical
7785.0	-60.26	5.67	36.85	-29.08	-25	-4.08	Vertical
7785.0	-61.15	5.67	36.85	-29.97	-25	-4.97	Horizontal
510.4	-46.51	1.62	16.17	-31.96	-25	-6.96	Vertical
562.9	-43.97	1.74	17.63	-28.08	-25	-3.08	Horizontal
Test Results for High Channel 2647.5MHz							
5235.0	-59.47	5.24	35.83	-28.88	-25	-3.88	Horizontal
5235.0	-60.22	5.24	35.83	-29.63	-25	-4.63	Vertical
7852.5	-61.16	5.68	36.87	-29.97	-25	-4.97	Vertical
7852.5	-59.60	5.68	36.87	-28.41	-25	-3.41	Horizontal
197.6	-42.51	1.55	15.84	-28.22	-25	-3.22	Vertical
353.1	-46.13	1.51	17.06	-30.58	-25	-5.58	Horizontal

QPSK EIRP POWER FOR LTE BAND 41 (20MHZ BANDWIDTH)

Test Results for Low Channel 2550MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit(dBm)	Margin(dBm)	Polarity
5160.0	-61.36	5.23	35.82	-30.77	-25	-5.77	Horizontal
5160.0	-58.87	5.23	35.82	-28.28	-25	-3.28	Vertical
7740.0	-61.50	5.67	36.86	-30.31	-25	-5.31	Vertical
7740.0	-60.62	5.67	36.86	-29.43	-25	-4.43	Horizontal
128.9	-43.66	1.43	15.51	-29.58	-25	-4.58	Vertical
344.8	-44.05	1.40	16.97	-28.48	-25	-3.48	Horizontal
Test Results for Mid Channel 2595MHz							
5190.0	-59.57	5.23	35.82	-28.98	-25	-3.98	Horizontal
5190.0	-59.47	5.23	35.82	-28.88	-25	-3.88	Vertical
7785.0	-59.50	5.67	36.85	-28.32	-25	-3.32	Vertical
7785.0	-60.21	5.67	36.85	-29.03	-25	-4.03	Horizontal
100.8	-48.38	1.77	16.72	-33.43	-25	-8.43	Vertical
263.5	-47.48	1.31	16.99	-31.80	-25	-6.80	Horizontal
Test Results for High Channel 2640MHz							
5220.0	-62.41	5.24	35.83	-31.82	-25	-6.82	Horizontal
5220.0	-61.89	5.24	35.83	-31.30	-25	-6.30	Vertical
7830.0	-60.06	5.70	36.88	-28.88	-25	-3.88	Vertical
7830.0	-60.29	5.70	36.88	-29.11	-25	-4.11	Horizontal
349.9	-47.05	1.70	15.73	-33.02	-25	-8.02	Vertical
110.3	-44.57	1.75	17.33	-28.99	-25	-3.99	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}\text{C}$

Voltage = low voltage, DC 3.27V, Normal, DC 3.8V and High voltage, DC 4.43V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 2/4/5/7/12/41

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1880	7.2	0.003830	2.5
3.80	1880	11.1	0.005904	2.5
4.37	1880	14.2	0.007553	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	14.8	0.007872	2.5
Extreme (50C)	1880	13.8	0.007340	2.5
Extreme (40C)	1880	12.2	0.006489	2.5
Extreme (30C)	1880	7.7	0.004096	2.5
Extreme (10C)	1880	3.8	0.002021	2.5
Extreme (0C)	1880	12.6	0.006702	2.5
Extreme (-10C)	1880	5.7	0.003032	2.5
Extreme (-20C)	1880	10.9	0.005798	2.5
Extreme (-30C)	1880	12.6	0.006702	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1880	12.5	0.006649	2.5
3.80	1880	9.4	0.005000	2.5
4.37	1880	14.5	0.007713	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	13.7	0.007287	2.5
Extreme (50C)	1880	13.2	0.007021	2.5
Extreme (40C)	1880	10.6	0.005638	2.5
Extreme (30C)	1880	11.1	0.005904	2.5
Extreme (10C)	1880	14.1	0.007500	2.5
Extreme (0C)	1880	11.6	0.006170	2.5
Extreme (-10C)	1880	13.2	0.007021	2.5
Extreme (-20C)	1880	13.5	0.007181	2.5
Extreme (-30C)	1880	11.8	0.006277	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1732.5	6.7	0.003867	2.5
3.80	1732.5	10.9	0.006291	2.5
4.37	1732.5	15.1	0.008716	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	12.2	0.007042	2.5
Extreme (50C)	1732.5	15.2	0.008773	2.5
Extreme (40C)	1732.5	12.6	0.007273	2.5
Extreme (30C)	1732.5	13.2	0.007619	2.5
Extreme (10C)	1732.5	15.3	0.008831	2.5
Extreme (0C)	1732.5	13.8	0.007965	2.5
Extreme (-10C)	1732.5	14.2	0.008196	2.5
Extreme (-20C)	1732.5	13.2	0.007619	2.5
Extreme (-30C)	1732.5	11.6	0.006696	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1732.5	11.5	0.006638	2.5
3.80	1732.5	13.7	0.007908	2.5
4.37	1732.5	12.9	0.007446	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	13.8	0.007965	2.5
Extreme (50C)	1732.5	14.8	0.008543	2.5
Extreme (40C)	1732.5	6.5	0.003752	2.5
Extreme (30C)	1732.5	12.6	0.007273	2.5
Extreme (10C)	1732.5	15.7	0.009062	2.5
Extreme (0C)	1732.5	10.8	0.006234	2.5
Extreme (-10C)	1732.5	12.1	0.006984	2.5
Extreme (-20C)	1732.5	12.5	0.007215	2.5
Extreme (-30C)	1732.5	12.8	0.007388	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	836.5	15.5	0.018530	2.5
3.80	836.5	12.8	0.015302	2.5
4.37	836.5	5.2	0.006216	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	7.7	0.009205	2.5
Extreme (50C)	836.5	12.7	0.015182	2.5
Extreme (40C)	836.5	10.6	0.012672	2.5
Extreme (30C)	836.5	12.2	0.014585	2.5
Extreme (10C)	836.5	12.6	0.015063	2.5
Extreme (0C)	836.5	15.3	0.018290	2.5
Extreme (-10C)	836.5	14.8	0.017693	2.5
Extreme (-20C)	836.5	12.2	0.014585	2.5
Extreme (-30C)	836.5	10.3	0.012313	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	836.5	13.7	0.016378	2.5
3.80	836.5	14.6	0.017454	2.5
4.37	836.5	10.9	0.013030	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	14.8	0.017693	2.5
Extreme (50C)	836.5	15.4	0.018410	2.5
Extreme (40C)	836.5	8.8	0.010520	2.5
Extreme (30C)	836.5	11.9	0.014226	2.5
Extreme (10C)	836.5	14.7	0.017573	2.5
Extreme (0C)	836.5	13.3	0.015900	2.5
Extreme (-10C)	836.5	15.6	0.018649	2.5
Extreme (-20C)	836.5	10.3	0.012313	2.5
Extreme (-30C)	836.5	14.7	0.017573	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	2535	6.5	0.002564	2.5
3.80	2535	12.4	0.004892	2.5
4.37	2535	5.5	0.002170	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	15.2	0.005996	2.5
Extreme (50C)	2535	10.5	0.004142	2.5
Extreme (40C)	2535	13.6	0.005365	2.5
Extreme (30C)	2535	11.2	0.004418	2.5
Extreme (10C)	2535	10.7	0.004221	2.5
Extreme (0C)	2535	15.5	0.006114	2.5
Extreme (-10C)	2535	8.8	0.003471	2.5
Extreme (-20C)	2535	12.6	0.004970	2.5
Extreme (-30C)	2535	12.9	0.005089	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	2535	10.2	0.004024	2.5
3.80	2535	9.8	0.003866	2.5
4.37	2535	11.5	0.004536	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	13.3	0.005247	2.5
Extreme (50C)	2535	13.6	0.005365	2.5
Extreme (40C)	2535	14.2	0.005602	2.5
Extreme (30C)	2535	5.6	0.002209	2.5
Extreme (10C)	2535	11.6	0.004576	2.5
Extreme (0C)	2535	14.7	0.005799	2.5
Extreme (-10C)	2535	11.5	0.004536	2.5
Extreme (-20C)	2535	15.6	0.006154	2.5
Extreme (-30C)	2535	12.5	0.004931	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

Band 12 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	707.5	13.3	0.018799	2.5
3.80	707.5	11.8	0.016678	2.5
4.37	707.5	14.6	0.020636	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	10.1	0.014276	2.5
Extreme (50C)	707.5	7.3	0.010318	2.5
Extreme (40C)	707.5	13.4	0.018940	2.5
Extreme (30C)	707.5	8.5	0.012014	2.5
Extreme (10C)	707.5	11.8	0.016678	2.5
Extreme (0C)	707.5	13.9	0.019647	2.5
Extreme (-10C)	707.5	13.1	0.018516	2.5
Extreme (-20C)	707.5	14.6	0.020636	2.5
Extreme (-30C)	707.5	11.8	0.016678	2.5

Band 12 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	707.5	13.6	0.019223	2.5
3.80	707.5	15.9	0.022473	2.5
4.37	707.5	11.5	0.016254	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	11.1	0.015689	2.5
Extreme (50C)	707.5	11.6	0.016396	2.5
Extreme (40C)	707.5	14.5	0.020495	2.5
Extreme (30C)	707.5	11.6	0.016396	2.5
Extreme (10C)	707.5	13.4	0.018940	2.5
Extreme (0C)	707.5	13.8	0.019505	2.5
Extreme (-10C)	707.5	7.2	0.010177	2.5
Extreme (-20C)	707.5	5.5	0.007774	2.5
Extreme (-30C)	707.5	7.4	0.010459	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 41

Band 41 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.27	2595	13.7	0.005283	2.5
3.85	2595	8.2	0.003162	2.5
4.43	2595	8.6	0.003317	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2595	12.6	0.004859	2.5
Extreme (50C)	2595	14.4	0.005553	2.5
Extreme (40C)	2595	13.7	0.005283	2.5
Extreme (30C)	2595	12.6	0.004859	2.5
Extreme (10C)	2595	15.3	0.005901	2.5
Extreme (0C)	2595	3.4	0.001311	2.5
Extreme (-10C)	2595	11.9	0.004589	2.5
Extreme (-20C)	2595	11.7	0.004512	2.5
Extreme (-30C)	2595	6.2	0.002391	2.5

Band 41 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	2595	7.3	0.002815	2.5
3.80	2595	9.4	0.003625	2.5
4.37	2595	10.5	0.004049	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2595	11.2	0.004319	2.5
Extreme (50C)	2595	14.8	0.005708	2.5
Extreme (40C)	2595	10.6	0.004088	2.5
Extreme (30C)	2595	10.2	0.003934	2.5
Extreme (10C)	2595	6.6	0.002545	2.5
Extreme (0C)	2595	4.6	0.001774	2.5
Extreme (-10C)	2595	14.2	0.005476	2.5
Extreme (-20C)	2595	13.5	0.005206	2.5
Extreme (-30C)	2595	10.6	0.004088	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

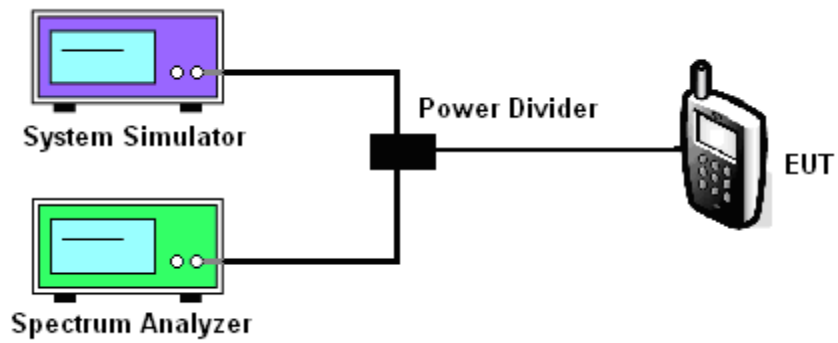

MODES TESTED

LTE Band 2/4/5/7/12/41

Test data reference attachment.

-----END OF REPORT-----