



Test Report

Report No. : MTi250611016-0105E1
Date of issue : 2025-09-01
Applicant : Shenzhen Allsight E-business Co.Ltd
Product : 25W 2-in-1 Magnetic Fast Wireless Charger
Model(s) : LC-MC213
FCC ID : 2BMO9-LCMC213

Shenzhen Microtest Co., Ltd.

TEST REPORT

Report No.: MTi250611016-0105E1

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	4
1.3	Environmental Conditions	7
1.4	Description of support units	7
1.5	Measurement uncertainty	7
2	Summary of Test Result	8
3	Test Facilities and accreditations	9
3.1	Test laboratory	9
4	List of test equipment	10
5	Evaluation Results (Evaluation)	11
5.1	Antenna requirement	11
6	Radio Spectrum Matter Test Results (RF)	12
6.1	Conducted Emission at AC power line	12
6.2	20dB Occupied Bandwidth	15
6.3	Emissions in frequency bands (below 30MHz)	21
6.4	Emissions in frequency bands (30MHz - 1GHz)	28
	Photographs of the test setup	32
	Photographs of the EUT	33

TEST REPORT

Report No.: MTi250611016-0105E1

Test Result Certification	
Applicant	Shenzhen Allsight E-business Co.Ltd
Applicant Address	Room 116, Kangli Information Valley Building, Longgang District, Shenzhen, China
Manufacturer	AuGroup (SHENZHEN) Cross-Border Business Co., Ltd.
Manufacturer Address	Room 106, Kangli Information Valley Building, No. 66 Pingji Avenue, Shanglilang Community, Nanwan Street, Longgang District, Shenzhen
Factory	Shenzhen Xiaoju Technology Co.,Ltd
Factory Address	Floor, C Building, Huamingcheng Industry Park, Matian Street, Guangming District, Shenzhen City, Guangdong Province, China
Product description	
Product name	25W 2-in-1 Magnetic Fast Wireless Charger
Trademark	AUKEY
Model name	LC-MC213
Series Model(s)	N/A
Standards	47 CFR Part 15C
Test Method	ANSI C63.10-2020
Testing Information	
Date of test	2025-06-27 to 2025-08-31
Test result	Pass
Prepared by:	Maleah Deng
Reviewed by:	David Lee
Approved by:	Lewis Lian

TEST REPORT

Report No.: MTi250611016-0105E1

1 General Description

1.1 Description of the EUT

Product name:	25W 2-in-1 Magnetic Fast Wireless Charger
Model name:	LC-MC213
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: DC 9V3A, DC 12V3A, DC 15V3A, DC 20V3.35A, 67W Max Wireless Output1/2: 5W,7.5W,10W,15W,25W Max
Accessories:	Adaptor: Model: PA-BG67 Input: AC 100-240V, 50/60Hz, 1.5A Max USB-C (PD 3.0) Output: DC 5V/3A(15.0W), DC 9V/3A(27.0W), DC 12V/3A(36.00W), DC 15V/3A(45.0W), DC 20V/3.35A(67.0W) PPS Output: DC 3.3-11V/5A, 45.0W Max Total Output: 67.0W Max Cable: USB-C to USB-C cable 150cm*1
Hardware version:	V1.3
Software version:	SC96019_2025Jun15_0XA0FC_0615_AUKEY
Test sample(s) number:	MTi250611016-01-R001

RF specification

Operating frequency range:	Coil 1(Phone 1): 115-205kHz(5W, 7.5W, 10W), 360kHz(15W, 25W) Coil 2(Phone 2): 115-205kHz(5W, 7.5W, 10W), 360kHz(15W, 25W)
Modulation type:	ASK
Antenna(s) type:	Coil Antenna

1.2 Description of test modes

No.	Emission test modes
Mode1	Powered by USB-C adapter+Wireless Output(Phone1(5W)+Phone2(5W))
Mode2	Powered by USB-C adapter+Wireless Output(Phone1(7.5W)+Phone2(7.5W))
Mode3	Powered by USB-C adapter+Wireless Output(Phone1(10W)+Phone2(10W))
Mode4	Powered by USB-C adapter+Wireless Output(Phone1(15W)+Phone2(15W))
Mode5	Powered by USB-C adapter+Wireless Output(Phone1(25W)+Phone2(25W))
Mode6	Powered by USB-C adapter+Wireless Output(Phone1(5W)+Phone2(7.5W))
Mode7	Powered by USB-C adapter+Wireless Output(Phone1(5W)+Phone2(10W))
Mode8	Powered by USB-C adapter+Wireless Output(Phone1(5W)+Phone2(15W))
Mode9	Powered by USB-C adapter+Wireless Output(Phone1(5W)+Phone2(25W))
Mode10	Powered by USB-C adapter+Wireless Output(Phone1(7.5W)+Phone2(5W))
Mode11	Powered by USB-C adapter+Wireless Output(Phone1(7.5W)+Phone2(10W))

TEST REPORT

Report No.: MTi250611016-0105E1

Mode12	Powered by USB-C adapter+Wireless Output(Phone1(7.5W)+Phone2(15W))
Mode13	Powered by USB-C adapter+Wireless Output(Phone1(7.5W)+Phone2(25W))
Mode14	Powered by USB-C adapter+Wireless Output(Phone1(10W)+Phone2(5W))
Mode15	Powered by USB-C adapter+Wireless Output(Phone1(10W)+Phone2(7.5W))
Mode16	Powered by USB-C adapter+Wireless Output(Phone1(10W)+Phone2(15W))
Mode17	Powered by USB-C adapter+Wireless Output(Phone1(10W)+Phone2(25W))
Mode18	Powered by USB-C adapter+Wireless Output(Phone1(15W)+Phone2(5W))
Mode19	Powered by USB-C adapter+Wireless Output(Phone1(15W)+Phone2(7.5W))
Mode20	Powered by USB-C adapter+Wireless Output(Phone1(15W)+Phone2(10W))
Mode21	Powered by USB-C adapter+Wireless Output(Phone1(15W)+Phone2(25W))
Mode22	Powered by USB-C adapter+Wireless Output(Phone1(25W)+Phone2(5W))
Mode23	Powered by USB-C adapter+Wireless Output(Phone1(25W)+Phone2(7.5W))
Mode24	Powered by USB-C adapter+Wireless Output(Phone1(25W)+Phone2(10W))
Mode25	Powered by USB-C adapter+Wireless Output(Phone1(25W)+Phone2(15W))
Mode26	Powered by USB-C adapter+Wireless Output(Phone 1(5W))
Mode27	Powered by USB-C adapter+Wireless Output(Phone1(7.5W))
Mode28	Powered by USB-C adapter+Wireless Output(Phone1(10W))
Mode29	Powered by USB-C adapter+Wireless Output(Phone1(15W))
Mode30	Powered by USB-C adapter+Wireless Output(Phone1(25W))
Mode31	Powered by USB-C adapter+Wireless Output(Phone 2(5W))
Mode32	Powered by USB-C adapter+Wireless Output(Phone 2(7.5W))
Mode33	Powered by USB-C adapter+Wireless Output(Phone 2(10W))
Mode34	Powered by USB-C adapter+Wireless Output(Phone 2(15W))
Mode35	Powered by USB-C adapter+Wireless Output(Phone 2(25W))
Mode36	Powered by USB-C cable+Wireless Output(Phone1(5W)+Phone2(5W))
Mode37	Powered by USB-C cable+Wireless Output(Phone1(7.5W)+Phone2(7.5W))
Mode38	Powered by USB-C cable+Wireless Output(Phone1(10W)+Phone2(10W))
Mode39	Powered by USB-C cable+Wireless Output(Phone1(15W)+Phone2(15W))
Mode40	Powered by USB-C cable+Wireless Output(Phone1(25W)+Phone2(25W))
Mode41	Powered by USB-C cable+Wireless Output(Phone1(5W)+Phone2(7.5W))
Mode42	Powered by USB-C cable+Wireless Output(Phone1(5W)+Phone2(10W))
Mode43	Powered by USB-C cable+Wireless Output(Phone1(5W)+Phone2(15W))
Mode44	Powered by USB-C cable+Wireless Output(Phone1(5W)+Phone2(25W))
Mode45	Powered by USB-C cable+Wireless Output(Phone1(7.5W)+Phone2(5W))
Mode46	Powered by USB-C cable+Wireless Output(Phone1(7.5W)+Phone2(10W))

TEST REPORT

Report No.: MTi250611016-0105E1

Mode47	Powered by USB-C cable+Wireless Output(Phone1(7.5W)+Phone2(15W))
Mode48	Powered by USB-C cable+Wireless Output(Phone1(7.5W)+Phone2(25W))
Mode49	Powered by USB-C cable+Wireless Output(Phone1(10W)+Phone2(5W))
Mode50	Powered by USB-C cable+Wireless Output(Phone1(10W)+Phone2(7.5W))
Mode51	Powered by USB-C cable+Wireless Output(Phone1(10W)+Phone2(15W))
Mode52	Powered by USB-C cable+Wireless Output(Phone1(10W)+Phone2(25W))
Mode53	Powered by USB-C cable+Wireless Output(Phone1(15W)+Phone2(5W))
Mode54	Powered by USB-C cable+Wireless Output(Phone1(15W)+Phone2(7.5W))
Mode55	Powered by USB-C cable+Wireless Output(Phone1(15W)+Phone2(10W))
Mode56	Powered by USB-C cable+Wireless Output(Phone1(15W)+Phone2(25W))
Mode57	Powered by USB-C cable+Wireless Output(Phone1(25W)+Phone2(5W))
Mode58	Powered by USB-C cable+Wireless Output(Phone1(25W)+Phone2(7.5W))
Mode59	Powered by USB-C cable+Wireless Output(Phone1(25W)+Phone2(10W))
Mode60	Powered by USB-C cable+Wireless Output(Phone1(25W)+Phone2(15W))
Mode61	Powered by USB-C cable+Wireless Output(Phone 1(5W))
Mode62	Powered by USB-C cable+Wireless Output(Phone1(7.5W))
Mode63	Powered by USB-C cable+Wireless Output(Phone1(10W))
Mode64	Powered by USB-C cable+Wireless Output(Phone1(15W))
Mode65	Powered by USB-C cable+Wireless Output(Phone1(25W))
Mode66	Powered by USB-C cable+Wireless Output(Phone 2(5W))
Mode67	Powered by USB-C cable+Wireless Output(Phone 2(7.5W))
Mode68	Powered by USB-C cable+Wireless Output(Phone 2(10W))
Mode69	Powered by USB-C cable+Wireless Output(Phone 2(15W))
Mode70	Powered by USB-C cable+Wireless Output(Phone 2(25W))
Mode71	Powered by USB-C adapter+Stand by
Mode72	Powered by USB-C cable+Stand by

TEST REPORT

Report No.: MTi250611016-0105E1

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
wireless charging load	YBZ1.1	/	YBZ
wireless charging load	YBZ1.1	/	YBZ
wireless charging load	YBZ3.0(MPP15W&25W)	/	YBZ
wireless charging load	YBZ3.0(MPP15W&25W)	/	YBZ
HUAWEI QUICK CHARGE(65W)	HW-200200ZP1	JN67LSN7N03451	HUAWEI

Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTi250611016-0105E1

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15C	47 CFR Part 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15C	47 CFR Part 15.207(a)	Pass
3	20dB Occupied Bandwidth	47 CFR Part 15C	47 CFR Part 15.215(c)	Pass
4	Emissions in frequency bands (below 30MHz)	47 CFR Part 15C	47 CFR Part 15.209	Pass
5	Emissions in frequency bands (30MHz - 1GHz)	47 CFR Part 15C	47 CFR Part 15.209	Pass

TEST REPORT

Report No.: MTi250611016-0105E1

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

TEST REPORT

Report No.: MTi250611016-0105E1

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2025-03-14	2026-03-13
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2025-03-18	2026-03-17
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2025-03-18	2026-03-17
20dB Occupied Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2025-03-18	2026-03-17
2	ESG Series Analog Signal Generator	Agilent	E4421B	GB400512	2025-03-40	2026-03-13
3	PXA Signal Analyzer	Agilent	N9030A	MY513502	2025-03-96	2026-03-13
4	Synthesized Sweeper	Agilent	83752A	3610A019	2025-03-57	2026-03-13
5	MXA Signal Analyzer	Agilent	N9020A	MY501434	2025-03-83	2026-03-13
6	RF Control Unit	Tonscend	JS0806-1	19D80601	2025-03-52	2026-03-17
7	Band Reject Filter Group	Tonscend	JS0806-F	19D80601	2025-03-60	2026-03-13
8	ESG Vector Signal Generator	Agilent	N5182A	MY501437	2025-03-62	2026-03-13
9	DC Power Supply	Agilent	E3632A	MY400276	2025-03-95	2026-03-17
Emissions in frequency bands (below 30MHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03-14	2026-03-13
2	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2026-03-22
3	Amplifier	Hewlett-Packard	8447F	3113A0618	2025-03-4	2026-03-17
Emissions in frequency bands (30MHz - 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03-14	2026-03-13
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1338	2025-05-23	2027-05-22
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2026-03-22
4	Amplifier	Hewlett-Packard	8447F	3113A0618	2025-03-4	2026-03-17

TEST REPORT

Report No.: MTi250611016-0105E1

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached.
The EUT complies with the requirement of FCC PART 15.203.

TEST REPORT

Report No.: MTi250611016-0105E1

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)		Conducted limit (dB μ V)
			Quasi-peak Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

*Decreases with the logarithm of the frequency.

Test Method: ANSI C63.10-2020 section 6.2

Procedure: Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices

6.1.1 E.U.T. Operation:


Operating Environment:

Temperature: 26 °C Humidity: 41 % Atmospheric Pressure: 100 kPa

Pre test mode: Mode1-72

Final test mode: All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report

6.1.2 Test Setup Diagram:

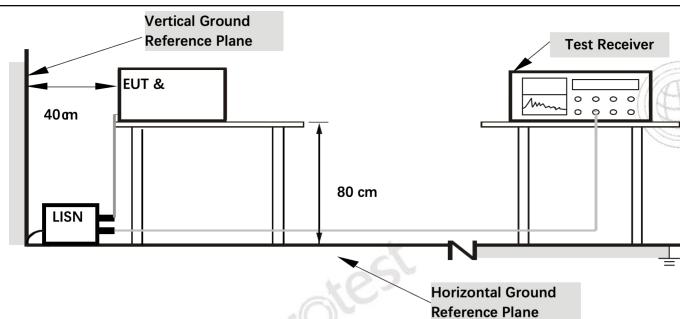


TEST REPORT

Report No.: MTi250611016-0105E1

6.1.3 Test Data:

Mode1 / Line: Line

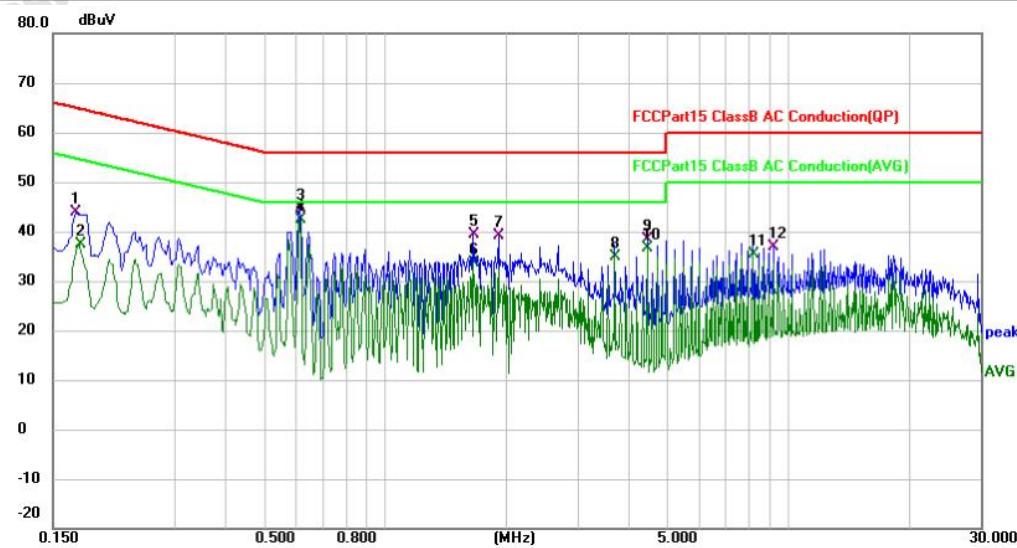


No. Mk.	Freq. MHz	Reading dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Detector	Over dB	Comment
1	0.1700	33.16	10.69	43.85	64.96	-21.11	QP	
2	0.1740	26.79	10.69	37.48	54.77	-17.29	AVG	
3	0.6140	34.05	10.68	44.73	56.00	-11.27	QP	
4 *	0.6140	31.81	10.68	42.49	46.00	-3.51	AVG	
5	1.6620	28.68	10.73	39.41	56.00	-16.59	QP	
6	1.6620	23.00	10.73	33.73	46.00	-12.27	AVG	
7	1.9180	28.32	10.74	39.06	56.00	-16.94	QP	
8	3.7060	24.12	10.84	34.96	46.00	-11.04	AVG	
9	4.4739	27.46	10.89	38.35	56.00	-17.65	QP	
10	4.4739	25.73	10.89	36.62	46.00	-9.38	AVG	
11	8.1779	24.12	11.18	35.30	50.00	-14.70	AVG	
12	9.1979	25.68	11.27	36.95	60.00	-23.05	QP	

TEST REPORT

Report No.: MTi250611016-0105E1

Mode1 / Line: Neutral

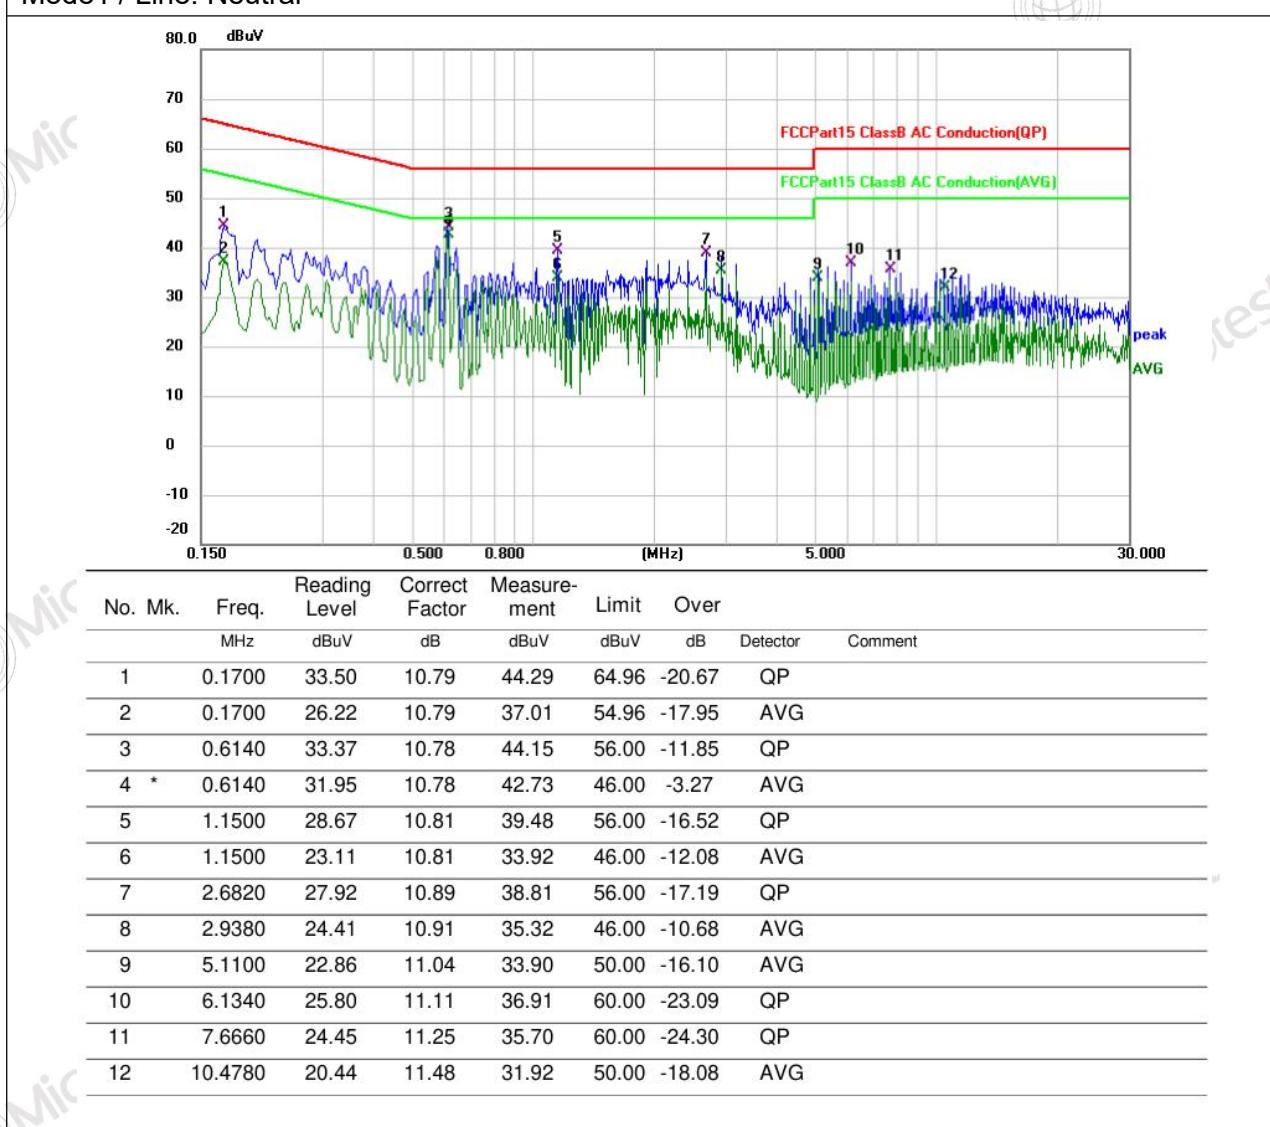

TEST REPORT

Report No.: MTi250611016-0105E1

6.2 20dB Occupied Bandwidth

Test Requirement:	47 CFR Part 15.215(c)
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	ANSI C63.10-2020, section 6.9.2
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.</p> <p>i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).</p> <p>j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.</p> <p>k) The occupied bandwidth shall be reported by providing plot(s) of the</p>

TEST REPORT

Report No.: MTi250611016-0105E1

	measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).
--	---

6.2.1 E.U.T. Operation:


Operating Environment:

Temperature: 28.7 °C Humidity: 44 % Atmospheric Pressure: 101 kPa

Pre test mode: Mode1-72

Final test mode: All of the listed pre-test mode were tested, only the data of the worst mode (Mode28, Mode30, Mode33, Mode35) is recorded in the report

6.2.2 Test Setup Diagram:

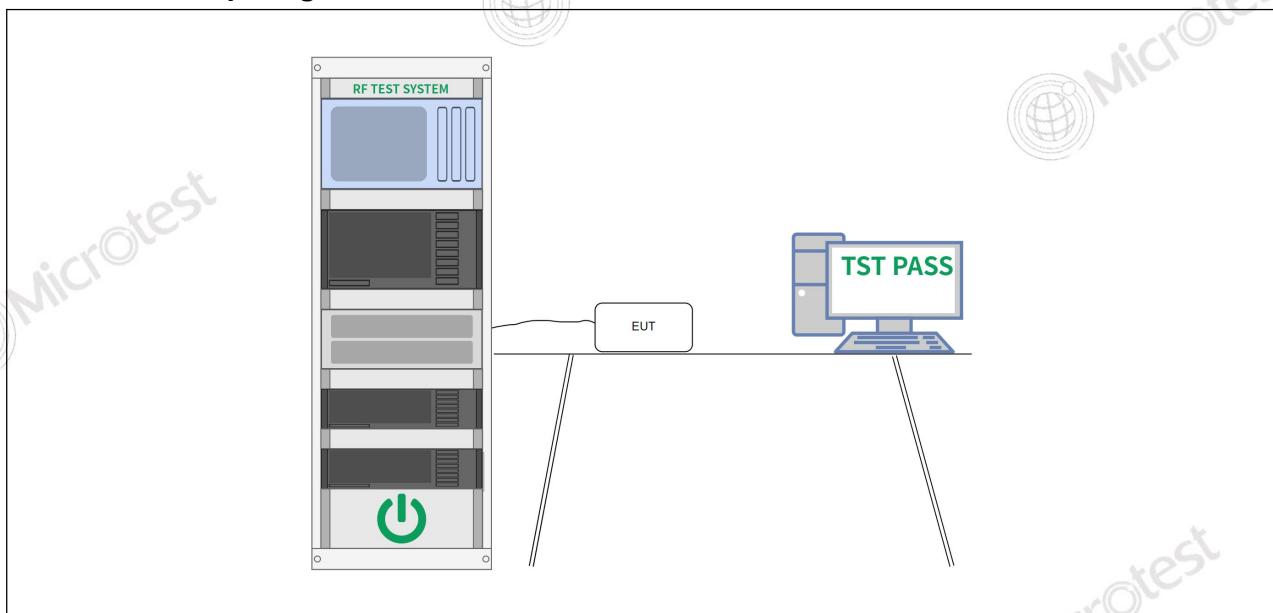

TEST REPORT


Report No.: MTi250611016-0105E1

6.2.3 Test Data:

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

Coil 1(10W)

Frequency kHz	20 dB occupied bandwidth Hz	99% occupied bandwidth Hz
127.77	749	635

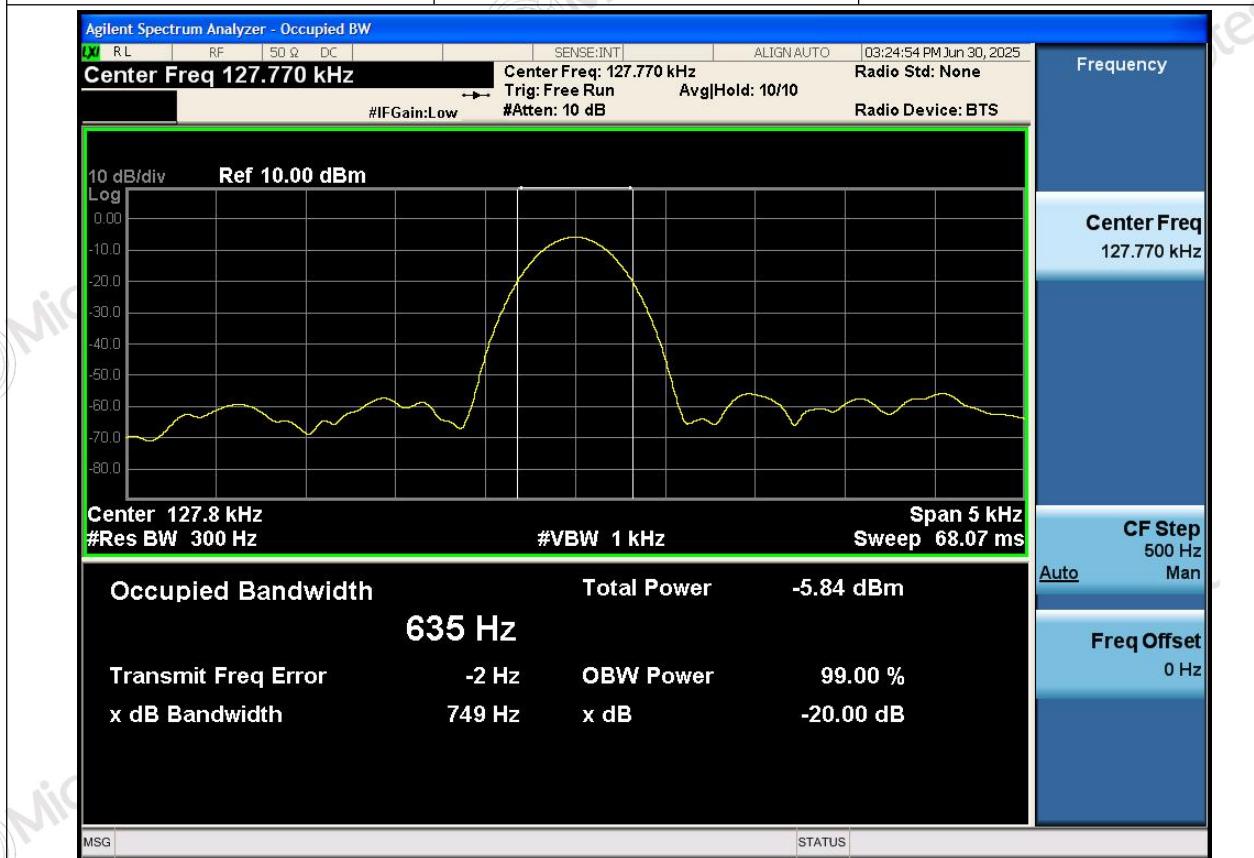


TEST REPORT

Report No.: MTi250611016-0105E1

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

Coil 1(25W)

Frequency kHz	20 dB occupied bandwidth Hz	99% occupied bandwidth Hz
360	774	684

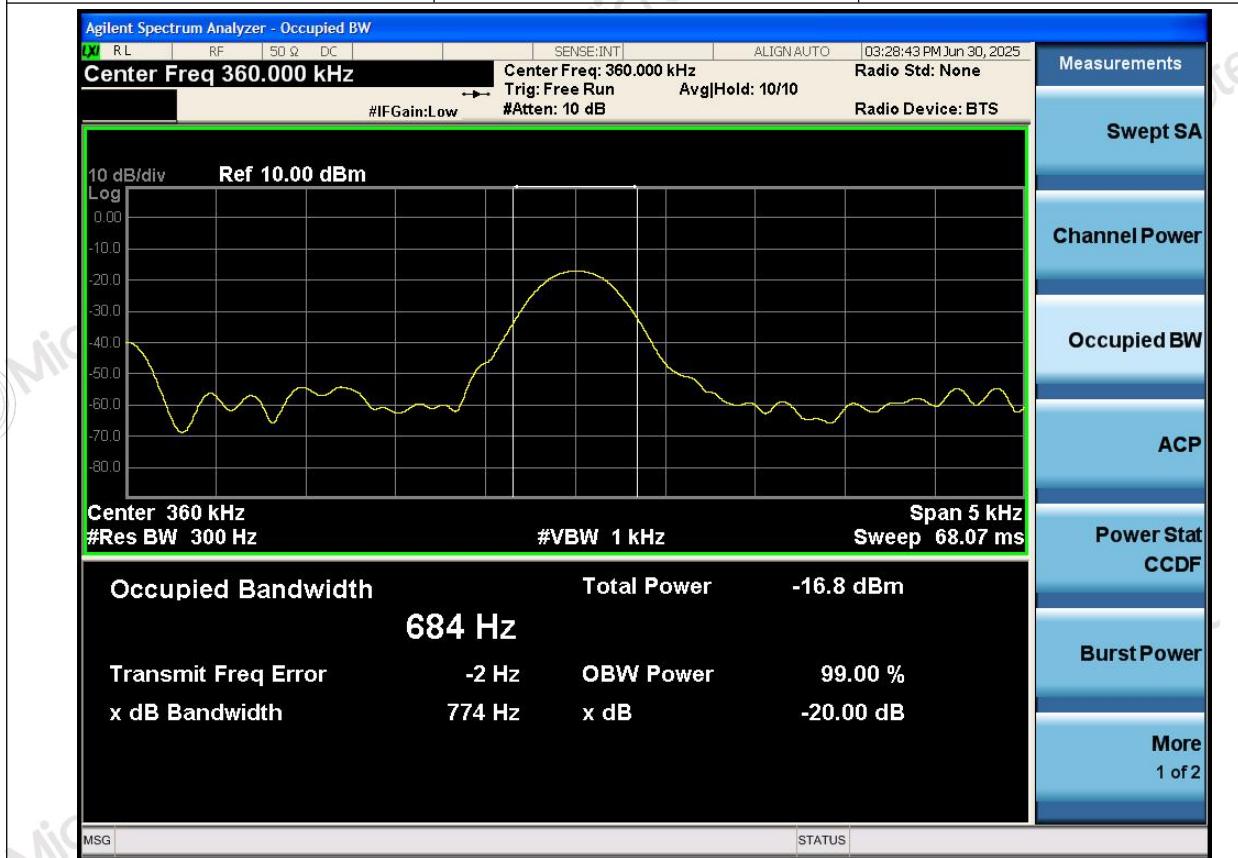


TEST REPORT

Report No.: MTi250611016-0105E1

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

Coil 2(10W)

Frequency kHz	20 dB occupied bandwidth Hz	99% occupied bandwidth Hz
127.765	749	636

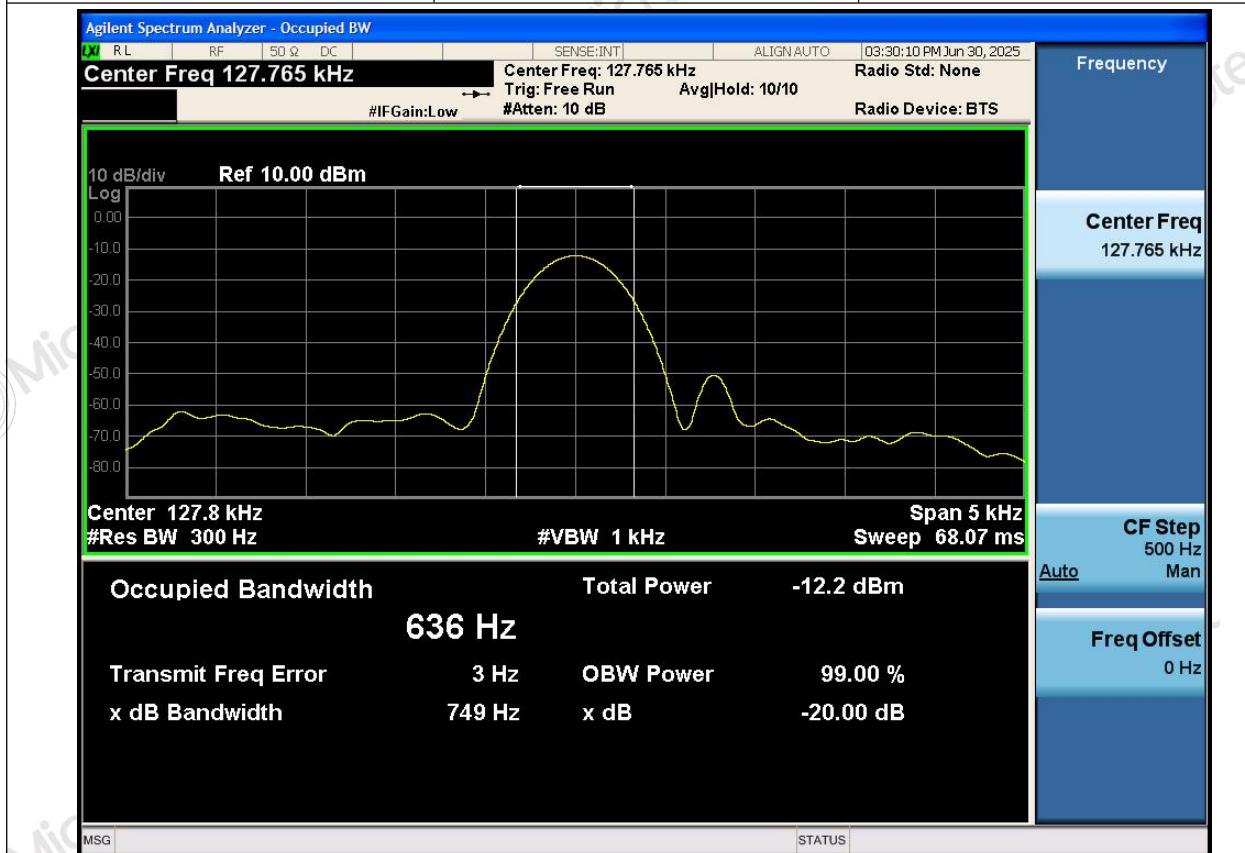


TEST REPORT

Report No.: MTi250611016-0105E1

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

Coil 2(25W)

Frequency kHz	20 dB occupied bandwidth Hz	99% occupied bandwidth Hz
360	776	673

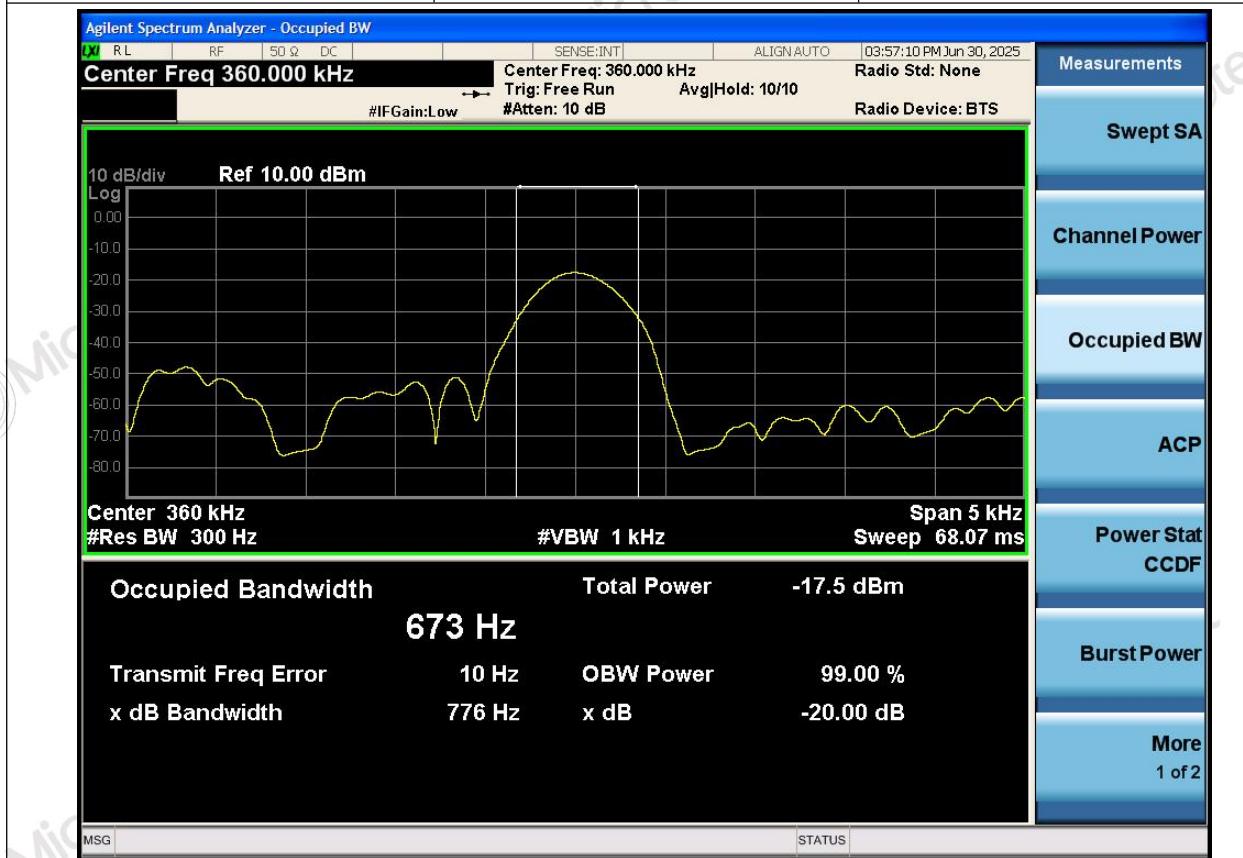

TEST REPORT

Report No.: MTi250611016-0105E1

6.3 Emissions in frequency bands (below 30MHz)

Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.


In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

| Test Method: | ANSI C63.10-2020 section 6.4 | | |
| Procedure: | ANSI C63.10-2020 section 6.4 | | |

6.3.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22 °C	Humidity:	43 %	Atmospheric Pressure:
Pre test mode:	Mode1-72			
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode3, Mode17, Mode24) is recorded in the report			

6.3.2 Test Setup Diagram:

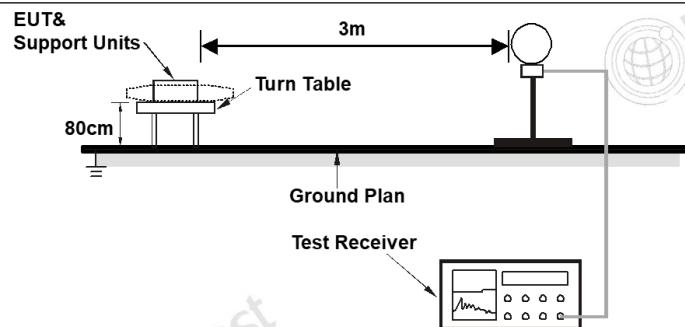


TEST REPORT

Report No.: MTi250611016-0105E1

6.3.3 Test Data:

Mode3 / EUT direction: X-axis

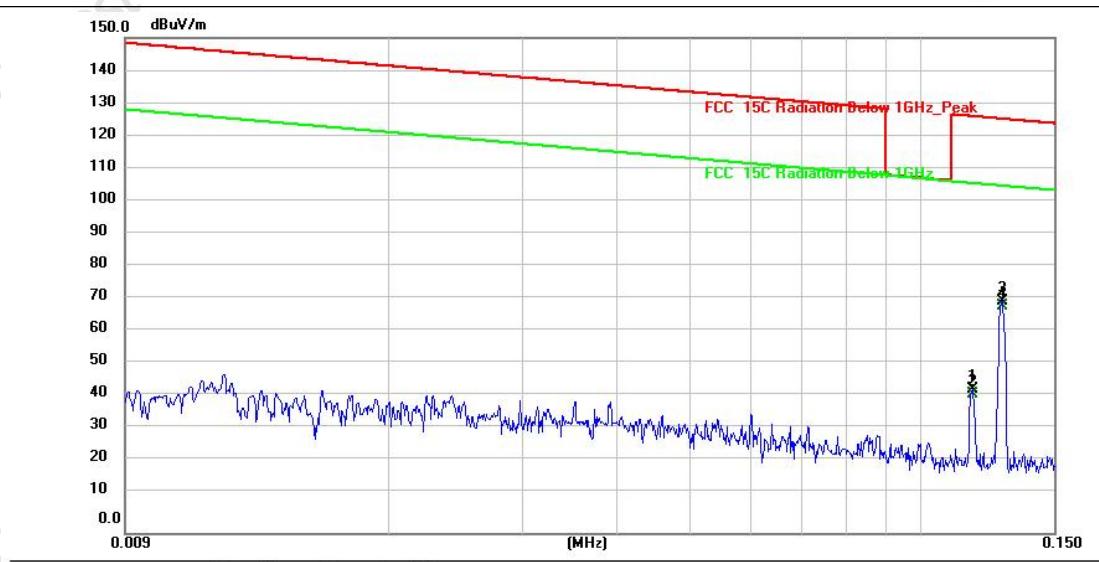


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.1171	23.09	20.50	43.59	126.26	-82.67	peak	
2		0.1171	21.80	20.50	42.30	106.26	-63.96	AVG	
3		0.1281	49.87	20.47	70.34	125.47	-55.13	peak	
4	*	0.1281	48.53	20.47	69.00	105.47	-36.47	AVG	

TEST REPORT

Report No.: MTi250611016-0105E1

Mode3 / EUT direction: X-axis

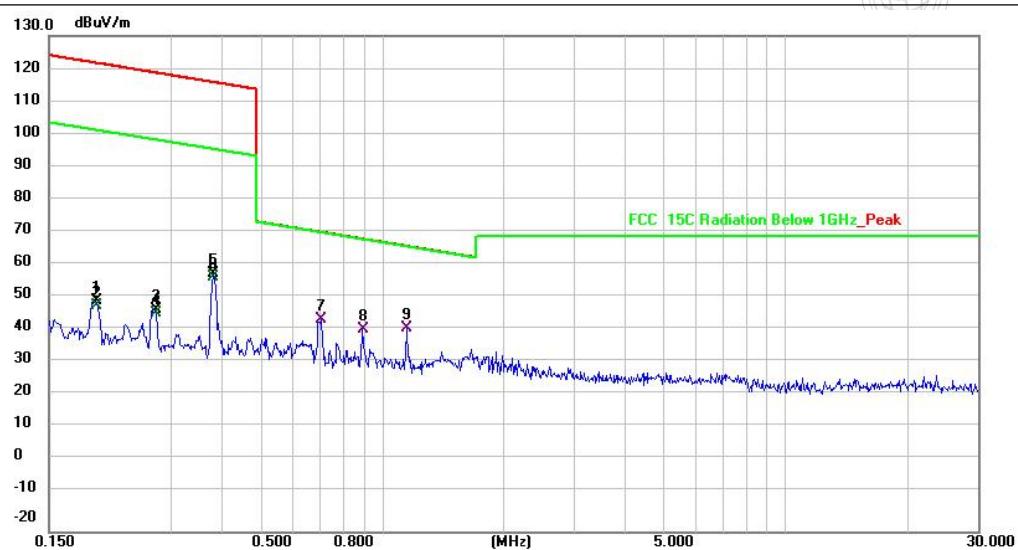


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	0.1955	29.05	20.71	20.71	49.76	121.80	-72.04	peak	
2	0.1955	27.59	20.71	20.71	48.30	101.80	-53.50	AVG	
3	0.2744	26.60	20.88	20.88	47.48	118.85	-71.37	peak	
4	0.2744	25.22	20.88	20.88	46.10	98.85	-52.75	AVG	
5	0.3811	36.92	21.13	21.13	58.05	115.99	-57.94	peak	
6	0.3811	35.77	21.13	21.13	56.90	95.99	-39.09	AVG	
7	0.7047	22.33	21.88	21.88	44.21	70.65	-26.44	QP	
8	0.8944	18.82	22.34	22.34	41.16	68.59	-27.43	QP	
9 *	1.1473	18.86	22.91	22.91	41.77	66.43	-24.66	QP	

TEST REPORT

Report No.: MTi250611016-0105E1

Mode17 / EUT direction: X-axis

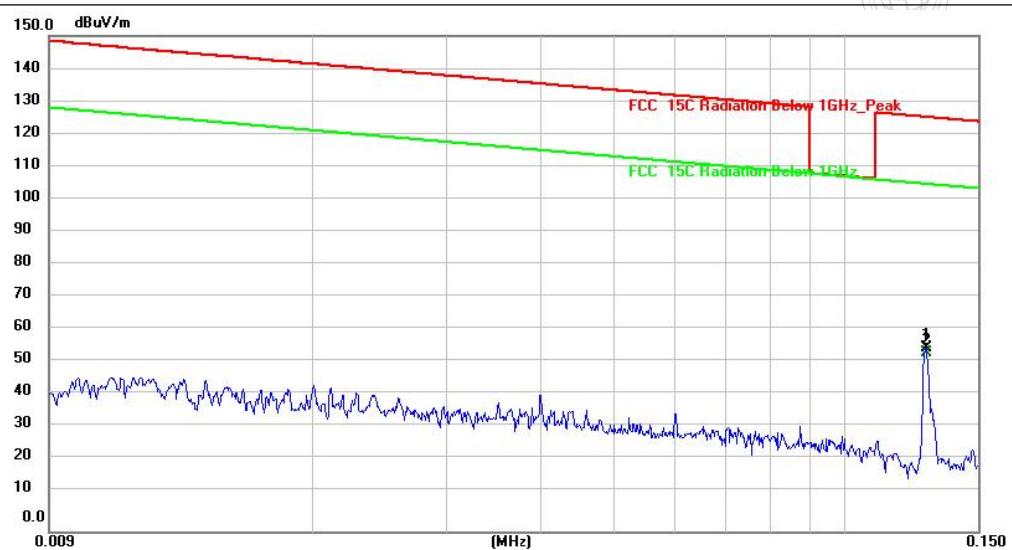


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		0.1281	35.15	20.47	55.62	125.47	-69.85	peak	
2	*	0.1281	33.83	20.47	54.30	105.47	-51.17	AVG	

TEST REPORT

Report No.: MTi250611016-0105E1

Mode17 / EUT direction: X-axis

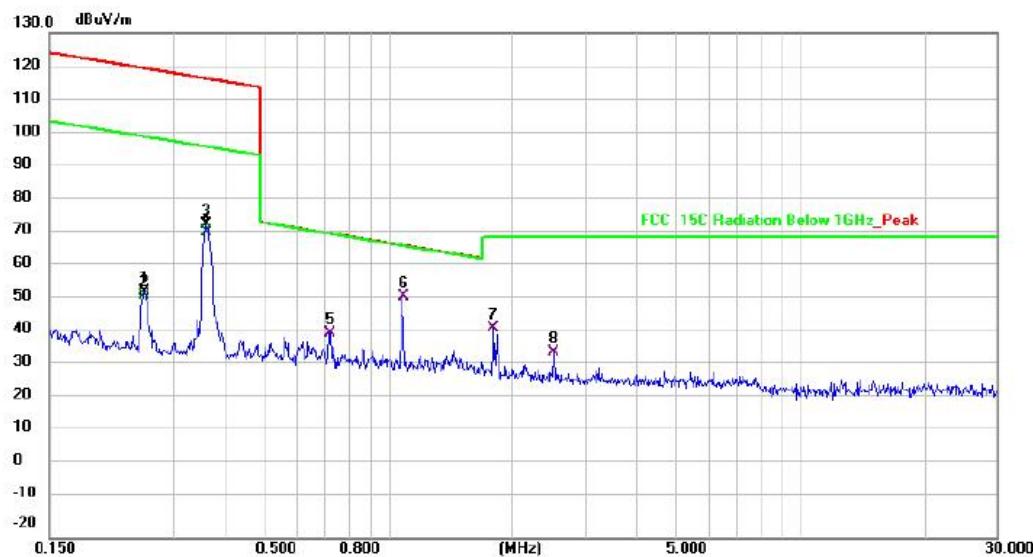


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	0.2548	32.42	20.83	53.25	119.49	-66.24	peak		
2	0.2548	31.27	20.83	52.10	99.49	-47.39	AVG		
3	0.3599	52.04	21.08	73.12	116.49	-43.37	peak		
4	0.3596	49.72	21.08	70.80	96.49	-25.69	AVG		
5	0.7198	19.16	21.93	41.09	70.47	-29.38	QP		
6 *	1.0824	28.97	22.76	51.73	66.94	-15.21	QP		
7	1.8000	18.16	24.24	42.40	69.50	-27.10	QP		
8	2.5266	9.75	25.75	35.50	69.50	-34.00	QP		

TEST REPORT

Report No.: MTi250611016-0105E1

Mode24 / EUT direction: X-axis

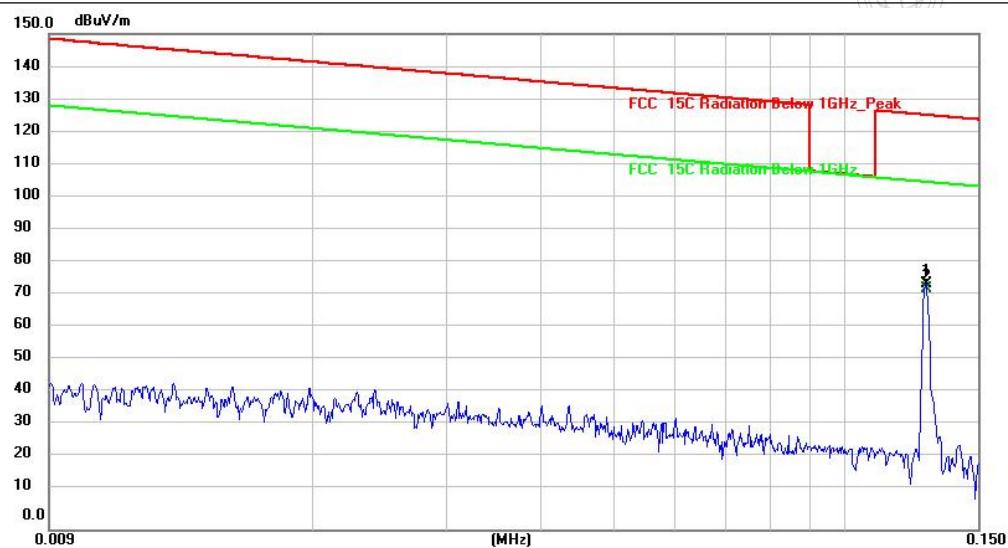


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		0.1281	53.85	20.47	74.32	125.47	-51.15	peak	
2	*	0.1281	52.63	20.47	73.10	105.47	-32.37	AVG	

TEST REPORT

Report No.: MTi250611016-0105E1

Mode24 / EUT direction: X-axis

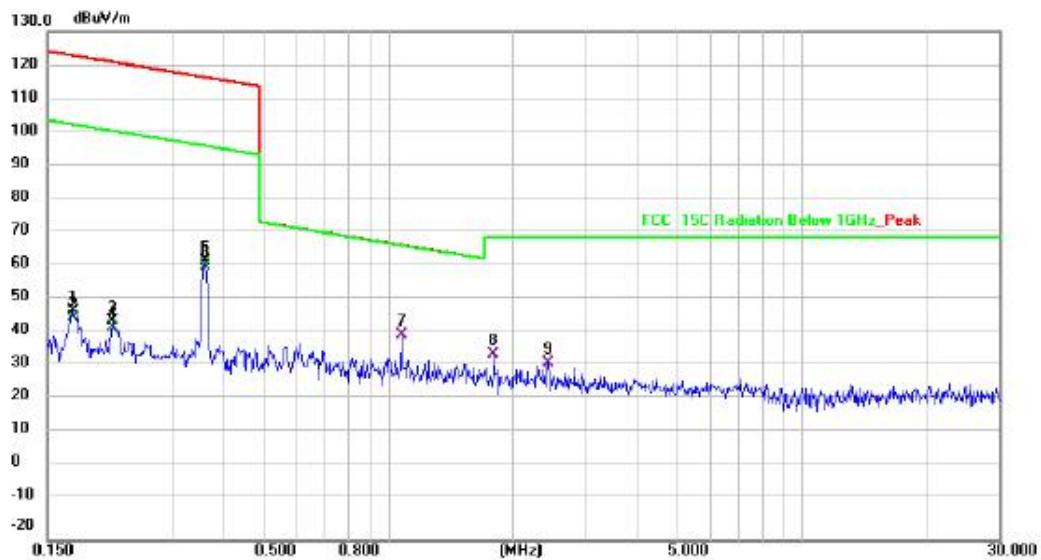

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.1722	27.19	20.65	47.84	122.90	-75.06	peak	
2		0.1722	25.25	20.65	45.90	102.90	-57.00	AVG	
3		0.2151	24.06	20.76	44.82	120.96	-76.14	peak	
4		0.2151	22.04	20.76	42.80	100.96	-58.16	AVG	
5		0.3599	41.05	21.08	62.13	116.49	-54.36	peak	
6		0.3599	39.72	21.08	60.80	96.49	-35.69	AVG	
7	*	1.0766	17.96	22.76	40.72	66.98	-26.26	QP	
8		1.8000	10.52	24.24	34.76	69.50	-34.74	QP	
9		2.4346	6.89	25.54	32.43	69.50	-37.07	QP	

TEST REPORT

Report No.: MTi250611016-0105E1

6.4 Emissions in frequency bands (30MHz - 1GHz)

Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

| Test Method: | ANSI C63.10-2020 section 6.5 | | |
| Procedure: | ANSI C63.10-2020 section 6.5 | | |

6.4.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.4 °C	Humidity:	45 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1-72				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.4.2 Test Setup Diagram:



TEST REPORT

Report No.: MTi250611016-0105E1

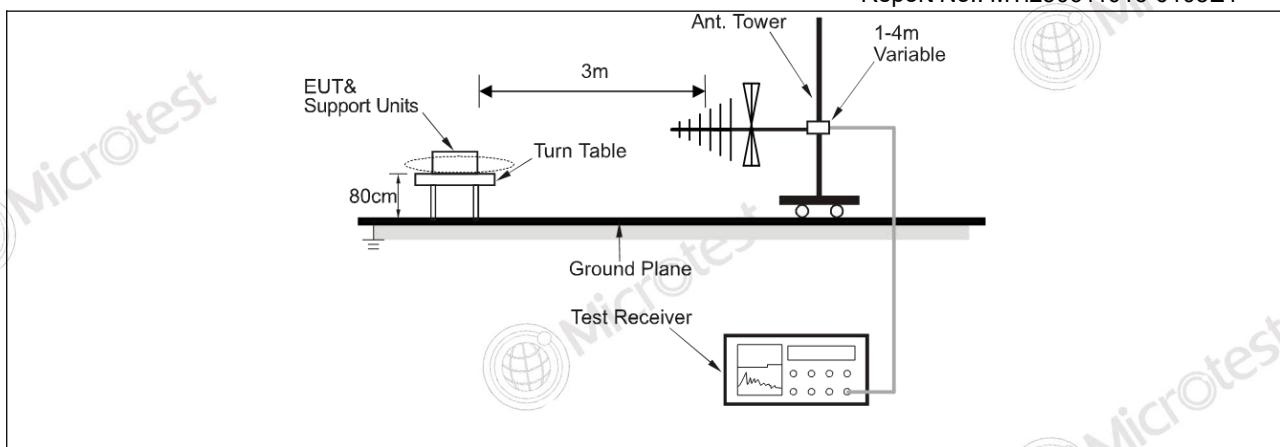


TEST REPORT

Report No.: MTi250611016-0105E1


6.4.3 Test Data:

Mode1 / Polarization: Horizontal

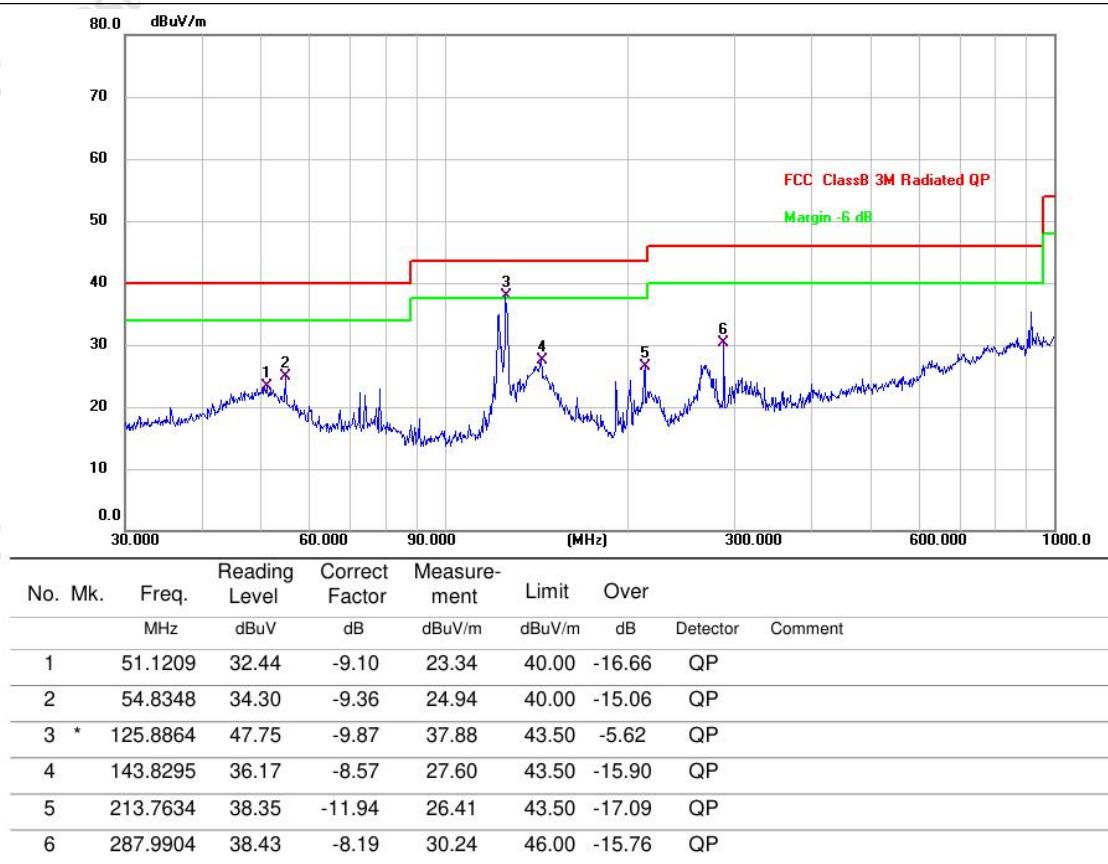

TEST REPORT

Report No.: MTi250611016-0105E1

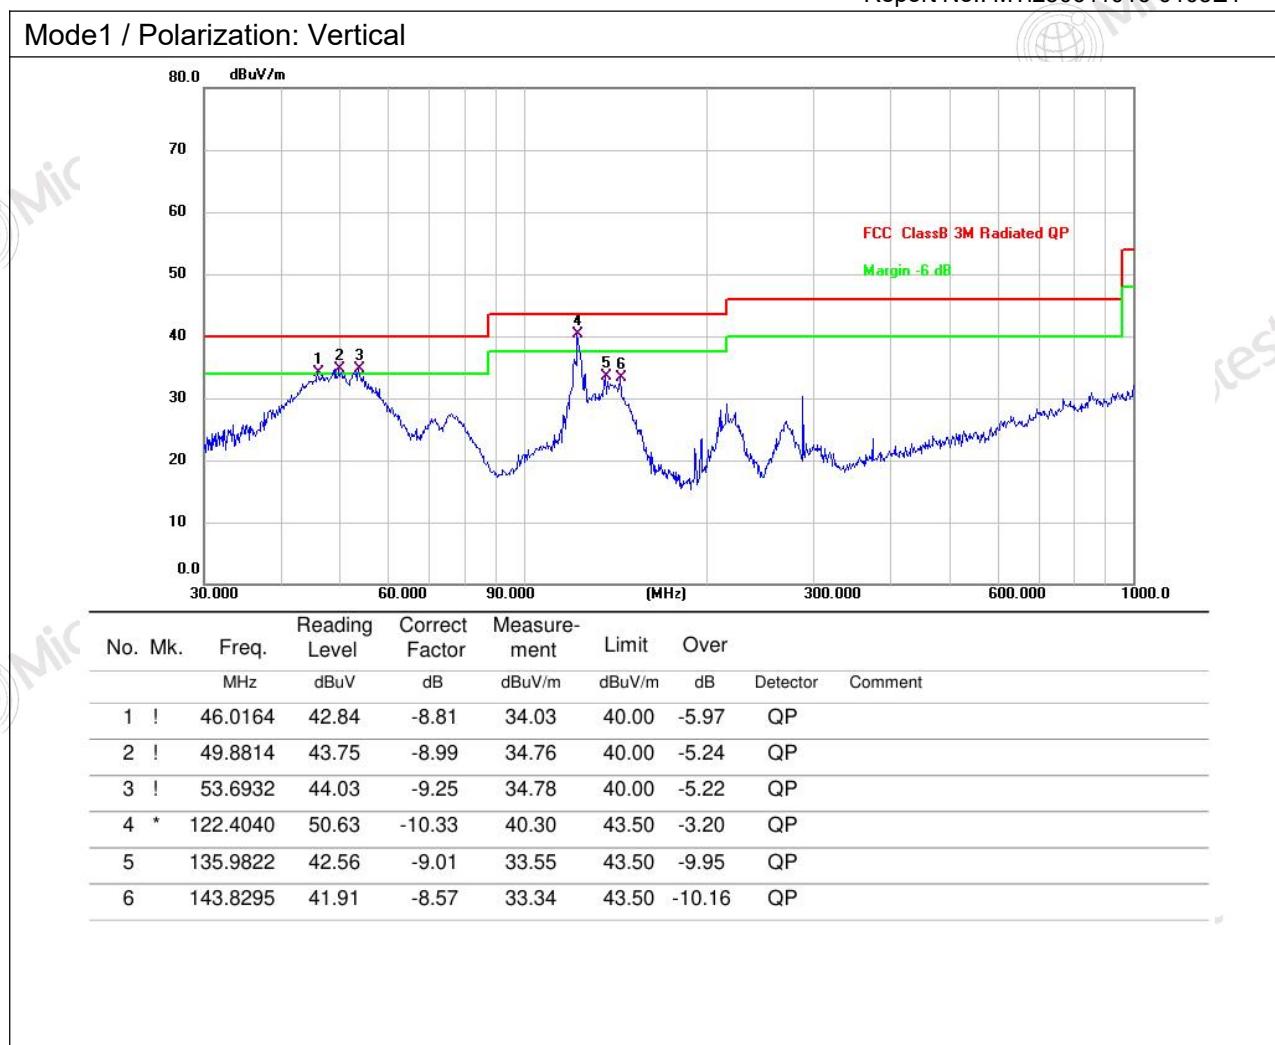Mode1 / Polarization: Vertical


TEST REPORT

Report No.: MTi250611016-0105E1

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Microtest





TEST REPORT

Report No.: MTi250611016-0105E1

Photographs of the EUT

Refer to Appendix - EUT Photos

TEST REPORT

Report No.: MTi250611016-0105E1

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****