

TEST REPORT

Report No.: **BCTC2412300920-1E**

Applicant: **WELLPOWER (shenzhen) electronics co.,LTD**

Product Name: **Portable Dual Connector Power Bank**

Test Model: **G50WP**

Tested Date: **2024-12-18 to 2024-12-25**

Issued Date: **2024-12-25**


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BMUE-G50WP

Product Name: Portable Dual Connector Power Bank
Trademark: N/A
Model/Type Reference: G50WP
Prepared For: WELLPOWER (shenzhen) electronics co.,LTD
Address: Room 609, Building 2, TOD Technology Center, Longgang District, Shenzhen, China
Manufacturer: Shenzhen Mgctech Co.,Ltd.
Address: 4F, Bldg B, No.48-12, Fuchengao Industrial Rd., Pinghu Street, Longgang District, Shenzhen, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2024-12-18
Sample Tested Date: 2024-12-18 to 2024-12-25
Issue Date: 2024-12-25
Report No.: BCTC2412300920-1E
Test Standards: FCC Part15.209
ANSI C63.10-2013
Test Results: PASS

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information.....	7
4.2 Support Equipment	7
4.3 Test Setup Configuration	8
4.4 Test Mode	8
5. Test Facility And Test Instrument Used.....	9
5.1 Test Facility.....	9
5.2 Test Instrument Used.....	9
6. Conducted Emissions.....	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit	11
6.3 Test procedure.....	11
6.4 EUT operating Conditions	11
6.5 Test Result.....	12
7. Radiated Emissions.....	14
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit	15
7.3 Test procedure.....	15
7.4 Test Result.....	16
8. Bandwidth Test.....	19
8.1 Test Procedure	19
8.2 Test Setup.....	19
8.3 Test Result.....	20
9. Antenna Requirements.....	21
9.1 Limit	21
9.2 Test Result.....	21
10. EUT Photographs	22
11. EUT Test Setup Photographs.....	23

(Note: N/A Means Not Applicable)


1. Version

Report No.	Issue Date	Description	Approved
BCTC2412300920-1E	2024-12-25	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	Radiated Emission	15.209	PASS
3	20dB Bandwidth	15.215	PASS
4	Antenna Requirement	15.203	PASS

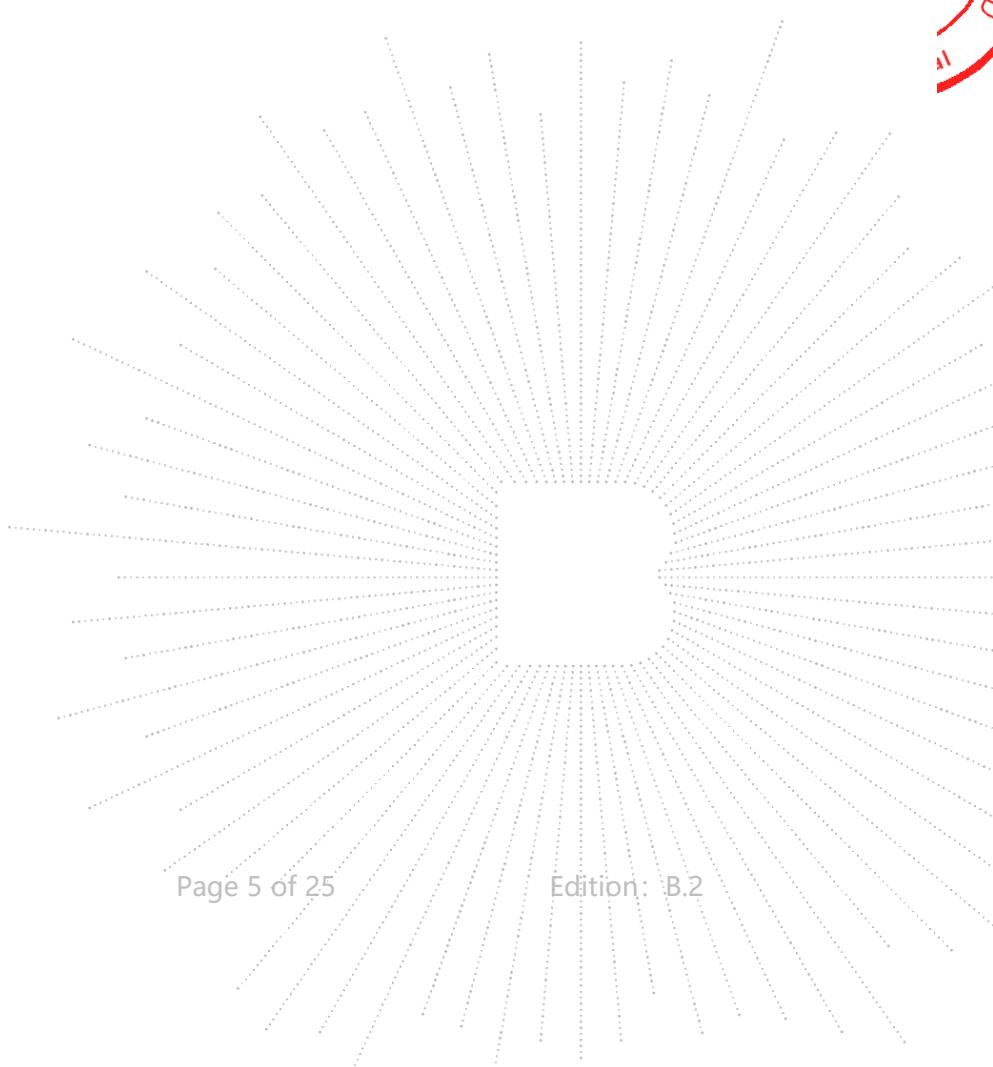

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	Conducted Emission (150kHz-30MHz)	$U=3.2\text{dB}$
3	humidity uncertainty	$U=5.3\%$
4	Temperature uncertainty	$U=0.59^\circ\text{C}$

 GO, LTD

4. Product Information And Test Setup

4.1 Product Information

Model/Type Reference: G50WP
 Model Differences: N/A
 Hardware Version: N/A
 Software Version: N/A
 Operation Frequency: 300kHz-350kHz
 Modulation: ASK
 Antenna installation: Coil antenna
 0 dBi
 Remark:
 Antenna Gain:
 The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.
 The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
 Apple Watch Charger: 2.5W Max
 USB-C port Input: DC 5V/2A or DC 9V/2A or DC 12V/1.5A
 Foldable USB-C Connector Input: DC 5V/2A or DC 9V/2A or DC 12V/1.5A
 Ratings: Foldable USB-C Connector Output: DC 5V/2.4A or DC 9V/2.22A or DC 12V/1.67A
 Foldable Lightning Connector Output: DC 5V/2.4A or DC 9V/2.22A or DC 12V/1.67A
 Battery: DC 3.6V

4.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Portable Dual Connector Power Bank	N/A	G50WP	N/A	EUT
E-2	N/A	N/A	N/A	N/A	Auxiliary


Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


4.3 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

AC Mode:

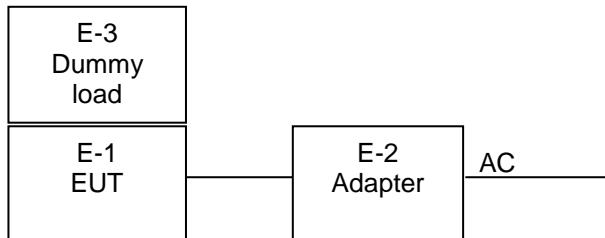

DC Mode:



4.4 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

AC Mode	Mode 1	Charging+2.5W (300-350kHz)
DC Mode	Mode 2	2.5W (300-350kHz)

Note: All test mode were tested and passed, only shows the worst case mode which were recorded in this report.

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used


Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 16, 2024	May 15, 2025

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer 20kHz - 26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer 9kHz - 40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

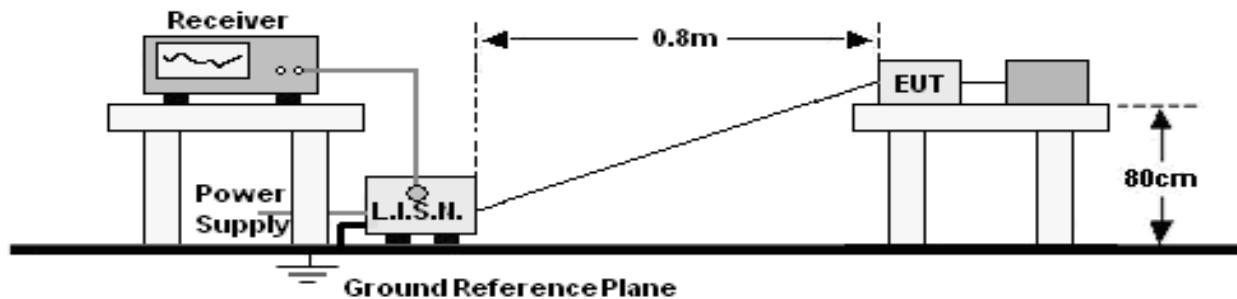

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

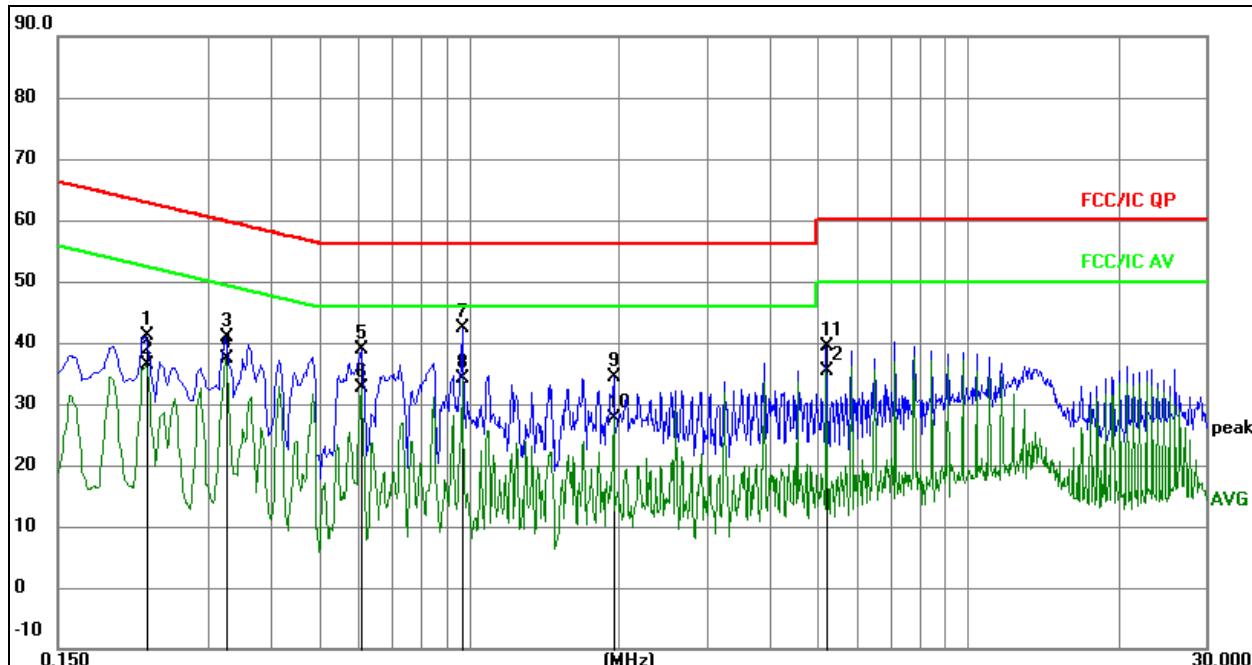


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.2265	21.07	20.07	41.14	62.58	-21.44	QP
2		0.2265	16.36	20.07	36.43	52.58	-16.15	AVG
3		0.3255	20.78	20.07	40.85	59.57	-18.72	QP
4		0.3255	17.29	20.07	37.36	49.57	-12.21	AVG
5		0.6090	18.76	20.09	38.85	56.00	-17.15	QP
6		0.6090	12.46	20.09	32.55	46.00	-13.45	AVG
7		0.9735	22.35	20.09	42.44	56.00	-13.56	QP
8	*	0.9735	14.16	20.09	34.25	46.00	-11.75	AVG
9		1.9545	14.36	20.10	34.46	56.00	-21.54	QP
10		1.9545	7.59	20.10	27.69	46.00	-18.31	AVG
11		5.2080	19.13	20.15	39.28	60.00	-20.72	QP
12		5.2080	15.28	20.15	35.43	50.00	-14.57	AVG

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

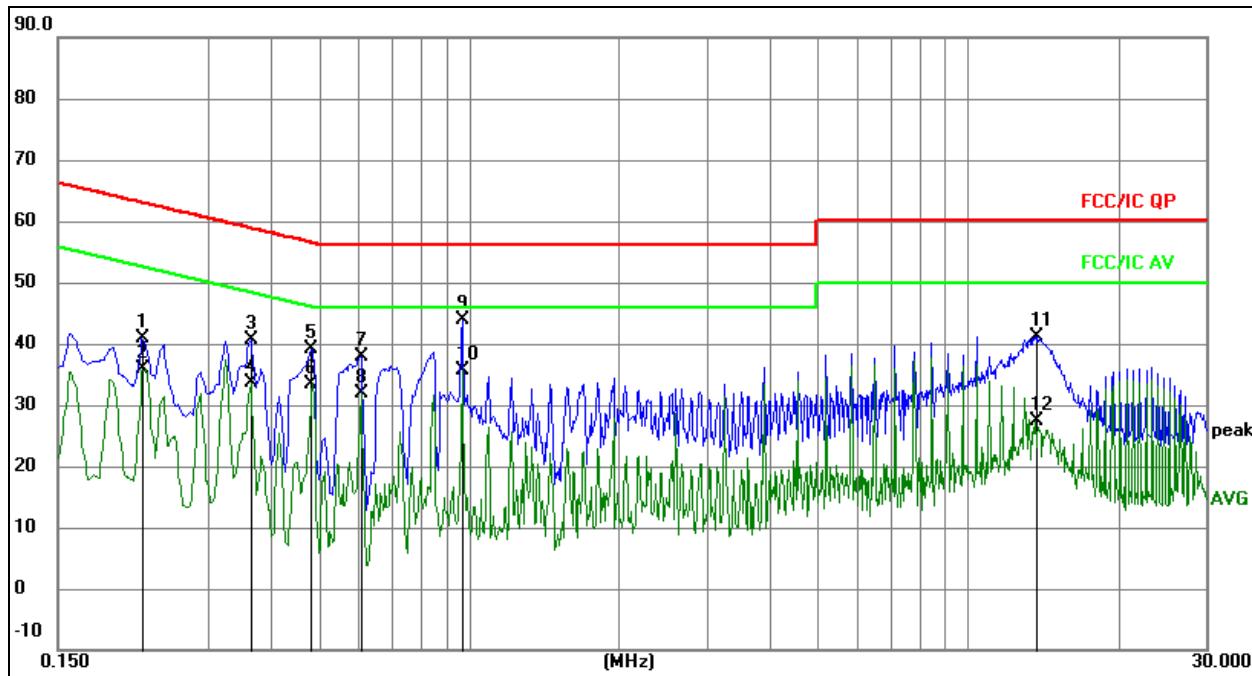

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz		dB	dBuV		
1		0.2220	20.84	20.07	40.91	62.74	-21.83 QP
2		0.2220	15.70	20.07	35.77	52.74	-16.97 AVG
3		0.3660	20.65	20.08	40.73	58.59	-17.86 QP
4		0.3660	13.48	20.08	33.56	48.59	-15.03 AVG
5		0.4830	19.12	20.08	39.20	56.29	-17.09 QP
6		0.4830	13.42	20.08	33.50	46.29	-12.79 AVG
7		0.6045	17.83	20.09	37.92	56.00	-18.08 QP
8		0.6045	11.71	20.09	31.80	46.00	-14.20 AVG
9		0.9735	23.70	20.09	43.79	56.00	-12.21 QP
10	*	0.9735	15.49	20.09	35.58	46.00	-10.42 AVG
11		13.6725	20.93	20.27	41.20	60.00	-18.80 QP
12		13.6725	7.10	20.27	27.37	50.00	-22.63 AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

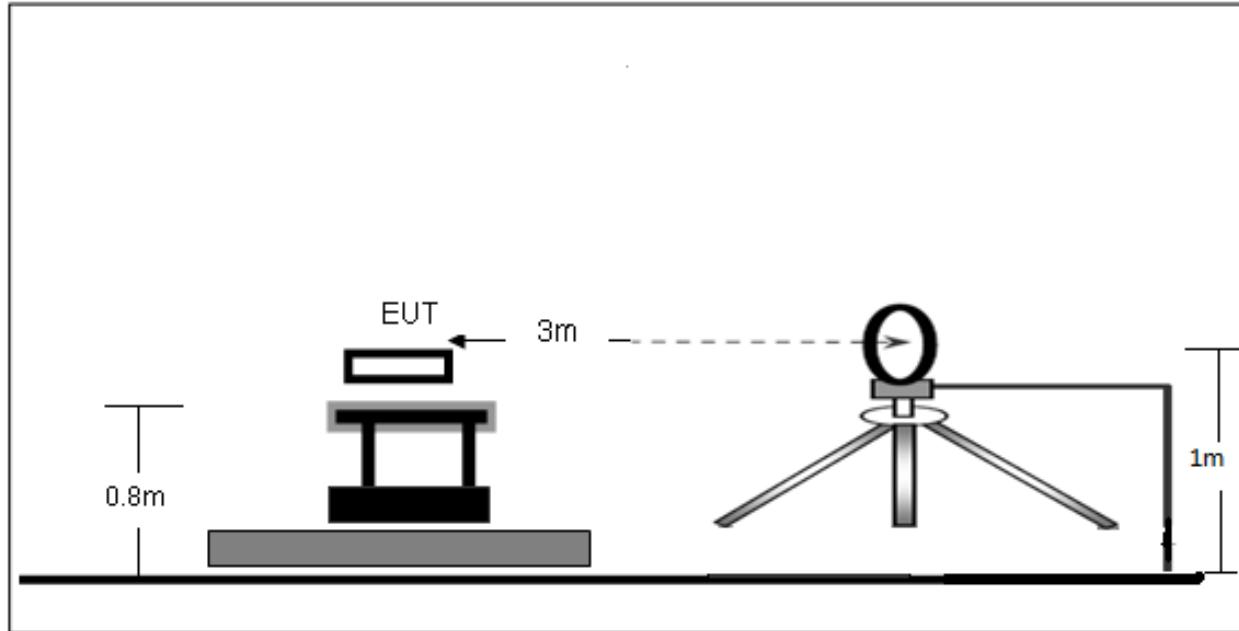

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

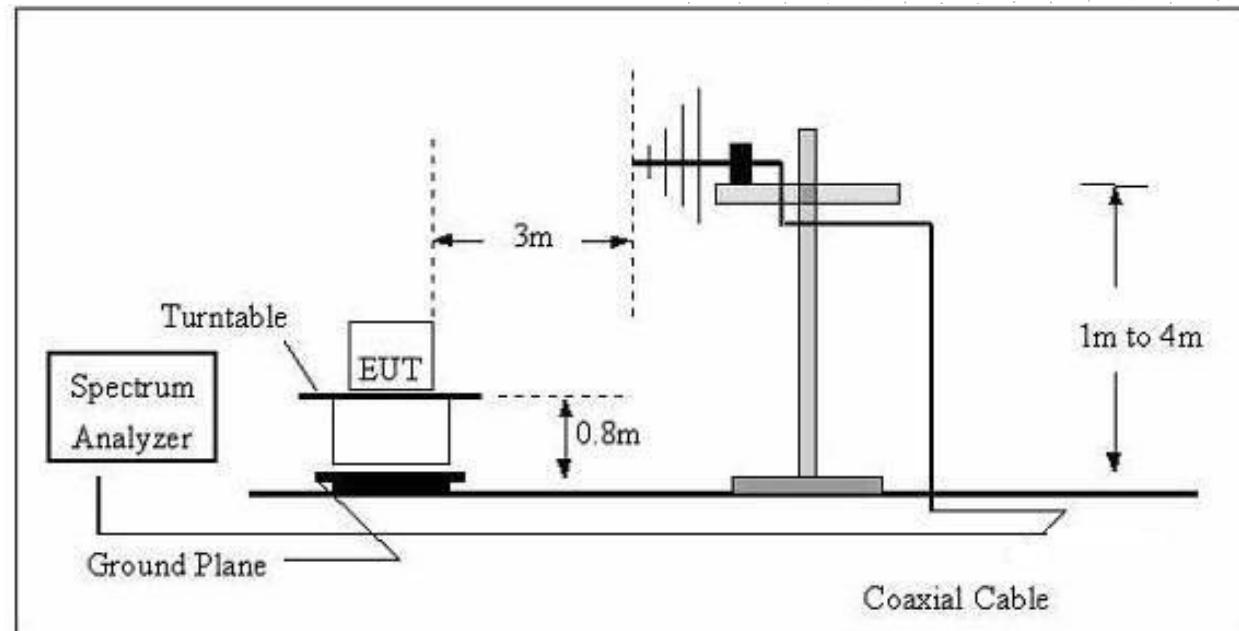

7.2 Limit

FCC §15.209; §15.205.

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
	-	74.0	Peak		3

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel ,the Highest channel.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 Test Result


9kHz-30MHz

Temperature:	23.8°C	Relative Humidity:	52%RH
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1(the worst mode)	Polarization:	Coaxial (Worst)

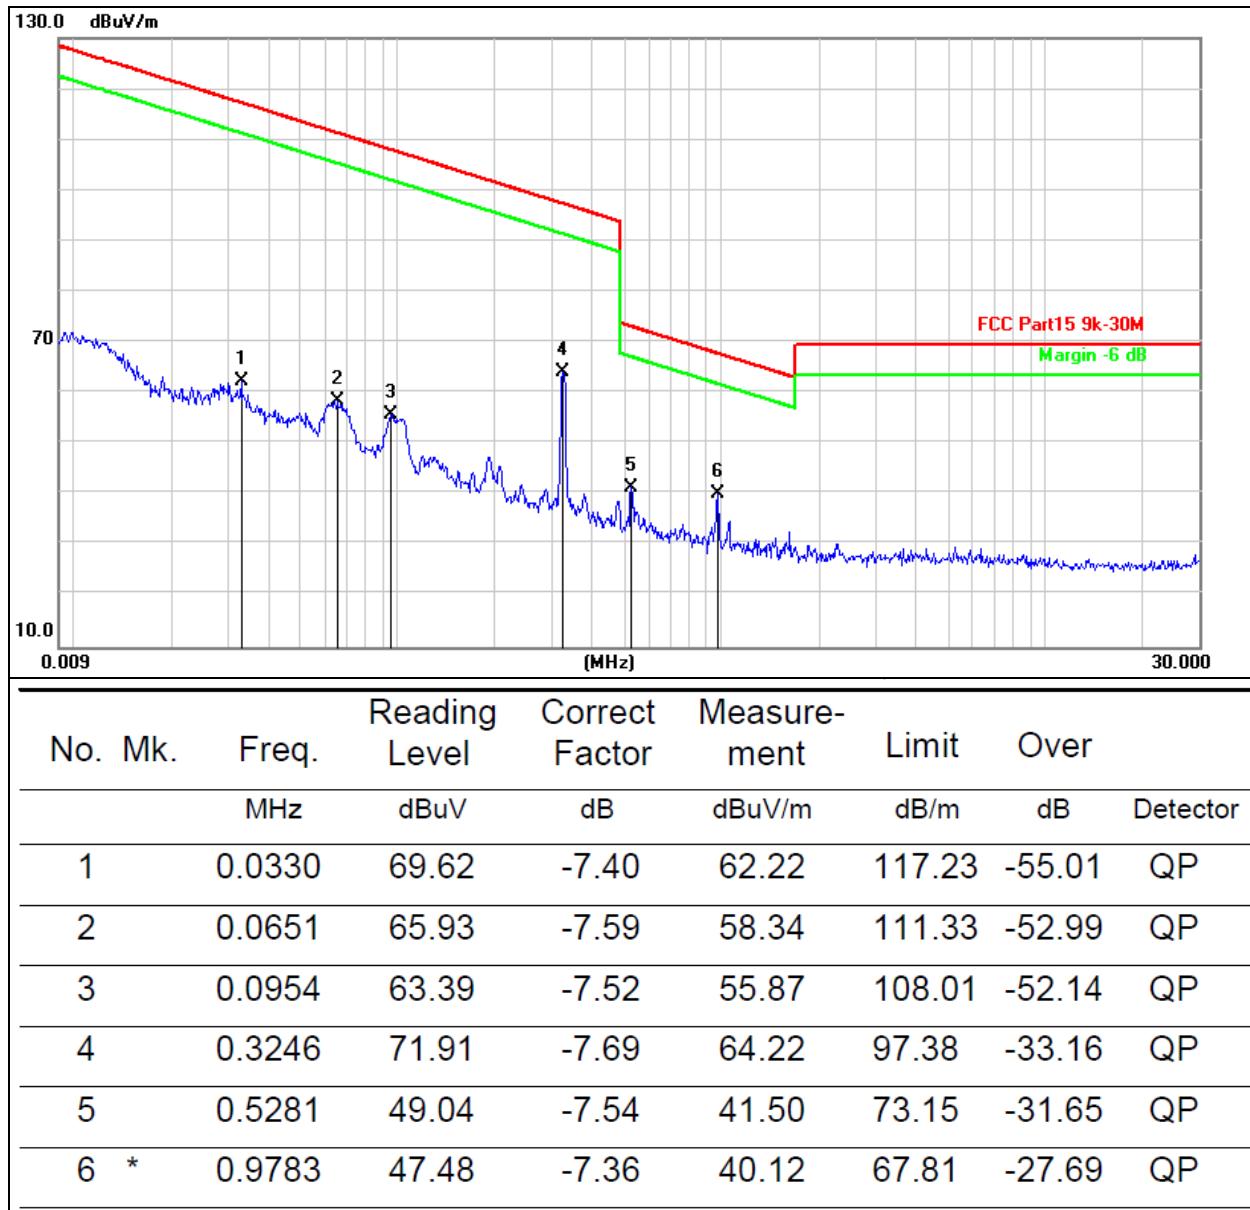

Between 30MHz – 1GHz


Temperature:	23.8°C	Relative Humidity:	52%RH
Pressure:	101KPa	Phase:	Horizontal
Test Mode:	Mode 1 (the worst mode)	Test Voltage:	AC 120V/60Hz

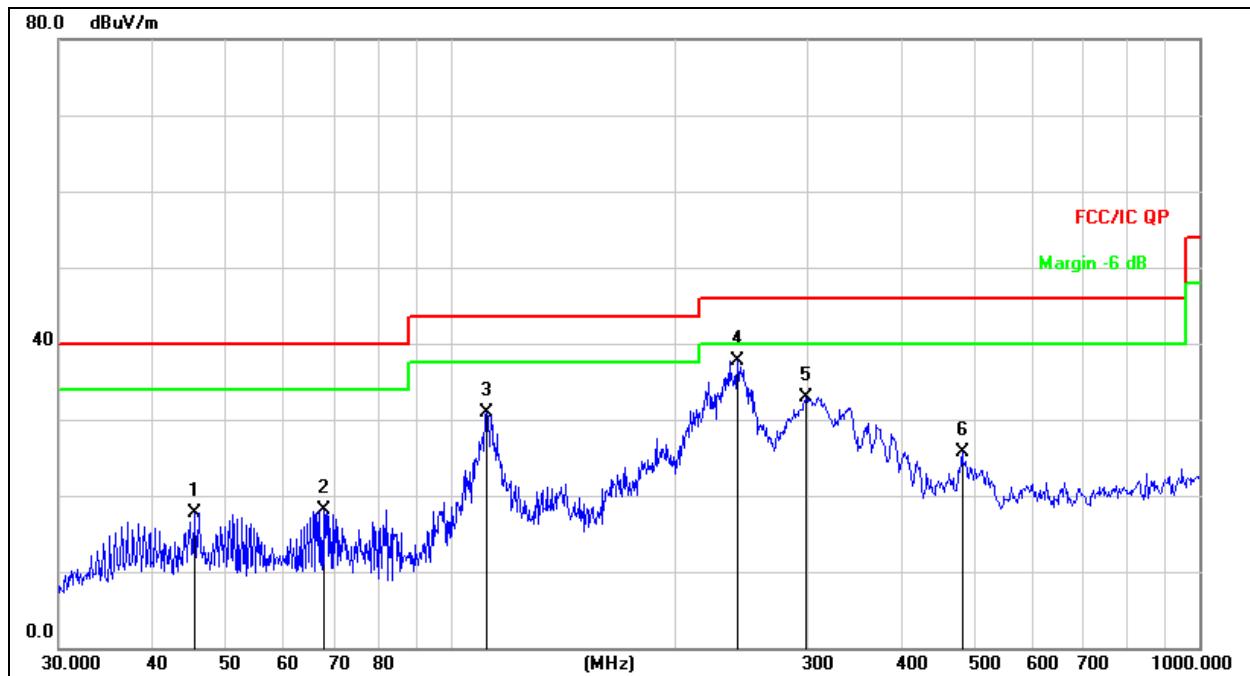
Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		45.5348	31.94	-14.27	17.67	40.00	-22.33	QP
2		67.6751	35.48	-17.36	18.12	40.00	-21.88	QP
3		111.7380	47.70	-16.75	30.95	43.50	-12.55	QP
4	*	241.6763	52.28	-14.53	37.75	46.00	-8.25	QP
5		298.2681	46.15	-13.28	32.87	46.00	-13.13	QP
6		482.2156	34.75	-9.05	25.70	46.00	-20.30	QP

Temperature:	23.8°C	Relative Humidity:	52%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 1 (the worst mode)	Test Voltage:	AC 120V/60Hz

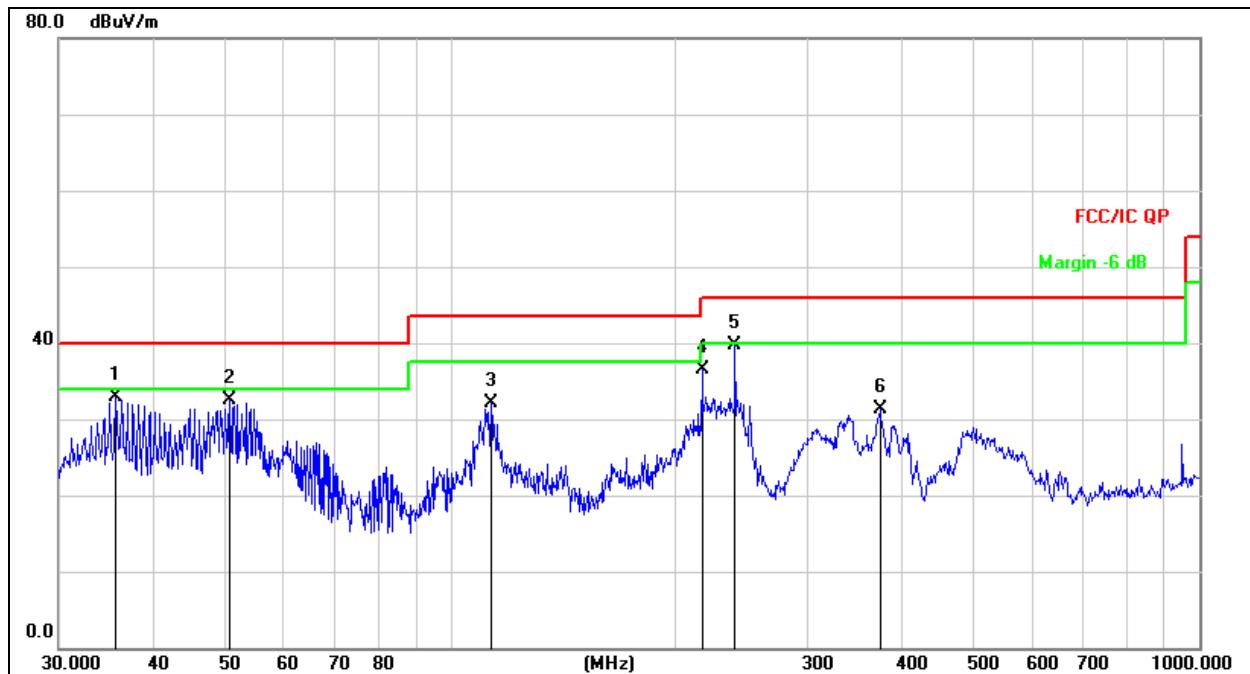
Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		35.7490	48.42	-15.54	32.88	40.00	-7.12	QP
2		50.7637	46.41	-14.00	32.41	40.00	-7.59	QP
3		113.3163	49.02	-16.86	32.16	43.50	-11.34	QP
4		216.7828	51.65	-15.24	36.41	46.00	-9.59	QP
5	*	239.9874	54.26	-14.58	39.68	46.00	-6.32	QP
6		374.6225	42.43	-11.16	31.27	46.00	-14.73	QP

8. Bandwidth Test

8.1 Test Procedure

1. Set RBW = 1%~5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

8.2 Test Setup



8.3 Test Result

Frequency (kHz)	20dB bandwidth (kHz)	Result
329	0.071	Pass



9. Antenna Requirements

9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Test Result

The antenna used for this product is Inductive Loop coil antenna.

10. EUT Photographs

EUT Photo 1



EUT Photo 2



NOTE: Appendix-Photographs Of EUT Constructional Details



11. EUT Test Setup Photographs

Conducted emissions



Radiated Measurement Photos 30MHz-1GHz

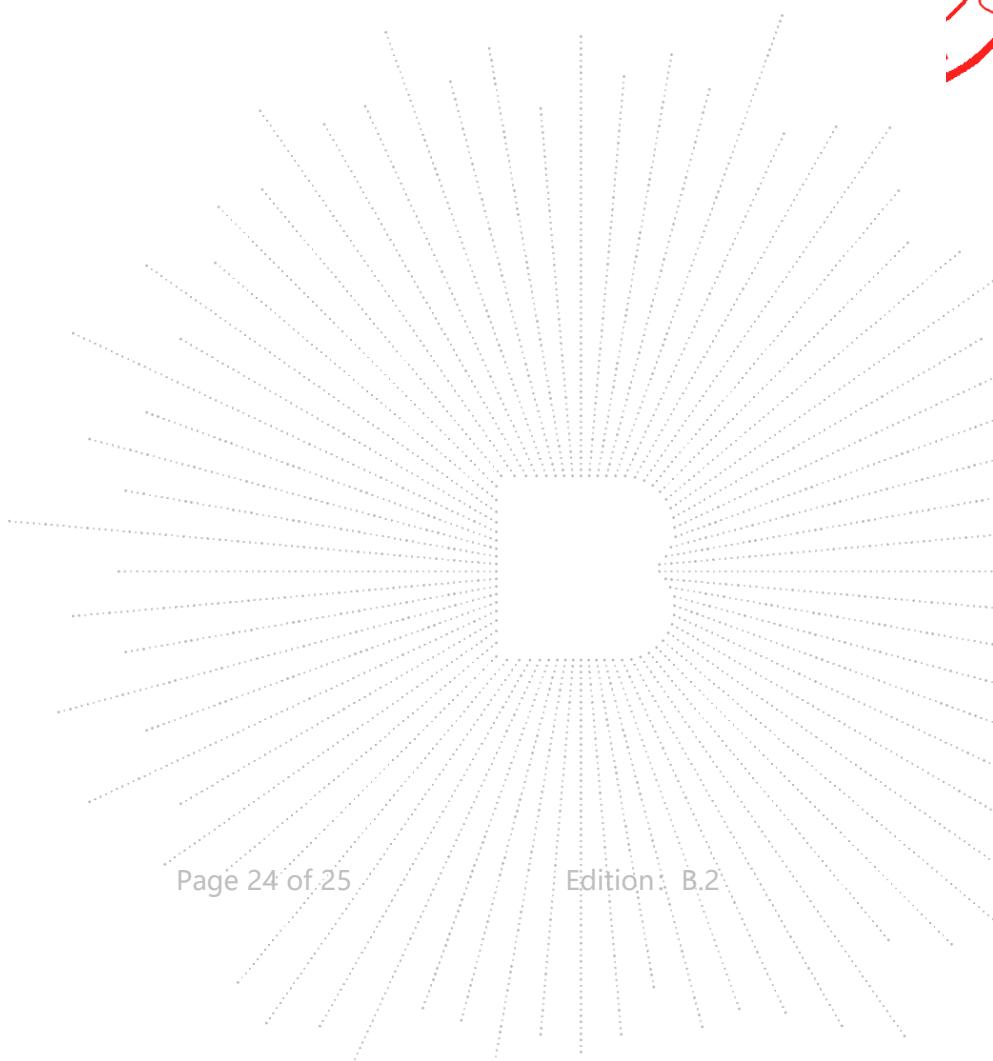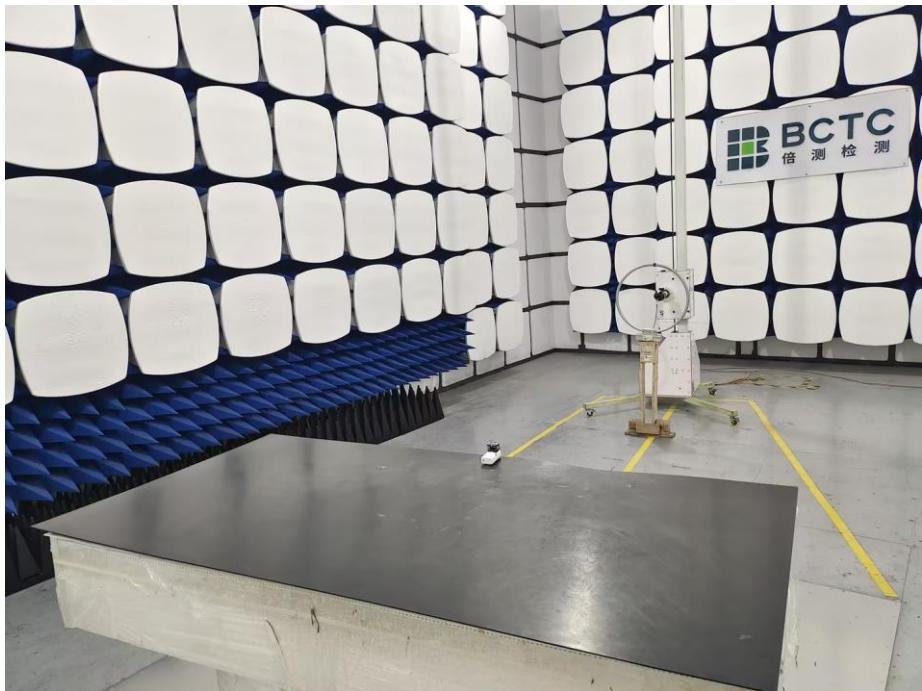

9kHz-30MHz

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

2017