



PSD NVNT ac40 5795MHz Ant1

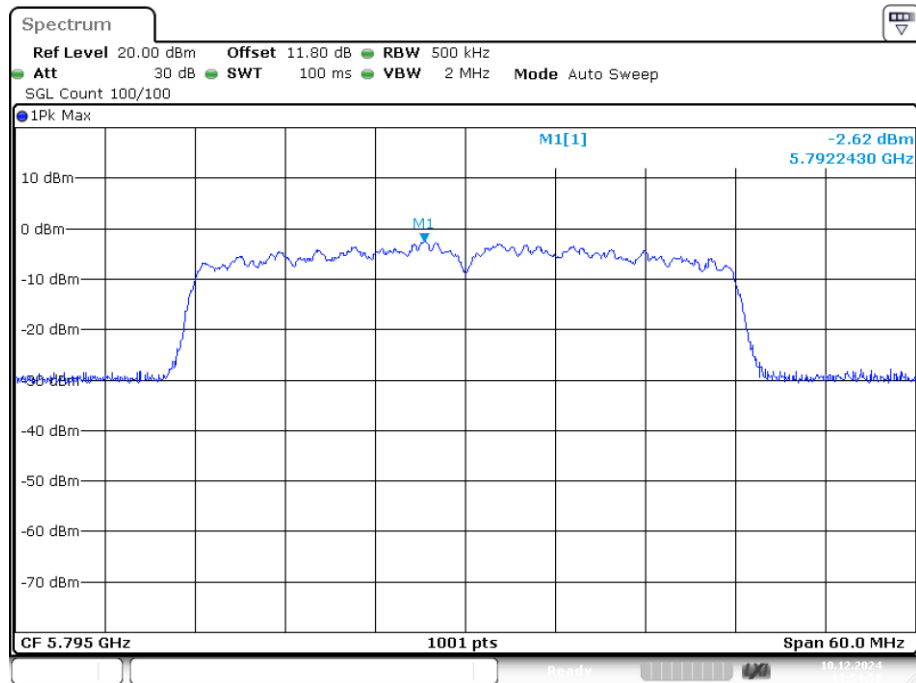


Date: 10.DEC.2024 13:54:59

PSD NVNT ac80 5775MHz Ant1

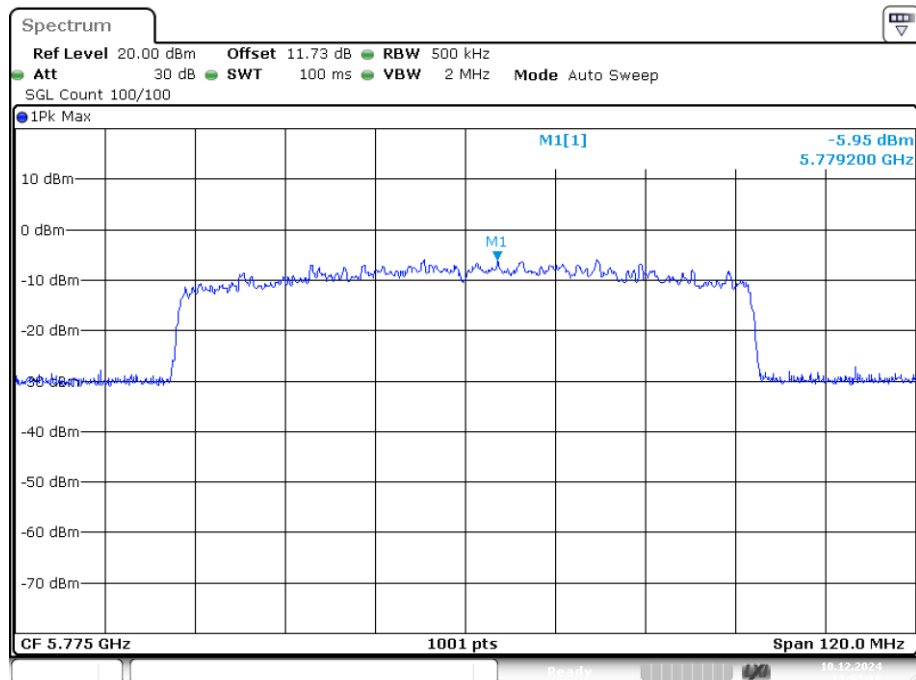


Date: 10.DEC.2024 13:57:16

PSD NVNT ax20 5745MHz Ant1

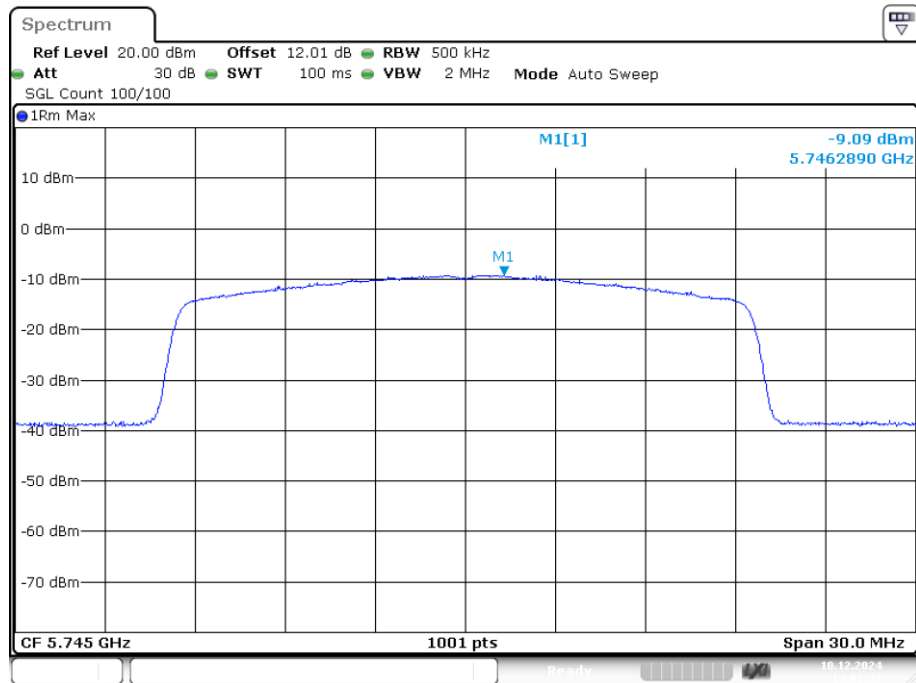


Date: 10.DEC.2024 14:01:31

PSD NVNT ax20 5785MHz Ant1

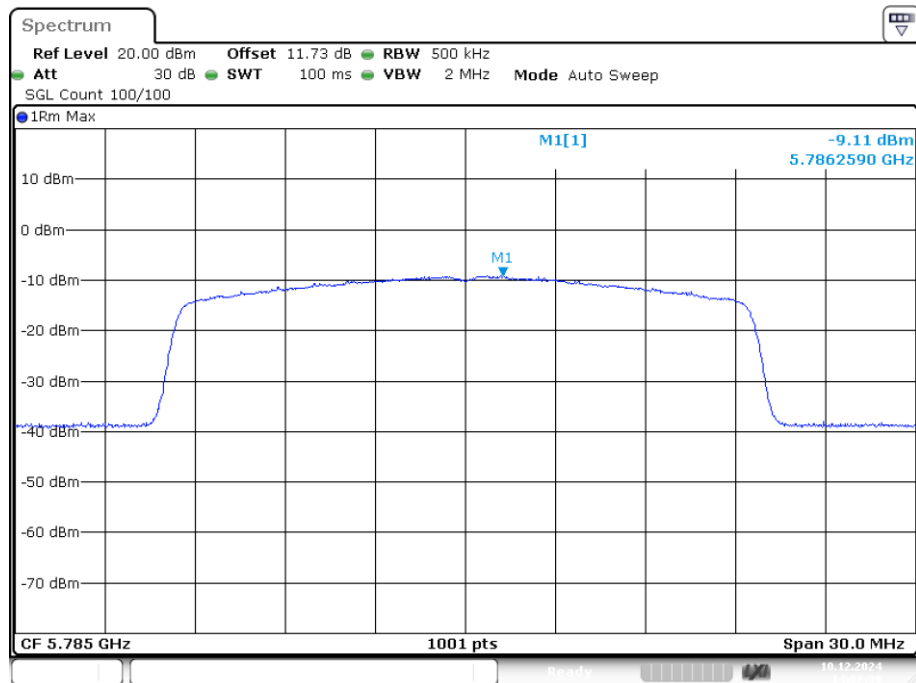


Date: 10.DEC.2024 14:07:39

PSD NVNT ax20 5825MHz Ant1

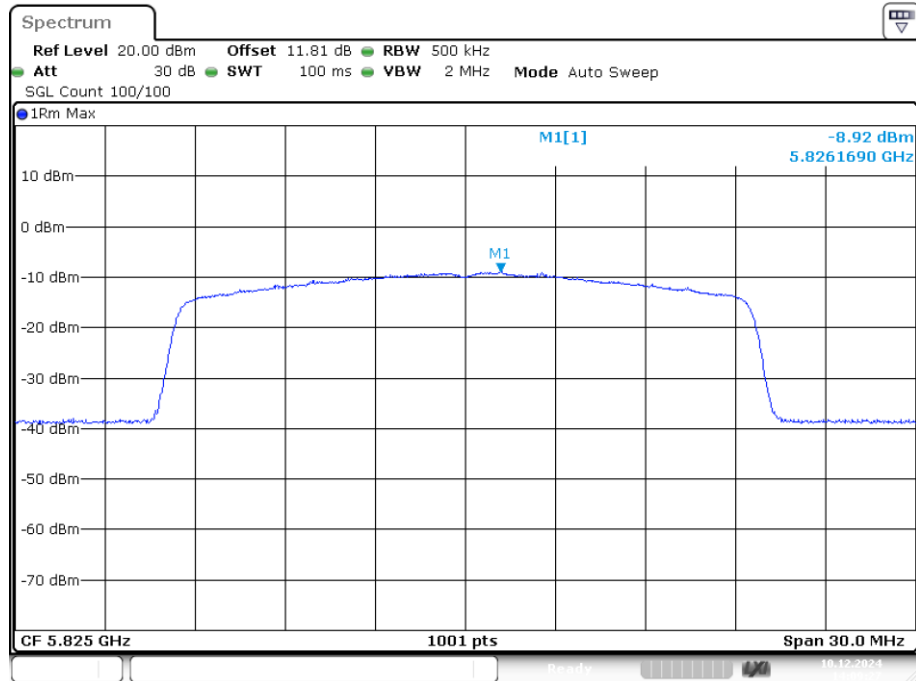


Date: 10.DEC.2024 14:09:27

PSD NVNT ax40 5755MHz Ant1

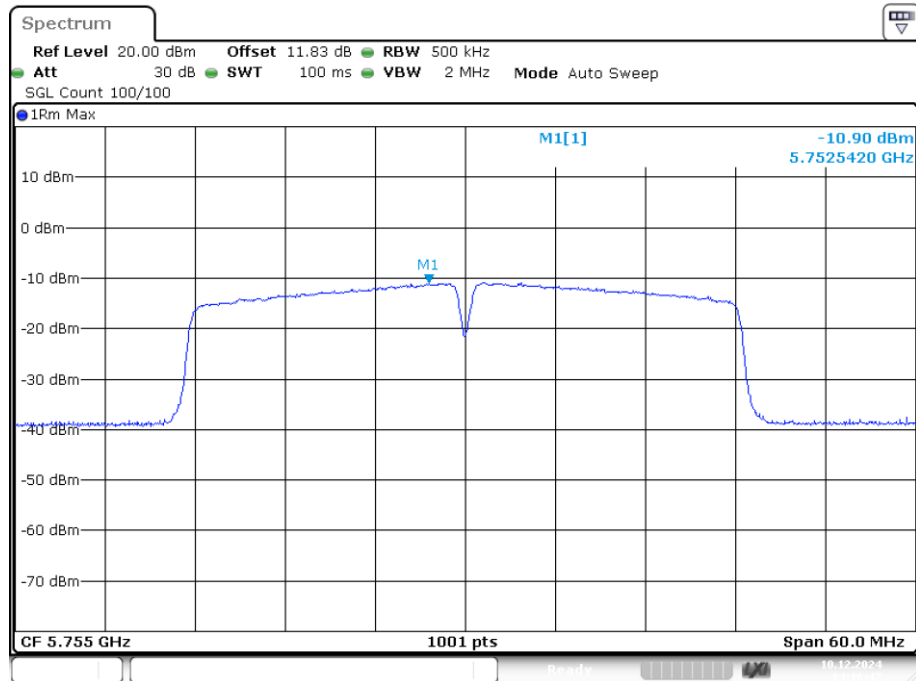


Date: 10.DEC.2024 14:16:47

PSD NVNT ax40 5795MHz Ant1

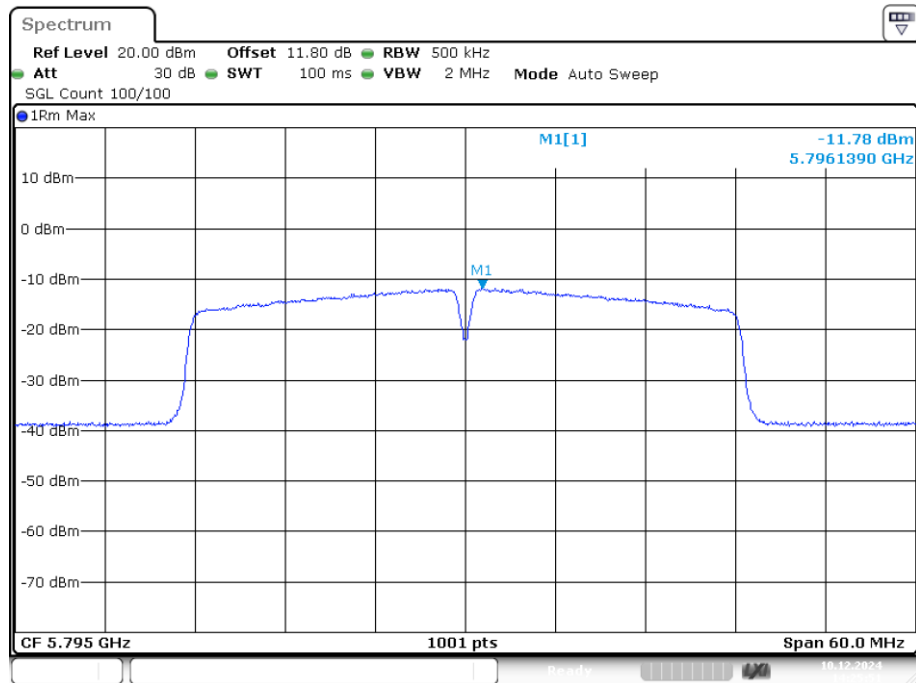


Date: 10.DEC.2024 14:25:51

PSD NVNT ax80 5775MHz Ant1

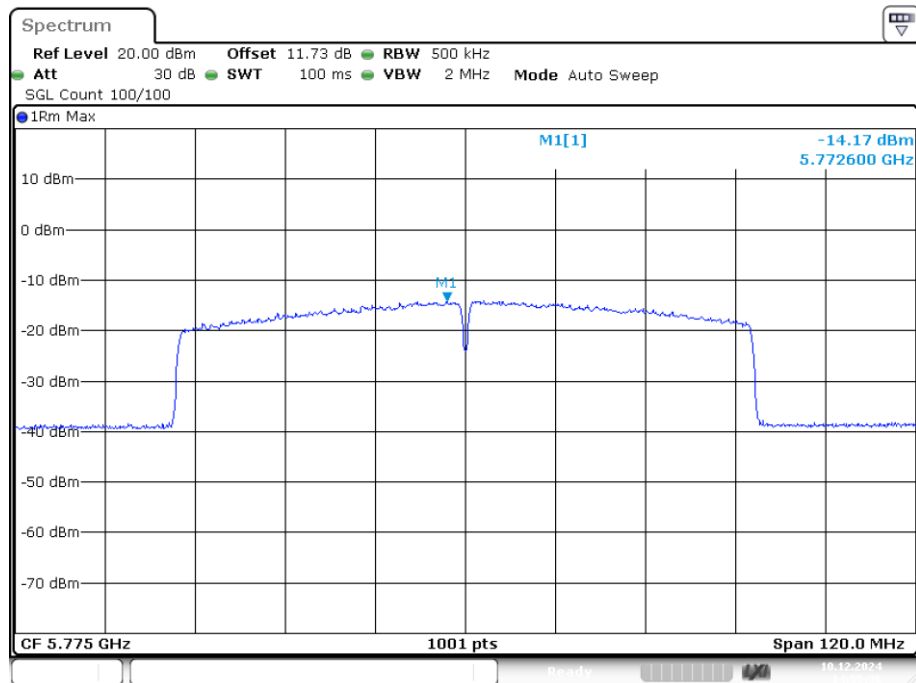


Date: 10.DEC.2024 14:55:36


PSD NVNT n20 5745MHz Ant1

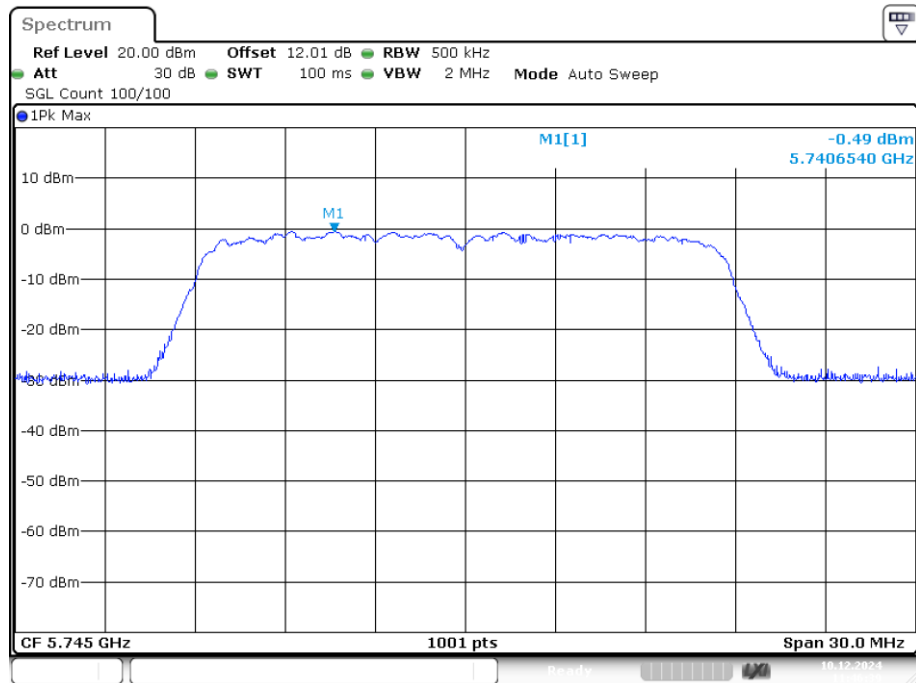

PSD NVNT n20 5785MHz Ant1

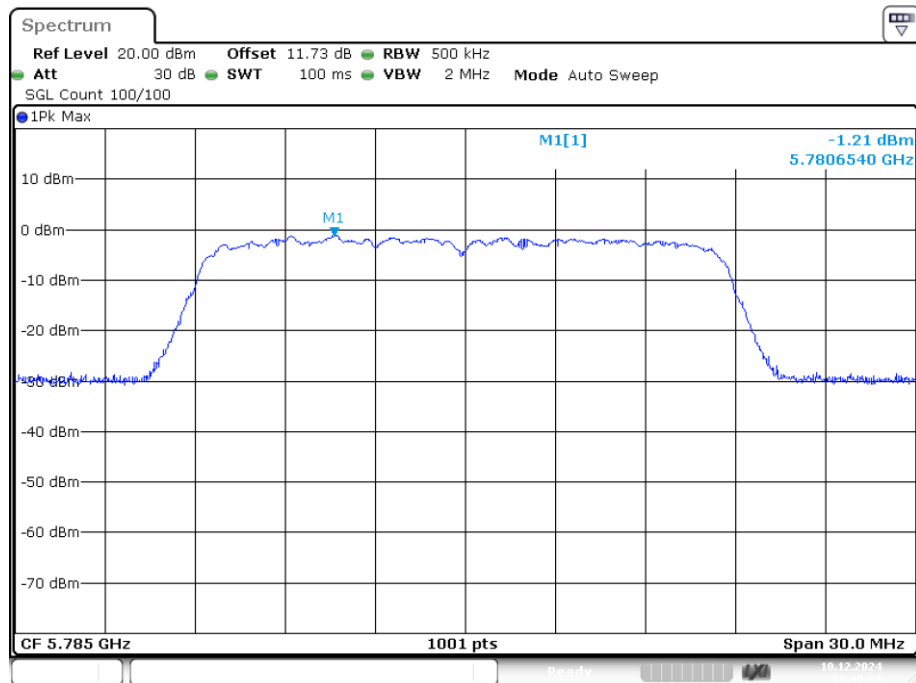


PSD NVNT n20 5825MHz Ant1

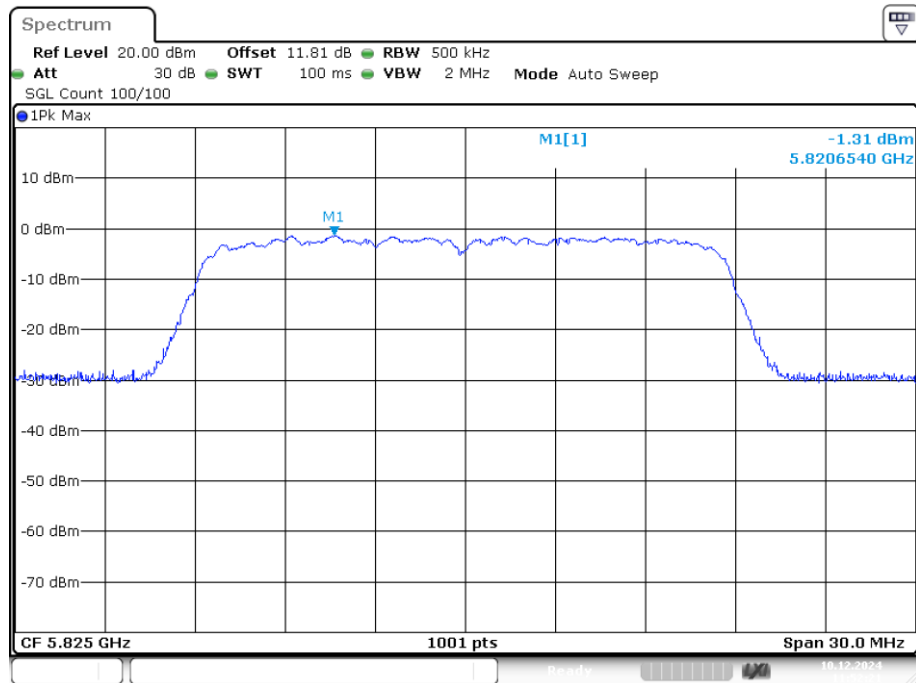


Date: 10.DEC.2024 11:52:21

PSD NVNT n40 5755MHz Ant1

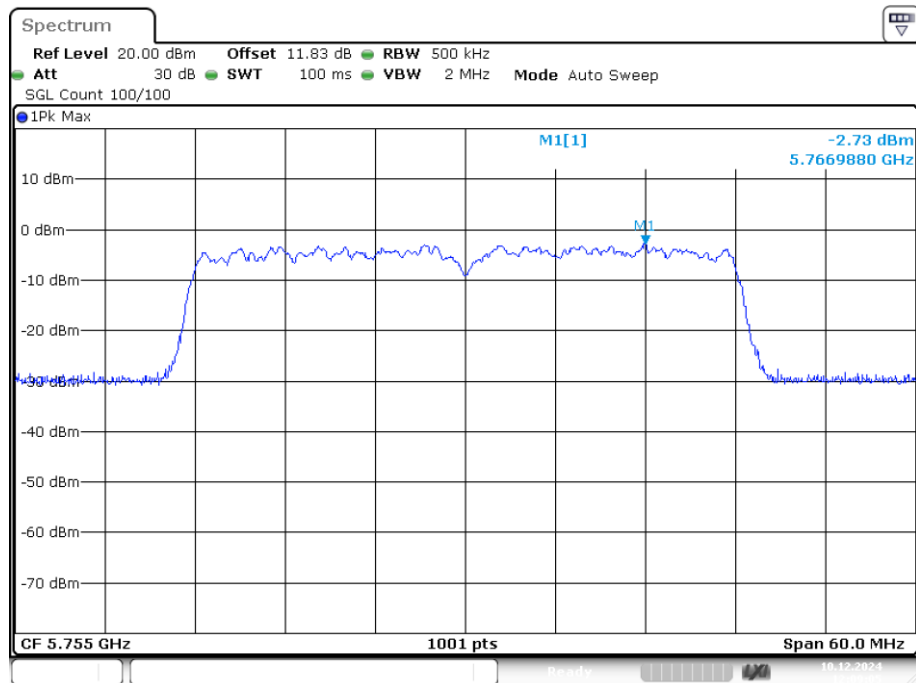

Date: 10.DEC.2024 12:09:04


PSD NVNT n40 5795MHz Ant1

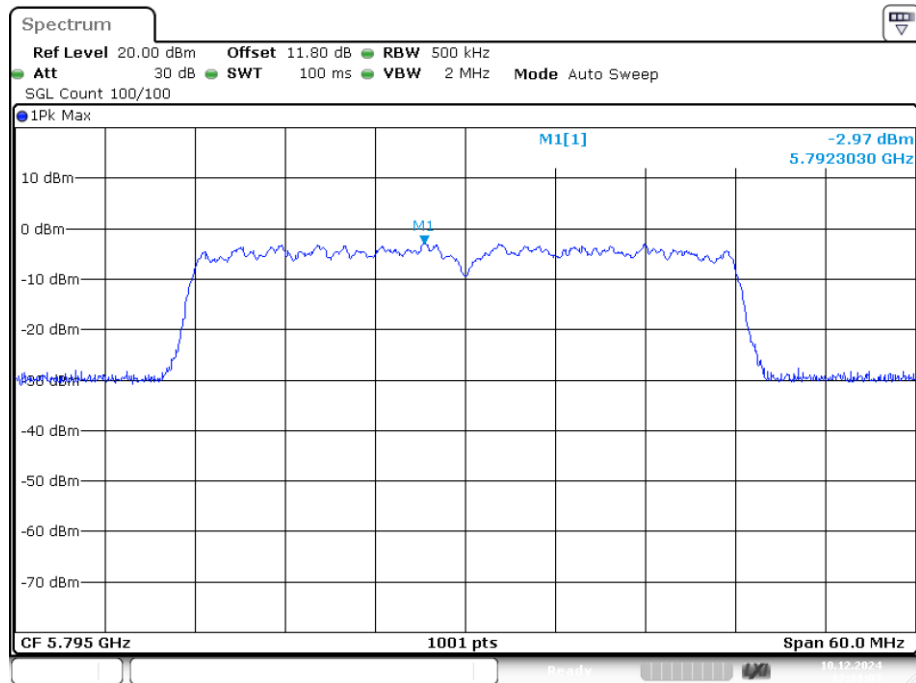

Date: 10.DEC.2024 12:11:03

4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								
Test setup:	Above 1GHz																								

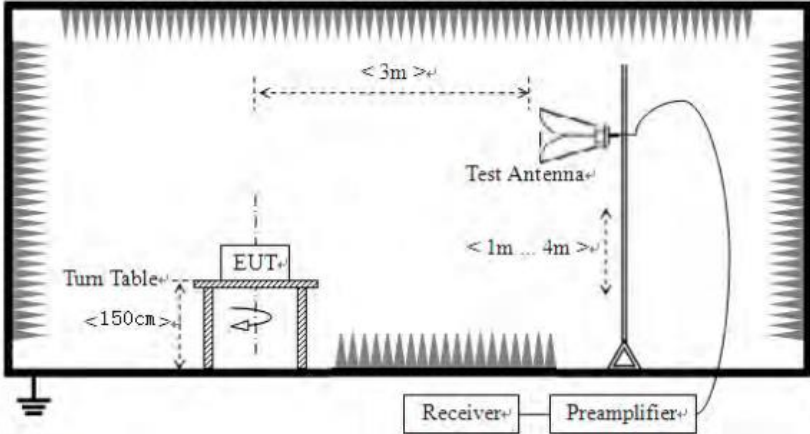	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	31.27	17.18	48.45	68.20	-19.75	PK
V	5150.00	34.46	17.18	51.64	68.20	-16.56	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.67	17.18	39.85	54.00	-14.15	AV
V	5150.00	25.48	17.18	42.66	54.00	-11.34	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.94	17.18	51.12	68.20	-17.08	PK
V	5150.00	33.72	17.18	50.90	68.20	-17.30	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	25.01	17.18	42.19	54.00	-11.81	AV
V	5150.00	26.82	17.18	44.00	54.00	-10.00	AV

Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.79	17.18	51.97	68.20	-16.23	PK
V	5150.00	33.69	17.18	50.87	68.20	-17.33	PK
Mode:		802.11ac(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.74	17.18	41.92	54.00	-12.08	AV
V	5150.00	25.54	17.18	42.72	54.00	-11.28	AV

Mode:		802.11ax20		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.18	17.18	51.36	68.20	-16.84	PK
V	5150.00	36.14	17.18	53.32	68.20	-14.88	PK
Mode:		802.11ax20		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.16	17.18	40.34	54.00	-13.66	AV
V	5150.00	24.78	17.18	41.96	54.00	-12.04	AV

Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	32.38	17.18	49.56	68.20	-18.64	PK
V	5150.00	33.08	17.18	50.26	68.20	-17.94	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.77	17.18	41.95	54.00	-12.05	AV
V	5150.00	25.01	17.18	42.19	54.00	-11.81	AV

Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.86	17.18	52.04	68.20	-16.16	PK
V	5150.00	33.76	17.18	50.94	68.20	-17.26	PK
Mode:		802.11ac(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.08	17.18	41.26	54.00	-12.74	AV
V	5150.00	25.35	17.18	42.53	54.00	-11.47	AV

Mode:		802.11ax40		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	32.50	17.18	49.68	68.20	-18.52	PK
V	5150.00	33.09	17.18	50.27	68.20	-17.93	PK
Mode:		802.11ax40		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	21.87	17.18	39.05	54.00	-14.95	AV
V	5150.00	24.74	17.18	41.92	54.00	-12.08	AV
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.62	17.18	50.80	68.20	-17.40	PK
V	5150.00	33.12	17.18	50.30	68.20	-17.90	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.29	17.18	40.47	54.00	-13.53	AV
V	5150.00	23.86	17.18	41.04	54.00	-12.96	AV
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.72	17.18	50.90	68.20	-17.30	PK
V	5350.00	33.44	17.18	50.62	68.20	-17.58	PK
Mode:		802.11ac(HT80)		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	23.13	17.18	40.31	54.00	-13.69	AV
V	5350.00	26.01	17.18	43.19	54.00	-10.81	AV

Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.35	17.18	50.53	68.20	-17.67	PK
V	5150.00	35.03	17.18	52.21	68.20	-15.99	PK
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.67	17.18	41.85	54.00	-12.15	AV
V	5150.00	26.61	17.18	43.79	54.00	-10.21	AV
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	31.90	17.18	49.08	68.20	-19.12	PK
V	5350.00	35.58	17.18	52.76	68.20	-15.44	PK
Mode:		802.11ax80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	23.96	17.18	41.14	54.00	-12.86	AV
V	5350.00	25.14	17.18	42.32	54.00	-11.68	AV

Band2

Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	32.64	17.18	49.82	68.20	-18.38	PK
V	5350.00	35.45	17.18	52.63	68.20	-15.57	PK
Mode:		802.11a		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.98	17.18	42.16	54.00	-11.84	AV
V	5350.00	27.02	17.18	44.20	54.00	-9.80	AV

Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.56	17.18	50.74	68.20	-17.46	PK
V	5350.00	36.27	17.18	53.45	68.20	-14.75	PK
Mode:		802.11n(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.83	17.18	42.01	54.00	-11.99	AV
V	5350.00	23.82	17.18	41.00	54.00	-13.00	AV

Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.54	17.18	51.72	68.20	-16.48	PK
V	5350.00	34.81	17.18	51.99	68.20	-16.21	PK
Mode:		802.11ac(HT20)		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.56	17.18	42.74	54.00	-11.26	AV
V	5350.00	26.65	17.18	43.83	54.00	-10.17	AV

Mode:		802.11ax20		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.94	17.18	51.12	68.20	-17.08	PK
V	5350.00	34.51	17.18	51.69	68.20	-16.51	PK
Mode:		802.11ax20		Frequency:		5320MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.55	17.18	42.73	54.00	-11.27	AV
V	5350.00	26.89	17.18	44.07	54.00	-9.93	AV

Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	32.60	17.18	49.78	68.20	-18.42	PK
V	5350.00	33.35	17.18	50.53	68.20	-17.67	PK
Mode:		802.11n(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.11	17.18	39.29	54.00	-14.71	AV
V	5350.00	23.55	17.18	40.73	54.00	-13.27	AV

Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	32.84	17.18	50.02	68.20	-18.18	PK
V	5350.00	35.27	17.18	52.45	68.20	-15.75	PK
Mode:		802.11ac(HT40)		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.88	17.18	42.06	54.00	-11.94	AV
V	5350.00	25.58	17.18	42.76	54.00	-11.24	AV

Mode:		802.11ax40		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	32.00	17.18	49.18	68.20	-19.02	PK
V	5350.00	35.21	17.18	52.39	68.20	-15.81	PK
Mode:		802.11ax40		Frequency:		5310MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	25.15	17.18	42.33	54.00	-11.67	AV
V	5350.00	23.38	17.18	40.56	54.00	-13.44	AV

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.91	17.18	52.09	68.20	-16.11	PK
V	5150.00	35.56	17.18	52.74	68.20	-15.46	PK

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.87	17.18	40.05	54.00	-13.95	AV
V	5150.00	25.65	17.18	42.83	54.00	-11.17	AV

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.60	17.18	50.78	68.20	-17.42	PK
V	5350.00	32.91	17.18	50.09	68.20	-18.11	PK

Mode:		802.11ac(HT80)		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.95	17.18	40.13	54.00	-13.87	AV
V	5350.00	24.50	17.18	41.68	54.00	-12.32	AV

Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.25	17.18	50.43	68.20	-17.77	PK
V	5150.00	34.15	17.18	51.33	68.20	-16.87	PK
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	24.65	17.18	41.83	54.00	-12.17	AV
V	5150.00	24.16	17.18	41.34	54.00	-12.66	AV
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.54	17.18	51.72	68.20	-16.48	PK
V	5350.00	33.11	17.18	50.29	68.20	-17.91	PK
Mode:		802.11ax80		Frequency:		5290MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	24.93	17.18	42.11	54.00	-11.89	AV
V	5350.00	23.69	17.18	40.87	54.00	-13.13	AV

Band3

Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	34.75	17.21	51.96	68.20	-16.24	PK
V	5470.00	32.57	17.21	49.78	68.20	-18.42	PK
Mode:		802.11a		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	26.61	17.21	43.82	54.00	-10.18	AV
V	5470.00	24.12	17.21	41.33	54.00	-12.67	AV
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	36.37	17.21	53.58	68.20	-14.62	PK
V	5725.00	34.07	17.21	51.28	68.20	-16.92	PK
Mode:		802.11a		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	28.63	17.21	45.84	54.00	-8.16	AV
V	5725.00	22.73	17.21	39.94	54.00	-14.06	AV

Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	36.29	17.21	53.50	68.20	-14.70	PK
V	5470.00	31.79	17.21	49.00	68.20	-19.20	PK
Mode:		802.11n(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5470.00	29.30	17.21	46.51	54.00	-7.49	AV
V	5470.00	25.48	17.21	42.69	54.00	-11.31	AV
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	35.91	17.21	53.12	68.20	-15.08	PK
V	5725.00	34.19	17.21	51.40	68.20	-16.80	PK
Mode:		802.11n(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	29.11	17.21	46.32	54.00	-7.68	AV
V	5725.00	25.66	17.21	42.87	54.00	-11.13	AV

Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	37.01	17.21	54.22	68.20	-13.98	PK
V	5470.00	33.12	17.21	50.33	68.20	-17.87	PK
Mode:		802.11ac(HT20)		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	26.77	17.21	43.98	54.00	-10.02	AV
V	5470.00	24.26	17.21	41.47	54.00	-12.53	AV
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	34.68	17.21	51.89	68.20	-16.31	PK
V	5725.00	33.36	17.21	50.57	68.20	-17.63	PK
Mode:		802.11ac(HT20)		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.36	17.21	44.57	54.00	-9.43	AV
V	5725.00	23.78	17.21	40.99	54.00	-13.01	AV

Mode:		802.11ax20		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	34.11	17.21	51.32	68.20	-16.88	PK
V	5470.00	32.47	17.21	49.68	68.20	-18.52	PK
Mode:		802.11ax20		Frequency:		5500MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	28.94	17.21	46.15	54.00	-7.85	AV
V	5470.00	24.74	17.21	41.95	54.00	-12.05	AV
Mode:		802.11ax20		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	35.57	17.21	52.78	68.20	-15.42	PK
V	5725.00	31.99	17.21	49.20	68.20	-19.00	PK
Mode:		802.11ax20		Frequency:		5700MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	29.79	17.21	47.00	54.00	-7.00	AV
V	5725.00	25.11	17.21	42.32	54.00	-11.68	AV

Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	33.81	17.21	51.02	68.20	-17.18	PK
V	5470.00	31.54	17.21	48.75	68.20	-19.45	PK
Mode:		802.11n(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	28.69	17.21	45.90	54.00	-8.10	AV
V	5470.00	24.87	17.21	42.08	54.00	-11.92	AV
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	36.69	17.21	53.90	68.20	-14.30	PK
V	5725.00	30.62	17.21	47.83	68.20	-20.37	PK
Mode:		802.11n(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.63	17.21	44.84	54.00	-9.16	AV
V	5725.00	24.27	17.21	41.48	54.00	-12.52	AV

Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	34.54	17.21	51.75	68.20	-16.45	PK
V	5470.00	32.51	17.21	49.72	68.20	-18.48	PK
Mode:		802.11ac(HT40)		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	29.36	17.21	46.57	54.00	-7.43	AV
V	5470.00	25.18	17.21	42.39	54.00	-11.61	AV
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	34.03	17.21	51.24	68.20	-16.96	PK
V	5725.00	31.66	17.21	48.87	68.20	-19.33	PK
Mode:		802.11ac(HT40)		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	27.74	17.21	44.95	54.00	-9.05	AV
V	5725.00	24.63	17.21	41.84	54.00	-12.16	AV


Mode:		802.11ax40		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	36.57	17.21	53.78	68.20	-14.42	PK
V	5470.00	33.73	17.21	50.94	68.20	-17.26	PK
Mode:		802.11ax40		Frequency:		5510MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	29.80	17.21	47.01	54.00	-6.99	AV
V	5470.00	25.90	17.21	43.11	54.00	-10.89	AV
Mode:		802.11ax40		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.17	17.21	54.38	68.20	-13.82	PK
V	5725.00	34.04	17.21	51.25	68.20	-16.95	PK
Mode:		802.11ax40		Frequency:		5670MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	29.49	17.21	46.70	54.00	-7.30	AV
V	5725.00	26.13	17.21	43.34	54.00	-10.66	AV

Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	34.69	17.21	51.90	68.20	-16.30	PK
V	5470.00	34.06	17.21	51.27	68.20	-16.93	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	28.31	17.21	45.52	54.00	-8.48	AV
V	5470.00	24.71	17.21	41.92	54.00	-12.08	AV
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	37.06	17.21	54.27	68.20	-13.93	PK
V	5725.00	30.98	17.21	48.19	68.20	-20.01	PK
Mode:		802.11ac(HT80)		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	28.82	17.21	46.03	54.00	-7.97	AV
V	5725.00	22.74	17.21	39.95	54.00	-14.05	AV


Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	34.69	17.21	51.90	68.20	-16.30	PK
V	5470.00	32.83	17.21	50.04	68.20	-18.16	PK
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5470.00	29.24	17.21	46.45	54.00	-7.55	AV
V	5470.00	24.18	17.21	41.39	54.00	-12.61	AV
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	35.46	17.21	52.67	68.20	-15.53	PK
V	5725.00	34.02	17.21	51.23	68.20	-16.97	PK
Mode:		802.11ax80		Frequency:		5530MHz	
Antenna Pol.	Frequency (MHz)	Reading Level	Factor	Measure Level	Limit (dBuV/m)	Over limit(dB)	Detector
		(dBuV)	(dB/m)	(dBuV/m)			
H	5725.00	28.30	17.21	45.51	54.00	-8.49	AV
V	5725.00	25.58	17.21	42.79	54.00	-11.21	AV

Band4


Band Edge NVNT a 5745MHz Low Ant1

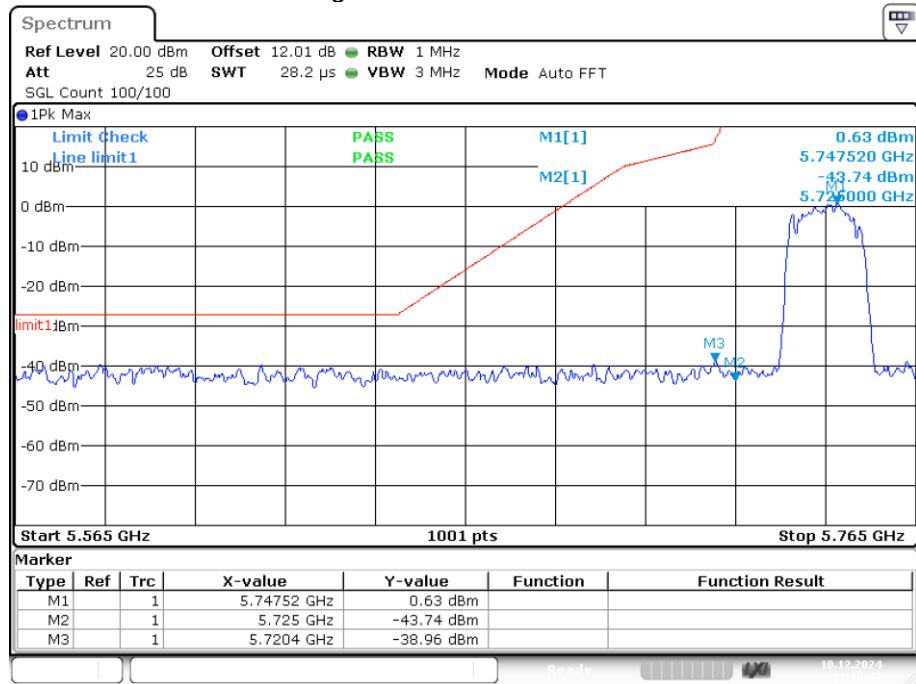


Band Edge NVNT a 5825MHz High Ant1

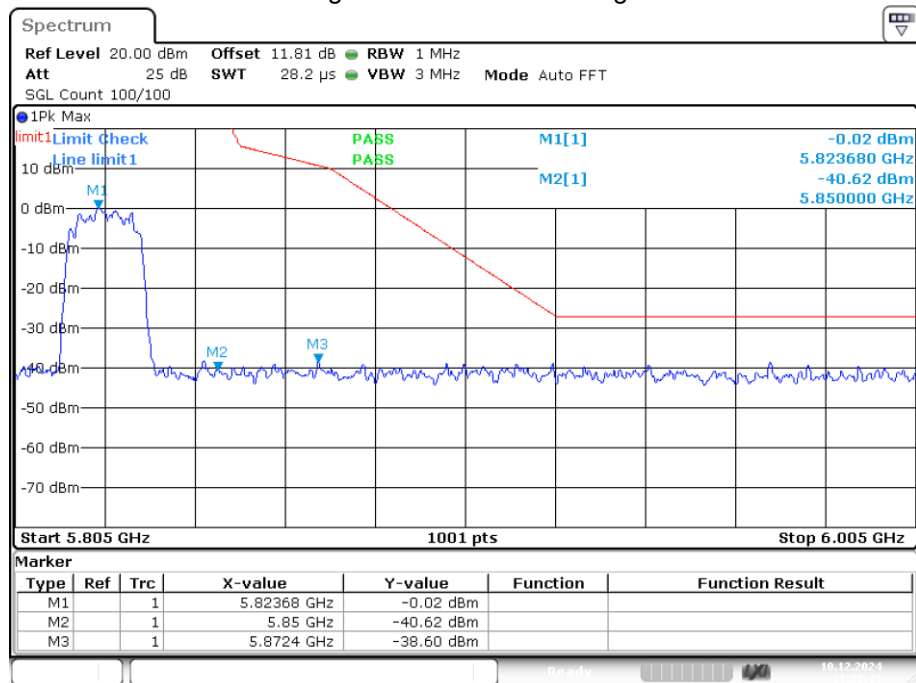


Band Edge NVNT ac20 5745MHz Low Ant1

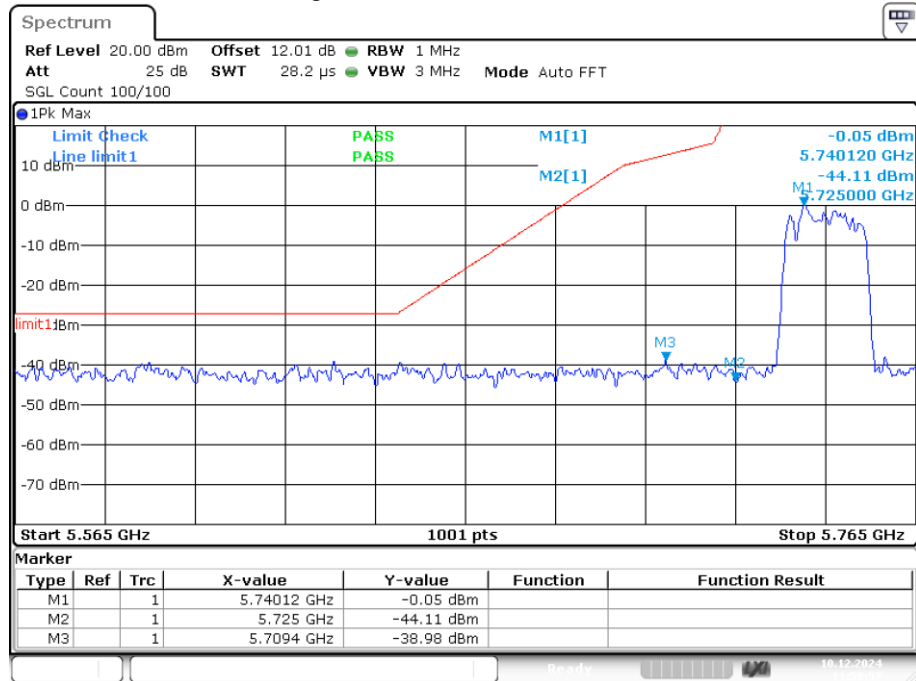

Band Edge NVNT ac20 5825MHz High Ant1

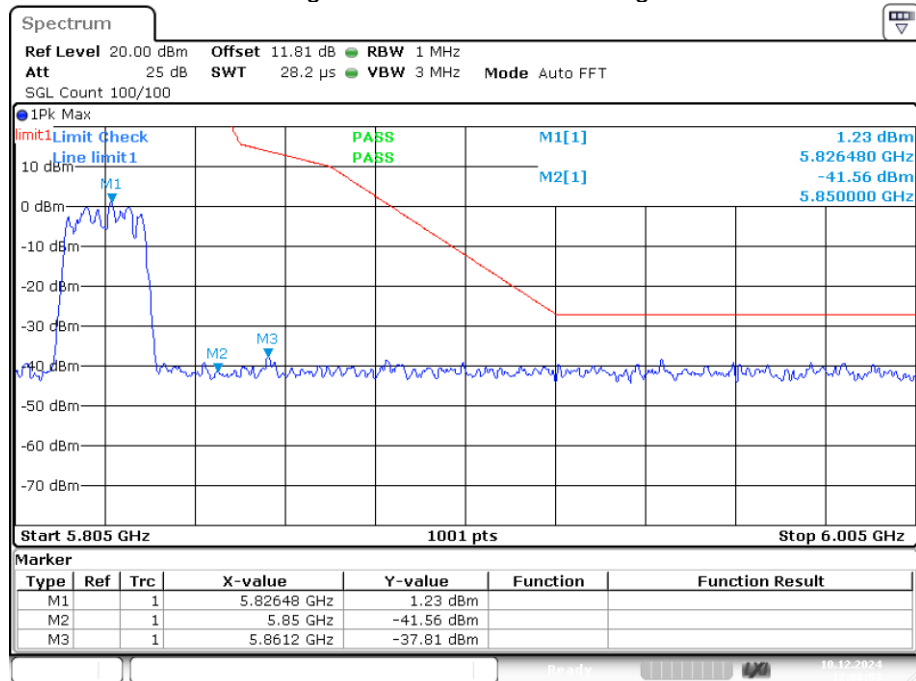


Band Edge NVNT ac40 5755MHz Low Ant1

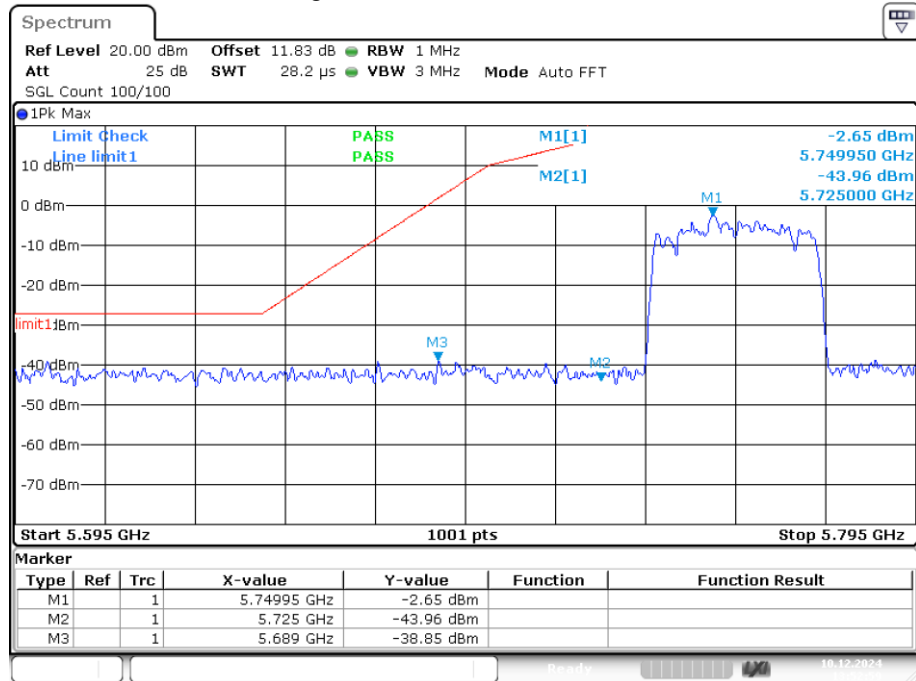


Date: 10.DEC.2024 13:52:59

Band Edge NVNT ac40 5795MHz High Ant1

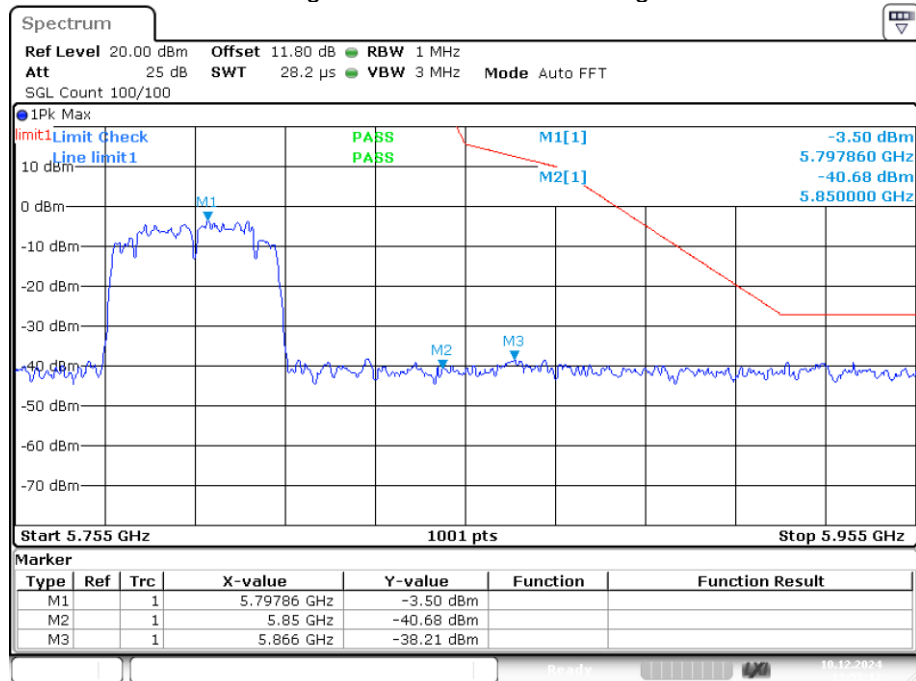


Date: 10.DEC.2024 13:55:11

Band Edge NVNT ac80 5745MHz Low Ant1

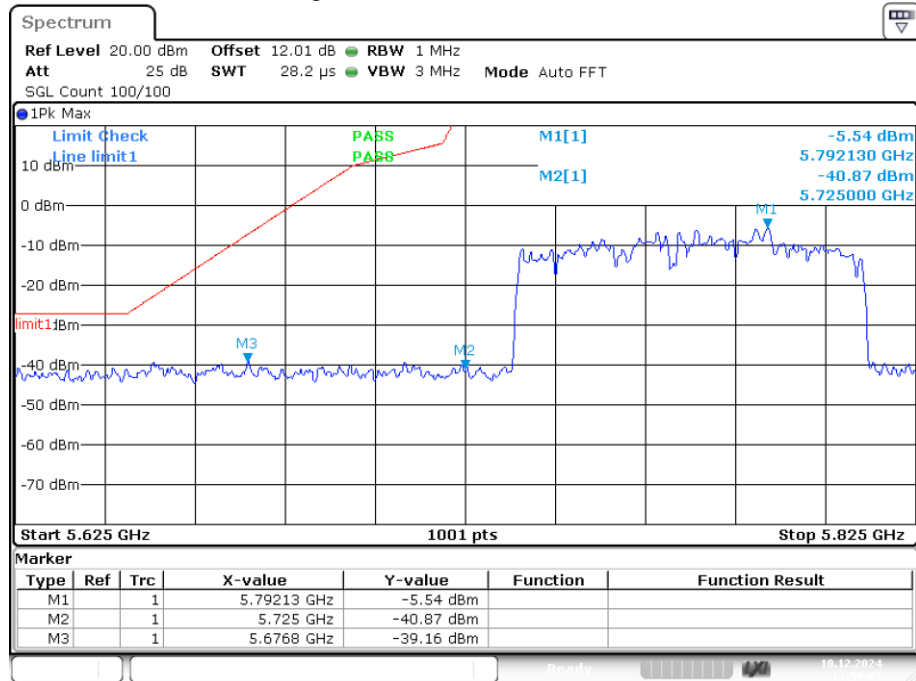


Date: 10.DEC.2024 13:59:05

Band Edge NVNT ac80 5825MHz High Ant1

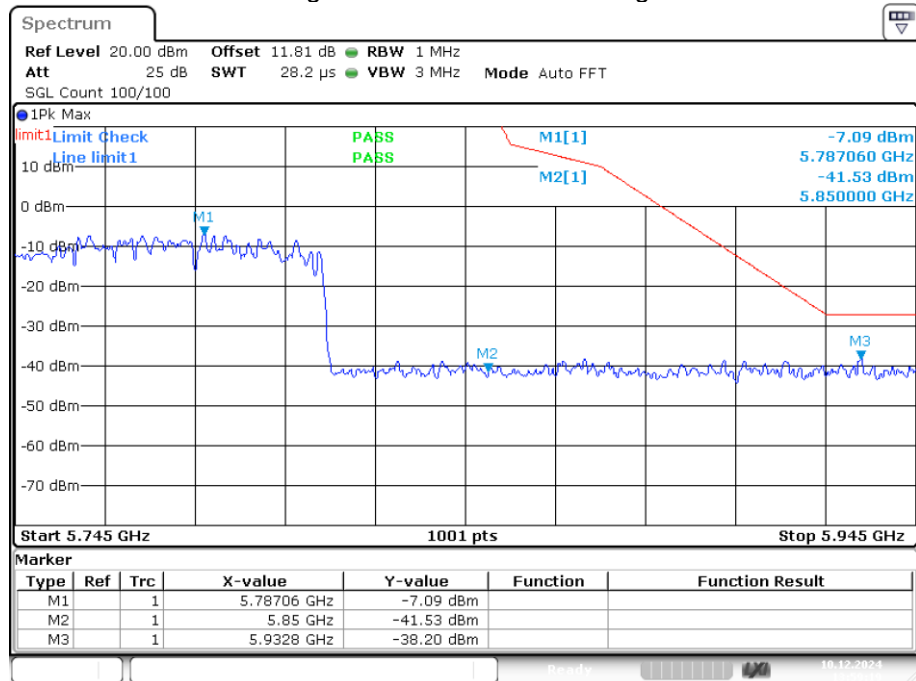


Date: 10.DEC.2024 13:59:20


Band Edge NVNT ax20 5745MHz Low Ant1

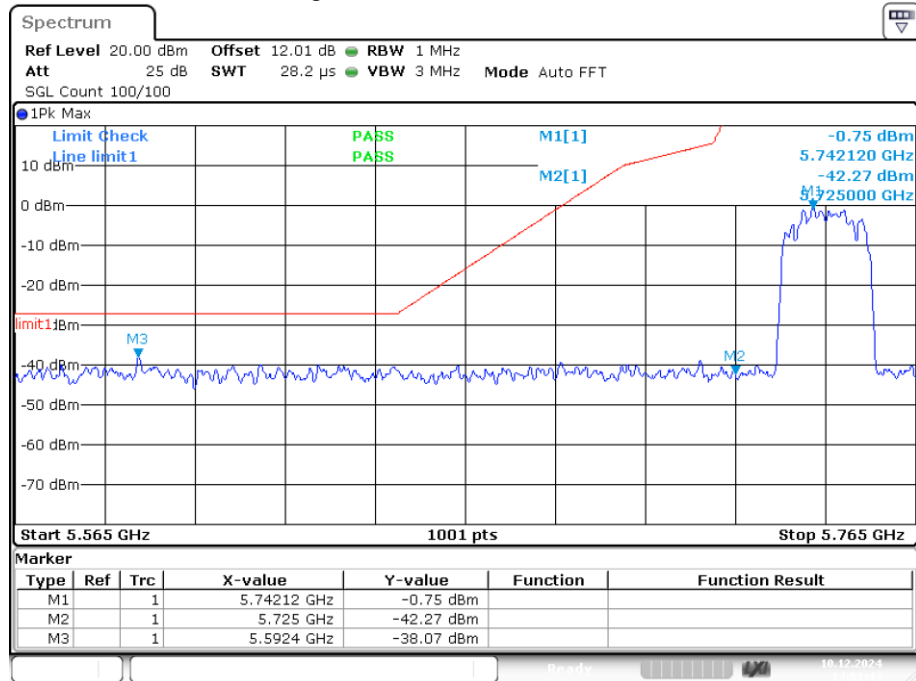

Band Edge NVNT ax20 5825MHz High Ant1

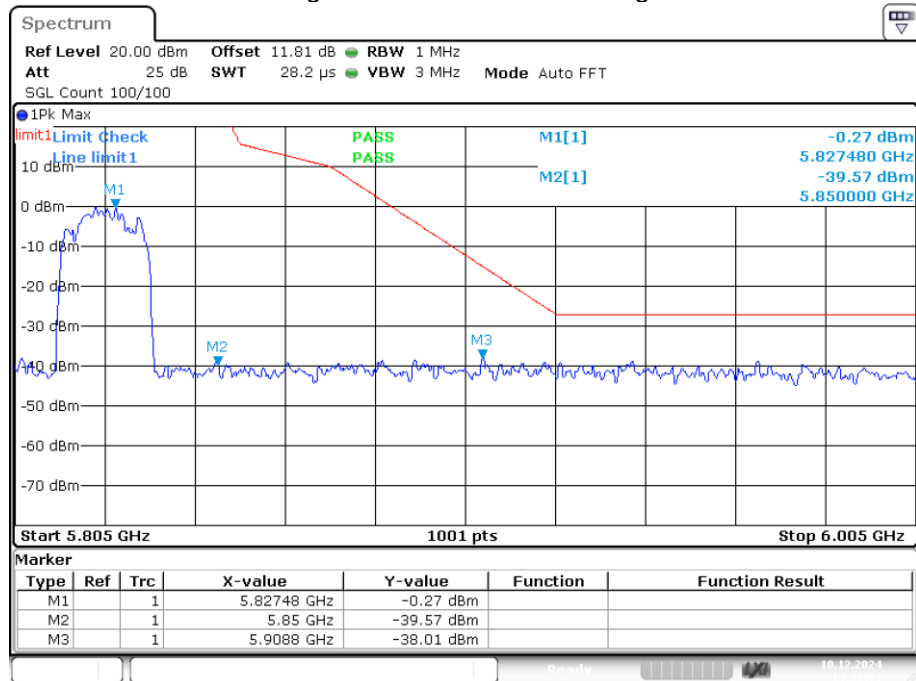


Band Edge NVNT ax40 5755MHz Low Ant1

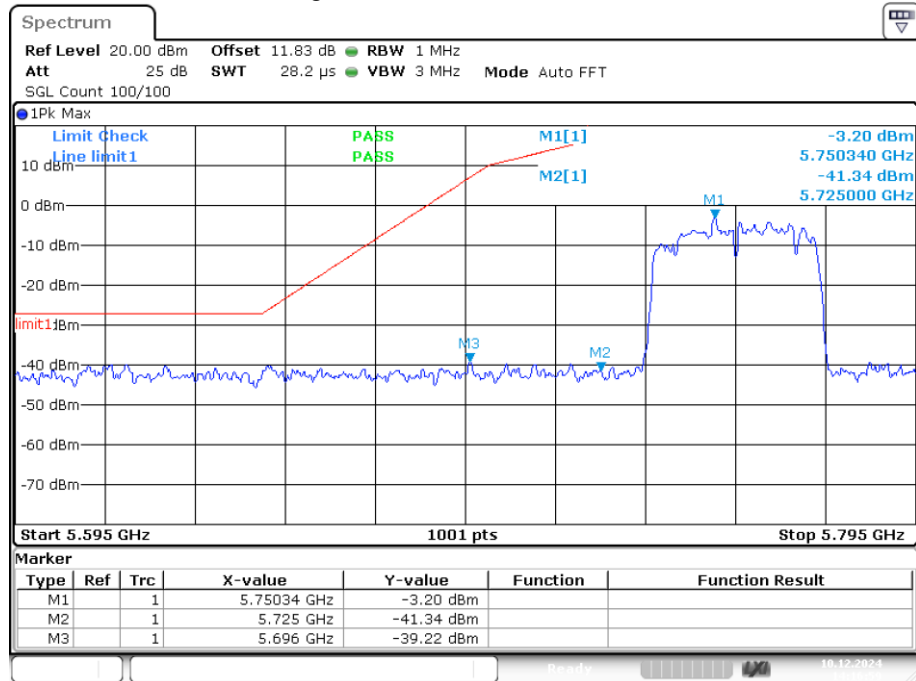


Date: 10.DEC.2024 14:16:59

Band Edge NVNT ax40 5795MHz High Ant1

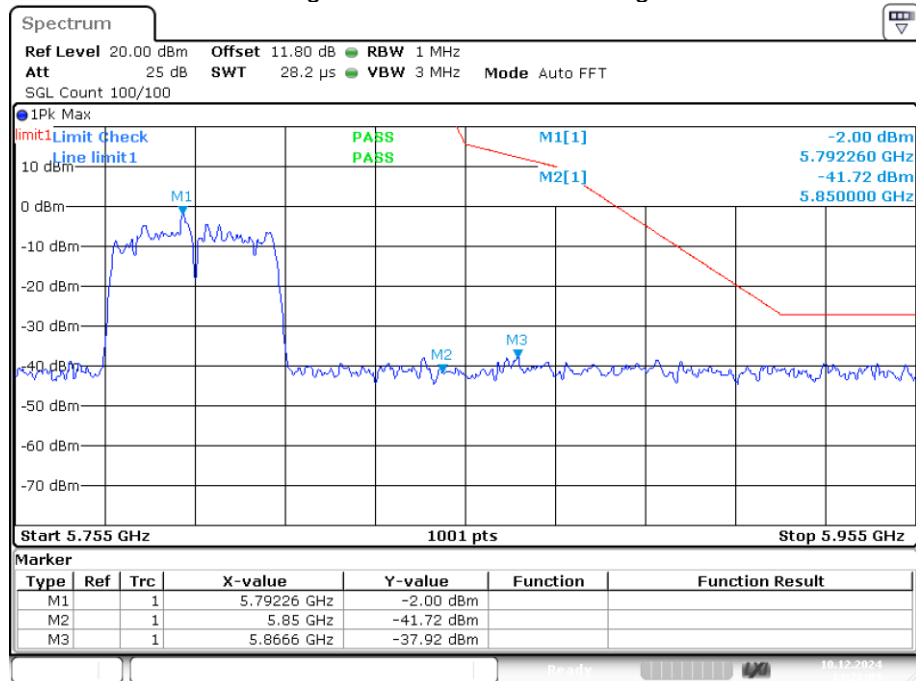


Date: 10.DEC.2024 14:26:03

Band Edge NVNT ax80 5745MHz Low Ant1

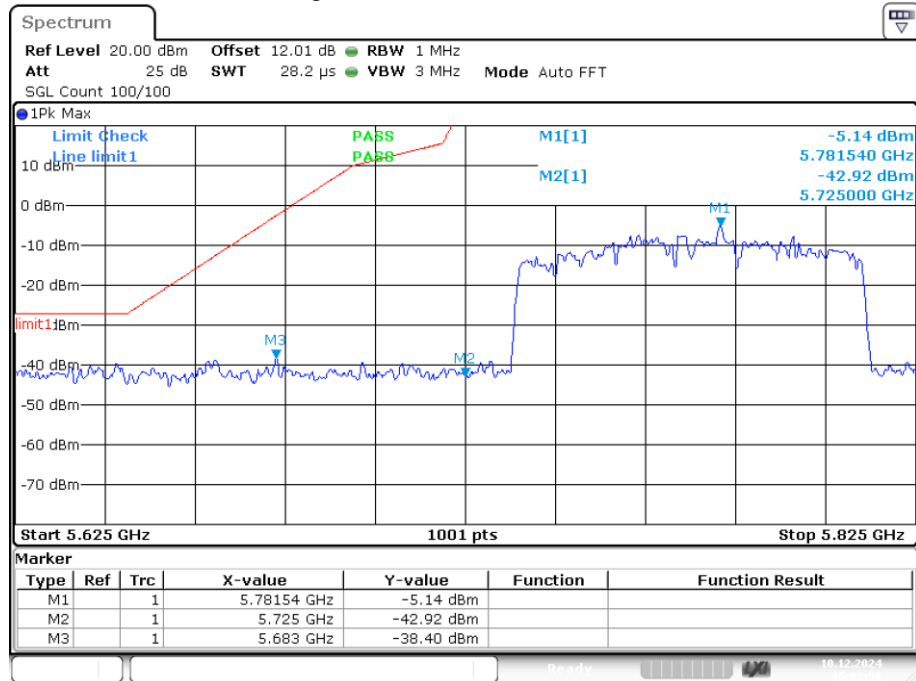


Date: 10.DEC.2024 15:02:50

Band Edge NVNT ax80 5825MHz High Ant1

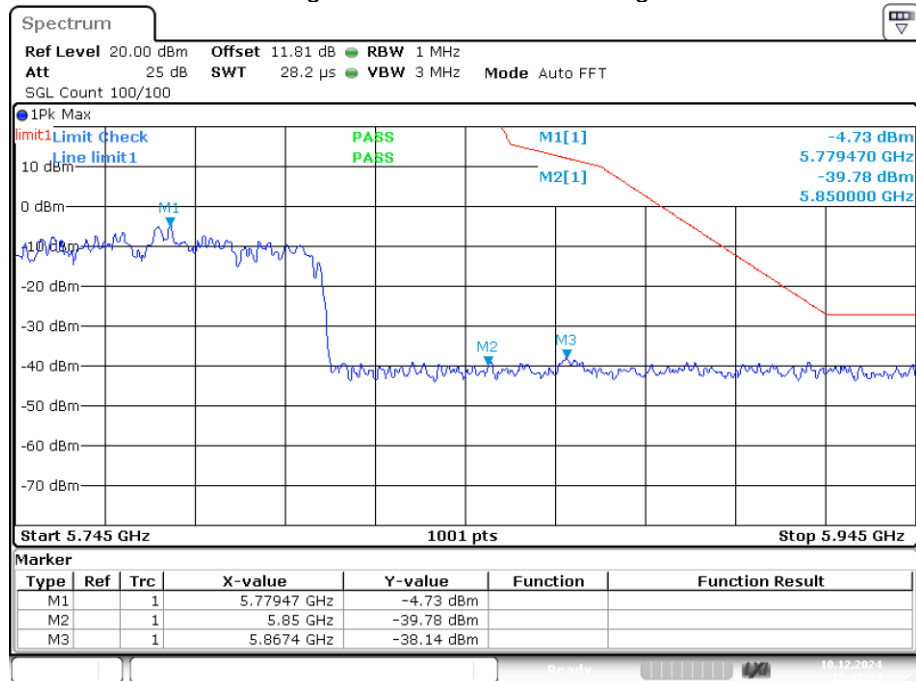


Date: 10.DEC.2024 15:03:04


Band Edge NVNT n20 5745MHz Low Ant1

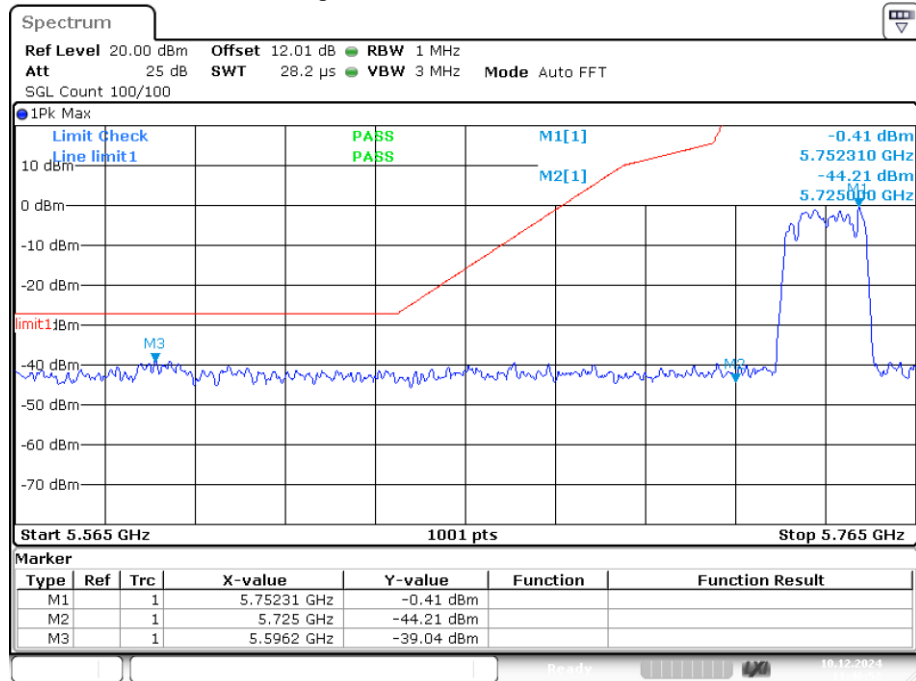

Band Edge NVNT n20 5825MHz High Ant1

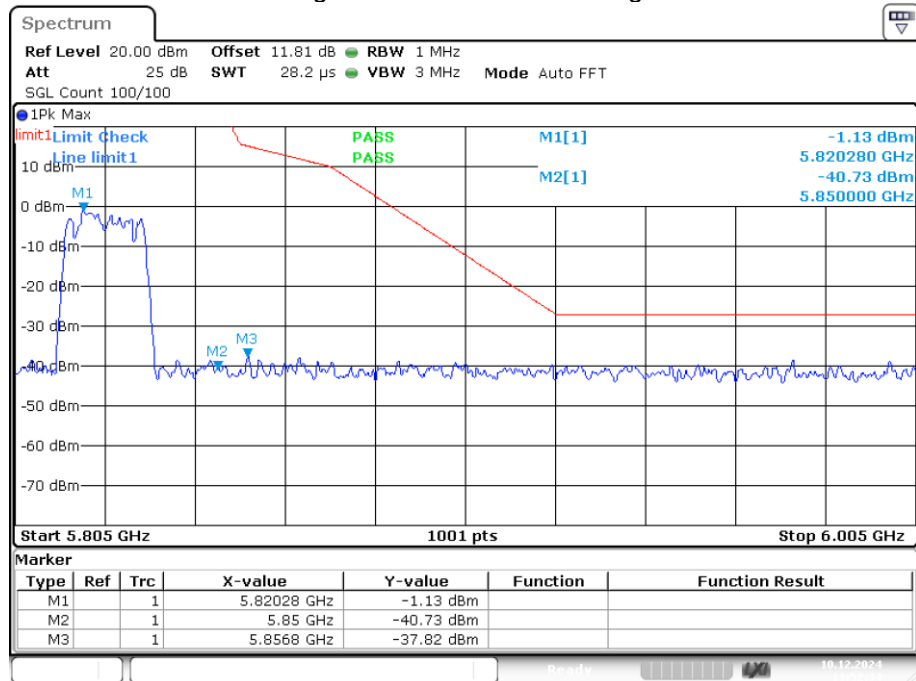


Band Edge NVNT n40 5755MHz Low Ant1

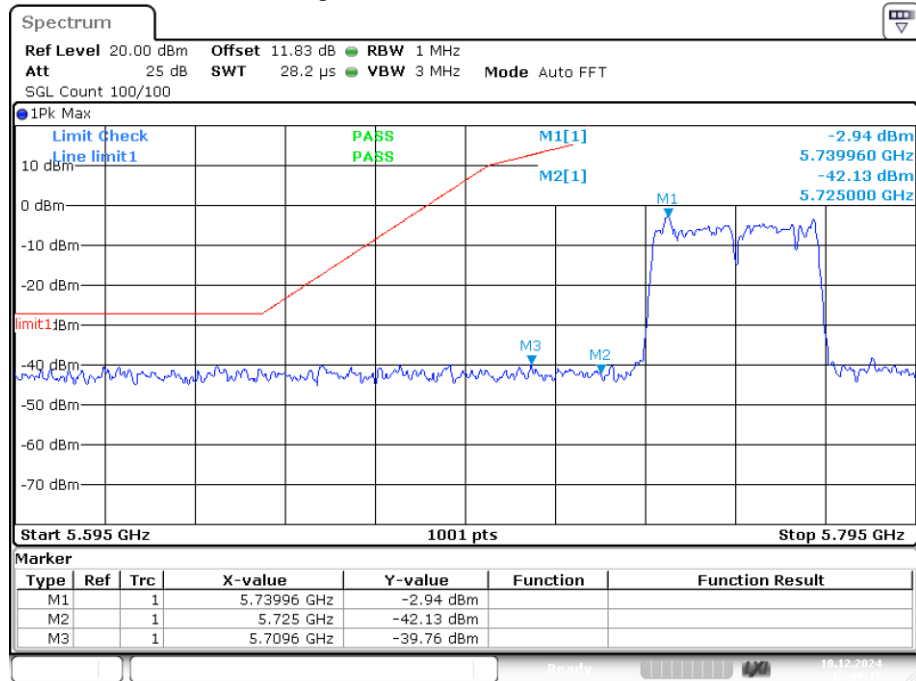

Date: 10.DEC.2024 12:09:17


Band Edge NVNT n40 5795MHz High Ant1

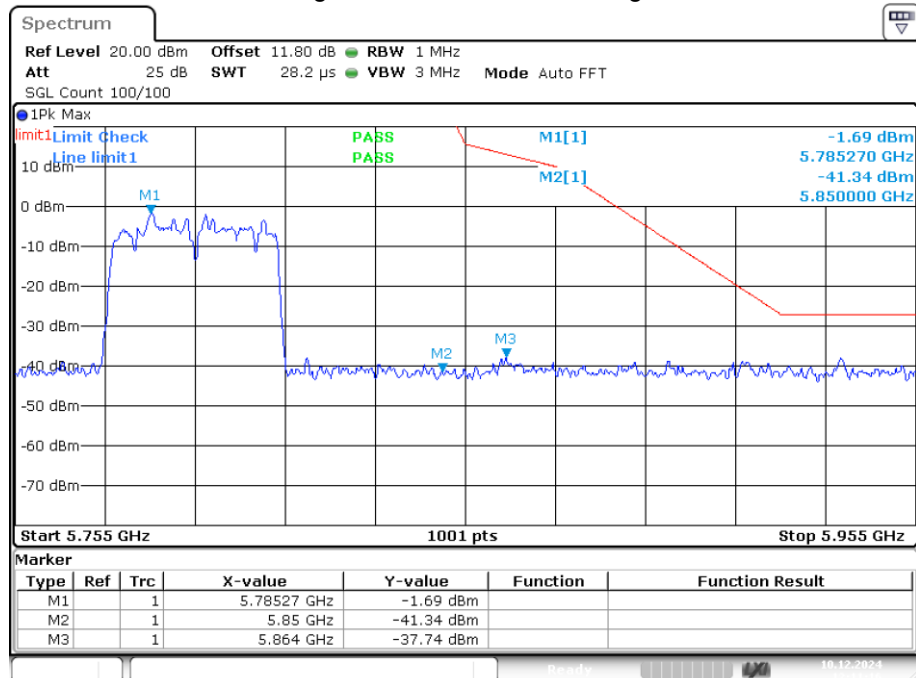


Date: 10.DEC.2024 12:11:16

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.				

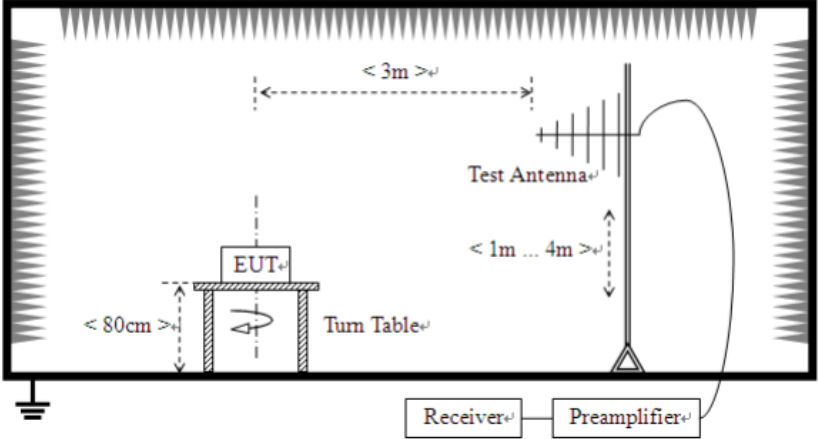	4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

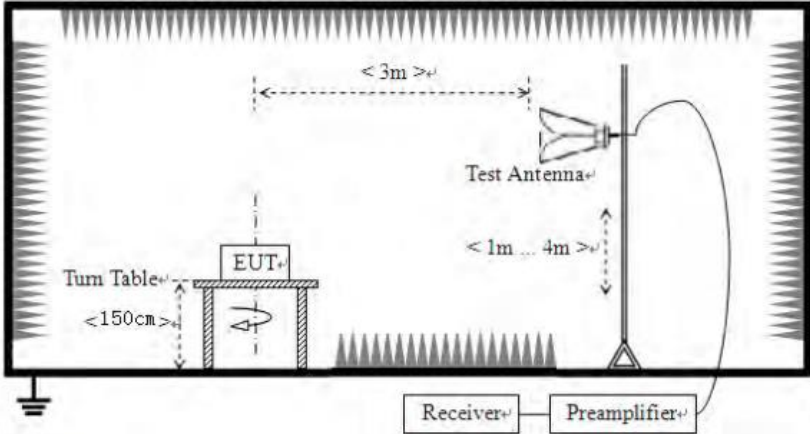	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:**Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.61	47.67	11.25	0.59	30.08	29.43	40	-10.57	Vertical
57.22	40.69	11.93	0.81	29.96	23.47	40	-16.53	Vertical
119.78	46.83	9.4	1.36	29.57	28.02	43.5	-15.48	Vertical
174.71	43.27	8.5	1.7	29.31	24.16	43.5	-19.34	Vertical
439.23	37.27	16.29	3.05	29.41	27.20	46	-18.80	Vertical
862.69	33.38	21.83	4.69	29.14	30.76	46	-15.24	Vertical
66.94	35.91	8.73	0.9	29.89	15.65	40	-24.35	Horizontal
100.53	33.64	11.73	1.19	29.7	16.86	43.5	-26.64	Horizontal
270.32	45.18	12.53	2.22	29.79	30.14	46	-15.86	Horizontal
349.78	36.70	14.5	2.62	29.73	24.09	46	-21.91	Horizontal
629.26	35.77	19.43	3.83	29.27	29.76	46	-16.24	Horizontal
954.87	41.00	22.54	5.06	29.1	39.50	46	-6.50	Horizontal

Above 1GHz:**U-NII-1**

802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.25	28.29	16.29	14.62	32.65	26.55	74.00	-47.45	Vertical
15630.10	30.96	21.83	17.66	34.46	35.99	74.00	-38.01	Vertical
10420.18	29.52	8.73	14.62	32.65	20.22	74.00	-53.78	Horizontal
15630.29	33.92	11.73	17.66	34.46	28.85	74.00	-45.15	Horizontal

U-NII-2A

802.11ac(HT80) 5290MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10580.30	25.36	16.29	14.62	32.65	23.62	74.00	-50.38	Vertical
15870.24	27.23	21.83	17.66	34.46	32.26	74.00	-41.74	Vertical
10580.05	31.95	8.73	14.62	32.65	22.65	74.00	-51.35	Horizontal
15870.24	33.24	11.73	17.66	34.46	28.17	74.00	-45.83	Horizontal

U-NII-2C

802.11ax40 5510MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.02	28.51	16.29	14.62	32.65	26.77	74.00	-47.23	Vertical
16530.07	27.21	21.83	17.66	34.46	32.24	74.00	-41.76	Vertical
11020.22	28.95	8.73	14.62	32.65	19.65	74.00	-54.35	Horizontal
16530.13	32.29	11.73	17.66	34.46	27.22	74.00	-46.78	Horizontal

802.11ax40 5670MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.11	26.97	16.29	14.62	32.65	25.23	74.00	-48.77	Vertical
17010.31	29.90	21.83	17.66	34.46	34.93	74.00	-39.07	Vertical
11340.26	28.62	8.73	14.62	32.65	19.32	74.00	-54.68	Horizontal
17010.11	31.54	11.73	17.66	34.46	26.47	74.00	-47.53	Horizontal

U-NII-3

802.11a(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.09	25.89	16.29	14.62	32.65	24.15	74.00	-49.85	Vertical
17235.26	27.54	21.83	17.66	34.46	32.57	74.00	-41.43	Vertical
11490.09	28.59	8.73	14.62	32.65	19.29	74.00	-54.71	Horizontal
17235.20	32.53	11.73	17.66	34.46	27.46	74.00	-46.54	Horizontal

802.11a(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.25	27.16	16.29	14.62	32.65	25.42	74.00	-48.58	Vertical
17355.05	30.91	21.83	17.66	34.46	35.94	74.00	-38.06	Vertical
11570.11	31.71	8.73	14.62	32.65	22.41	74.00	-51.59	Horizontal
17355.10	33.58	11.73	17.66	34.46	28.51	74.00	-45.49	Horizontal

802.11a(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	26.59	16.29	14.62	32.65	24.85	74.00	-49.15	Vertical
17475.19	30.17	21.83	17.66	34.46	35.20	74.00	-38.80	Vertical
11650.03	31.98	8.73	14.62	32.65	22.68	74.00	-51.32	Horizontal
17475.17	34.77	11.73	17.66	34.46	29.70	74.00	-44.30	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamplifier Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test data of the worst case.

-----END OF REPORT-----