

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

产品规格书

PRODUCT SPECIFICATION

客 户: SHENZHEN XINPIN INNOVATION ELECTRONIC TECHNOLOGY CO.,LTD

CUSTOMER: _____

客户料号: 101.0069

CUST P/N: _____

金赞料号:

K C P/N: _____

产品型号: 20.5*42*0.08*105P*10TS*10mm

D E S E : _____

日 期: 2022. 6. 18

D A T E : _____

版 本: A.0

VERSION : _____

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	制程审核 PRODUCTION CHECKDED BY	批准 APPROVED BY
刘志强				

Address:2 Xisha Road, Shijie Town, Dongguan City

Fax: 86-076986015646

Tel: 86-076986018114


Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

| 安 户 制 早 |

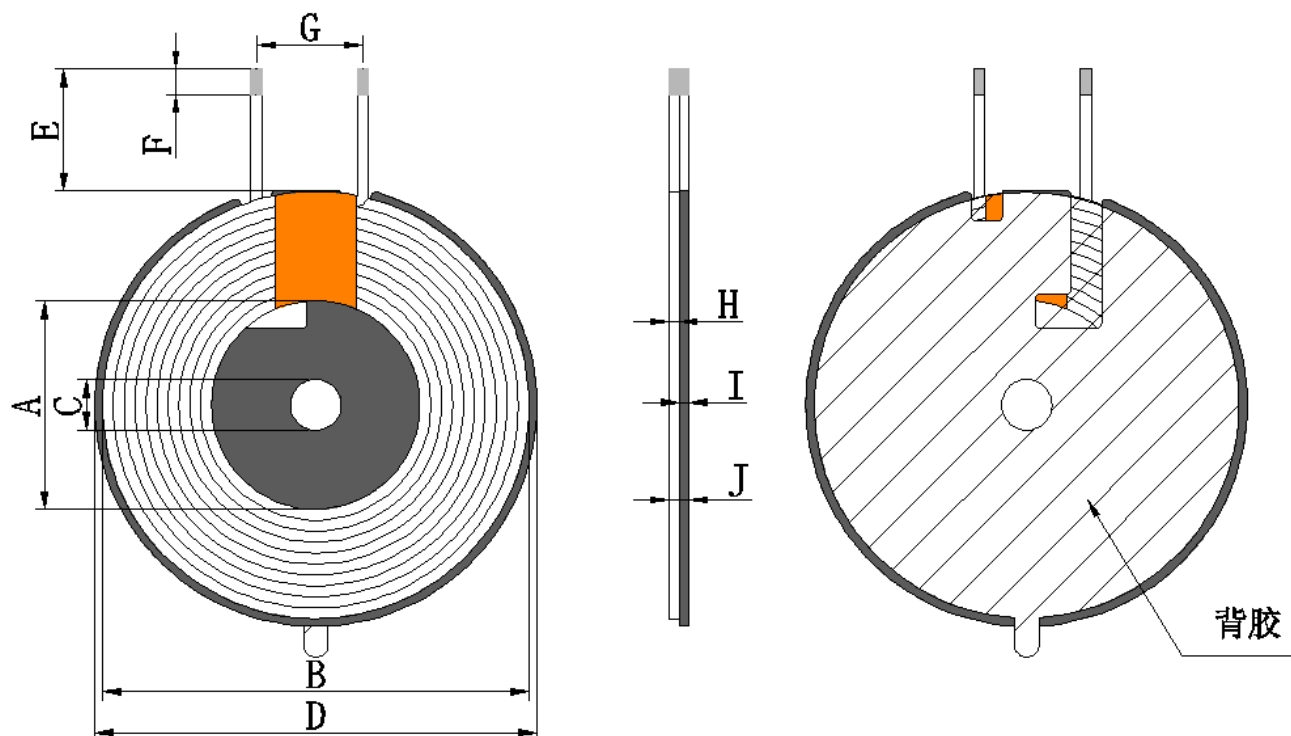

拟制
PREPARED BY

刘志强

工程审核
ENGINEER CHECKED BY

胡志军

制程审核
PRODUCTION CHECKED BY

高伟

Address: 2 Xisha Road, Shijie Town, Dongguan City
Tel: 86-076986018114
Http://www.jzcoil.com

Fax: 86-076986015646

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification					CUST P/N		101.0069				
	B	C	D	E		F	G	20.5*42*0.08*105P*10TS*10mm	H	I	J
20.5±0.5	42±1	5.0±0.5	43.5±	10±1		8±1	10±2		1.25max	1.0±0.1	2.8max
			0.5								

单位(Unit):毫米(mm)

PS:1. (E) 为磁外引线长度; 2. (H) 不包含进线; 3. (J) 不包含离型纸;

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
10TS	0.08*105P 丝包线 (Silk-Covered Wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/-Paste)

所有材料要求合格 ROHS 标准

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±10%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	线圈加磁片: 6.3 uH±10%	100kHz/V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIAIS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	线材	0.08*105P 丝包线	SBX-2U-F-0013	ZY

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY	制程审核 PRODUCTION CHECKED BY
刘志强	胡志军	高海峰

Address:2 Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114

Http://www.jzcoil.com

Fax: 86-076986015646

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

101.0069

金赞型号:
KC DESE

20.5*42*0.08*105P*10TS*10mm

2	ferrite	G43.5*5.0*1.0H (With hole)		
3	doubletape	42*5.0*0.08H(with hole, with hand tear)		
4	Gold finger tape	8mm	HT tape 8MM	JRM
5	glue	JS-E103	E103W-2	BRF
6	tin bar	Environmentally friendly solder bar		XC

东莞市金赞智能科技有限公司

拟制
PREPARED BY工程审核
ENGINEER CHECKED BY制程审核
PRODUCTION CHECKED BY

刘志强

胡志军

高海峰

Address: 2 Xisha Road, Shijie Town, Dongguan City
 Tel: 86-076986018114
 Http://www.jzcoil.com

Fax: 86-076986015646

文件编号 FilNo: KC-JZ-09-008