



PSD NVNT n20 5180MHz Ant1

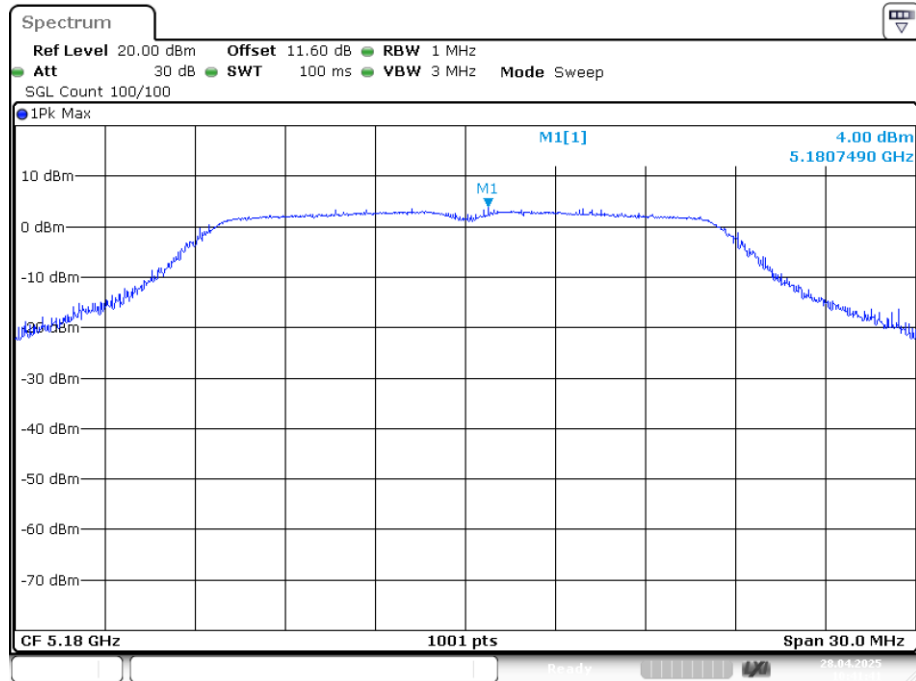


Date: 28.APR.2025 10:41:40

PSD NVNT n20 5200MHz Ant1

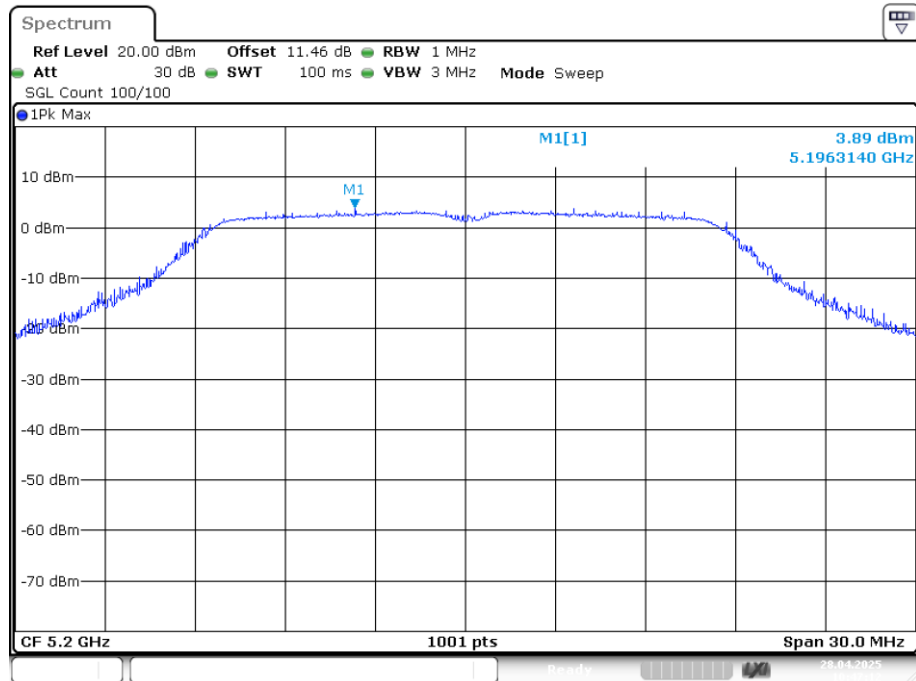


Date: 28.APR.2025 10:47:13

PSD NVNT n20 5240MHz Ant1

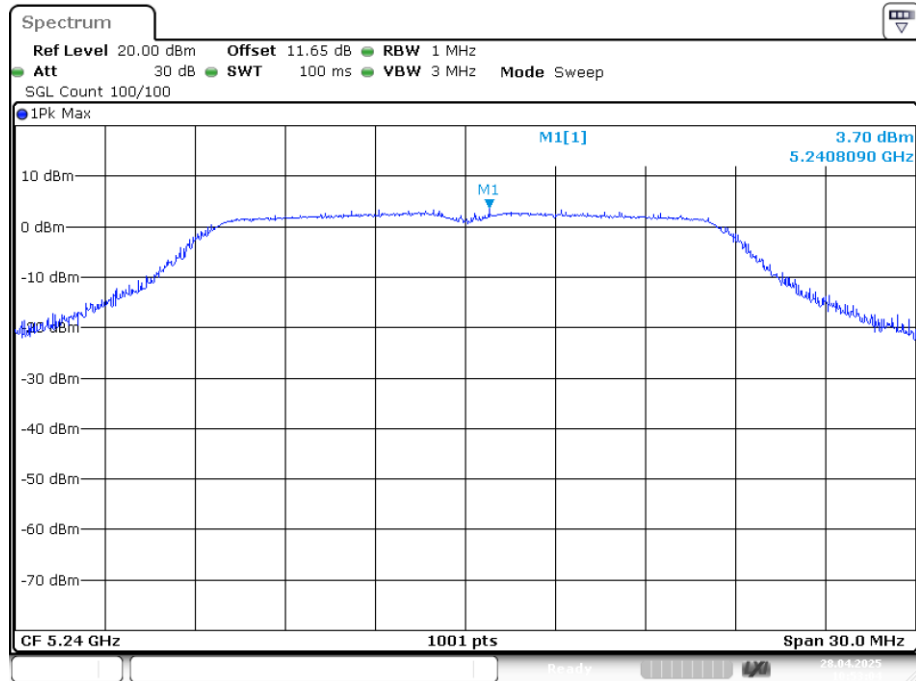


Date: 28.APR.2025 10:53:04

PSD NVNT n40 5190MHz Ant1

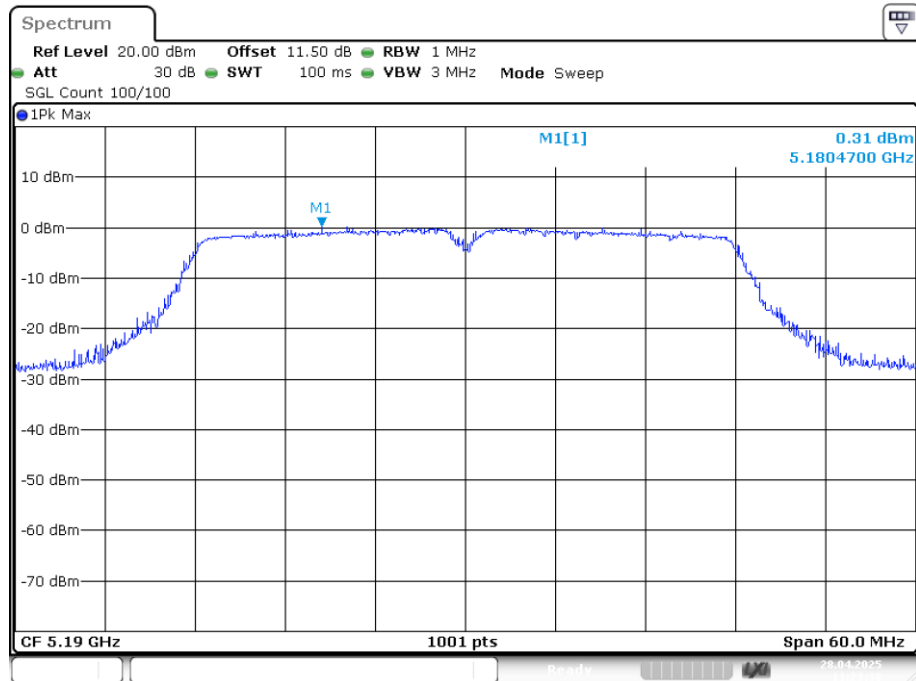

Date: 28.APR.2025 11:23:38

PSD NVNT n40 5230MHz Ant1

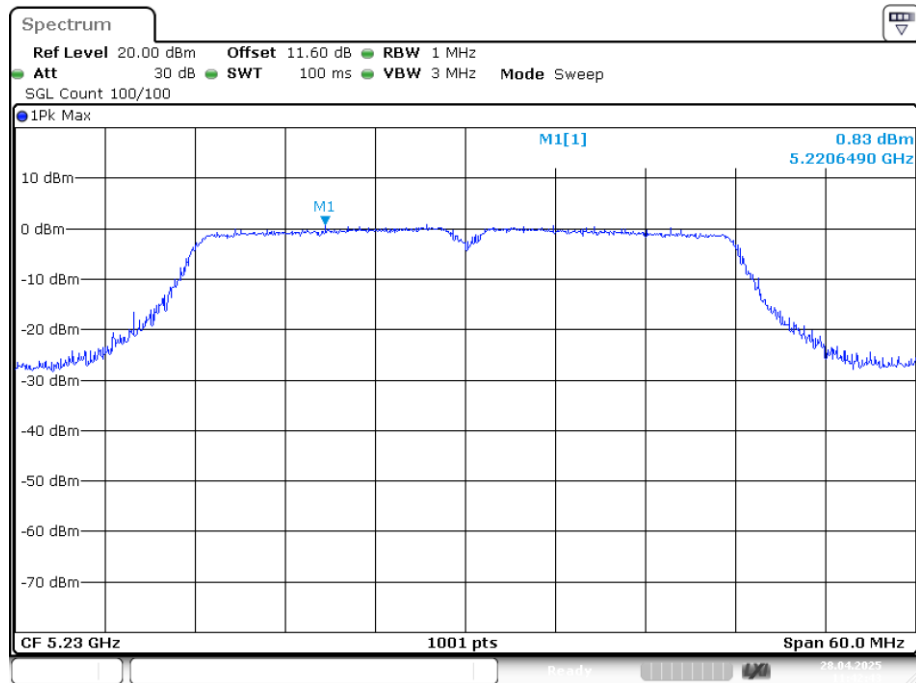

Date: 28.APR.2025 11:42:43


Band 4 (5725 - 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle Factor (dB)	Conducted PSD(dBm)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	0.11	-0.6	-0.49	30	Pass
NVNT	a	5785	Ant1	0.11	-0.957	-0.847	30	Pass
NVNT	a	5825	Ant1	0.11	0.089	0.199	30	Pass
NVNT	ac20	5745	Ant1	0.11	-0.155	-0.045	30	Pass
NVNT	ac20	5785	Ant1	0.11	-0.767	-0.657	30	Pass
NVNT	ac20	5825	Ant1	0.11	-0.326	-0.216	30	Pass
NVNT	ac40	5755	Ant1	0.23	-4.522	-4.292	30	Pass
NVNT	ac40	5795	Ant1	0.22	-5.52	-5.3	30	Pass
NVNT	ax20	5745	Ant1	0.11	-9.626	-9.516	30	Pass
NVNT	ax20	5785	Ant1	0.11	-10.259	-10.149	30	Pass
NVNT	ax20	5825	Ant1	0.12	-10.643	-10.523	30	Pass
NVNT	ax40	5755	Ant1	0.23	-12.727	-12.497	30	Pass
NVNT	ax40	5795	Ant1	0.22	-12.354	-12.134	30	Pass
NVNT	n20	5745	Ant1	0.12	-0.139	-0.019	30	Pass
NVNT	n20	5785	Ant1	0.12	-1.048	-0.928	30	Pass
NVNT	n20	5825	Ant1	0.12	-1.103	-0.983	30	Pass
NVNT	n40	5755	Ant1	0.24	-3.234	-2.994	30	Pass
NVNT	n40	5795	Ant1	0.23	-4.133	-3.903	30	Pass

Note: 1. Total PSD= Conducted PSD+ Duty Cycle Factor,


2. Offset = Cable loss

PSD NVNT a 5745MHz Ant1

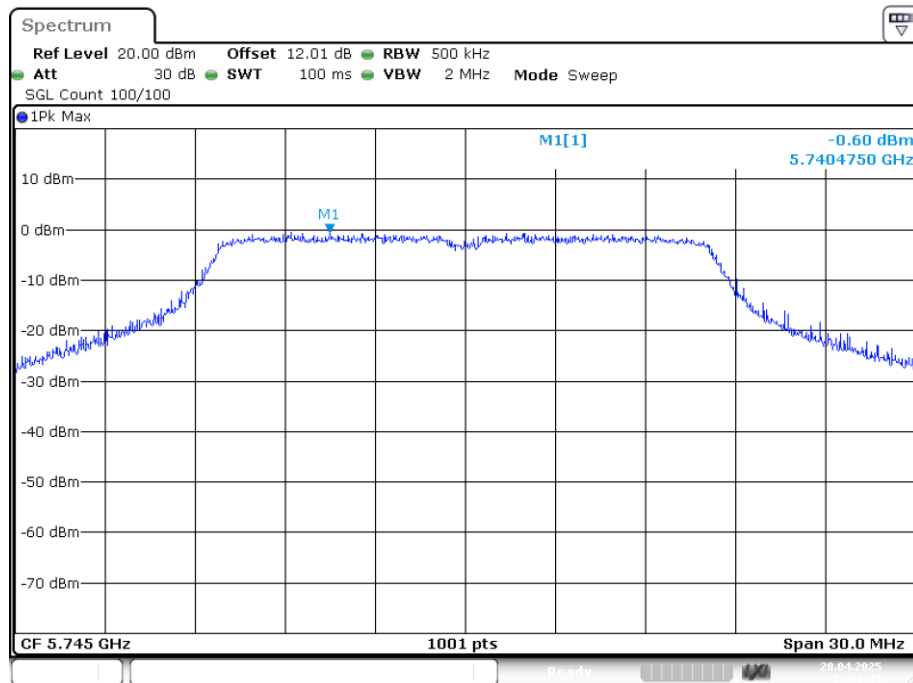


Date: 28.APR.2025 13:01:40

PSD NVNT a 5785MHz Ant1

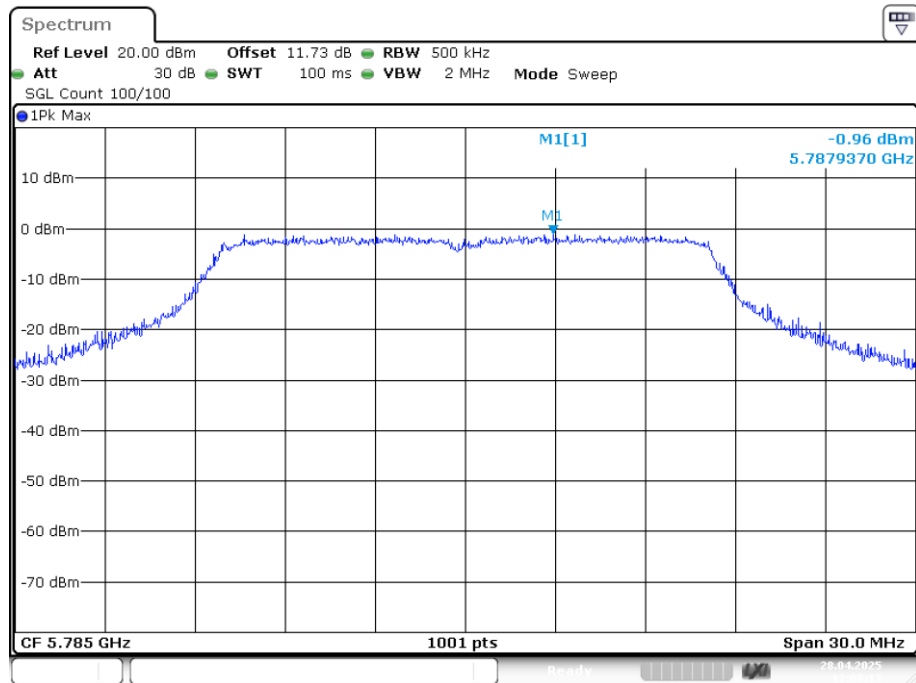


Date: 28.APR.2025 13:08:12

PSD NVNT a 5825MHz Ant1

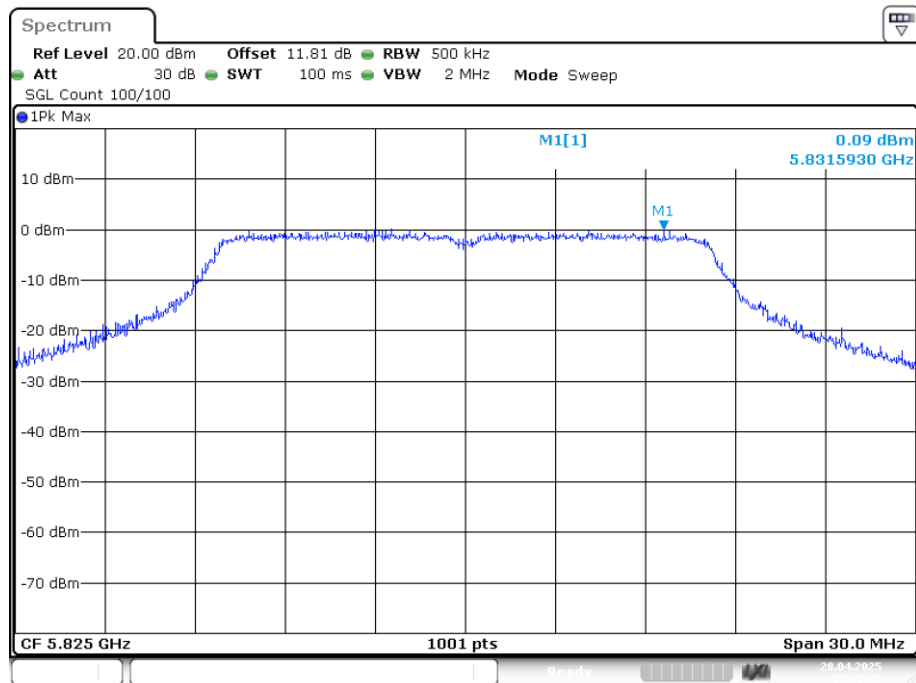


Date: 28.APR.2025 15:02:21

PSD NVNT ac20 5745MHz Ant1

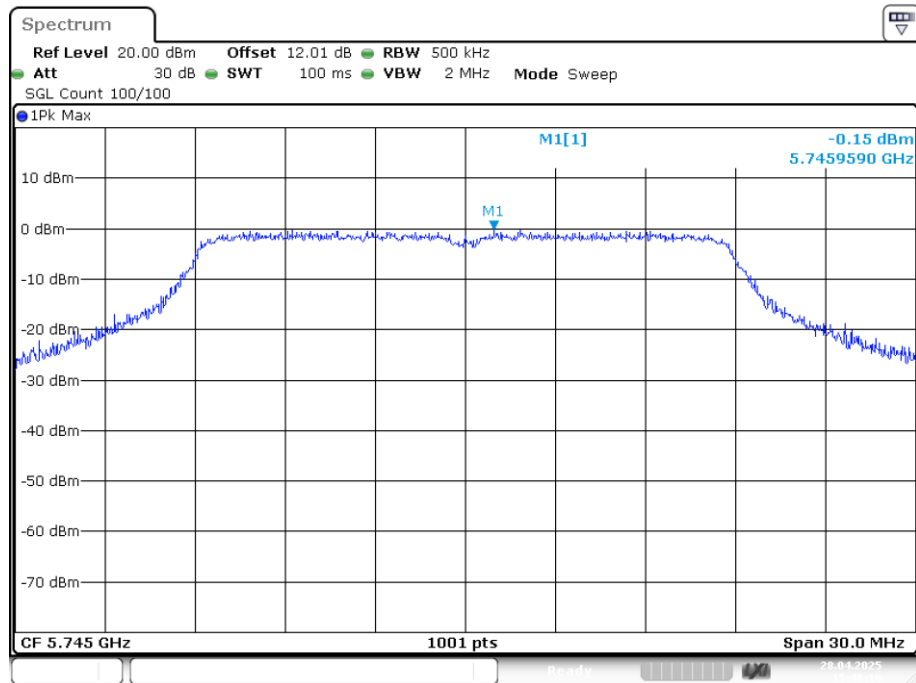


Date: 28.APR.2025 15:48:20

PSD NVNT ac20 5785MHz Ant1

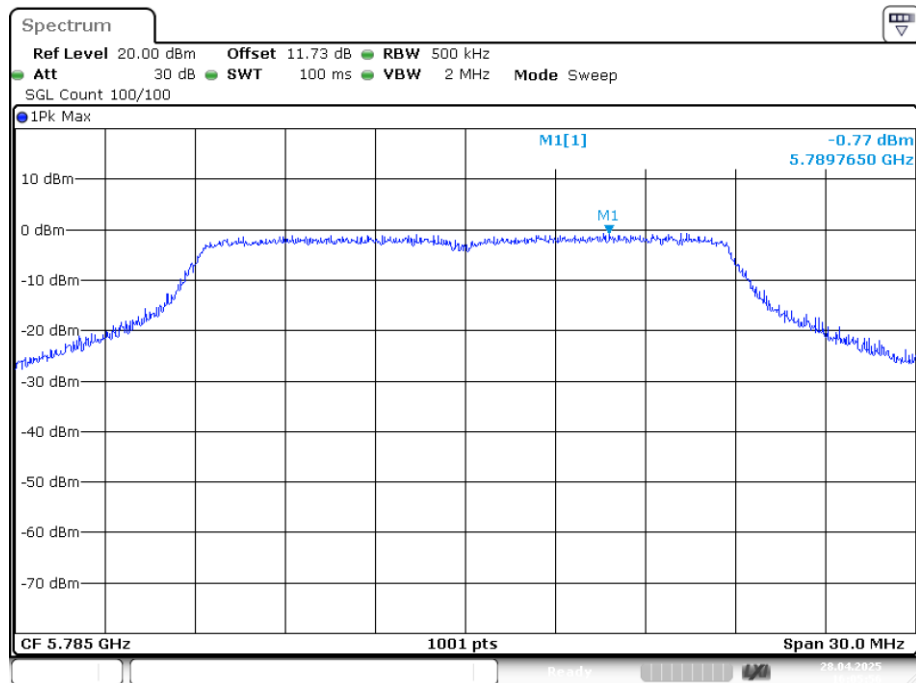


Date: 28.APR.2025 16:05:56

PSD NVNT ac20 5825MHz Ant1

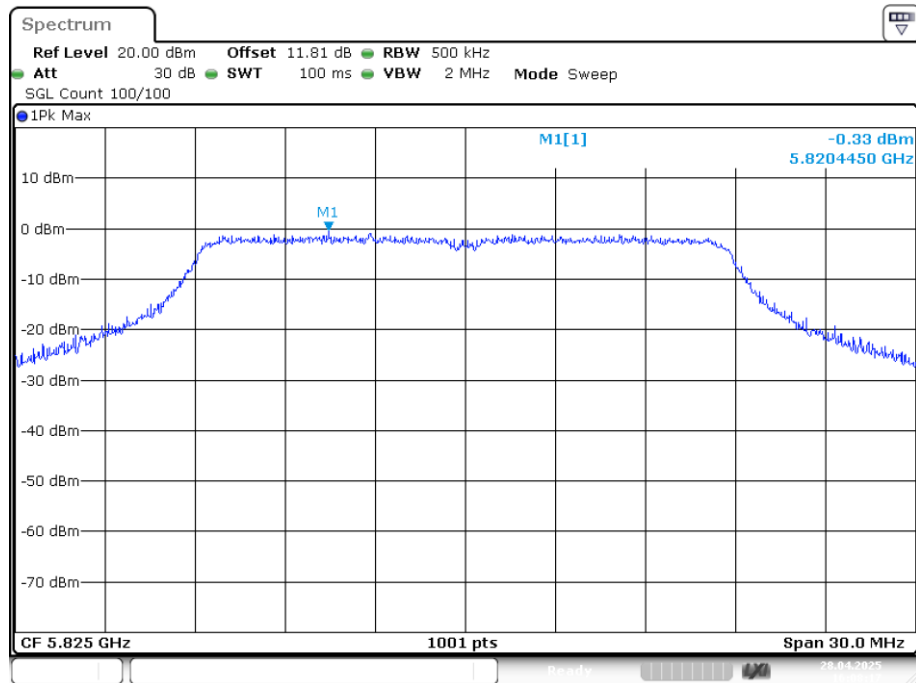


Date: 28.APR.2025 16:08:16

PSD NVNT ac40 5755MHz Ant1

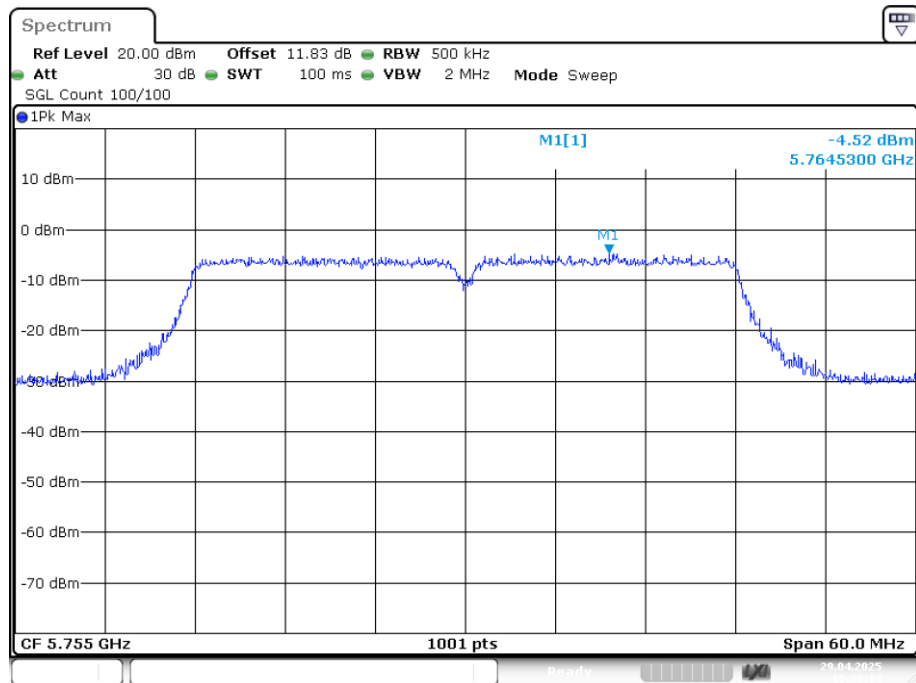


Date: 29.APR.2025 10:20:15

PSD NVNT ac40 5795MHz Ant1

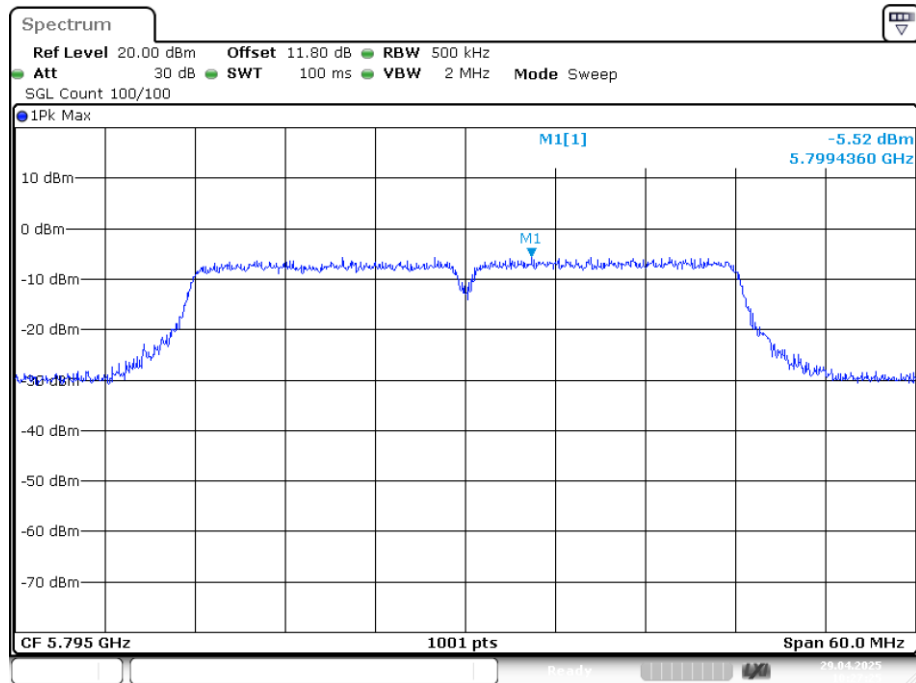


Date: 29.APR.2025 10:27:25

PSD NVNT ax20 5745MHz Ant1

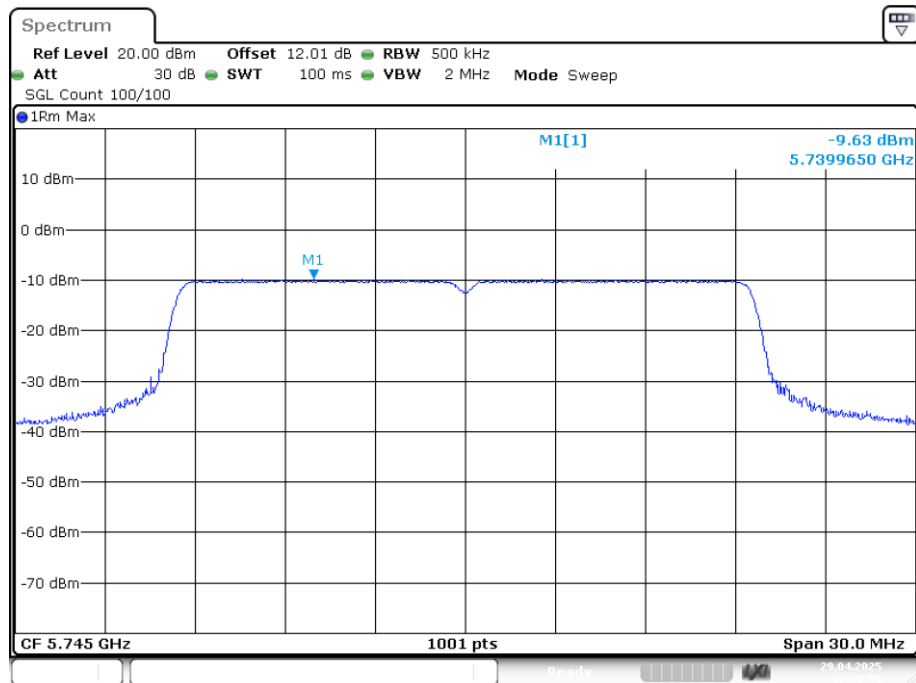


Date: 29.APR.2025 10:34:00

PSD NVNT ax20 5785MHz Ant1

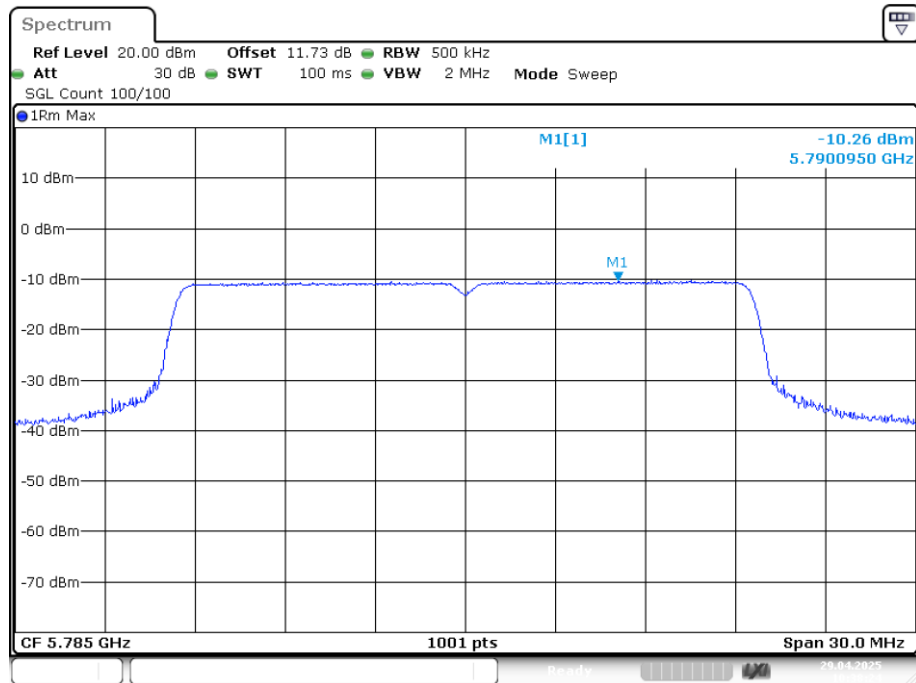


Date: 29.APR.2025 10:38:24

PSD NVNT ax20 5825MHz Ant1

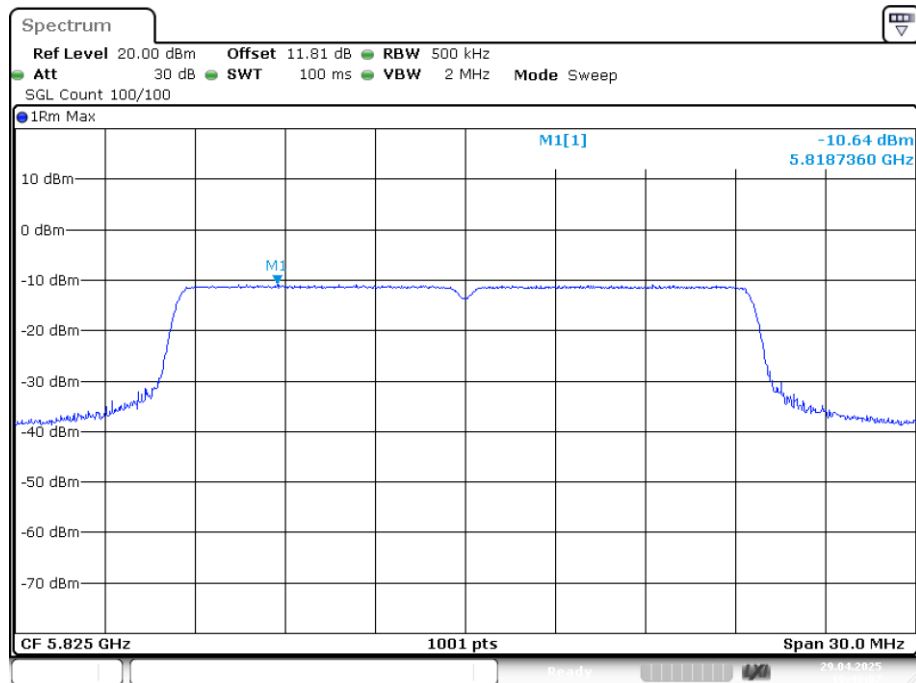


Date: 29.APR.2025 10:43:07

PSD NVNT ax40 5755MHz Ant1

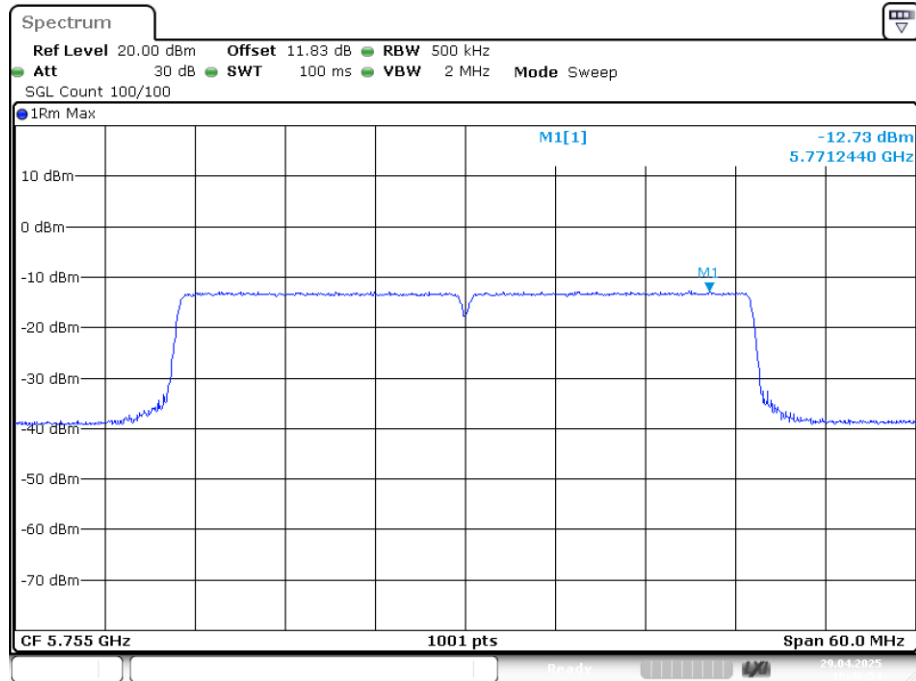


Date: 29.APR.2025 10:46:54

PSD NVNT ax40 5795MHz Ant1

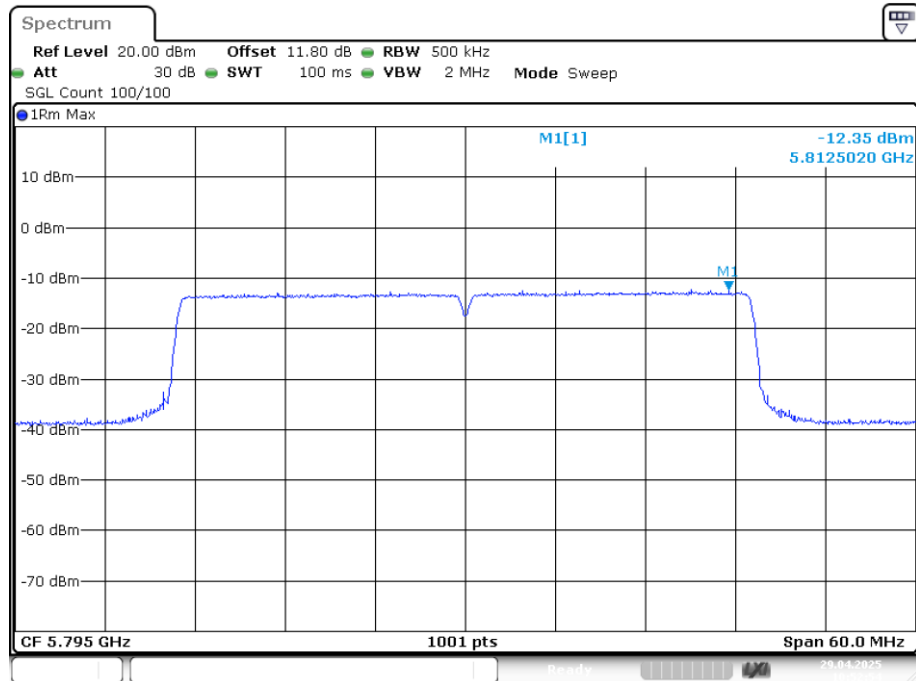


Date: 29.APR.2025 10:52:53

PSD NVNT n20 5745MHz Ant1

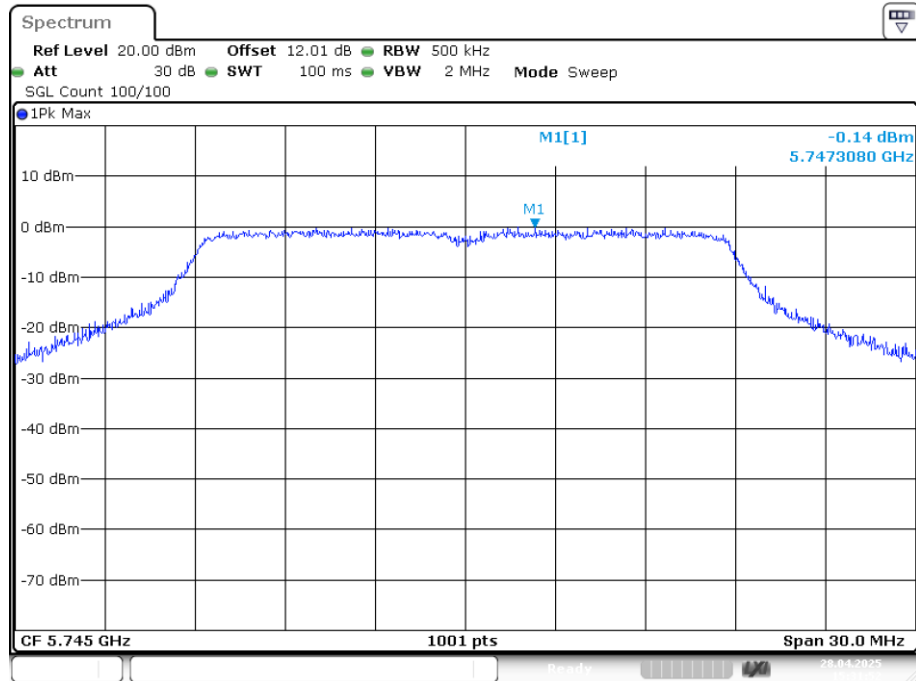


Date: 28.APR.2025 15:31:52

PSD NVNT n20 5785MHz Ant1

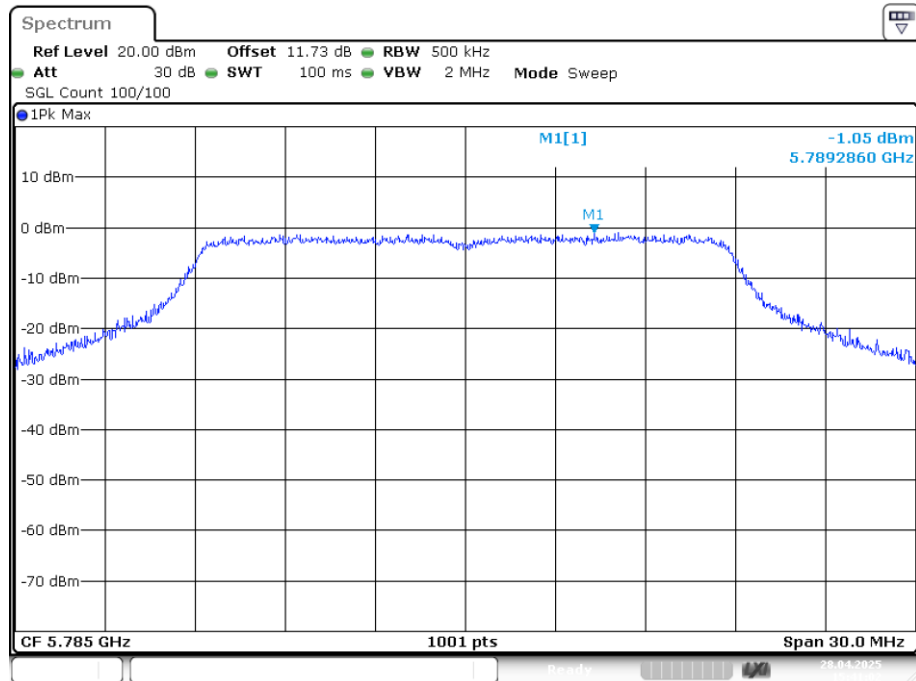


Date: 28.APR.2025 15:41:02

PSD NVNT n20 5825MHz Ant1

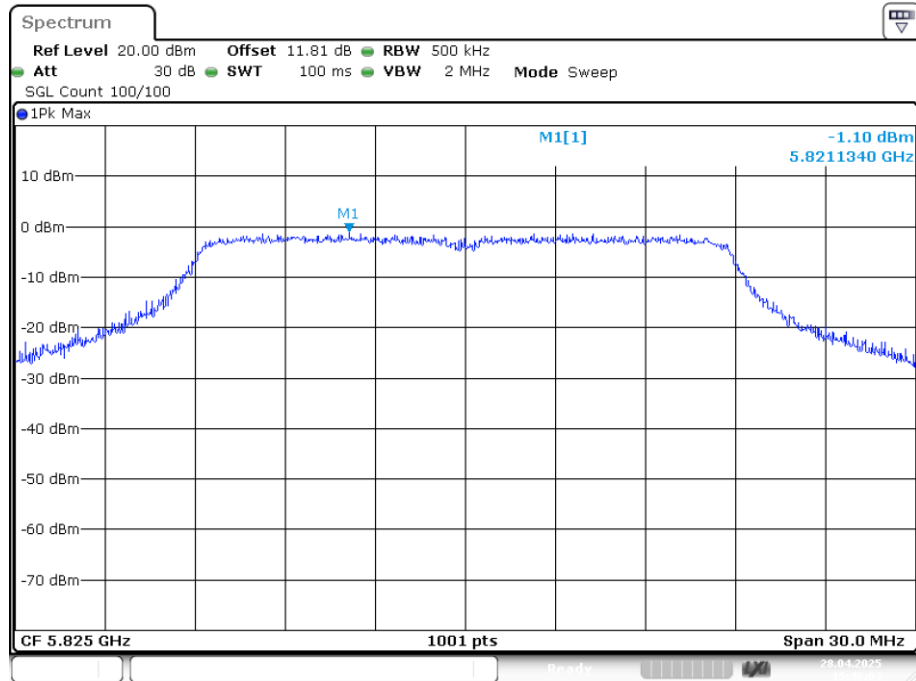


Date: 28.APR.2025 15:46:03

PSD NVNT n40 5755MHz Ant1

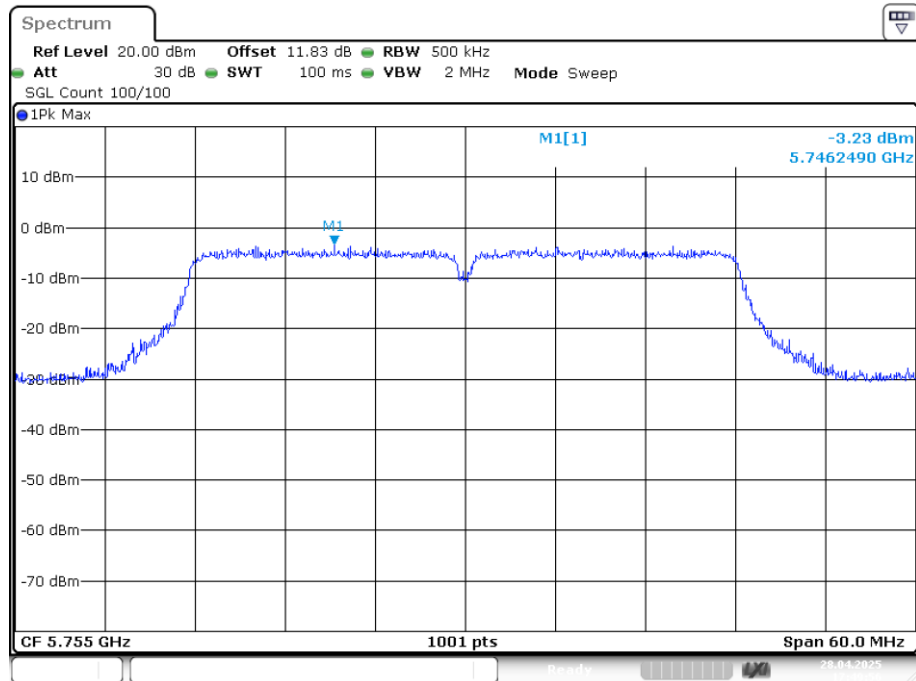

Date: 28.APR.2025 17:49:56


PSD NVNT n40 5795MHz Ant1

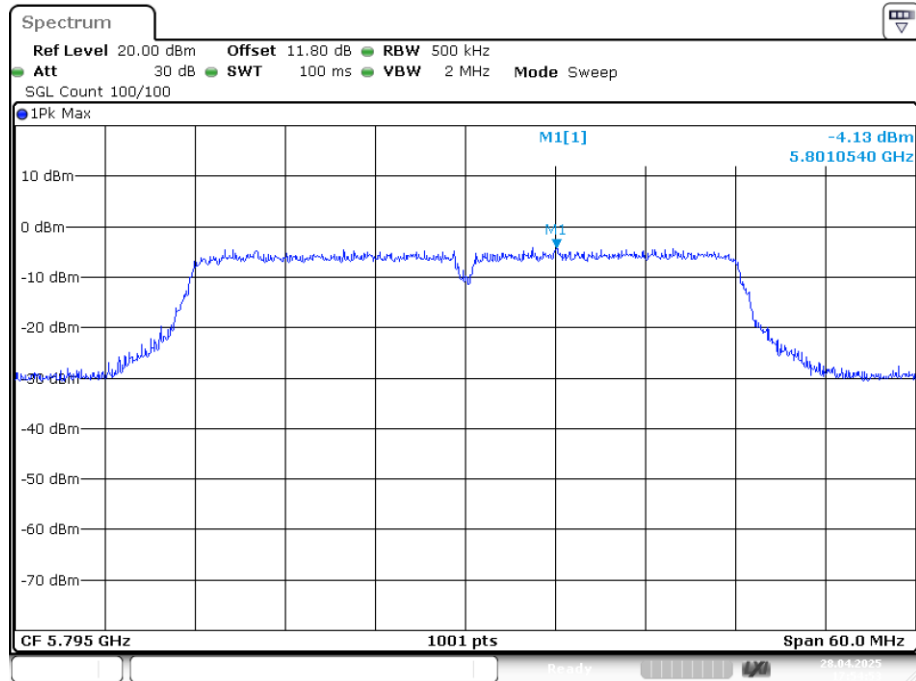

Date: 28.APR.2025 17:54:53

4.7 Radiated Band Edge

Test Requirement:	15.205&15.209																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								
Test setup:	Above 1GHz																								

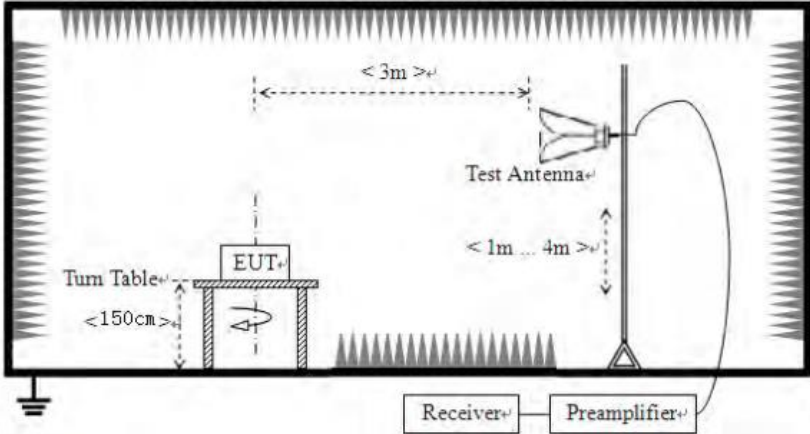	
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data:**Band1**

Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	32.10	17.18	49.28	74.00	-24.72	PK
V	5150.00	32.77	17.18	49.95	74.00	-24.05	PK
Mode:		802.11a		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.11	17.18	40.29	54.00	-13.71	AV
V	5150.00	24.03	17.18	41.21	54.00	-12.79	AV
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150	34.69	17.18	51.87	74.00	-22.13	PK
V	5150	34.44	17.18	51.62	74.00	-22.38	PK
Mode:		802.11a		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.61	17.20	43.81	54.00	-10.19	AV
V	5350.00	23.99	17.20	41.19	54.00	-12.81	AV

Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.71	17.18	51.89	74.00	-22.11	PK
V	5150.00	34.60	17.18	51.78	74.00	-22.22	PK
Mode:		802.11n(HT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.63	17.18	39.81	54.00	-14.19	AV
V	5150.00	24.12	17.18	41.30	54.00	-12.70	AV
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	31.37	17.18	48.55	74.00	-25.45	PK
V	5350.00	34.71	17.18	51.89	74.00	-22.11	PK
Mode:		802.11n(HT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	22.56	17.18	39.74	54.00	-14.26	AV
V	5350.00	24.79	17.18	41.97	54.00	-12.03	AV

Mode:		802.11ac(VHT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.86	17.18	51.04	74.00	-22.96	PK
V	5150.00	34.91	17.18	52.09	74.00	-21.91	PK
Mode:		802.11ac(VHT20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.40	17.18	40.58	54.00	-13.42	AV
V	5150.00	24.37	17.18	41.55	54.00	-12.45	AV
Mode:		802.11ac(VHT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.77	17.18	50.95	74.00	-23.05	PK
V	5350.00	36.40	17.18	53.58	74.00	-20.42	PK
Mode:		802.11ac(VHT20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.17	17.20	44.37	54.00	-9.63	AV
V	5350.00	25.69	17.20	42.89	54.00	-11.11	AV

Mode:		802.11ax(HE20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	33.57	17.18	50.75	74.00	-23.25	PK
V	5150.00	36.20	17.18	53.38	74.00	-20.62	PK
Mode:		802.11ax(HE20)		Frequency:		5180MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.07	17.18	39.25	54.00	-14.75	AV
V	5150.00	25.37	17.18	42.55	54.00	-11.45	AV
Mode:		802.11ax(HE20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	34.52	17.18	51.70	74.00	-22.30	PK
V	5350.00	34.23	17.18	51.41	74.00	-22.59	PK
Mode:		802.11ax(HE20)		Frequency:		5240MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	26.92	17.20	44.12	54.00	-9.88	AV
V	5350.00	23.53	17.20	40.73	54.00	-13.27	AV

Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	31.03	17.18	48.21	74.00	-25.79	PK
V	5150.00	32.98	17.18	50.16	74.00	-23.84	PK
Mode:		802.11n(HT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.14	17.18	39.32	54.00	-14.68	AV
V	5150.00	25.00	17.18	42.18	54.00	-11.82	AV
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.20	17.18	50.38	74.00	-23.62	PK
V	5350.00	33.92	17.18	51.10	74.00	-22.90	PK
Mode:		802.11n(HT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	27.00	17.20	44.20	54.00	-9.80	AV
V	5350.00	23.21	17.20	40.41	54.00	-13.59	AV

Mode:		802.11ac(VHT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	31.46	17.18	48.64	74.00	-25.36	PK
V	5150.00	36.11	17.18	53.29	74.00	-20.71	PK
Mode:		802.11ac(VHT40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	22.77	17.18	39.95	54.00	-14.05	AV
V	5150.00	25.54	17.18	42.72	54.00	-11.28	AV
Mode:		802.11ac(VHT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	31.65	17.18	48.83	74.00	-25.17	PK
V	5350.00	32.79	17.18	49.97	74.00	-24.03	PK
Mode:		802.11ac(VHT40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	30.33	17.20	47.53	54.00	-6.47	AV
V	5350.00	23.28	17.20	40.48	54.00	-13.52	AV

Mode:		802.11ax(HE40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	32.74	17.18	49.92	74.00	-24.08	PK
V	5150.00	34.74	17.18	51.92	74.00	-22.08	PK
Mode:		802.11ax(HE40)		Frequency:		5190MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	23.28	17.18	40.46	54.00	-13.54	AV
V	5150.00	27.22	17.18	44.40	54.00	-9.60	AV
Mode:		802.11ax(HE40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	33.52	17.18	50.70	74.00	-23.30	PK
V	5350.00	35.58	17.18	52.76	74.00	-21.24	PK
Mode:		802.11ax(HE40)		Frequency:		5230MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5350.00	30.23	17.20	47.43	54.00	-6.57	AV
V	5350.00	23.40	17.20	40.60	54.00	-13.40	AV

Band 4

Mode:		802.11a		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	32.75	17.18	49.93	68.20	-18.27	PK
V	5725.00	33.33	17.18	50.51	68.20	-17.69	PK
Mode:		802.11a		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	24.42	17.18	41.60	54.00	-12.40	AV
V	5725.00	23.95	17.18	41.13	54.00	-12.87	AV
Mode:		802.11a		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	33.41	17.18	50.59	68.20	-17.61	PK
V	5850.00	33.80	17.18	50.98	68.20	-17.22	PK
Mode:		802.11a		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	22.01	17.18	39.19	54.00	-14.81	AV
V	5850.00	27.04	17.18	44.22	54.00	-9.78	AV

Mode:		802.11n(HT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	33.25	17.18	50.43	68.20	-17.77	PK
V	5725.00	34.13	17.18	51.31	68.20	-16.89	PK
Mode:		802.11n(HT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	24.46	17.18	41.64	54.00	-12.36	AV
V	5725.00	25.85	17.18	43.03	54.00	-10.97	AV
Mode:		802.11n(HT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	31.35	17.18	48.53	68.20	-19.67	PK
V	5850.00	32.93	17.18	50.11	68.20	-18.09	PK
Mode:		802.11n(HT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	23.47	17.18	40.65	54.00	-13.35	AV
V	5850.00	24.72	17.18	41.90	54.00	-12.10	AV

Mode:		802.11ac(VHT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	33.34	17.18	50.52	68.20	-17.68	PK
V	5725.00	32.52	17.18	49.70	68.20	-18.50	PK
Mode:		802.11ac(VHT20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	21.84	17.18	39.02	54.00	-14.98	AV
V	5725.00	23.76	17.18	40.94	54.00	-13.06	AV
Mode:		802.11ac(VHT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	31.70	17.18	48.88	68.20	-19.32	PK
V	5850.00	33.76	17.18	50.94	68.20	-17.26	PK
Mode:		802.11ac(VHT20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	22.94	17.18	40.12	54.00	-13.88	AV
V	5850.00	25.83	17.18	43.01	54.00	-10.99	AV


Mode:		802.11ax(HE20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	33.13	17.18	50.31	68.20	-17.89	PK
V	5725.00	35.40	17.18	52.58	68.20	-15.62	PK
Mode:		802.11ax(HE20)		Frequency:		5745MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	21.72	17.18	38.90	54.00	-15.10	AV
V	5725.00	26.53	17.18	43.71	54.00	-10.29	AV
Mode:		802.11ax(HE20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	33.60	17.18	50.78	68.20	-17.42	PK
V	5850.00	35.18	17.18	52.36	68.20	-15.84	PK
Mode:		802.11ax(HE20)		Frequency:		5825MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	22.18	17.18	39.36	54.00	-14.64	AV
V	5850.00	24.61	17.18	41.79	54.00	-12.21	AV

Mode:		802.11n(HT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	31.83	17.18	49.01	68.20	-19.19	PK
V	5725.00	35.51	17.18	52.69	68.20	-15.51	PK
Mode:		802.11n(HT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	22.08	17.18	39.26	54.00	-14.74	AV
V	5725.00	26.42	17.18	43.60	54.00	-10.40	AV
Mode:		802.11n(HT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	34.22	17.18	51.40	68.20	-16.80	PK
V	5850.00	33.26	17.18	50.44	68.20	-17.76	PK
Mode:		802.11n(HT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	22.67	17.18	39.85	54.00	-14.15	AV
V	5850.00	26.16	17.18	43.34	54.00	-10.66	AV

Mode:		802.11ac(VHT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	33.23	17.18	50.41	68.20	-17.79	PK
V	5725.00	32.52	17.18	49.70	68.20	-18.50	PK
Mode:		802.11ac(VHT40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	24.45	17.18	41.63	54.00	-12.37	AV
V	5725.00	27.06	17.18	44.24	54.00	-9.76	AV
Mode:		802.11ac(VHT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	32.00	17.18	49.18	68.20	-19.02	PK
V	5850.00	35.54	17.18	52.72	68.20	-15.48	PK
Mode:		802.11ac(VHT40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	21.83	17.18	39.01	54.00	-14.99	AV
V	5850.00	24.94	17.18	42.12	54.00	-11.88	AV

Mode:		802.11ax(HE40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.00	32.93	17.18	50.11	68.20	-18.09	PK
V	5725.00	35.56	17.18	52.74	68.20	-15.46	PK
Mode:		802.11ax(HE40)		Frequency:		5755MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5725.000	25.00	17.18	42.18	54.00	-11.82	AV
V	5725.00	24.52	17.18	41.70	54.00	-12.30	AV
Mode:		802.11ax(HE40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	33.40	17.18	50.58	68.20	-17.62	PK
V	5850.00	33.32	17.18	50.50	68.20	-17.70	PK
Mode:		802.11ax(HE40)		Frequency:		5795MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5850.00	25.03	17.18	42.21	54.00	-11.79	AV
V	5850.00	25.19	17.18	42.37	54.00	-11.63	AV


4.8 Conducted Band Edge

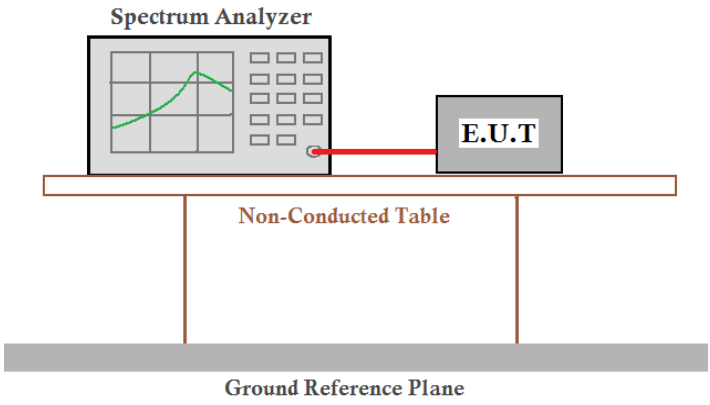Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. - For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	The procedure for peak unwanted emissions measurements above 1000 MHz is as follows: - Peak emission levels are measured by setting the instrument as follows: 1) RBW = 1 MHz. 2) VBW $\geq [3 \times \text{RBW}]$. 3) Detector = peak. 4) Sweep time = auto. 5) Trace mode = max hold. 6) Allow sweeps to continue until the trace stabilizes.
Test results:	Pass

Band 1


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-30.88	-27	Pass
NVNT	a	5240	Ant1	-30.07	-27	Pass
NVNT	ac20	5180	Ant1	-31.07	-27	Pass
NVNT	ac20	5240	Ant1	-31.04	-27	Pass
NVNT	ac40	5190	Ant1	-30.07	-27	Pass
NVNT	ac40	5230	Ant1	-31.21	-27	Pass
NVNT	ax20	5180	Ant1	-30.13	-27	Pass
NVNT	ax20	5240	Ant1	-31.43	-27	Pass
NVNT	ax40	5190	Ant1	-30.16	-27	Pass
NVNT	ax40	5230	Ant1	-41.11	-27	Pass
NVNT	n20	5180	Ant1	-30.36	-27	Pass
NVNT	n20	5240	Ant1	-30.45	-27	Pass
NVNT	n40	5190	Ant1	-30.29	-27	Pass
NVNT	n40	5230	Ant1	-30.51	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

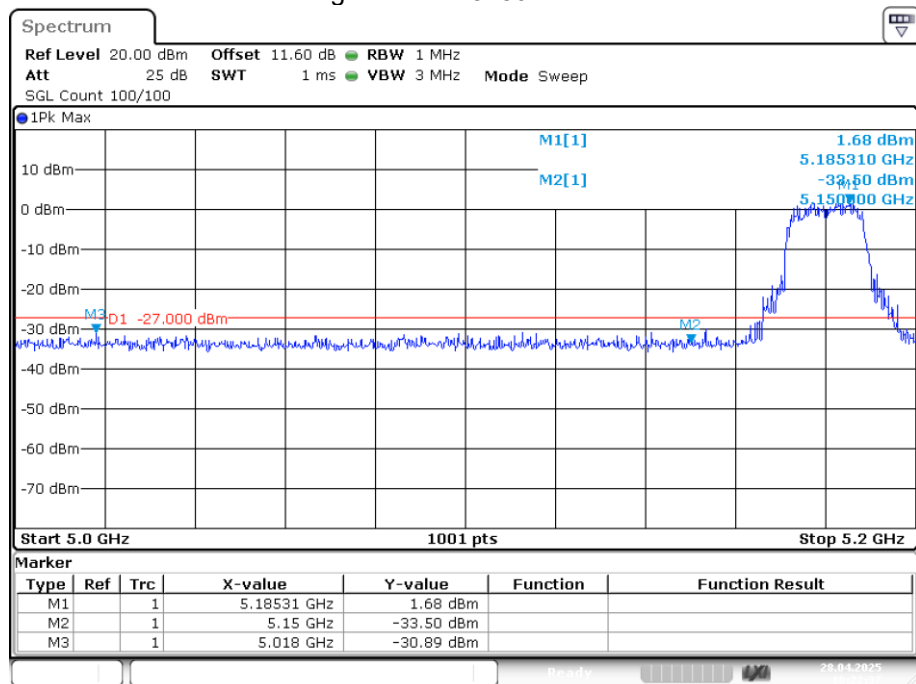Band Edge NVNT a 5180MHz Low Ant1


Date: 28.APR.2025 10:22:37

Band Edge NVNT a 5240MHz High Ant1

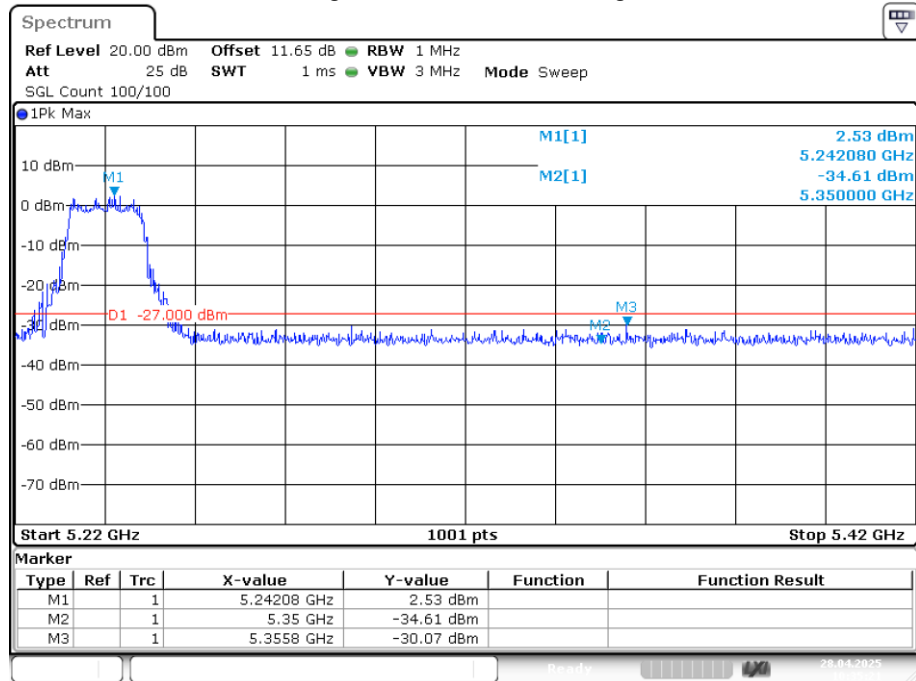


Date: 28.APR.2025 10:35:21

Band Edge NVNT ac20 5180MHz Low Ant1

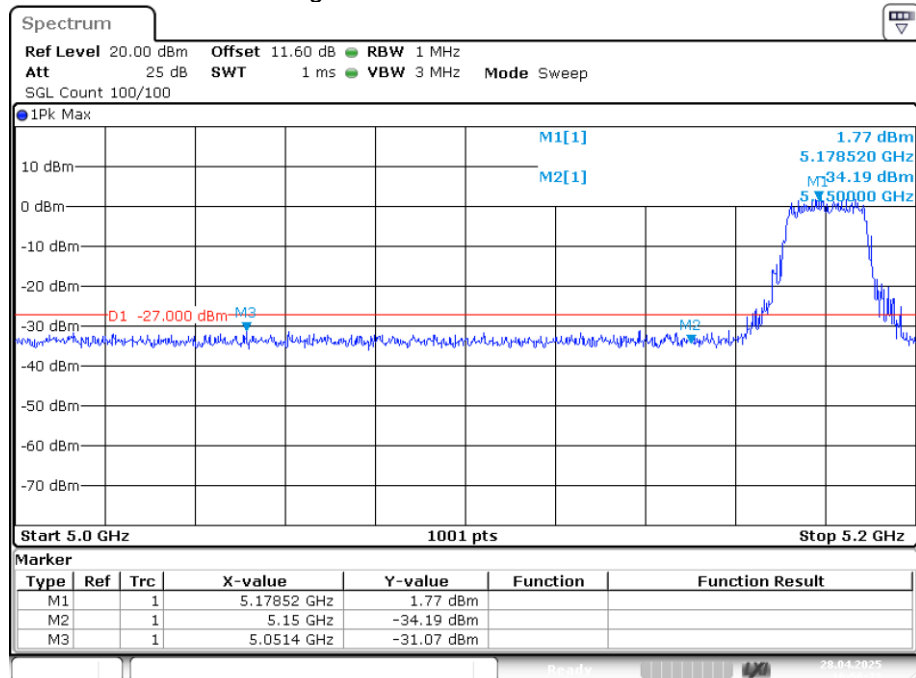


Date: 28.APR.2025 10:56:32

Band Edge NVNT ac20 5240MHz High Ant1

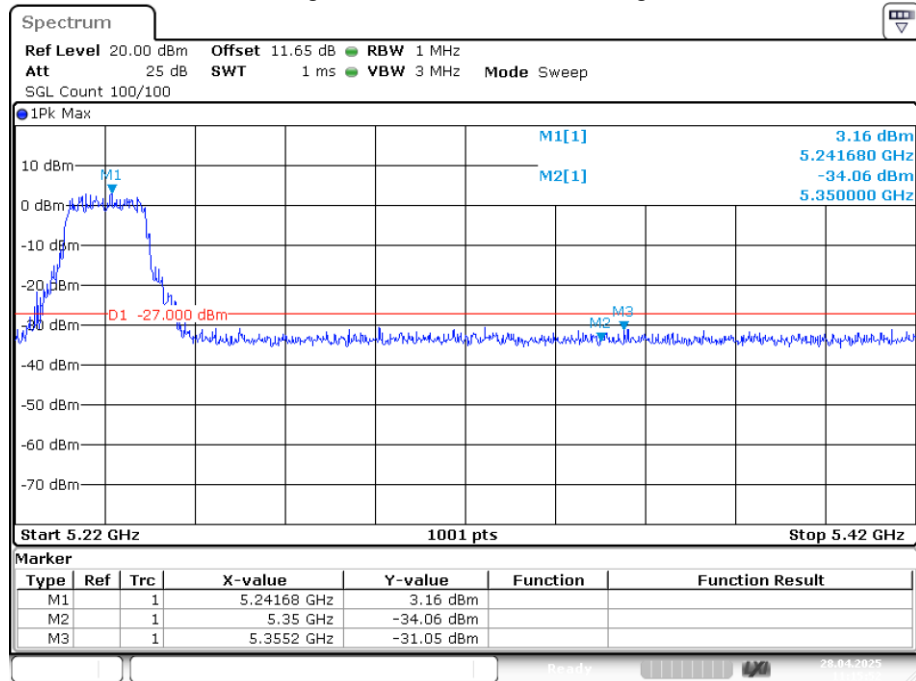


Date: 28.APR.2025 11:15:52

Band Edge NVNT ac40 5190MHz Low Ant1

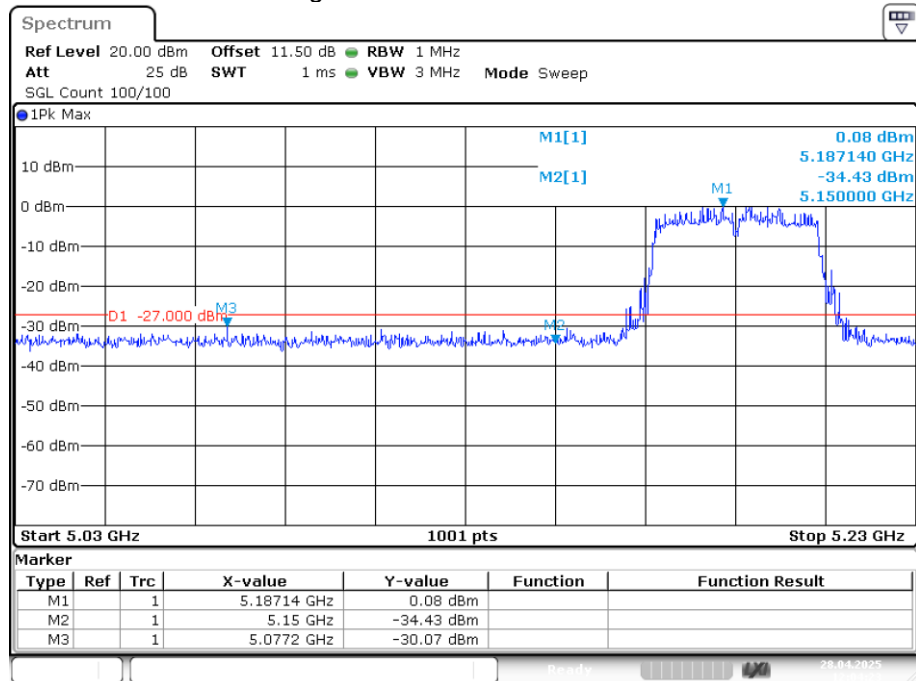


Date: 28.APR.2025 12:04:23

Band Edge NVNT ac40 5230MHz High Ant1

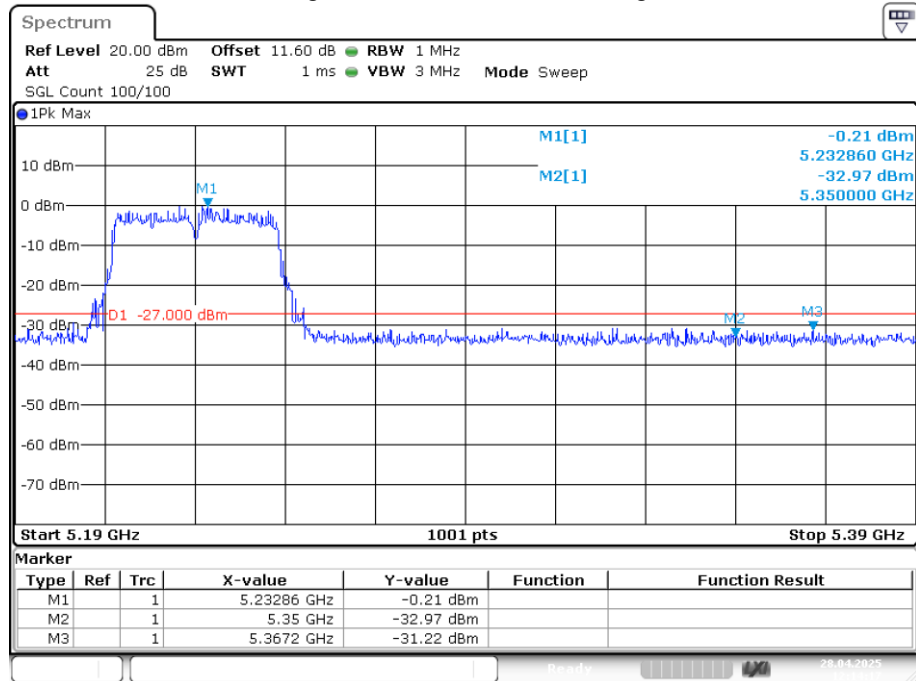


Date: 28.APR.2025 12:14:16

Band Edge NVNT ax20 5180MHz Low Ant1

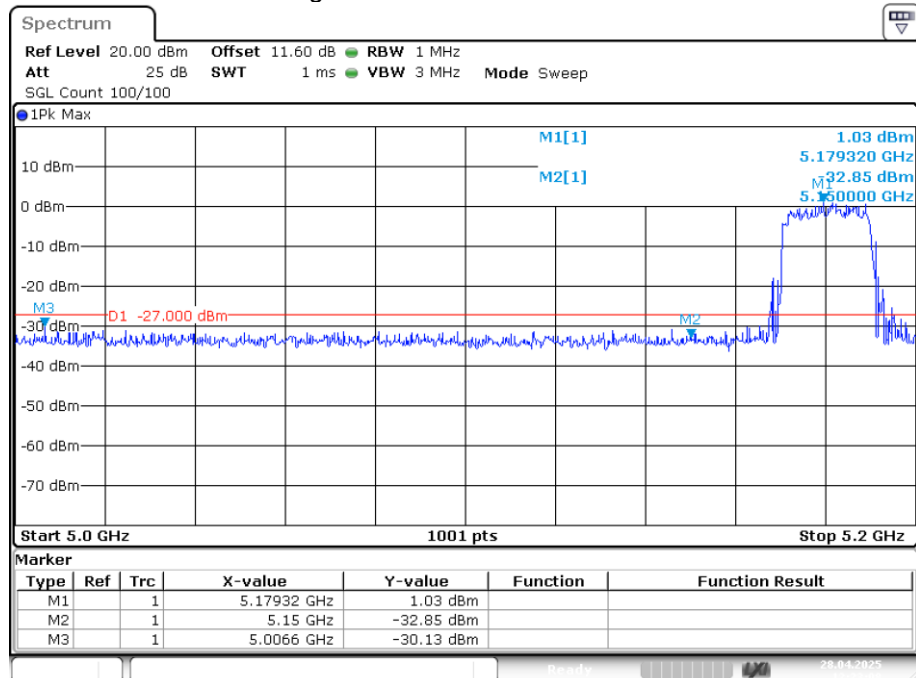


Date: 28.APR.2025 12:23:08

Band Edge NVNT ax20 5240MHz High Ant1

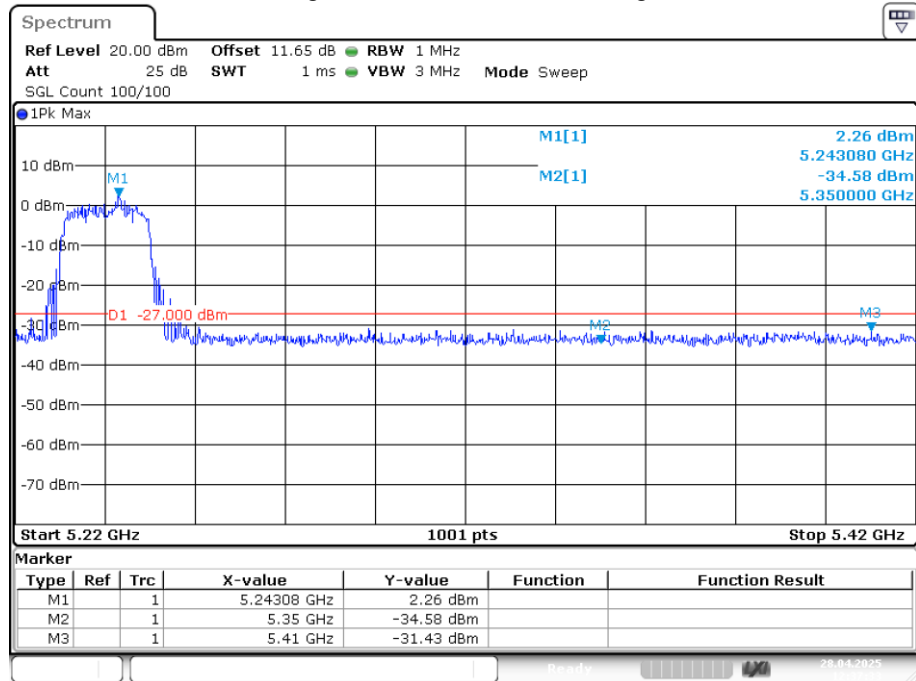


Date: 28.APR.2025 12:37:33

Band Edge NVNT ax40 5190MHz Low Ant1

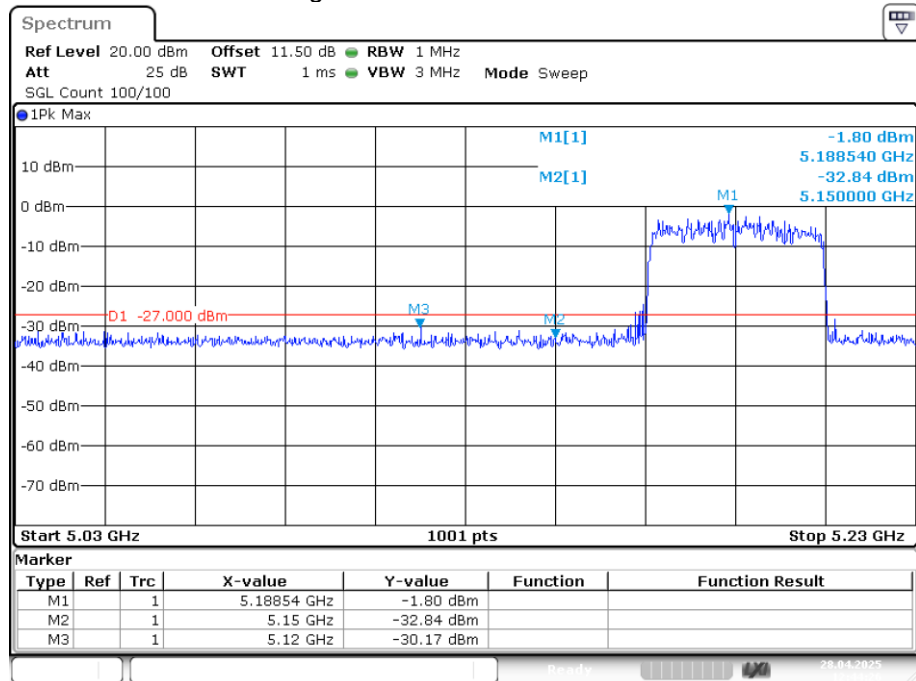


Date: 28.APR.2025 12:44:26

Band Edge NVNT ax40 5230MHz High Ant1

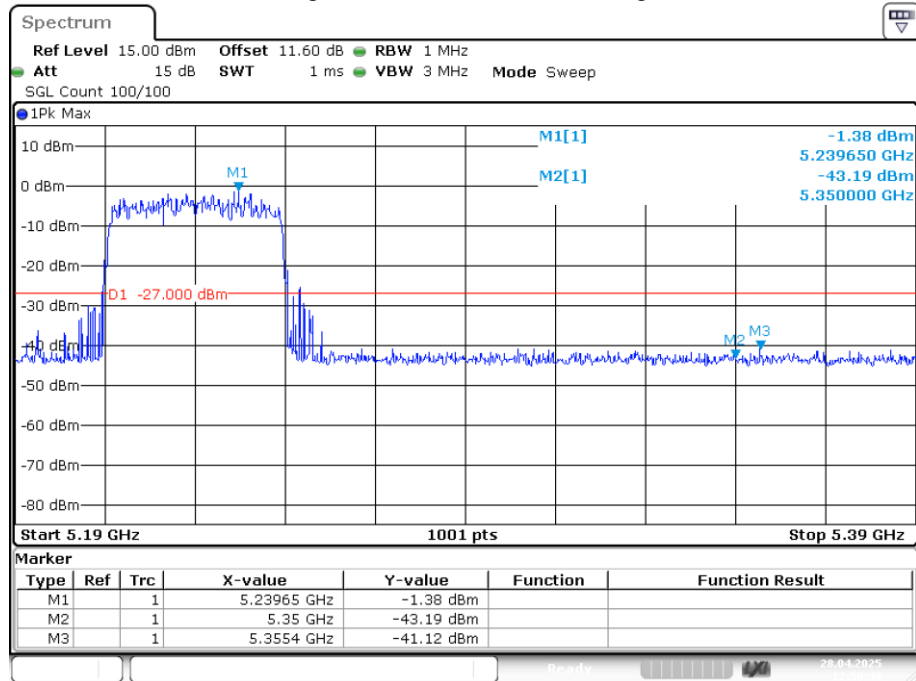


Date: 28.APR.2025 12:50:40

Band Edge NVNT n20 5180MHz Low Ant1

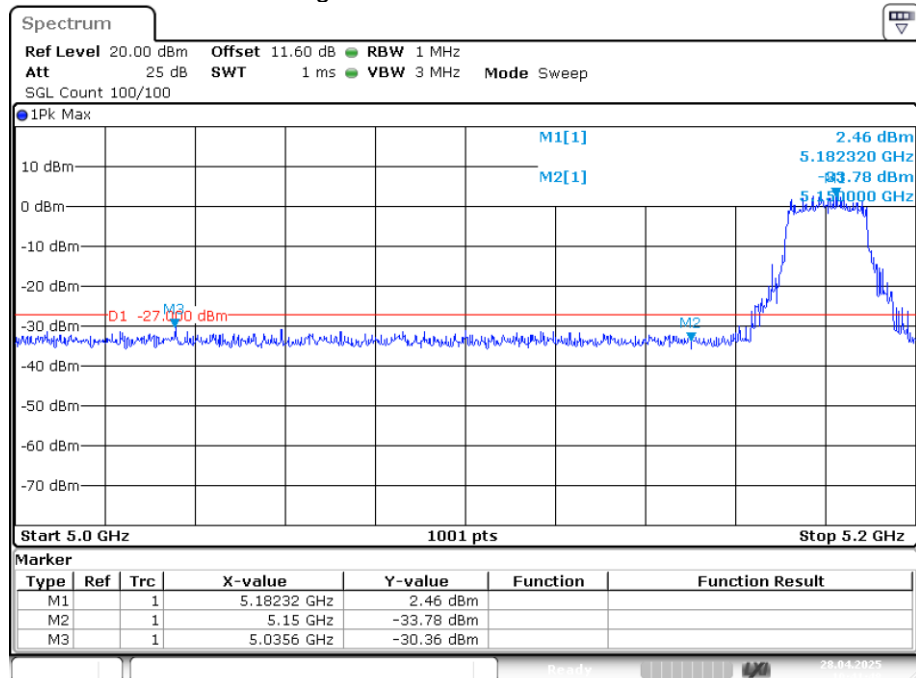


Date: 28.APR.2025 10:41:47

Band Edge NVNT n20 5240MHz High Ant1

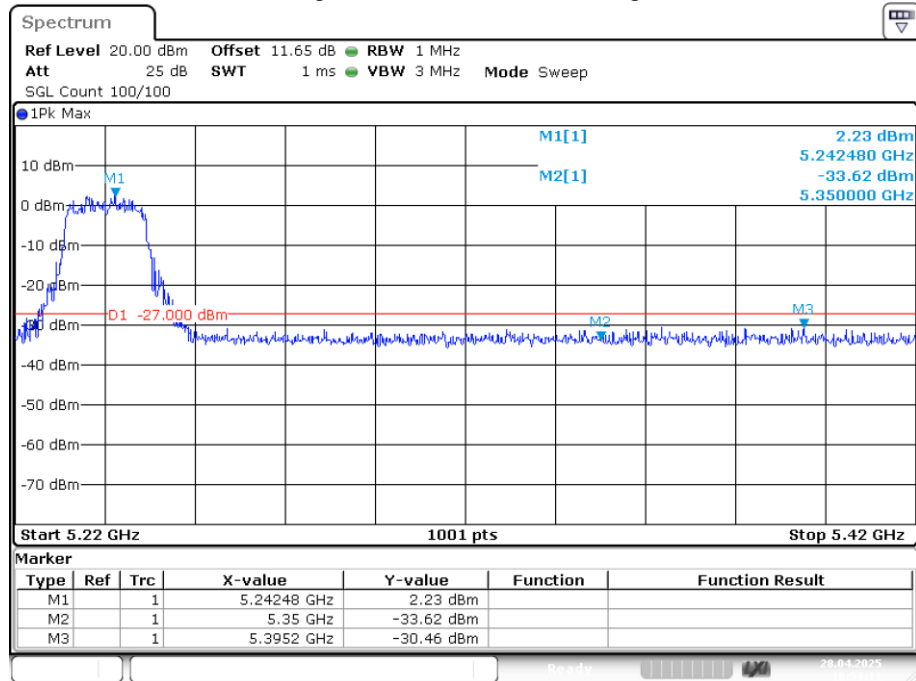


Date: 28.APR.2025 10:53:11

Band Edge NVNT n40 5190MHz Low Ant1

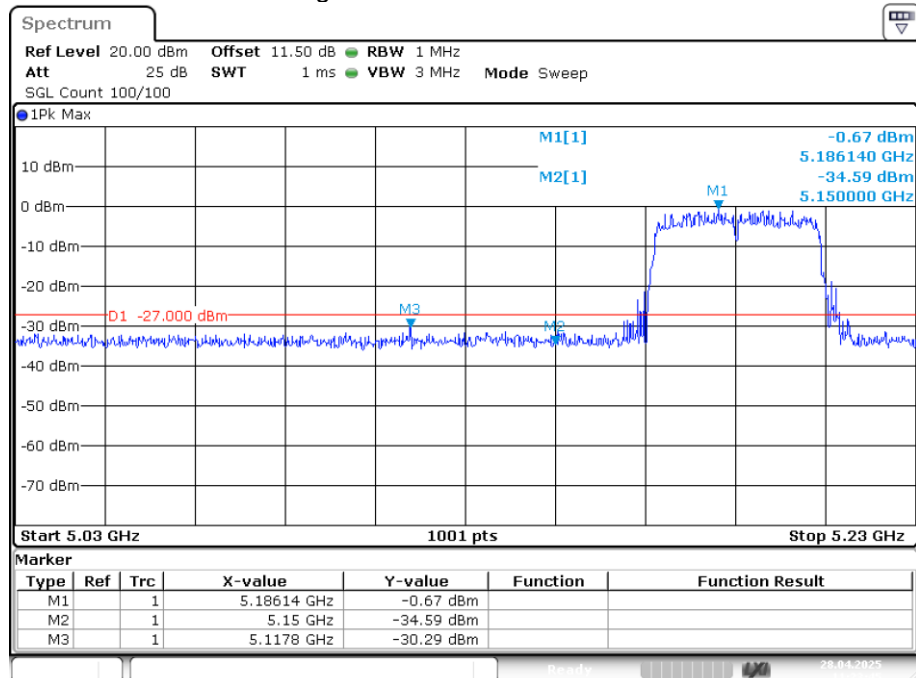

Date: 28.APR.2025 11:23:45

Band Edge NVNT n40 5230MHz High Ant1

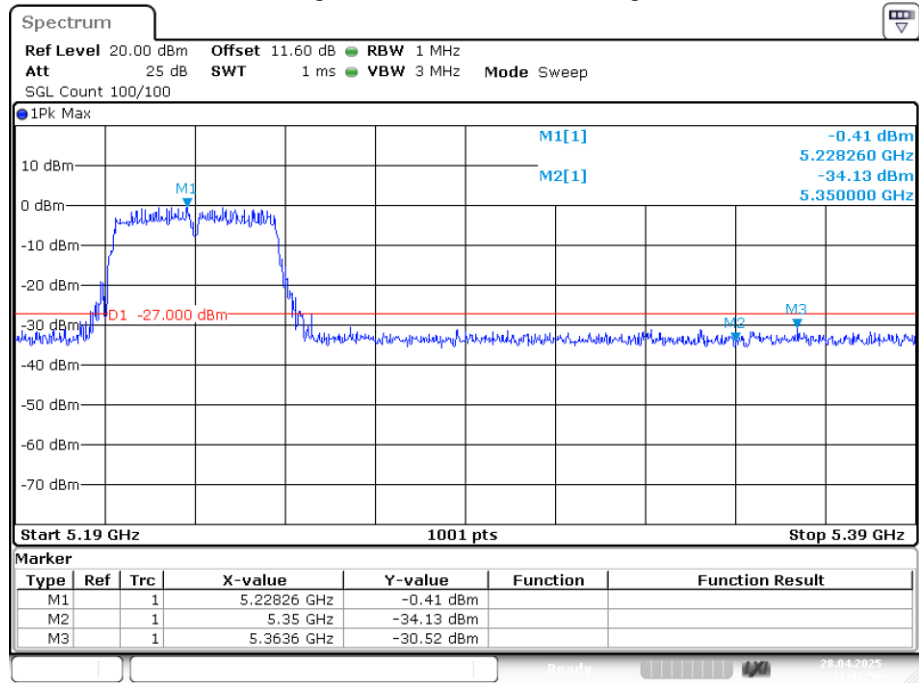


Date: 28.APR.2025 11:42:50


Band4

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-30.79	-27	Pass
NVNT	a	5825	Ant1	-28.93	-20.64	Pass
NVNT	ac20	5745	Ant1	-30.77	-27	Pass
NVNT	ac20	5825	Ant1	-29.67	14.26	Pass
NVNT	ac40	5755	Ant1	-30.45	14.98	Pass
NVNT	ac40	5795	Ant1	-29.12	13.25	Pass
NVNT	ax20	5745	Ant1	-30.76	-16.05	Pass
NVNT	ax20	5825	Ant1	-29.27	12.24	Pass
NVNT	ax40	5755	Ant1	-30.99	2.16	Pass
NVNT	ax40	5795	Ant1	-29.92	13.30	Pass
NVNT	n20	5745	Ant1	-30.3	7.93	Pass
NVNT	n20	5825	Ant1	-29.64	0.53	Pass
NVNT	n40	5755	Ant1	-30.85	15.66	Pass
NVNT	n40	5795	Ant1	-28.54	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

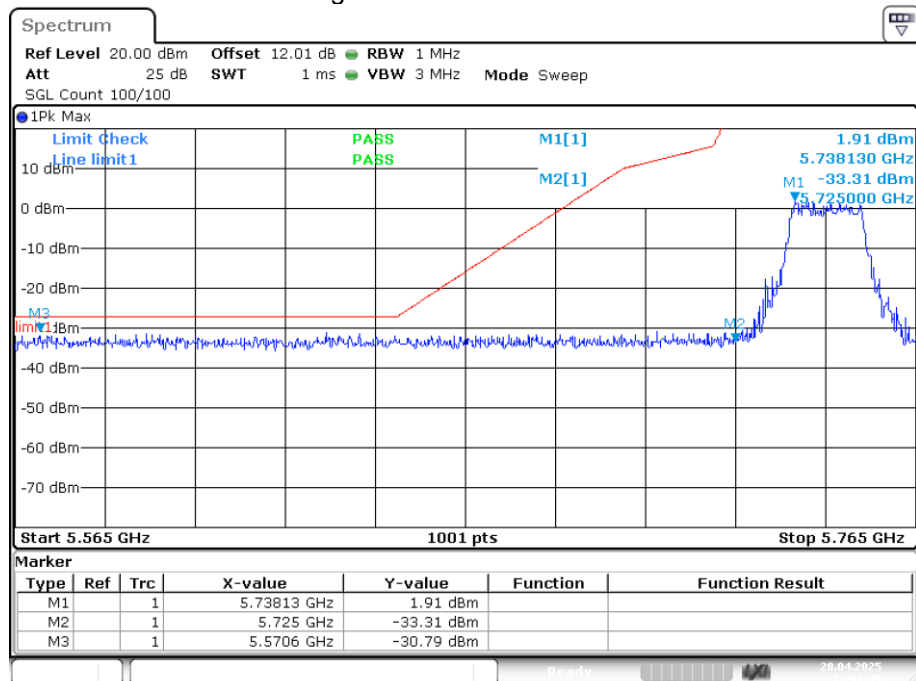
Band Edge NVNT a 5745MHz Low Ant1

Band Edge NVNT a 5825MHz High Ant1

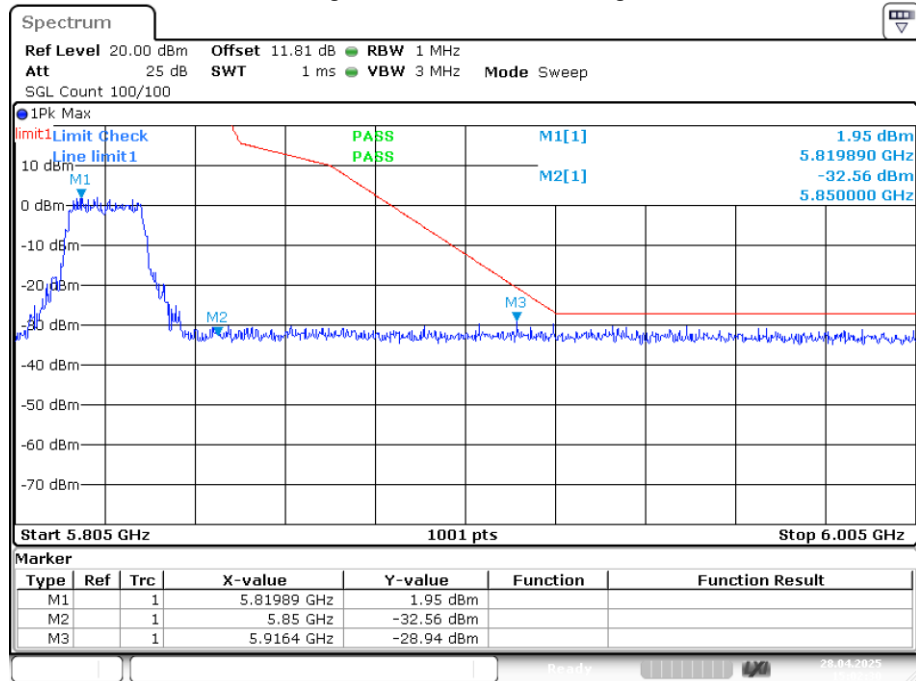


Date: 28.APR.2025 15:02:29

Band Edge NVNT ac20 5745MHz Low Ant1

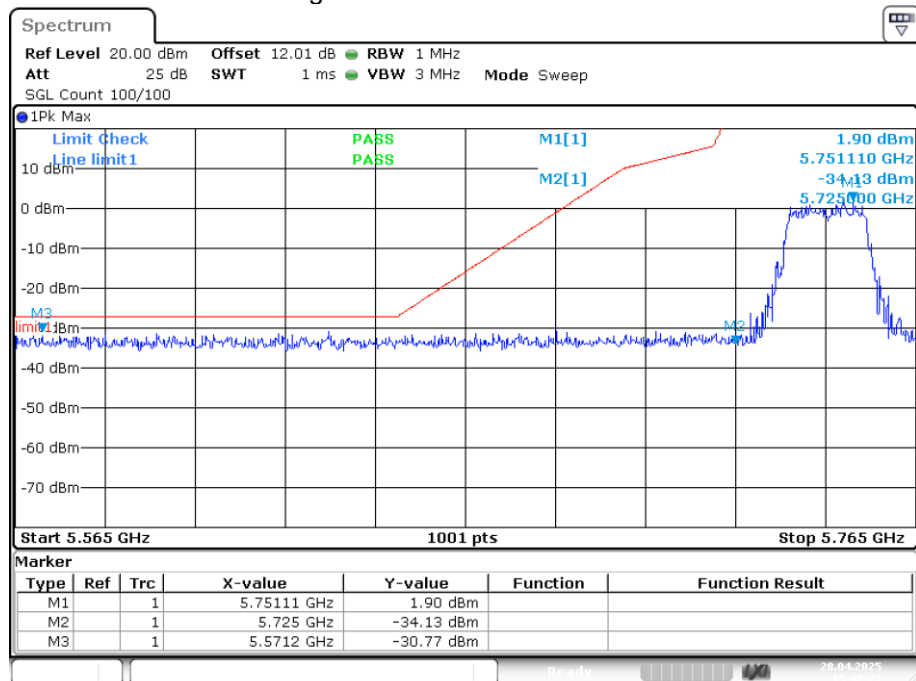


Date: 28.APR.2025 15:48:27

Band Edge NVNT ac20 5825MHz High Ant1

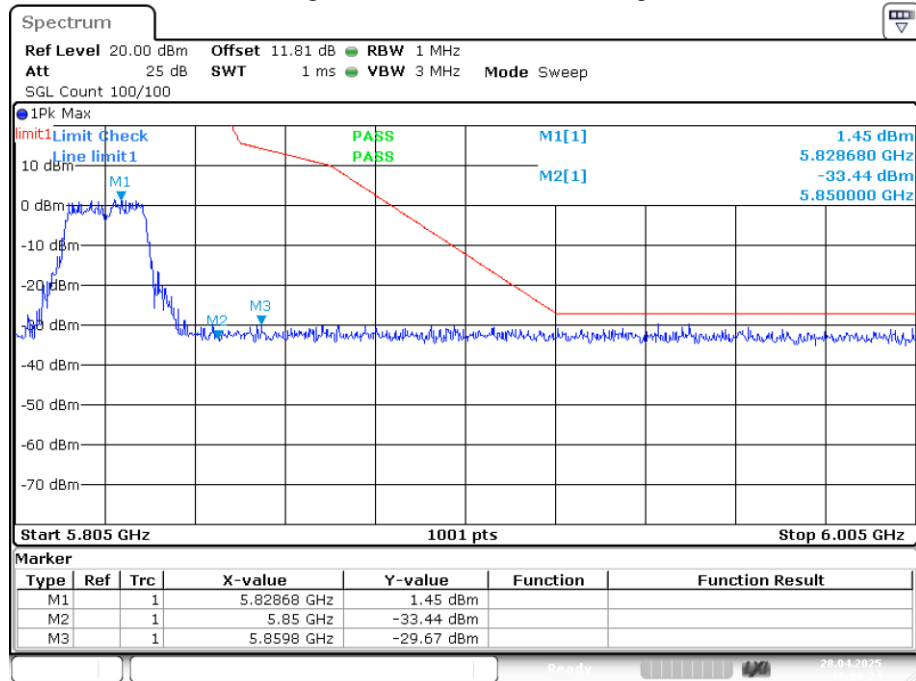


Date: 28.APR.2025 16:08:24

Band Edge NVNT ac40 5755MHz Low Ant1

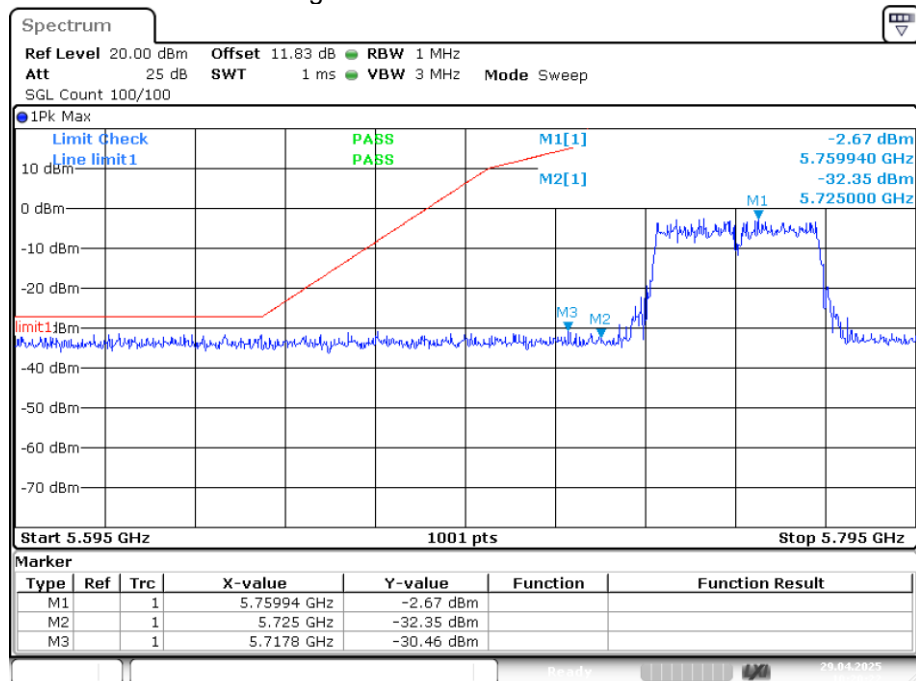


Date: 29.APR.2025 10:20:22

Band Edge NVNT ac40 5795MHz High Ant1

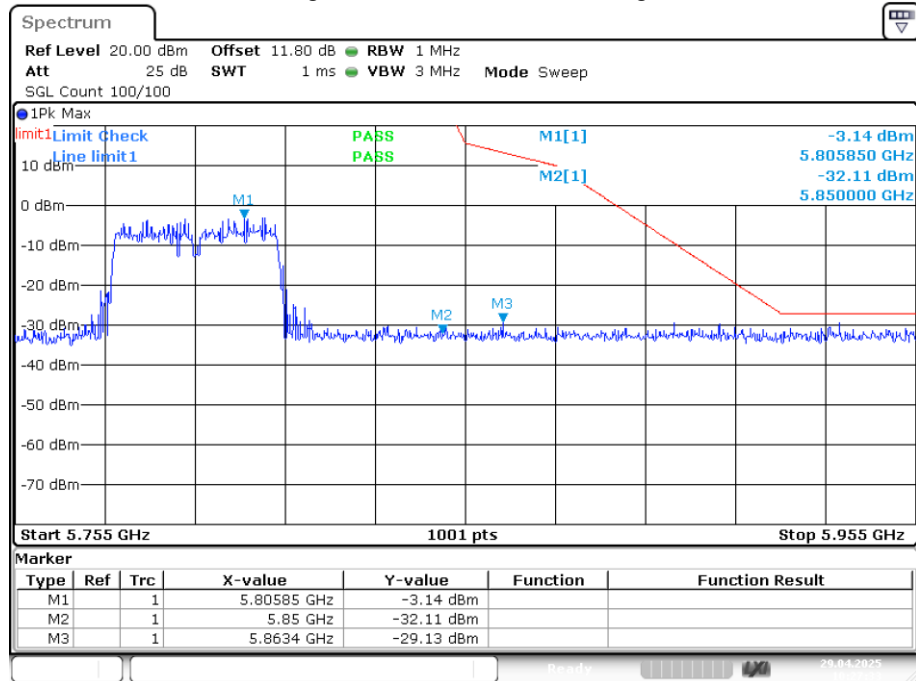


Date: 29.APR.2025 10:27:32

Band Edge NVNT ax20 5745MHz Low Ant1

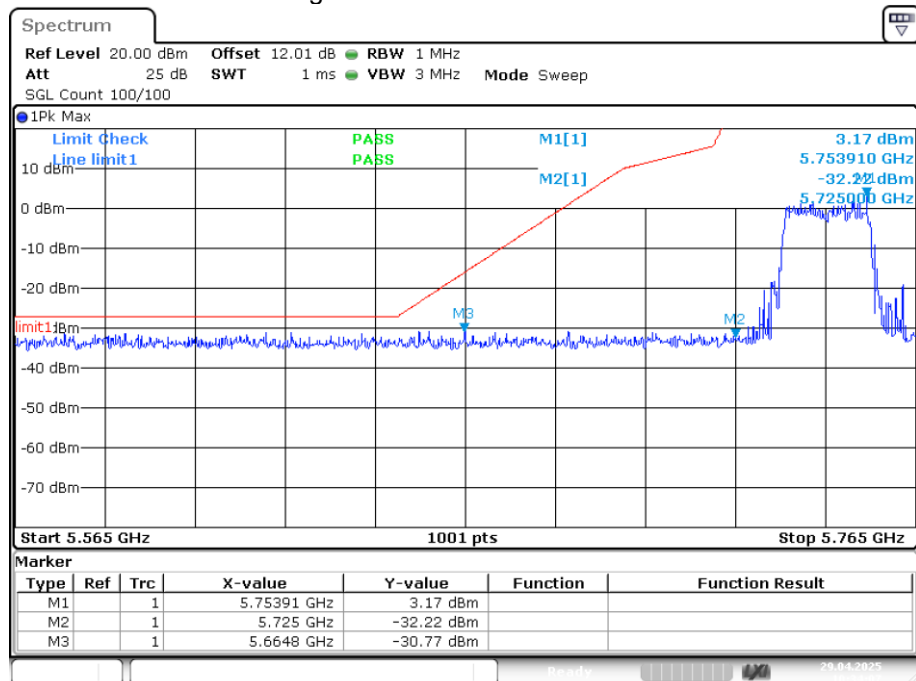


Date: 29.APR.2025 10:34:07

Band Edge NVNT ax20 5825MHz High Ant1

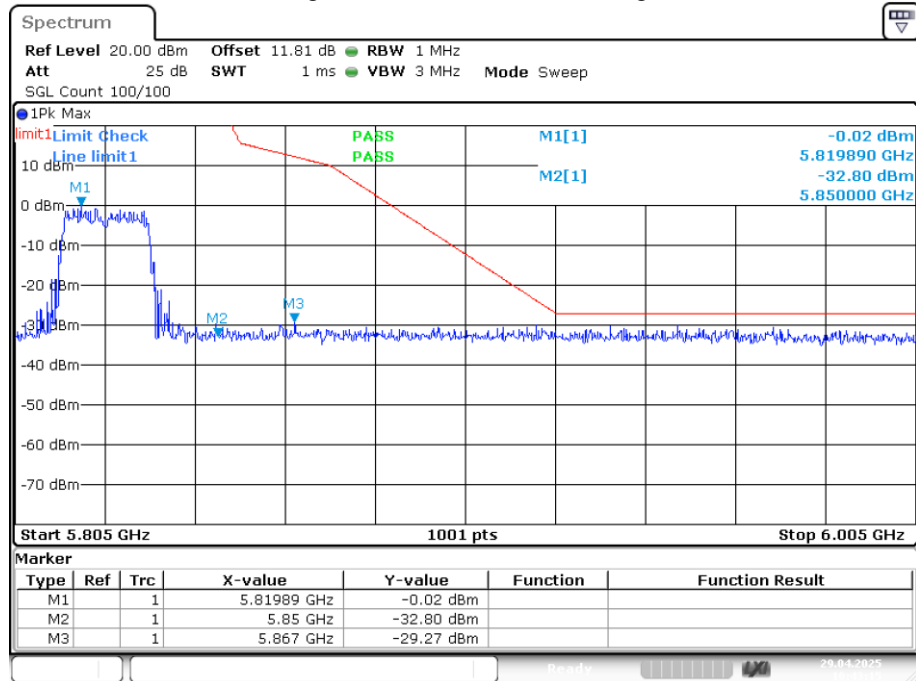


Date: 29.APR.2025 10:43:15

Band Edge NVNT ax40 5755MHz Low Ant1

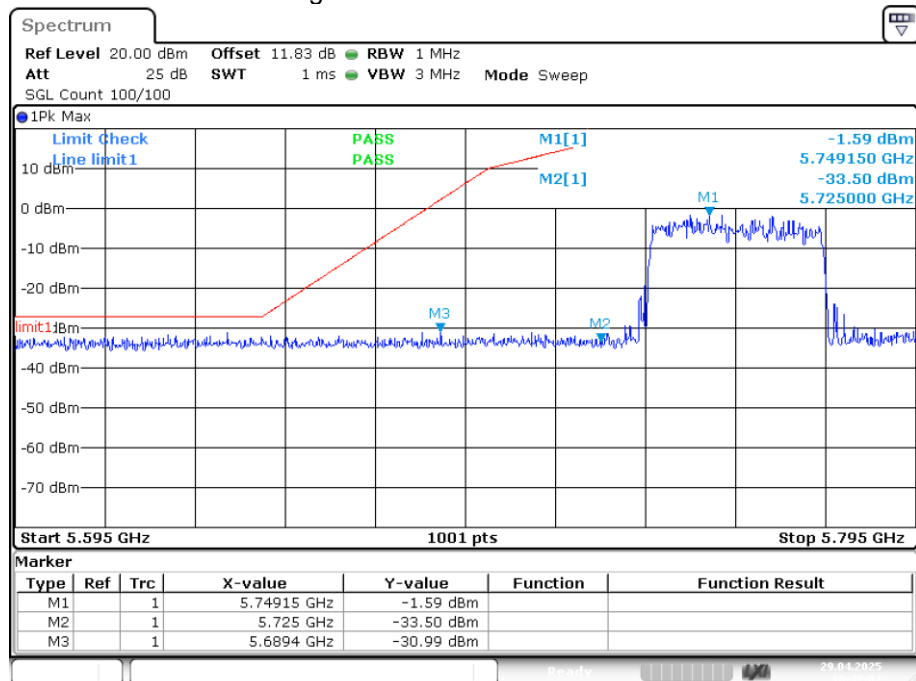


Date: 29.APR.2025 10:47:01

Band Edge NVNT ax40 5795MHz High Ant1

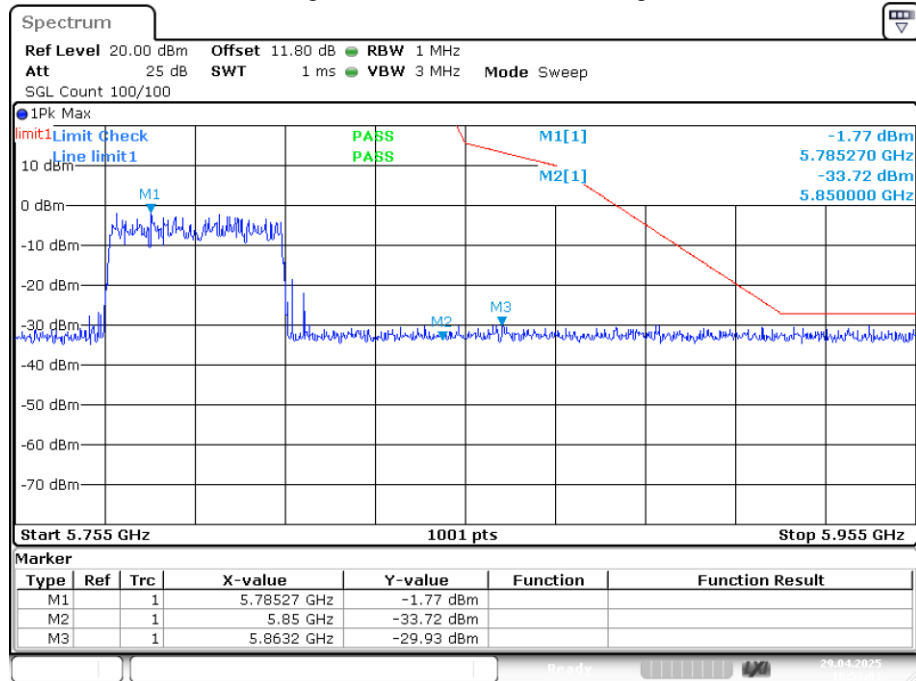


Date: 29.APR.2025 10:53:01

Band Edge NVNT n20 5745MHz Low Ant1

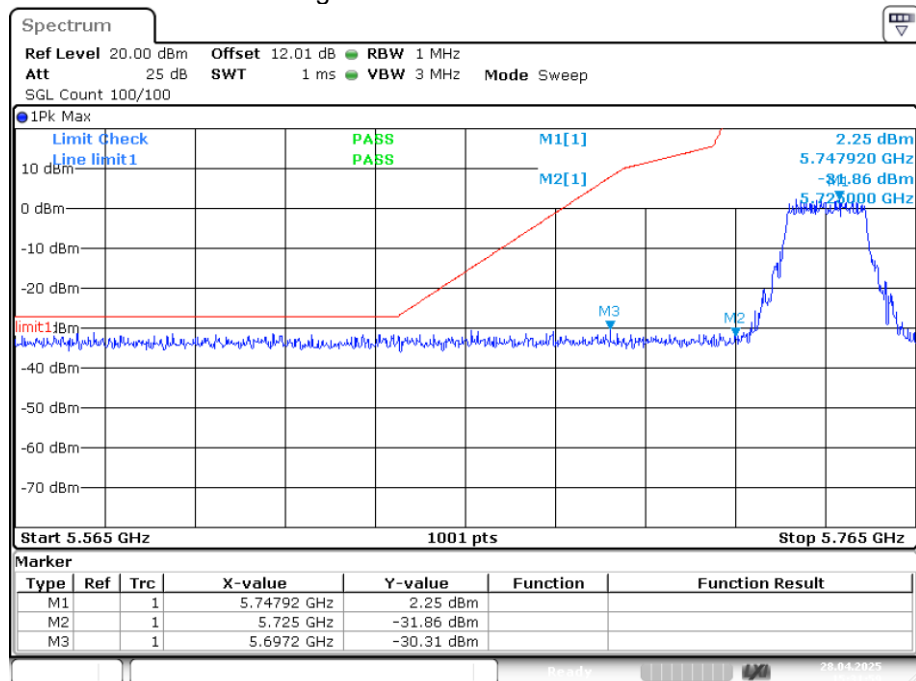


Date: 28.APR.2025 15:31:59

Band Edge NVNT n20 5825MHz High Ant1

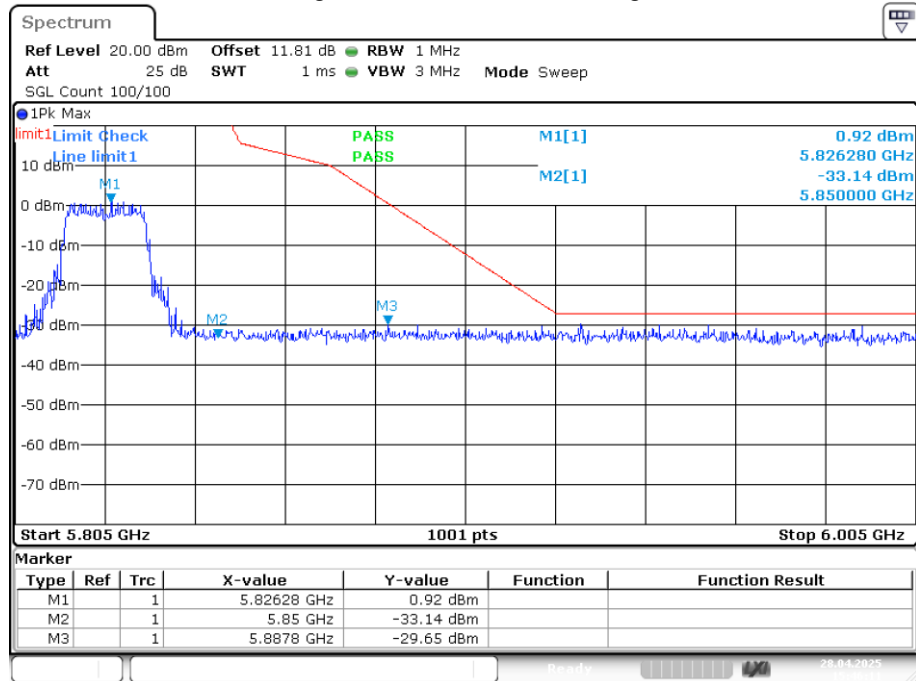


Date: 28.APR.2025 15:46:11

Band Edge NVNT n40 5755MHz Low Ant1

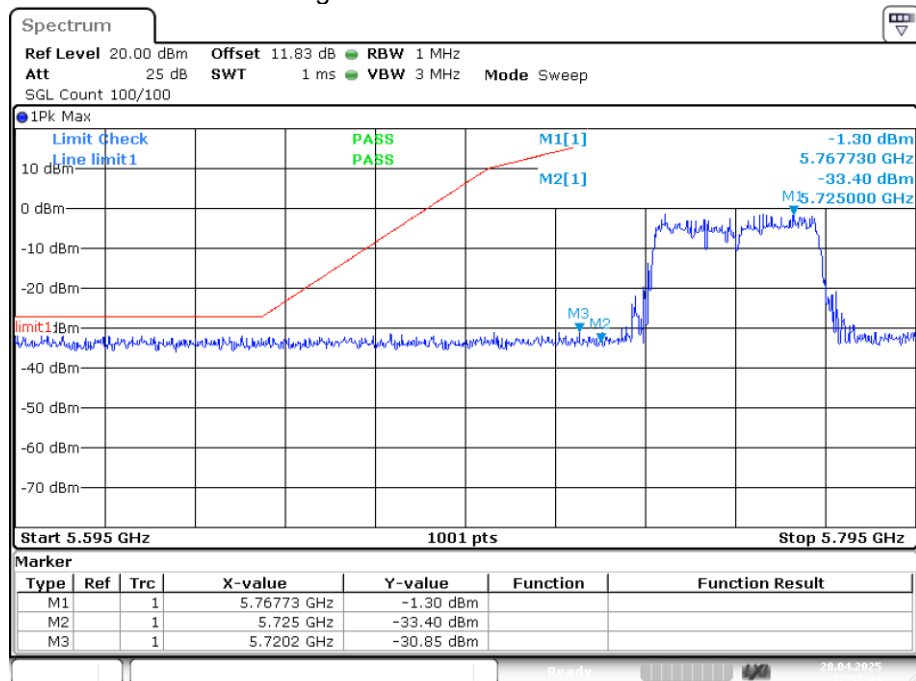

Date: 28.APR.2025 17:50:04


Band Edge NVNT n40 5795MHz High Ant1

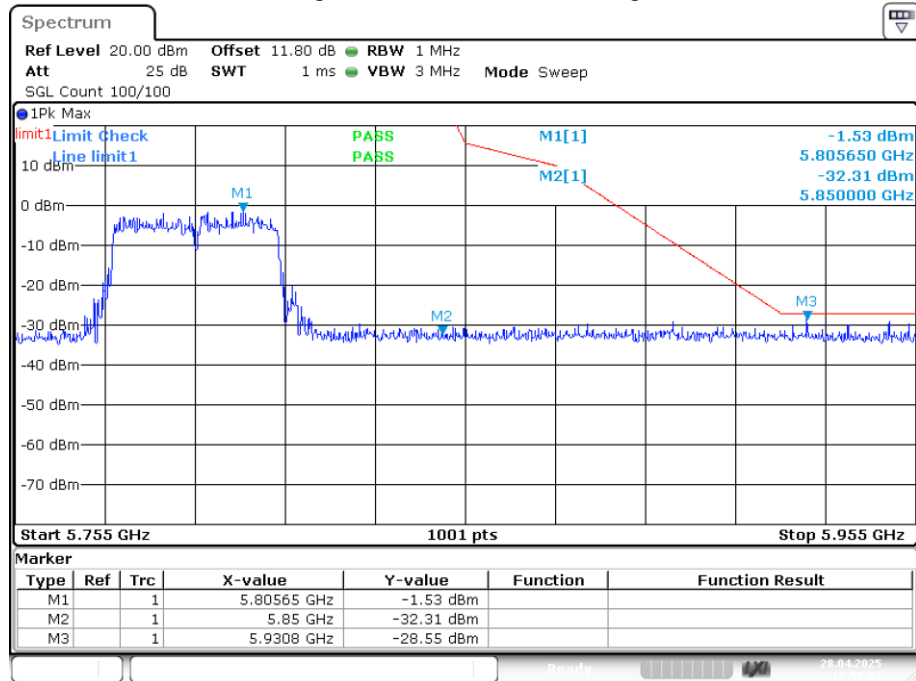


Date: 28.APR.2025 17:55:01


4.9 Radiated Emission

Test Requirement:	15.205&15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.				

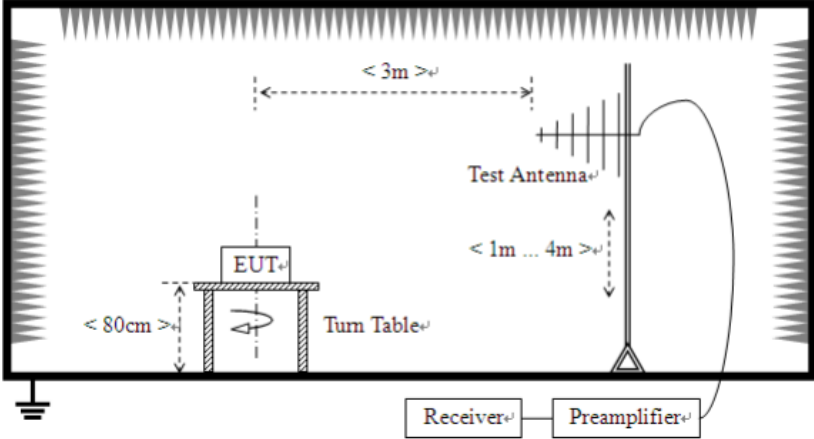	4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

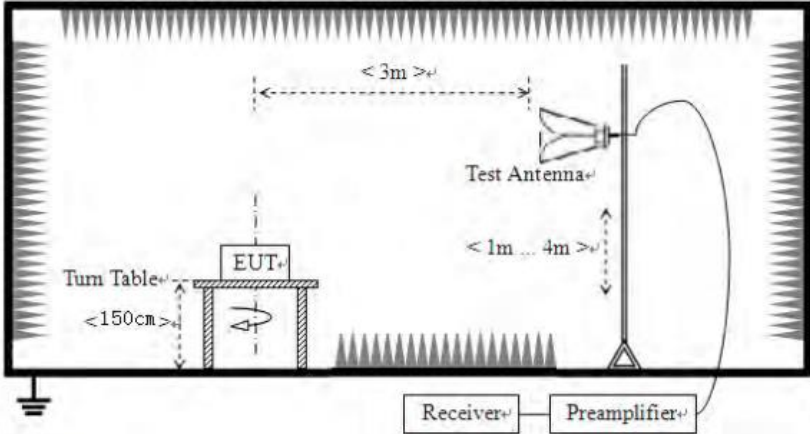
	
Test results:	Pass

Vertical:

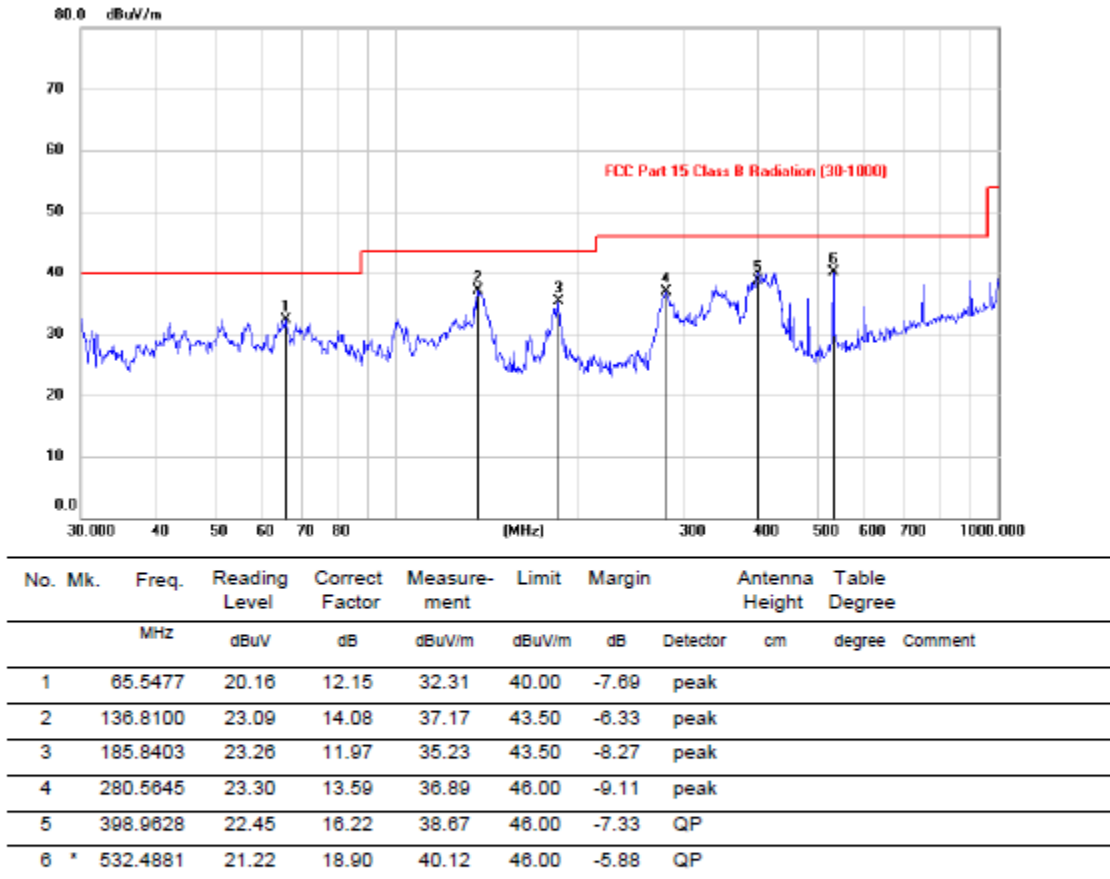

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

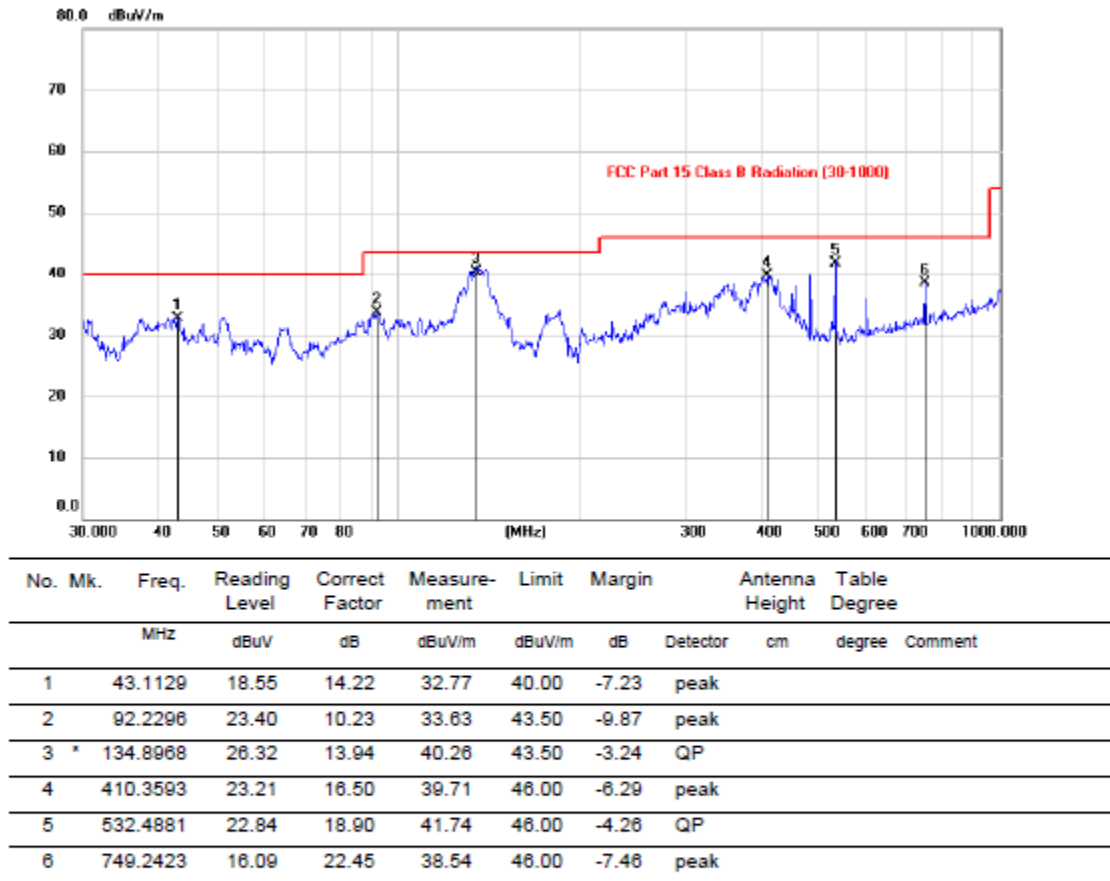Horizontal:

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of 802.11N mode, Channel 5180MHz was listed in this report.

Above 1GHz (U-NII-1):

802.11a(HT20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
10360.19	26.11	16.29	14.62	32.65	24.37	68.20	-43.83	Vertical
15540.27	28.48	21.83	17.66	34.46	33.51	74.00	-40.49	Vertical
10360.12	32.28	8.73	14.62	32.65	22.98	68.20	-45.22	Horizontal
15540.11	32.86	11.73	17.66	34.46	27.79	74.00	-46.21	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
10360.19	17.77	16.29	14.62	32.65	16.03	54.00	-37.97	Vertical
15540.27	20.45	21.83	17.66	34.46	25.48	54.00	-28.52	Vertical
10360.12	20.07	8.73	14.62	32.65	10.77	54.00	-43.23	Horizontal
15540.11	22.11	11.73	17.66	34.46	17.04	54.00	-36.96	Horizontal

802.11a(HT20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
10400.10	27.08	16.29	14.62	32.65	25.34	68.20	-42.86	Vertical
15600.16	29.68	21.83	17.66	34.46	34.71	74.00	-39.29	Vertical
10400.15	29.07	8.73	14.62	32.65	19.77	68.20	-48.43	Horizontal
15600.10	34.17	11.73	17.66	34.46	29.10	74.00	-44.90	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
10400.10	15.53	16.29	14.62	32.65	13.79	54.00	-40.21	Vertical
15600.16	19.75	21.83	17.66	34.46	24.78	54.00	-29.22	Vertical
10400.15	18.58	8.73	14.62	32.65	9.28	54.00	-44.72	Horizontal
15600.10	24.05	11.73	17.66	34.46	18.98	54.00	-35.02	Horizontal

802.11a(HT20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.31	26.06	16.29	14.62	32.65	24.32	68.20	-43.88	Vertical
15720.28	30.47	21.83	17.66	34.46	35.50	74.00	-38.50	Vertical
10480.21	31.08	8.73	14.62	32.65	21.78	68.20	-46.42	Horizontal
15720.30	32.29	11.73	17.66	34.46	27.22	74.00	-46.78	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.31	17.48	16.29	14.62	32.65	15.74	54.00	-38.26	Vertical
15720.28	18.08	21.83	17.66	34.46	23.11	54.00	-30.89	Vertical
10480.21	19.72	8.73	14.62	32.65	10.42	54.00	-43.58	Horizontal
15720.30	21.09	11.73	17.66	34.46	16.02	54.00	-37.98	Horizontal

802.11n(HT20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.04	24.69	16.29	14.62	32.65	22.95	68.20	-45.25	Vertical
15540.21	30.55	21.83	17.66	34.46	35.58	74.00	-38.42	Vertical
10360.08	32.34	8.73	14.62	32.65	23.04	68.20	-45.16	Horizontal
15540.13	32.99	11.73	17.66	34.46	27.92	74.00	-46.08	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.04	15.35	16.29	14.62	32.65	13.61	54.00	-40.39	Vertical
15540.21	18.73	21.83	17.66	34.46	23.76	54.00	-30.24	Vertical
10360.08	20.36	8.73	14.62	32.65	11.06	54.00	-42.94	Horizontal
15540.13	22.67	11.73	17.66	34.46	17.60	54.00	-36.40	Horizontal

802.11n(HT20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.30	26.00	16.29	14.62	32.65	24.26	68.20	-43.94	Vertical
15600.05	27.18	21.83	17.66	34.46	32.21	74.00	-41.79	Vertical
10400.04	29.55	8.73	14.62	32.65	20.25	68.20	-47.95	Horizontal
15600.06	33.41	11.73	17.66	34.46	28.34	74.00	-45.66	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.30	15.84	16.29	14.62	32.65	14.10	54.00	-39.90	Vertical
15600.05	17.37	21.83	17.66	34.46	22.40	54.00	-31.60	Vertical
10400.04	19.15	8.73	14.62	32.65	9.85	54.00	-44.15	Horizontal
15600.06	20.82	11.73	17.66	34.46	15.75	54.00	-38.25	Horizontal

802.11n(HT20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.05	26.66	16.29	14.62	32.65	24.92	68.20	-43.28	Vertical
15720.09	28.90	21.83	17.66	34.46	33.93	74.00	-40.07	Vertical
10480.28	30.06	8.73	14.62	32.65	20.76	68.20	-47.44	Horizontal
15720.22	33.86	11.73	17.66	34.46	28.79	74.00	-45.21	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.05	18.06	16.29	14.62	32.65	16.32	54.00	-37.68	Vertical
15720.09	18.93	21.83	17.66	34.46	23.96	54.00	-30.04	Vertical
10480.28	20.23	8.73	14.62	32.65	10.93	54.00	-43.07	Horizontal
15720.22	23.73	11.73	17.66	34.46	18.66	54.00	-35.34	Horizontal