



802.11ax(HT40)


U-NII 1

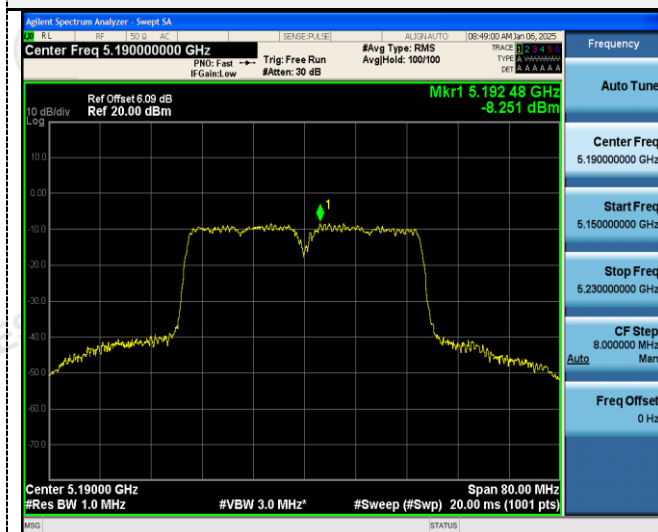


U-NII 3

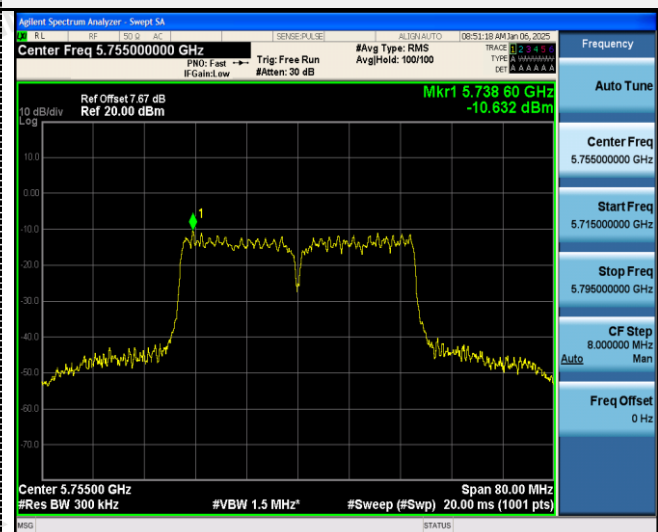

CH38

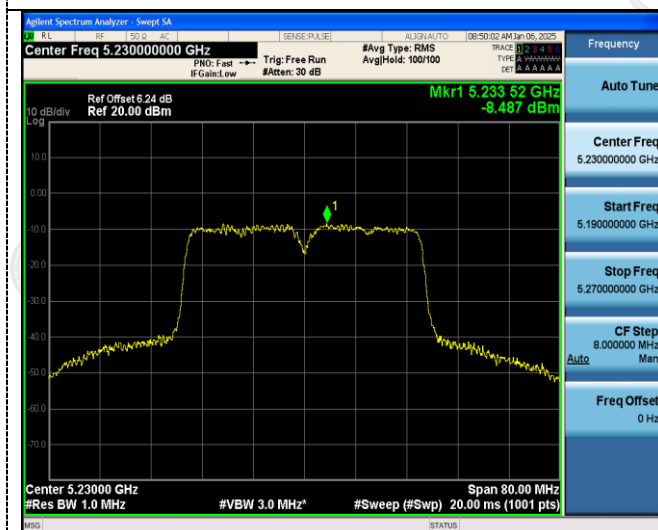

CH151

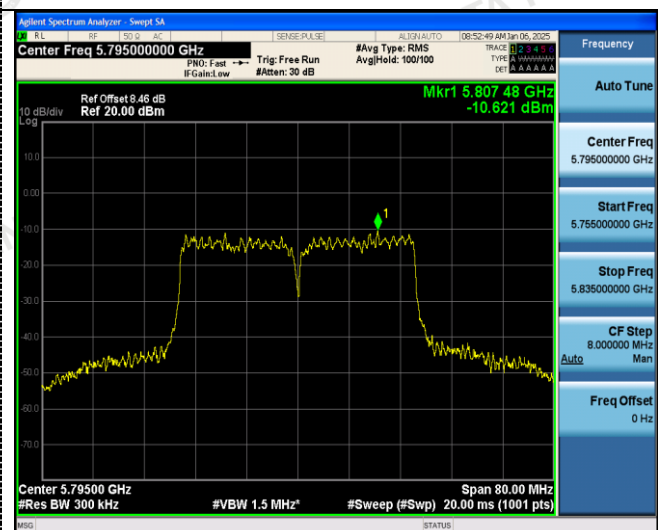

CH46

CH159

4.5 Emission Bandwidth (26dB Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration




Test Results


Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	19.640	N/A	Pass
		40	19.880		
		48	20.800		
802.11n(HT20)	U-NII 1	36	24.520		
		40	24.720		
		48	25.240		
802.11n(HT40)	U-NII 1	38	42.960		
		46	42.320		
802.11ac(HT20)	U-NII 1	36	21.600		
		40	24.320		
		48	24.440		
802.11ac(HT40)	U-NII 1	38	48.320		
		46	42.640		
802.11ax(HT20)	U-NII 1	36	22.080		
		40	22.120		
		48	22.520		
802.11ax(HT40)	U-NII 1	38	45.360		
		46	41.520		

Test plot as follows:


802.11a

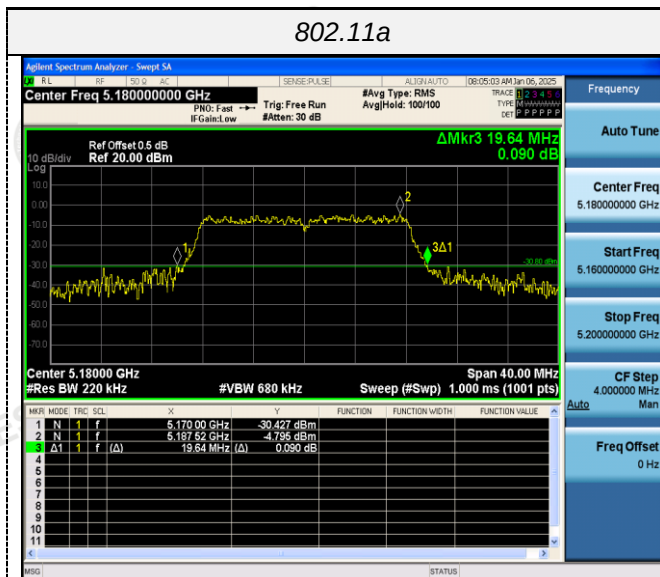


802.11n(HT20)

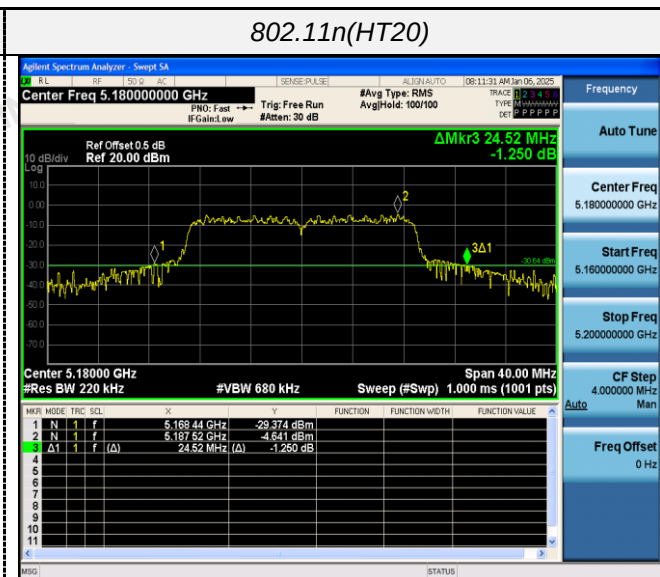


CH36

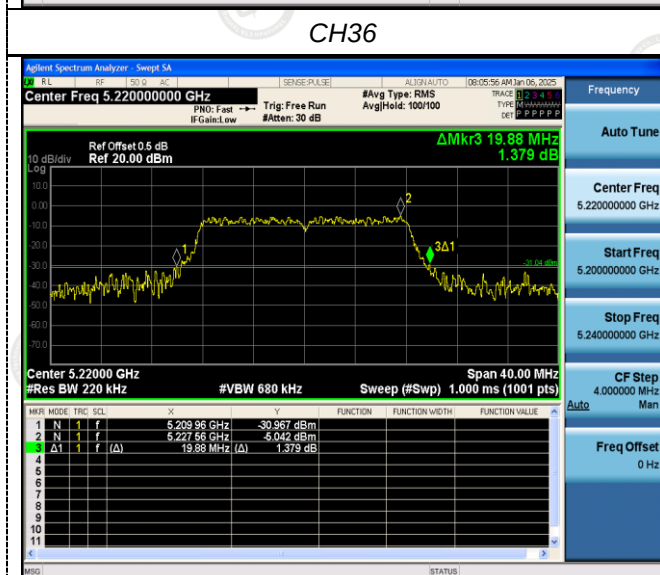


CH36

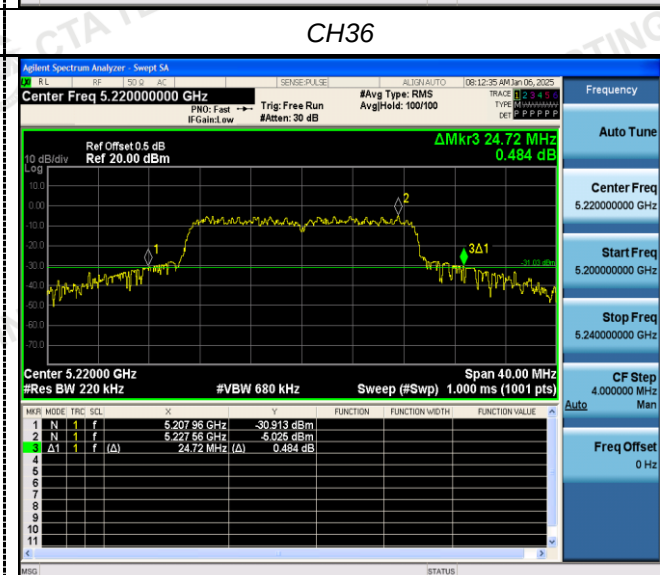

CH40

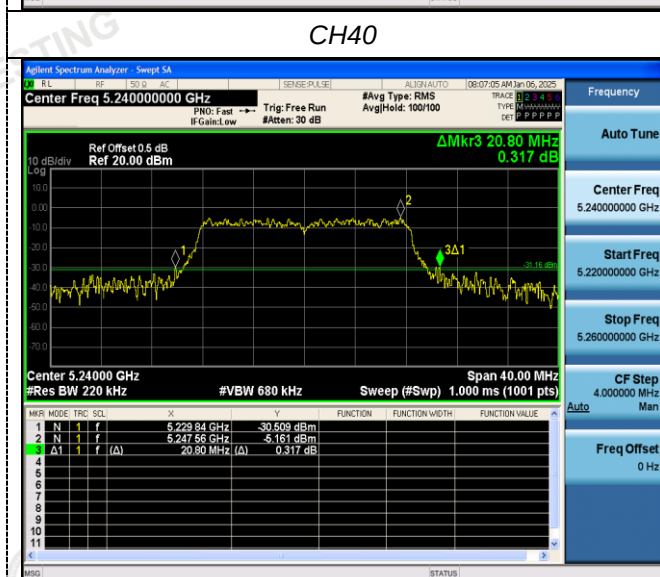

CH40

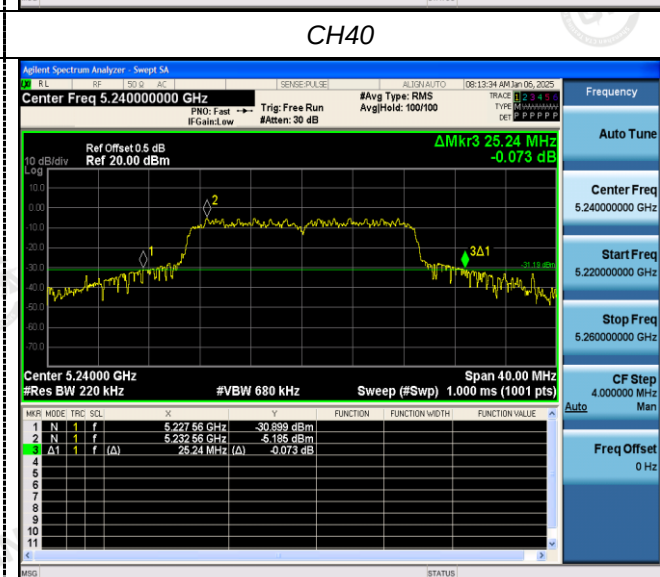


CH48




CH48




802.11n(HT40)

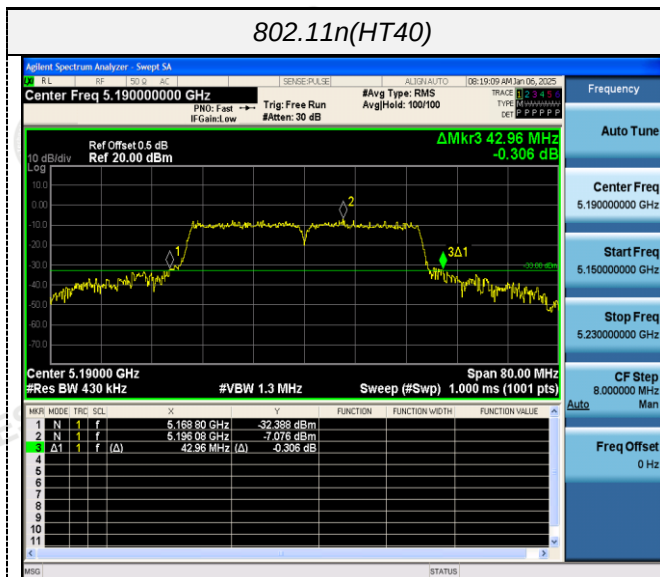


802.11ac(HT20)

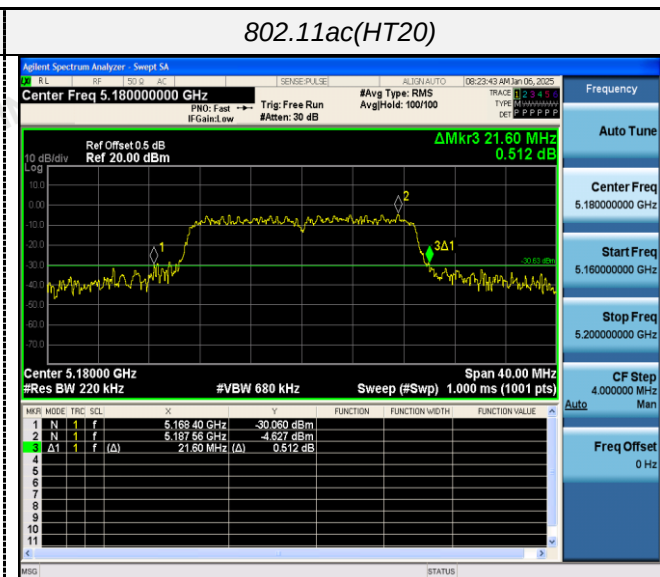


CH38

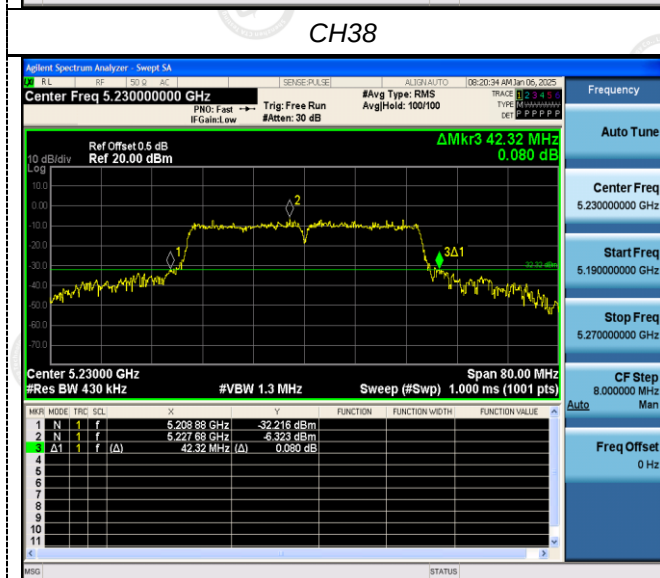


CH36

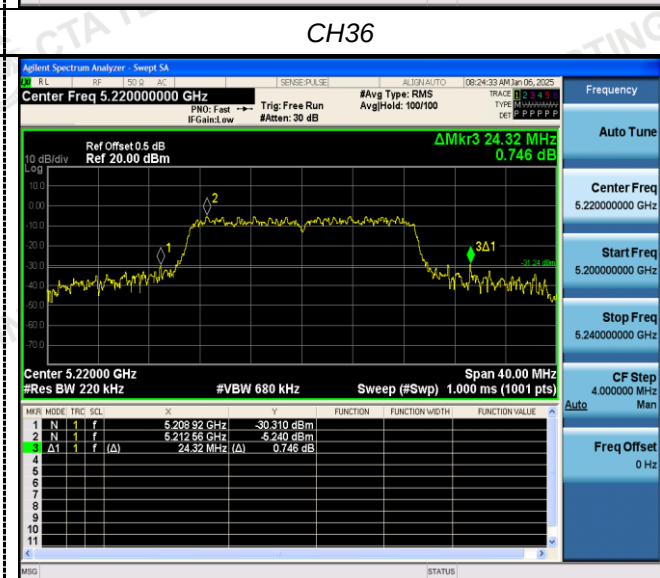

CH46

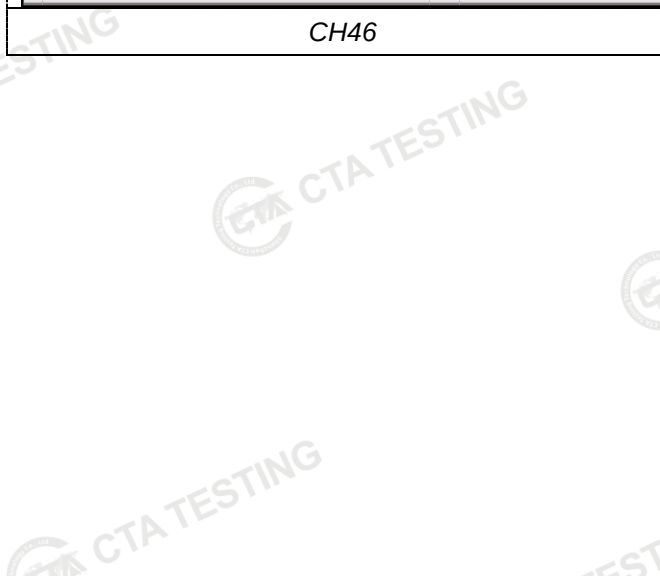


CH40

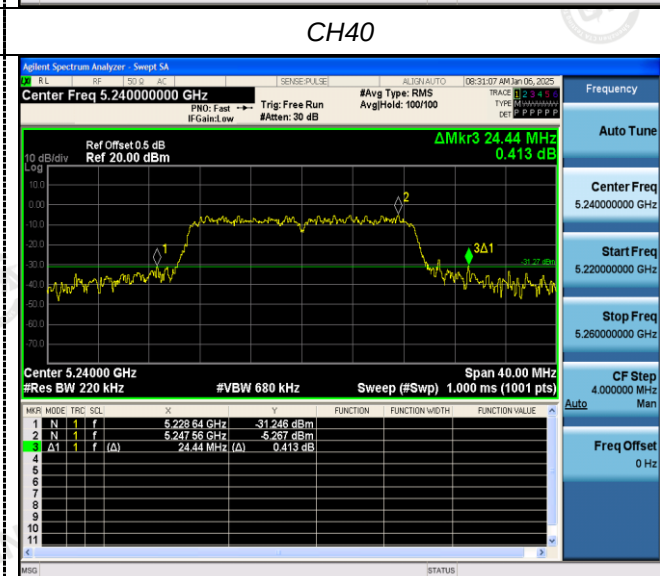


CH48


802.11ac(HT40)

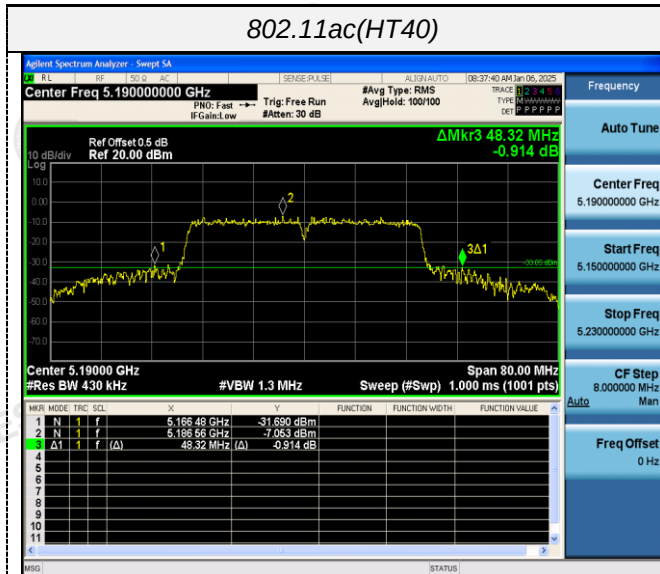


802.11ax(HT20)

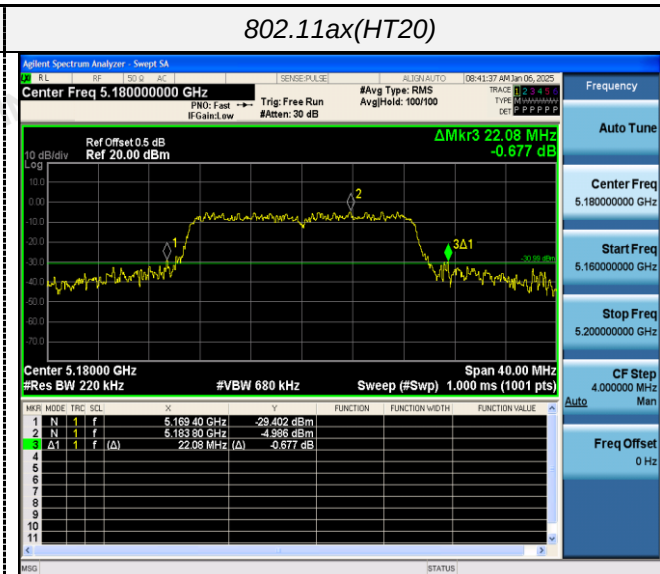


CH38

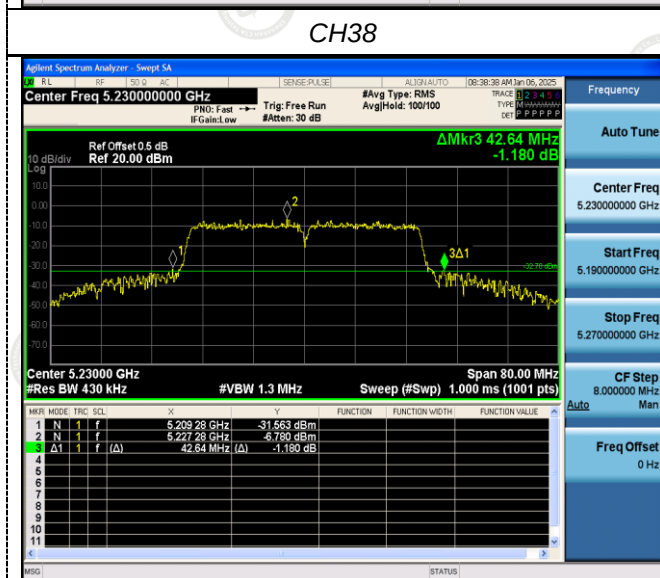


CH36

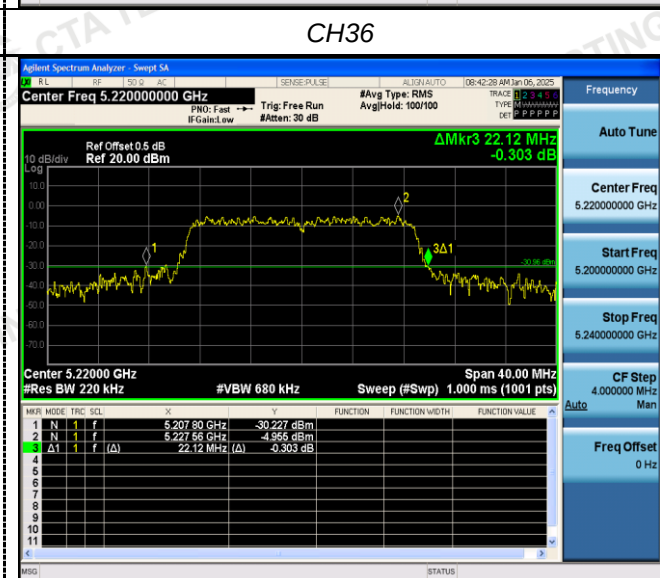


CH46

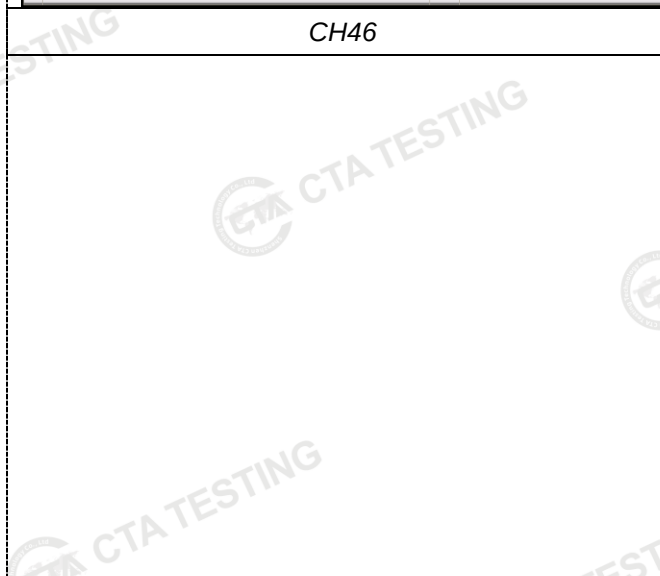

CH40

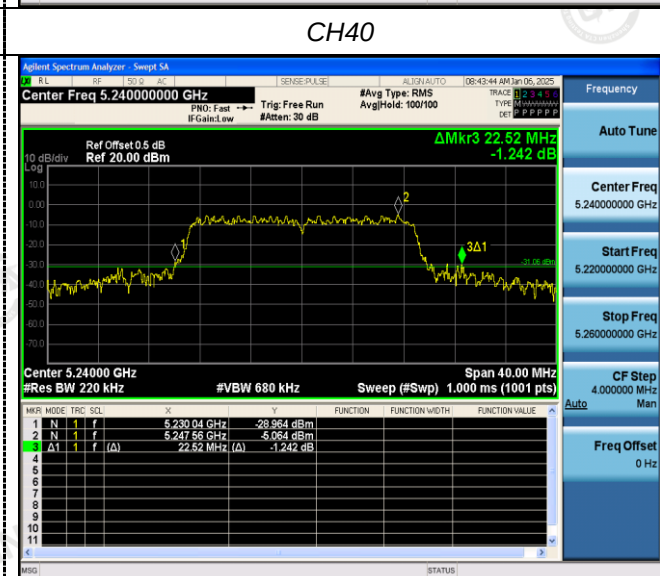

CH48

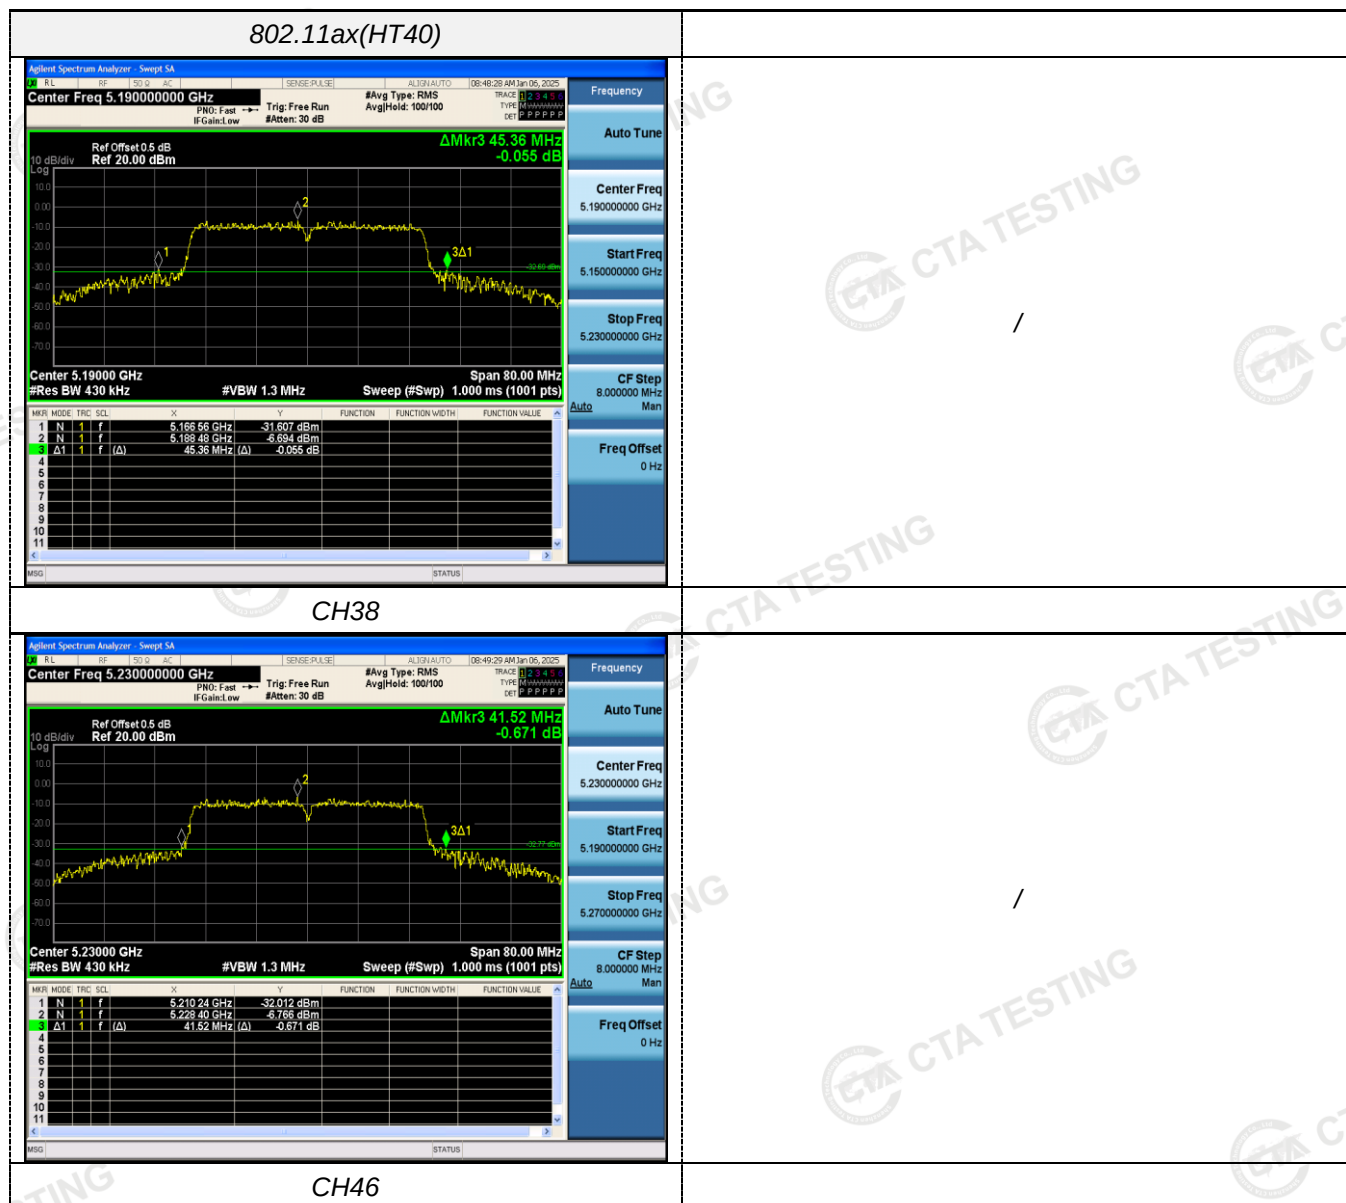

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.280	≥500KHz	Pass
		157	16.280		
		165	16.320		
802.11n(HT20)	U-NII 3	149	17.000		
		157	16.720		
		165	16.880		
802.11n(HT40)	U-NII 3	151	36.080		
		159	35.520		
802.11ac(HT20)	U-NII 3	149	16.680		
		157	16.760		
		165	17.000		
802.11ac(HT40)	U-NII 3	151	36.160		
		159	35.760		
802.11ax(HT20)	U-NII 3	149	16.840		
		157	17.000		
		165	17.000		
802.11ax(HT40)	U-NII 3	151	36.160		
		159	35.840		

Test plot as follows:


802.11a



802.11n(HT20)

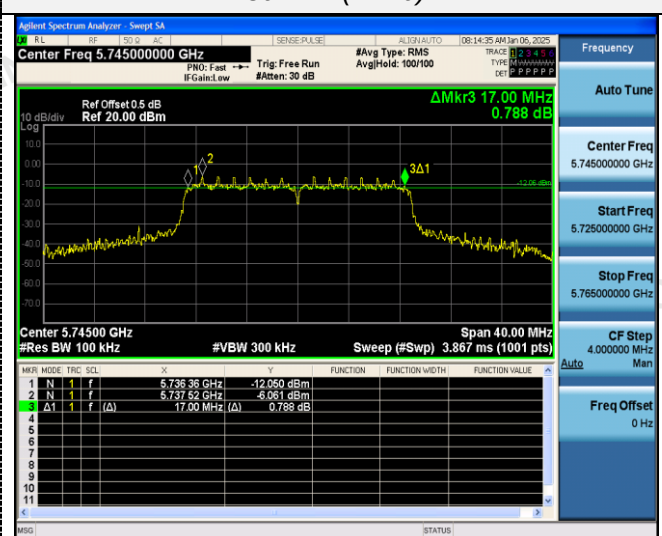


CH149

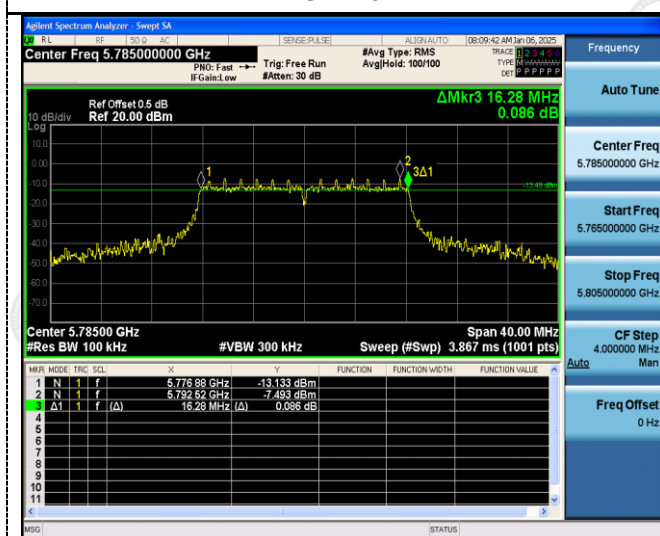


CH149



CH157

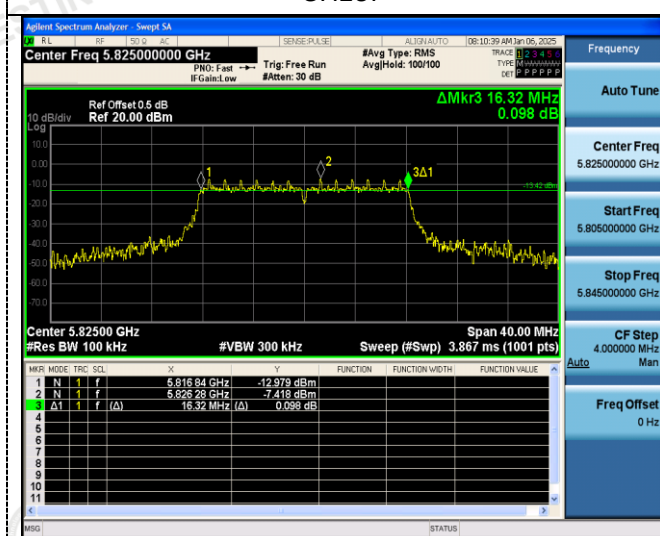

CH157

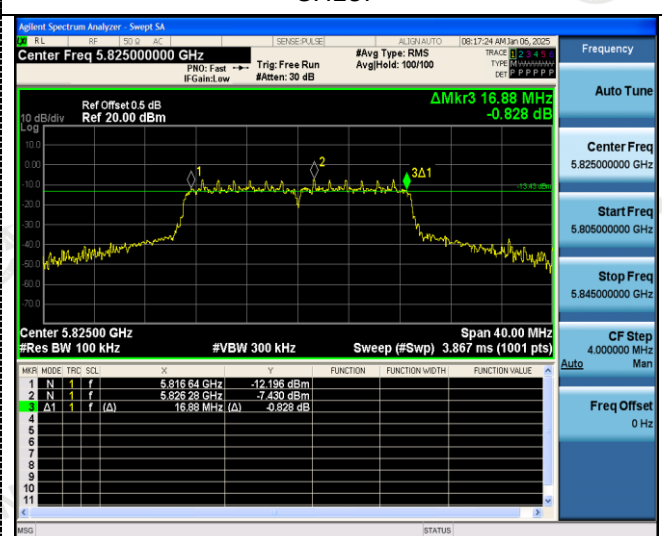


CH165




CH165




802.11n(HT40)

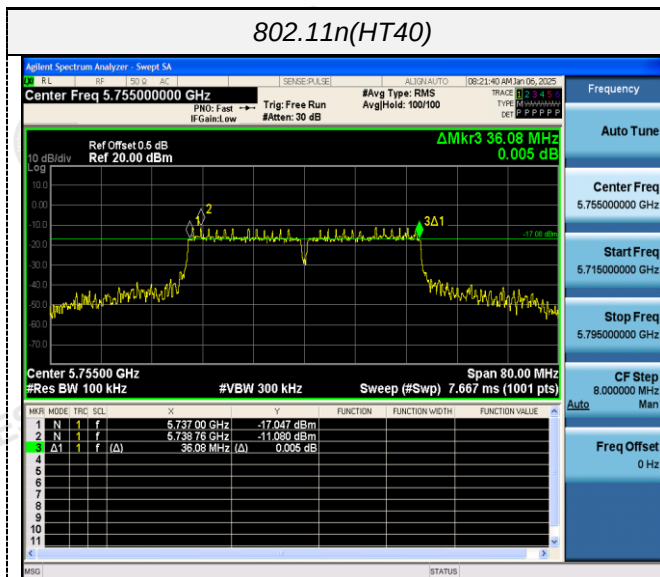


802.11ac(HT20)

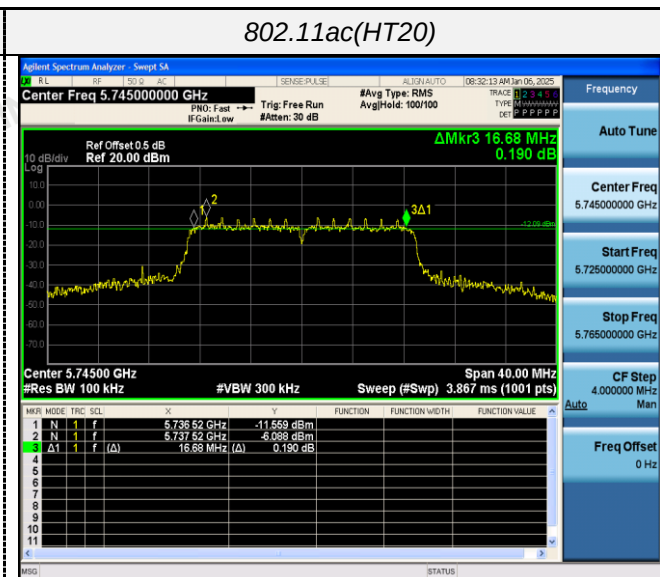

CH151

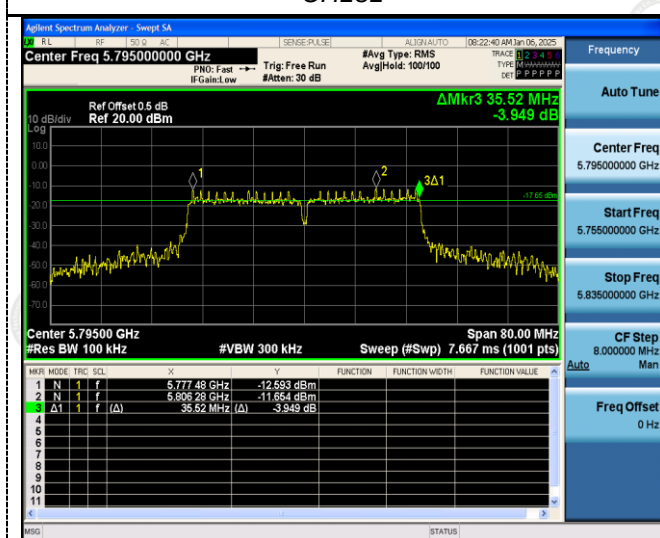


CH149

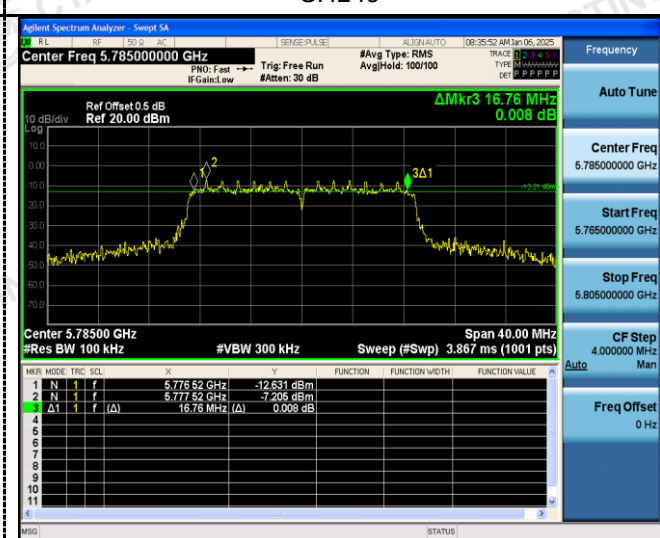

CH159




CH157

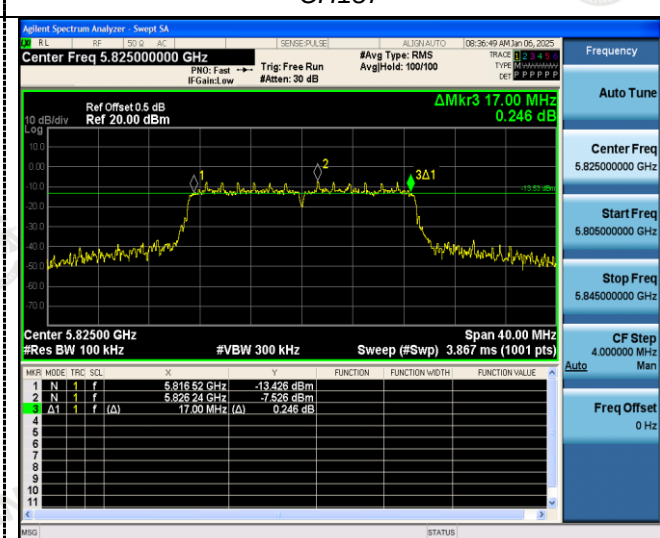


CH165


802.11ac(HT40)

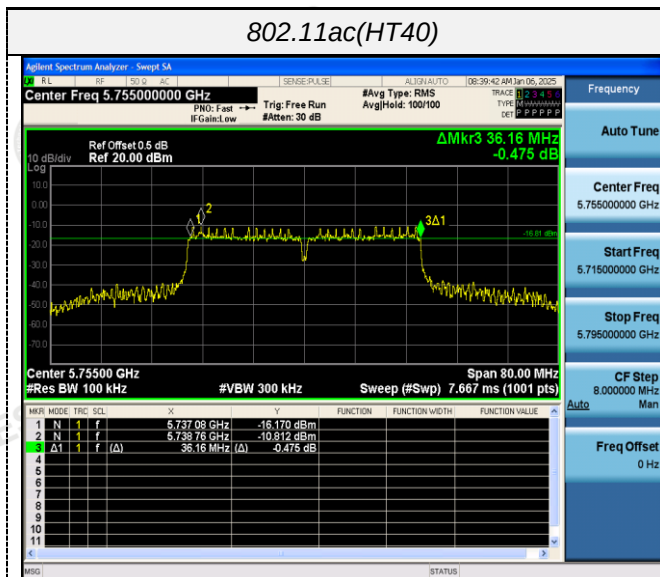


802.11ax(HT20)

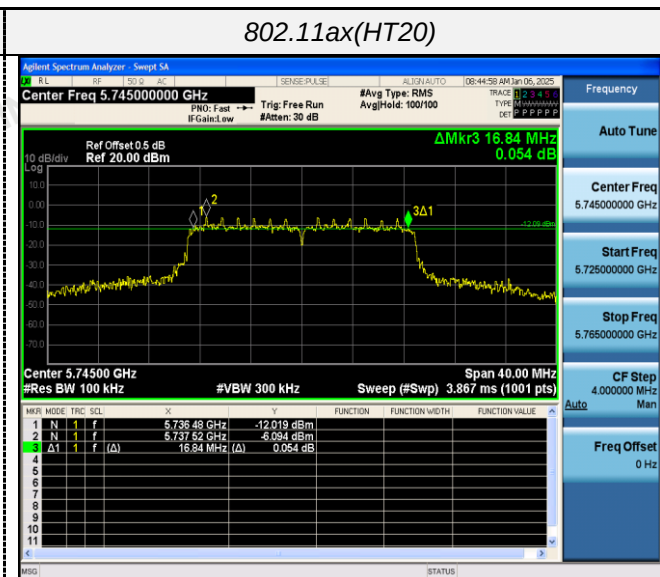

CH151

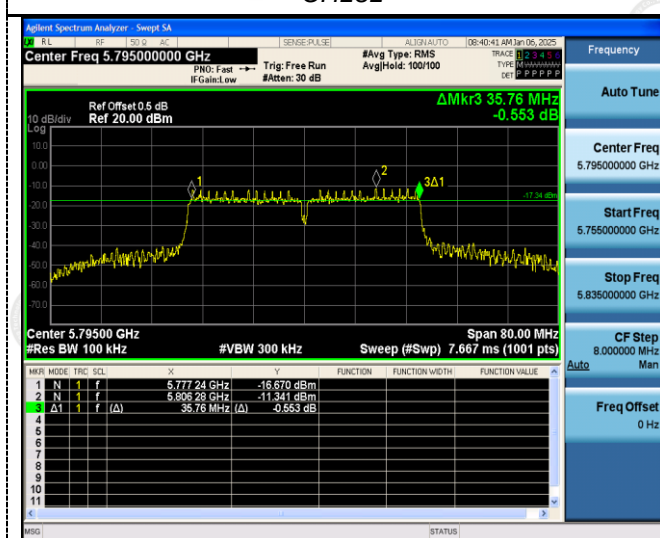


CH149

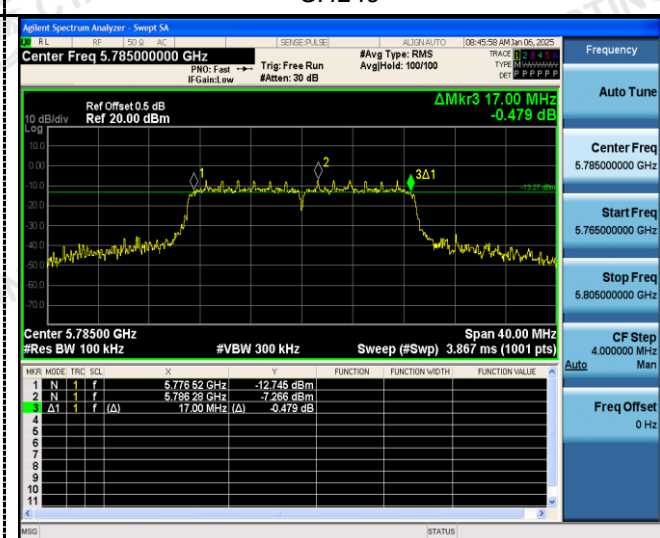


CH159



CH157

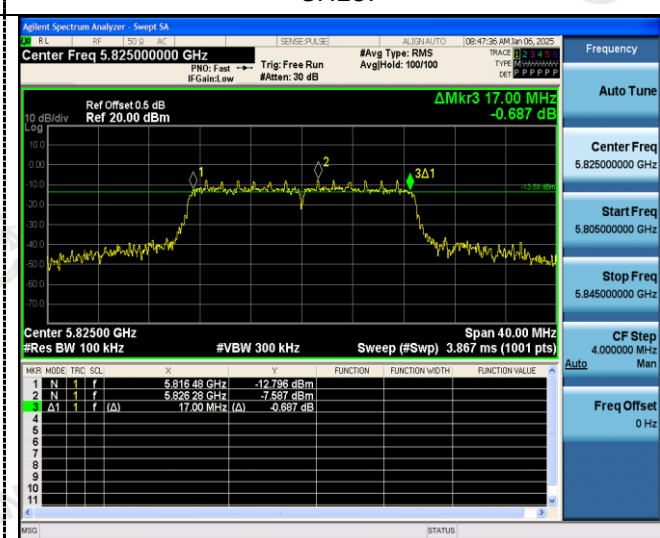

CH165

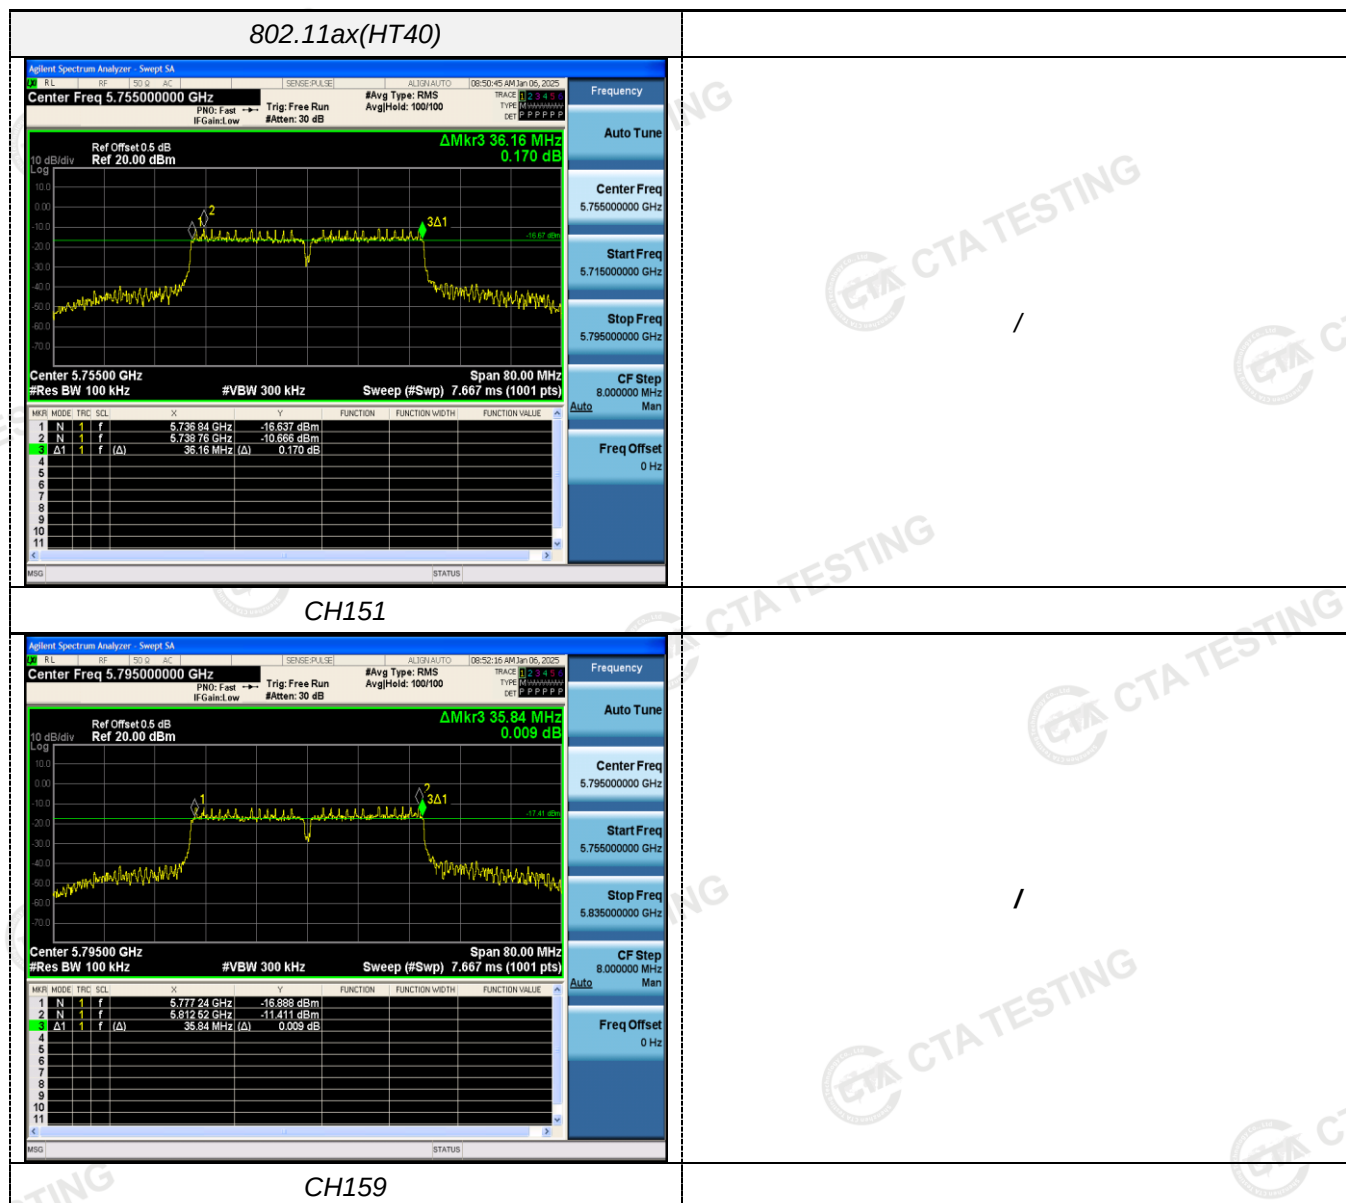


4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

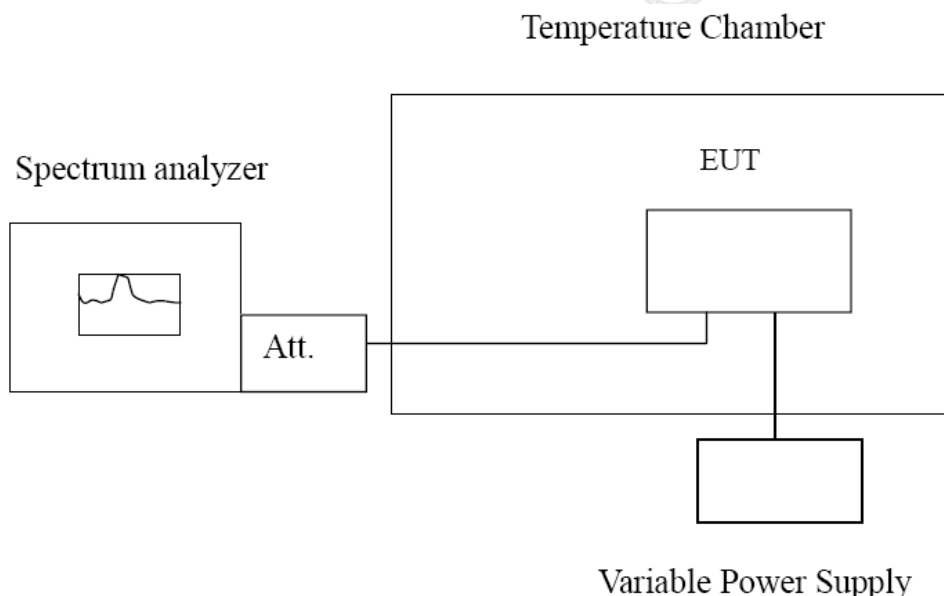

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.85	-30	110.44	0.021320	Within the band of operation	Pass
	-20	174.58	0.033703		
	-10	145.39	0.028068		
	0	146.78	0.028336		
	10	145.93	0.028172		
	20	99.88	0.019282		
	30	167.37	0.032311		
	40	129.31	0.024963		
	50	128.81	0.024867		
DC 4.20	25	195.55	0.037751	Within the band of operation	Pass
DC 3.40	25	118.54	0.022884		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.85	-30	135.72	0.023624	Within the band of operation	Pass
	-20	129.71	0.022578		
	-10	167.56	0.029166		
	0	169.92	0.029577		
	10	136.72	0.023798		
	20	144.51	0.025154		
	30	116.45	0.020270		
	40	168.65	0.029356		
	50	160.38	0.027916		
DC 4.20	25	150.60	0.026214	Within the band of operation	Pass
DC 3.40	25	129.93	0.022616		

5 Test Setup Photos of the EUT



6 Photos of the EUT

Reference to the test report No. CTA24122701801.

***** End of Report *****