



FCC TEST REPORT

FCC ID: 2BNTH-KONECT

On Behalf of

IMODEL

KN-KT3X/SET radio set

Model No.: See model list

Prepared for : IMODEL
Address : 3 rue Labouche 31100 Toulouse France

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2501082-C01-R01
Date of Receipt : January 10, 2025
Date of Test : January 10, 2025 - March 12, 2025
Date of Report : March 12, 2025
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	9
2.3. Tested Supporting System Details	9
2.4. Block Diagram of connection between EUT and simulators	9
2.5. Test Mode Description	9
2.6. Test Conditions	10
2.7. Test Facility	10
2.8. Measurement Uncertainty	10
2.9. Test Equipment List	11
3. Maximum Peak Output power	13
3.1. Limit	13
3.2. Test Procedure	13
3.3. Test Setup	13
3.4. Test Result	13
4. Bandwidth	14
4.1. Limit	14
4.2. Test Procedure	14
4.3. Test Result	14
5. Carrier Frequency Separation	18
5.1. Limit	18
5.2. Test Procedure	18
5.3. Test Result	18
6. Number Of Hopping Channel	19
6.1. Limit	19
6.2. Test Procedure	19
6.3. Test Result	19
7. Dwell Time	20
7.1. Test limit	20
7.2. Test Procedure	20
7.3. Test Result	20
8. Radiated emissions	22
8.1. Limit	22
8.2. Block Diagram of Test setup	24
8.3. Test Procedure	25
8.4. Test Result	25
9. Band Edge Compliance	32
9.1. Block Diagram of Test Setup	32

9.2. Limit	32
9.3. Test Procedure	32
9.4. Test Result	32
10. Power Line Conducted Emissions	38
10.1. Block Diagram of Test Setup	38
10.2. Limit	38
10.3. Test Procedure	38
10.4. Test Result	38
11. Antenna Requirements	39
11.1. Limit	39
11.2. Result	39
12. Test setup photo	40
12.1. Photo of Radiated Emission test	40
13. EUT Photo	41
14. Model list	48

TEST REPORT DECLARATION

Applicant : IMODEL
Address : 3 rue Labouche 31100 Toulouse France
Manufacturer : IMODEL
Address : 3 rue Labouche 31100 Toulouse France
EUT Description : KN-KT3X/SET radio set
(A) Model No. : See model list
(B) Trademark : **KONECT**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Jack Xu
Project Manager



Date of issue.....: March 12, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 12, 2025	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	N/A
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: KN-KT3X/SET radio set
Model Number	: See model list
Diff	: There is no difference except the name of the model. All tests are made with the FTK-STX-SPORT.GR model.
Power supply	: DC 4.5V from battery.
Radio Technology	: 2.4G Technology
Operation frequency	: 2406-2475MHz
Channel No.	: 64 channels
Channel Separation	: 1MHz
Modulation	: GFSK
Antenna Type	: Copper tube antenna, max gain 3.15dBi (Antenna information is provided by applicant.)
Software version	: V1.0
Hardware version	: V1.0
Intend use environment	Residential, commercial and light industrial environment

Channel list:

2406-2475MHz

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2406	14CH	2419	27CH	2433	40CH	2450	53CH	2464
2CH	2407	15CH	2420	28CH	2434	41CH	2451	54CH	2465
3CH	2408	16CH	2421	29CH	2435	42CH	2452	55CH	2466
4CH	2409	17CH	2423	30CH	2436	43CH	2453	56CH	2467
5CH	2410	18CH	2424	31CH	2437	44CH	2454	57CH	2468
6CH	2411	19CH	2425	32CH	2438	45CH	2455	58CH	2469
7CH	2412	20CH	2426	33CH	2443	46CH	2456	59CH	2470
8CH	2413	21CH	2427	34CH	2444	47CH	2457	60CH	2471
9CH	2414	22CH	2428	35CH	2445	48CH	2458	61CH	2472
10CH	2415	23CH	2429	36CH	2446	49CH	2460	62CH	2473
11CH	2416	24CH	2430	37CH	2447	50CH	2461	63CH	2474
12CH	2417	25CH	2431	38CH	2448	51CH	2462	64CH	2475
13CH	2418	26CH	2432	39CH	2449	52CH	2463		


2.2. Accessories of Device (EUT)

Accessories : /
 Manufacturer : /
 Model : /
 INPUT : /
 OUTPUT : /
 Accessories /
 Manufacturer /
 Model /
 Accessories /
 Manufacturer /
 Model /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Notebook PC	Lenovo	ThinkPad E14	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2406
	Middle: CH33	2443
	High: CH64	2475
	Hopping	2406-2475

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.18	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2406	Ant1	1.083	21	Pass
NVNT	2.4G	2443	Ant1	2.171	21	Pass
NVNT	2.4G	2475	Ant1	0.715	21	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated..

4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2406	Ant1	0.942	/	Pass
NVNT	2.4G	2443	Ant1	1.084	/	Pass
NVNT	2.4G	2475	Ant1	1.066	/	Pass

-20dB Bandwidth NVNT 2.4G 2406MHz Ant1

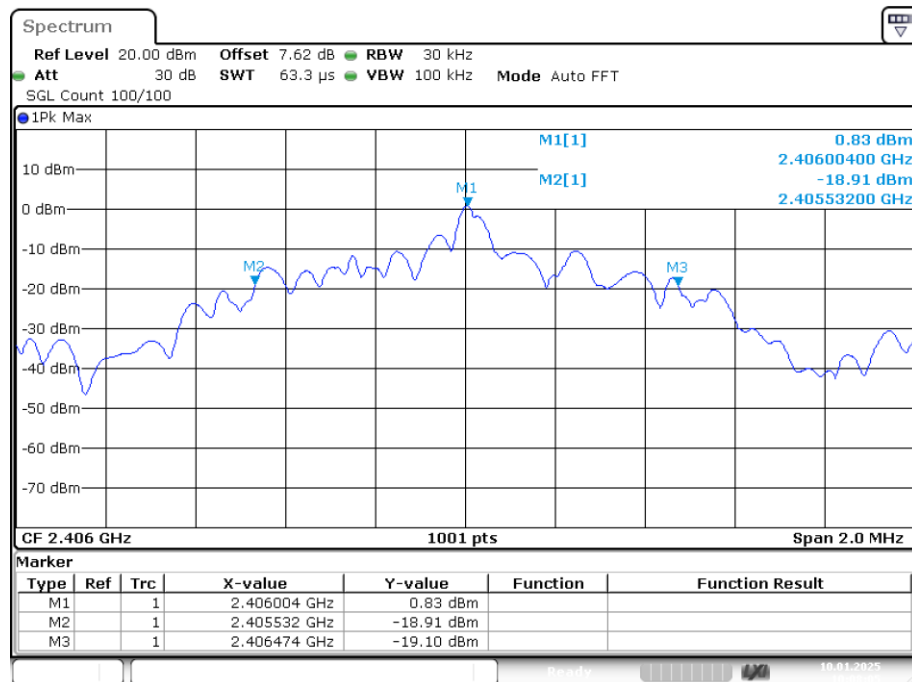


-20dB Bandwidth NVNT 2.4G 2443MHz Ant1

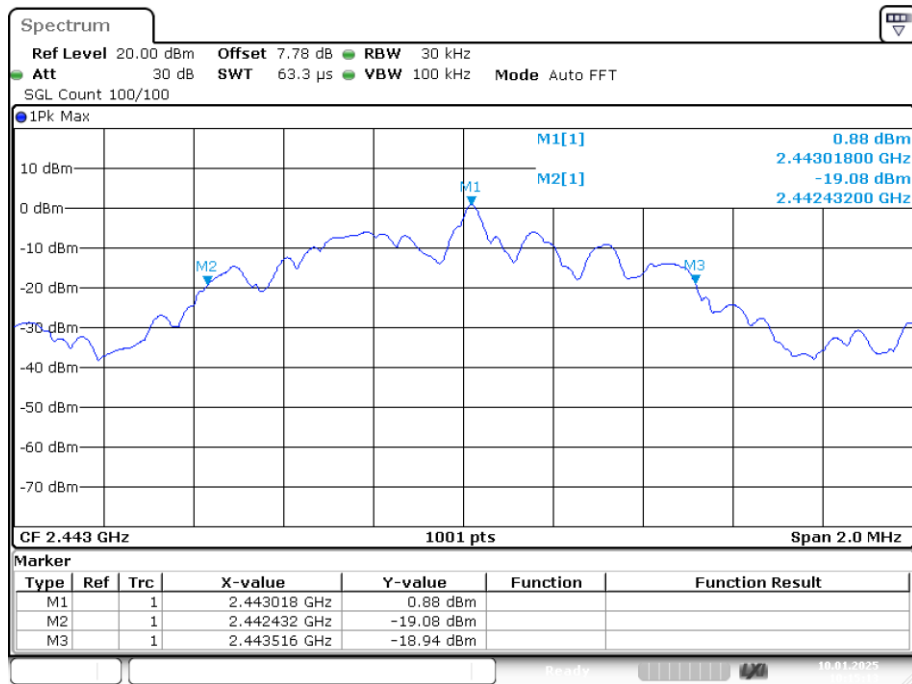

Date: 10.JAN.2025 10:15:12

-20dB Bandwidth NVNT 2.4G 2475MHz Ant1

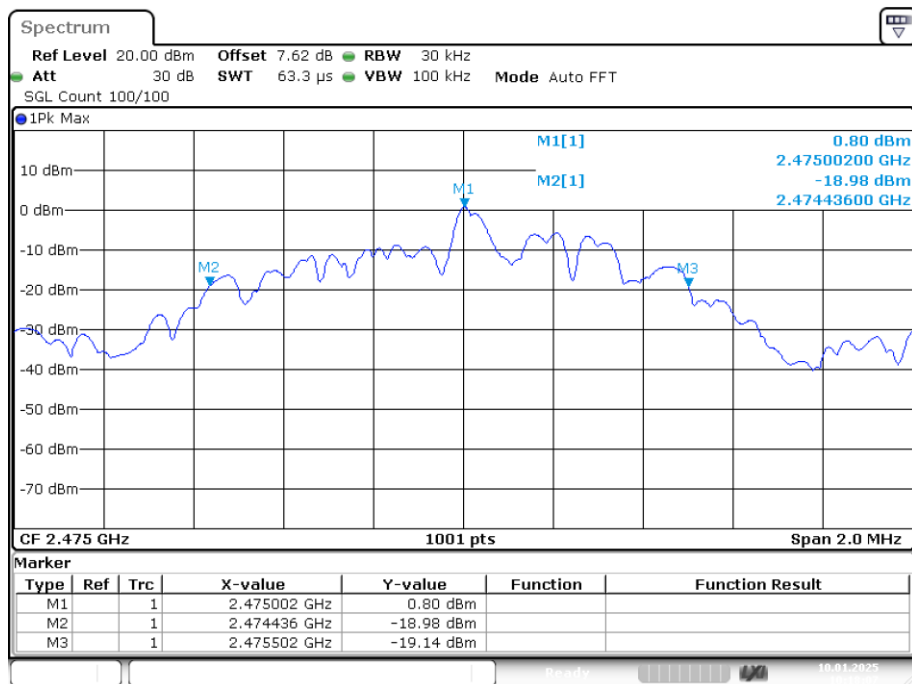


Date: 10.JAN.2025 10:18:06

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	2.4G	2406	Ant1	1.101
NVNT	2.4G	2443	Ant1	1.097
NVNT	2.4G	2475	Ant1	1.163

OBW NVNT 2.4G 2406MHz Ant1

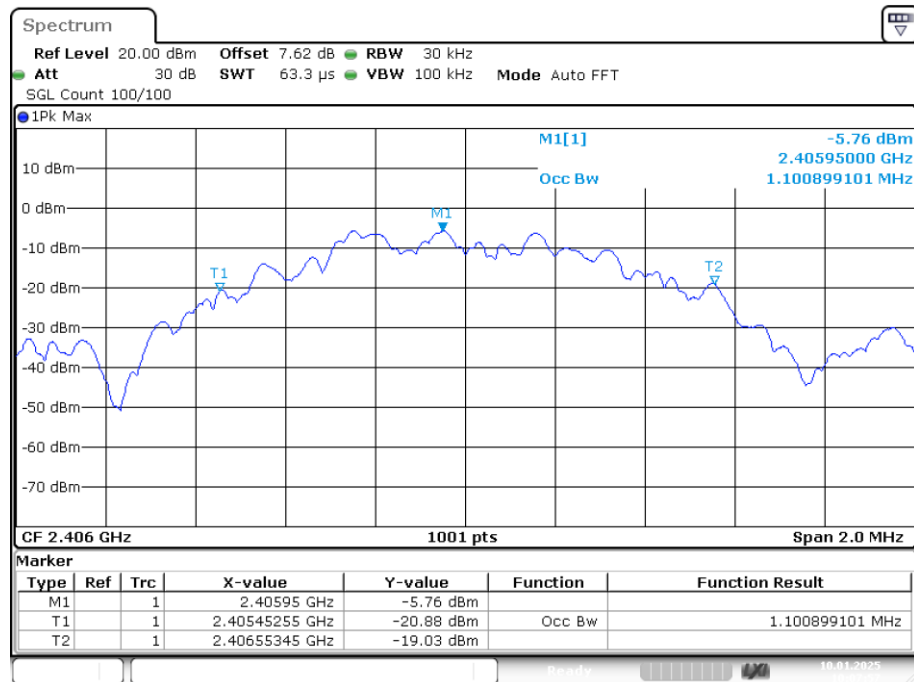


Date: 10.JAN.2025 10:07:56

OBW NVNT 2.4G 2443MHz Ant1

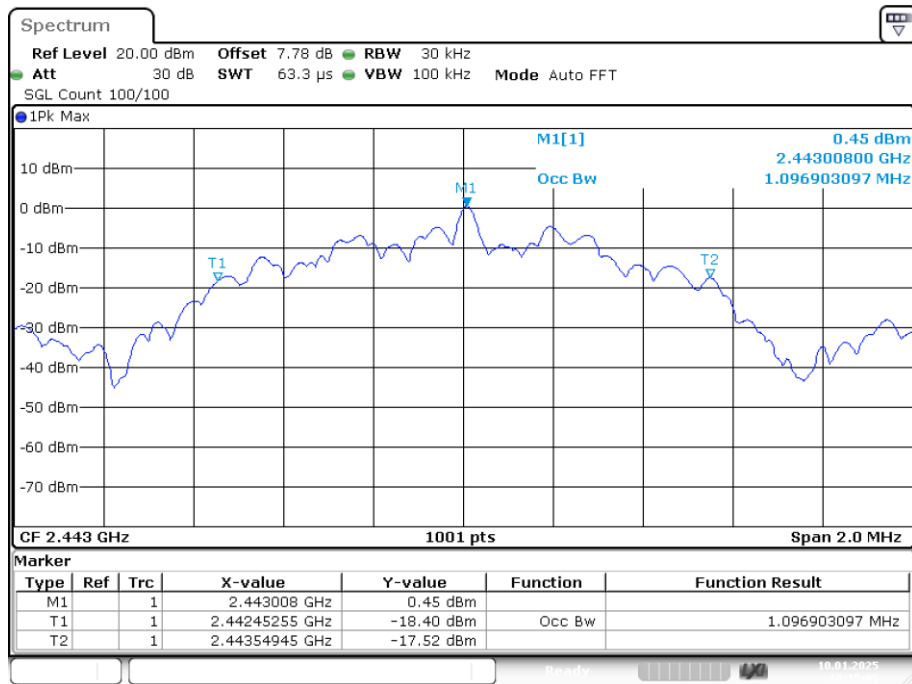

Date: 10.JAN.2025 10:15:05

OBW NVNT 2.4G 2475MHz Ant1

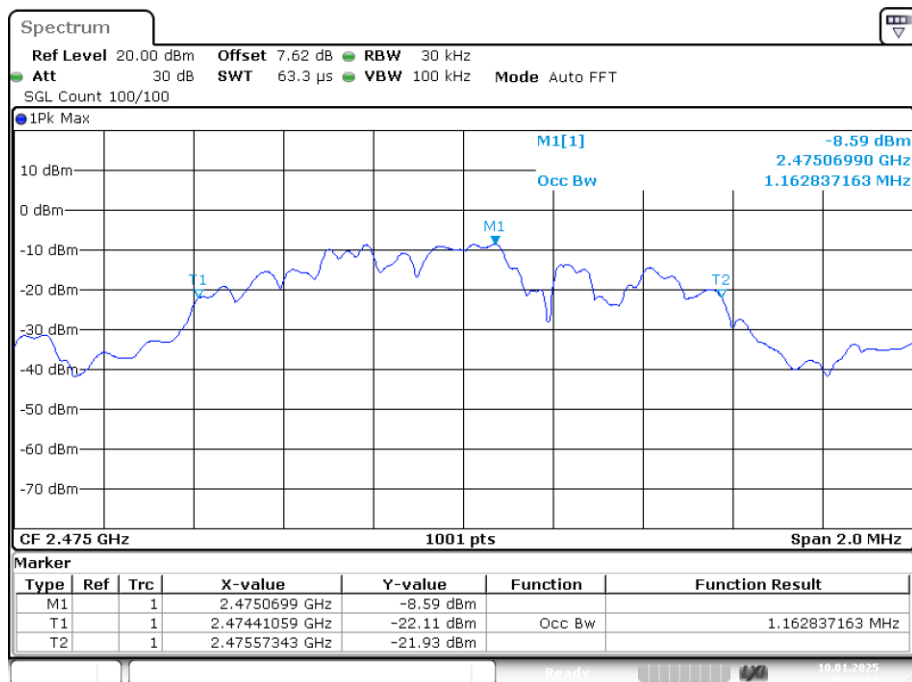

Date: 10.JAN.2025 10:17:58

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	2.4G	Ant1	2442.873	2444.033	1.16	1.084	Pass

CFS NVNT 2.4G 2443MHz Ant1

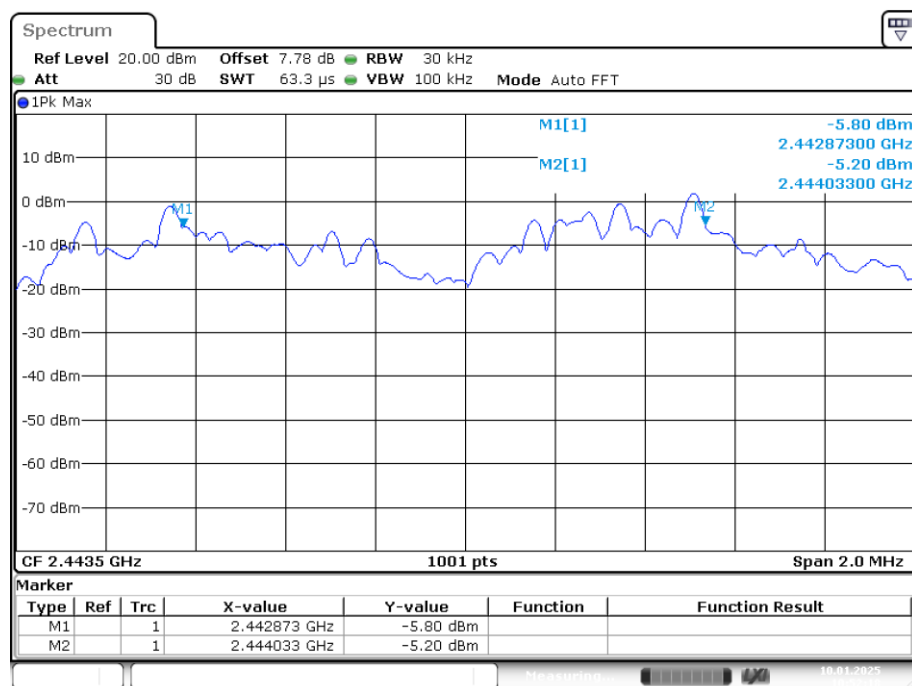

Date: 10.JAN.2025 10:52:18

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

6.3. Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	2.4G	64	15	Pass

Hopping No. NVNT 2.4G 2443MHz Ant1

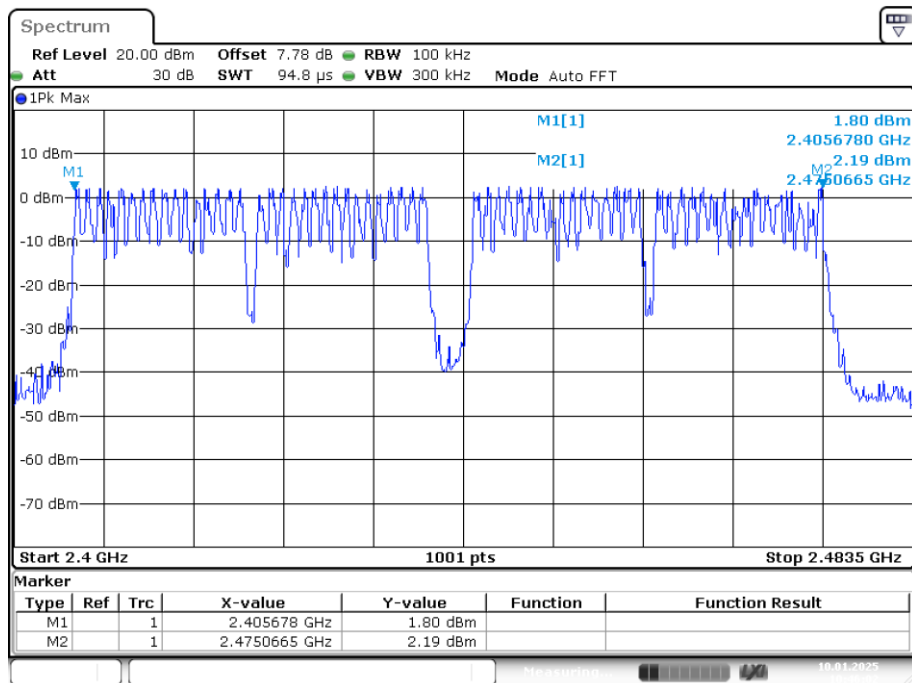

Date: 10.JAN.2025 10:46:02

7. DWELL TIME

7.1. Test limit

Please refer section 15.247.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.


7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	2.4G	2443	Ant1	0.251	24.849	99	25600	400	Pass

Dwell NVNT 1-DH1 2443MHz Ant1 One Burst

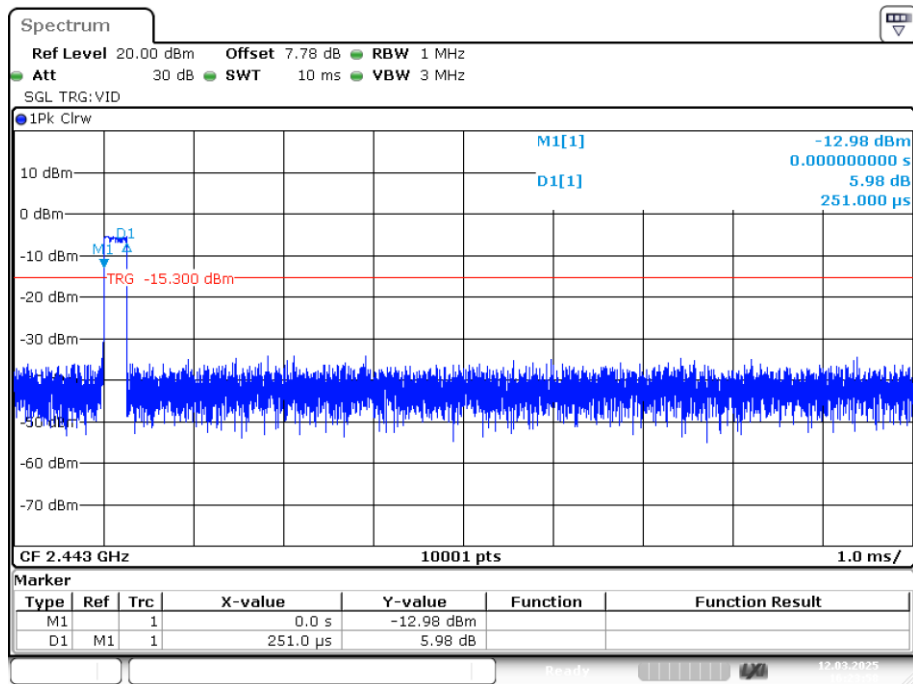

Date: 12.MAR.2025 16:23:58

Dwell NVNT 1-DH1 2443MHz Ant1 Accumulated

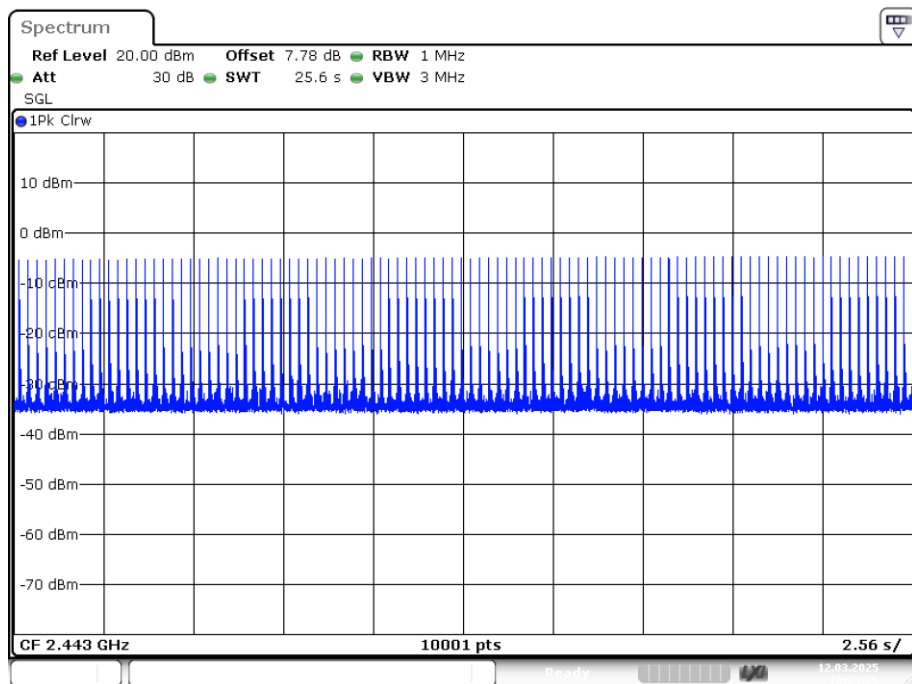

Date: 12.MAR.2025 16:24:26

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength (µV/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

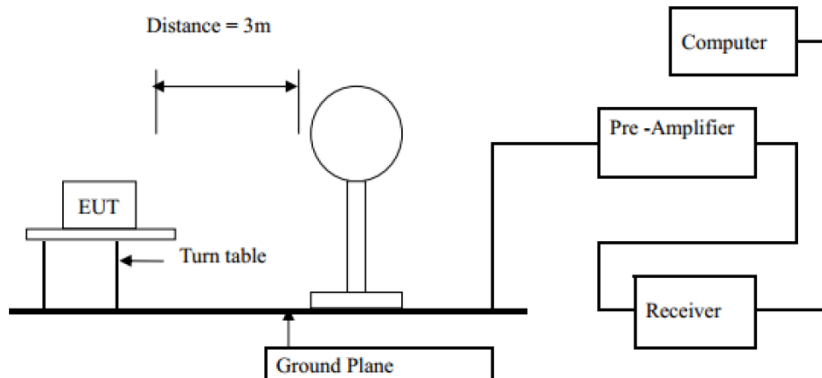

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

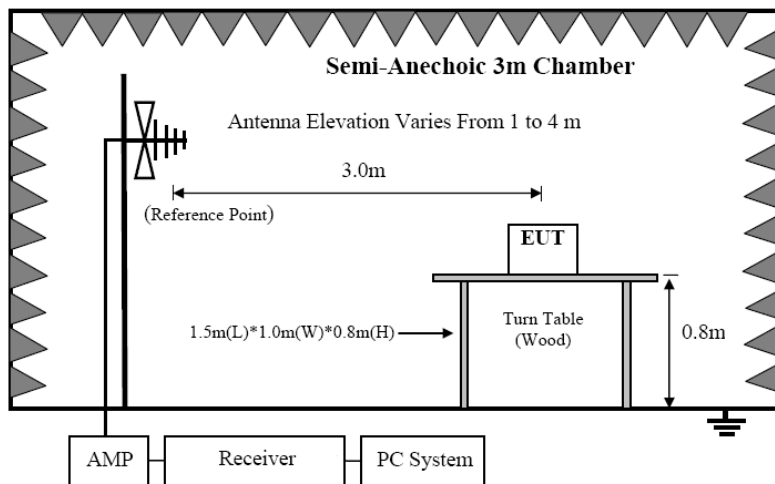

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

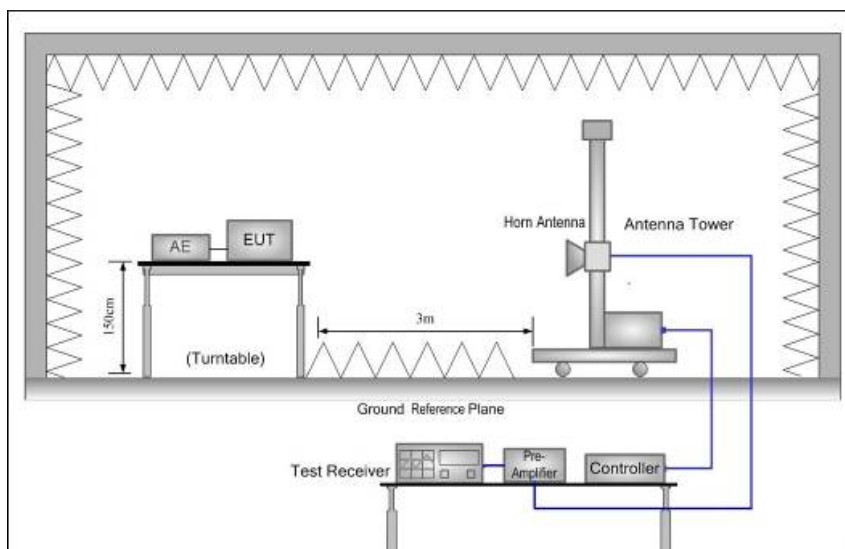

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

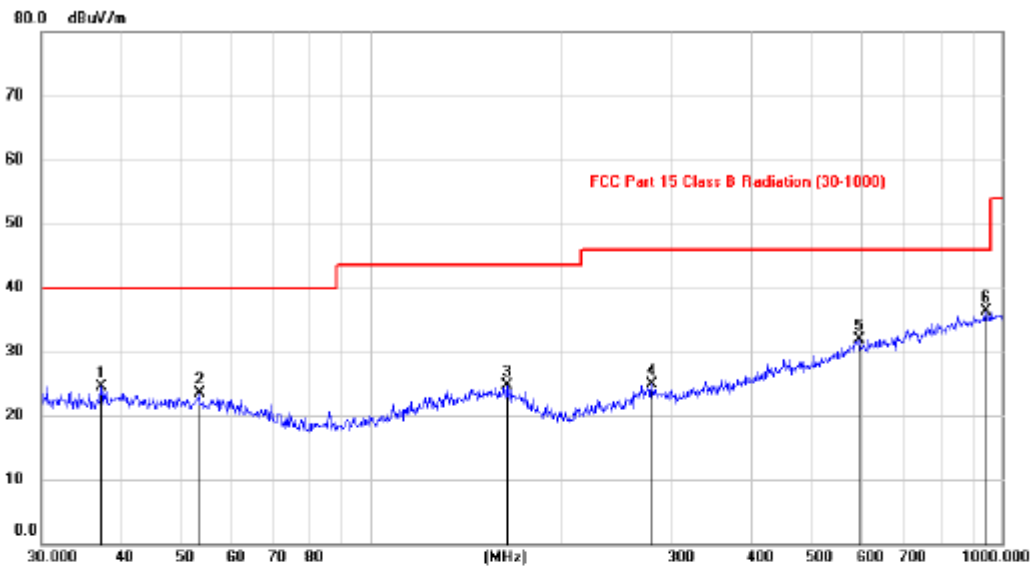

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		37.3115	10.47	14.10	24.57	40.00	-15.43	peak		
2		53.3242	9.71	13.72	23.43	40.00	-16.57	peak		
3		164.7919	10.07	14.58	24.65	43.50	-18.85	peak		
4		278.6525	11.34	13.53	24.87	46.00	-21.13	peak		
5		593.1883	11.80	20.08	31.88	46.00	-14.12	peak		
6	*	942.3508	11.77	24.59	36.36	46.00	-9.64	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

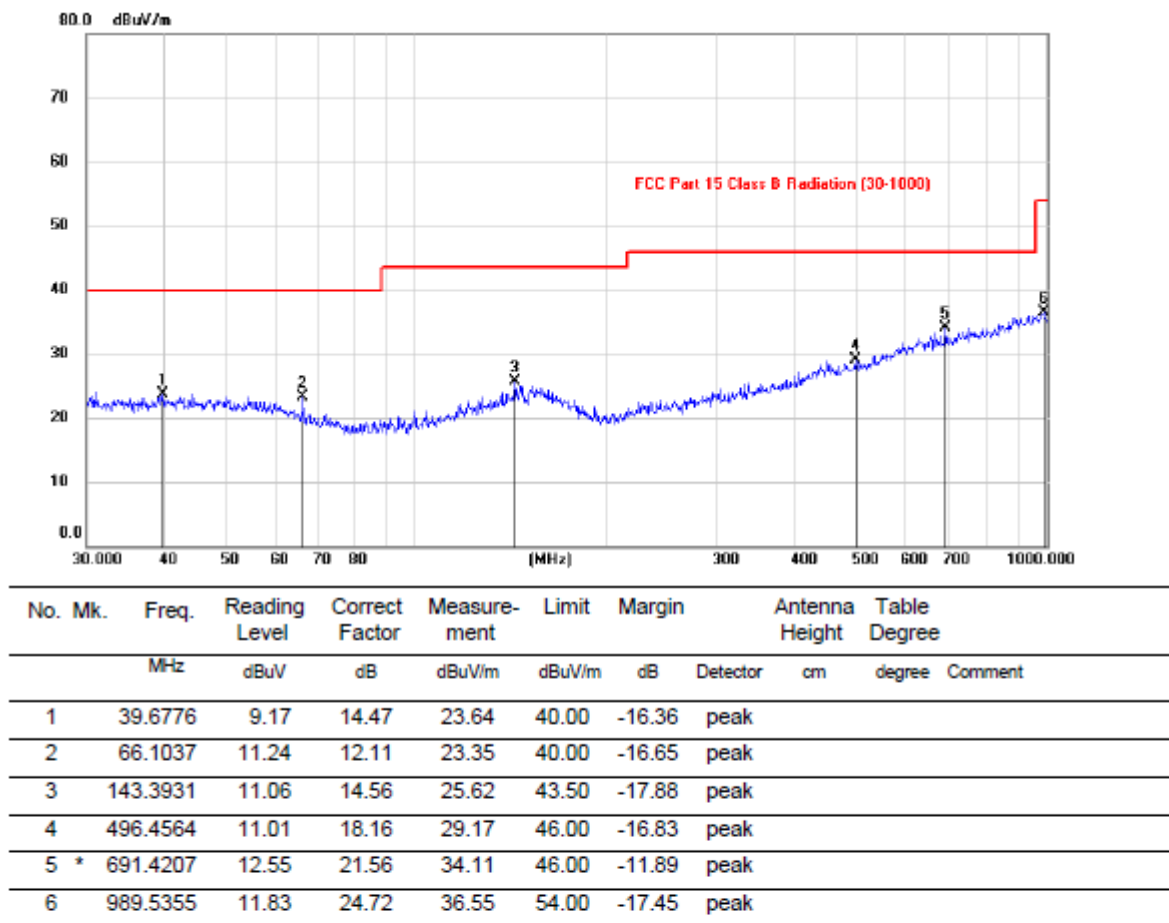Horizontal:

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor, Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK 2406MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.99	V	33.95	10.18	34.26	57.86	74	-16.14	PK
4804	35.87	V	33.95	10.18	34.26	45.74	54	-8.26	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	47.36	H	33.95	10.18	34.26	57.23	74	-16.77	PK
4804	37.69	H	33.95	10.18	34.26	47.56	54	-6.44	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	41.67	V	33.93	10.2	34.29	51.51	74	-22.49	PK
4882	33.38	V	33.93	10.2	34.29	43.22	54	-10.78	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.17	H	33.93	10.2	34.29	53.01	74	-20.99	PK
4882	35.23	H	33.93	10.2	34.29	45.07	54	-8.93	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	45.91	V	33.93	10.2	34.29	55.75	74	-18.25	PK
4960	36.07	V	33.93	10.2	34.29	45.91	54	-8.09	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.76	H	33.93	10.2	34.29	52.60	74	-21.40	PK
4960	34.50	H	33.93	10.2	34.29	44.34	54	-9.66	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:


1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

3. “/” means the test data is too lower than the limit.


Conducted RF Spurious Emission

Tx. Spurious NVNT 2.4G 2406MHz Ant1 Ref

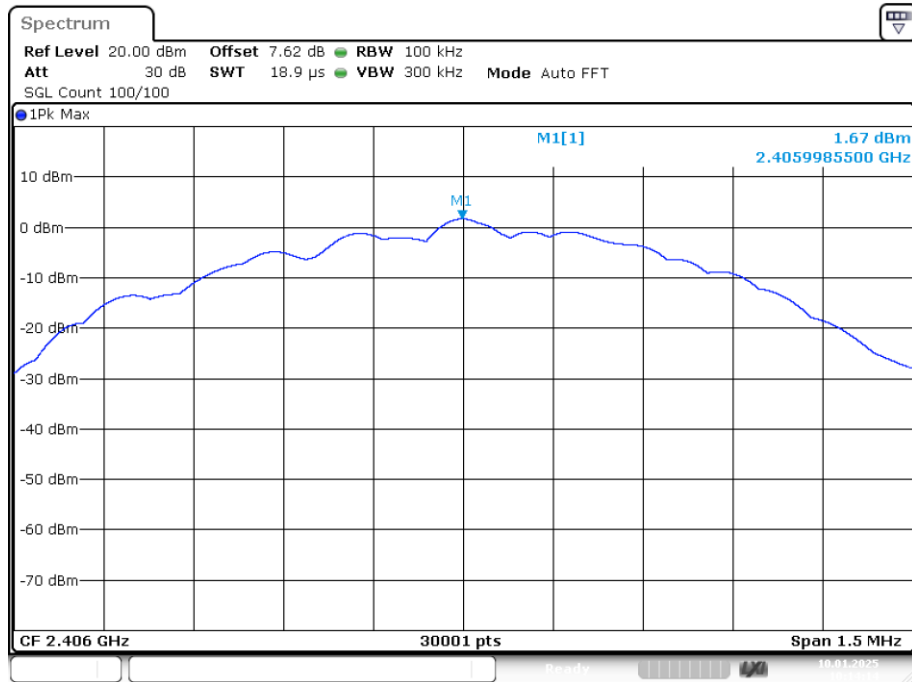


Date: 10.JAN.2025 10:14:14

Tx. Spurious NVNT 2.4G 2406MHz Ant1 Emission

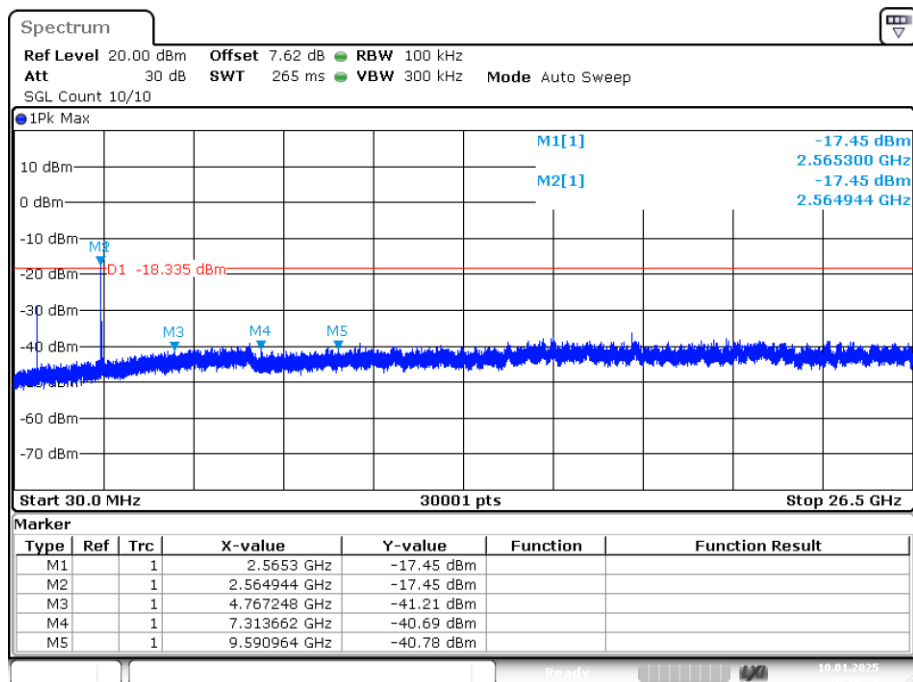


Date: 10.JAN.2025 10:14:28

Tx. Spurious NVNT 2.4G 2443MHz Ant1 Ref

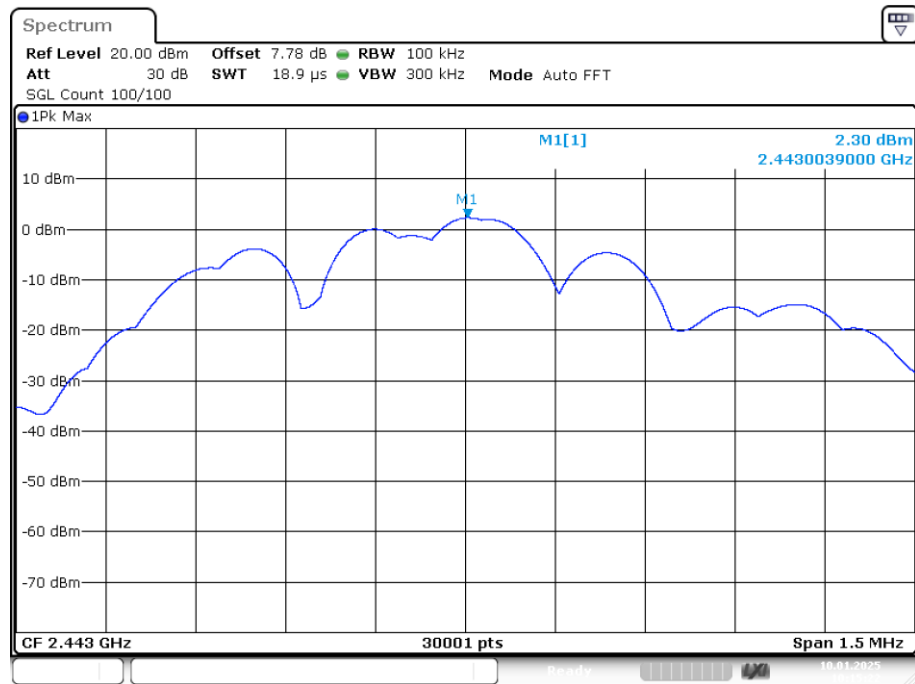


Date: 10.JAN.2025 10:15:22

Tx. Spurious NVNT 2.4G 2443MHz Ant1 Emission

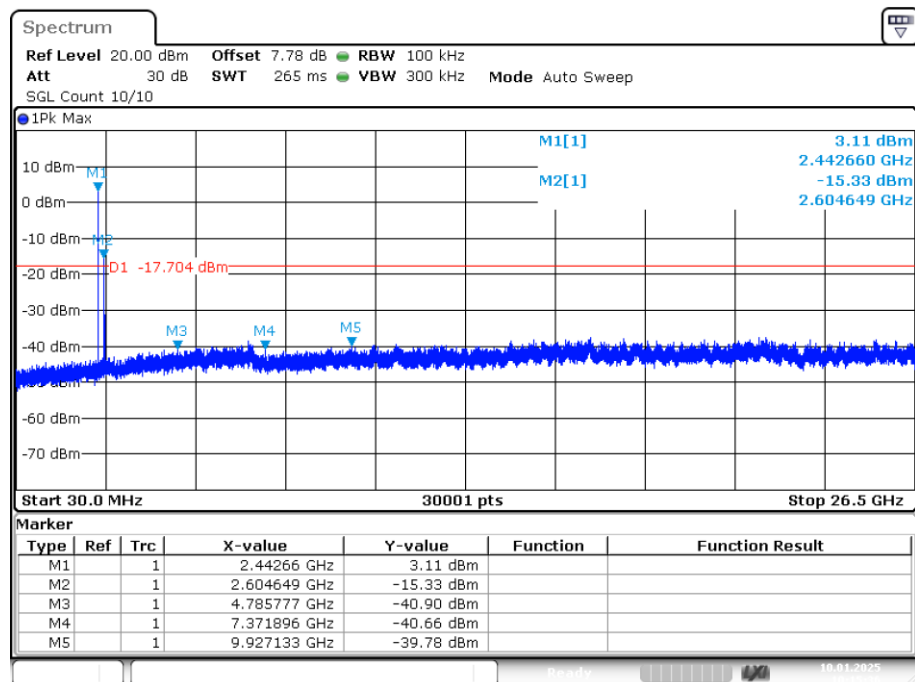


Date: 10.JAN.2025 10:15:36

Tx. Spurious NVNT 2.4G 2475MHz Ant1 Ref

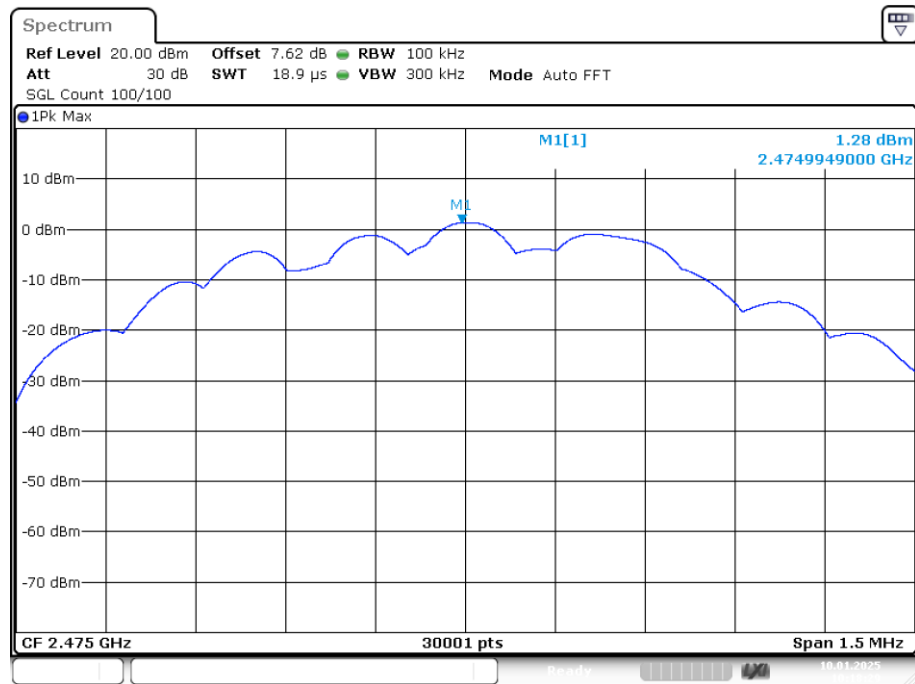

Date: 10.JAN.2025 10:18:29


Tx. Spurious NVNT 2.4G 2475MHz Ant1 Emission

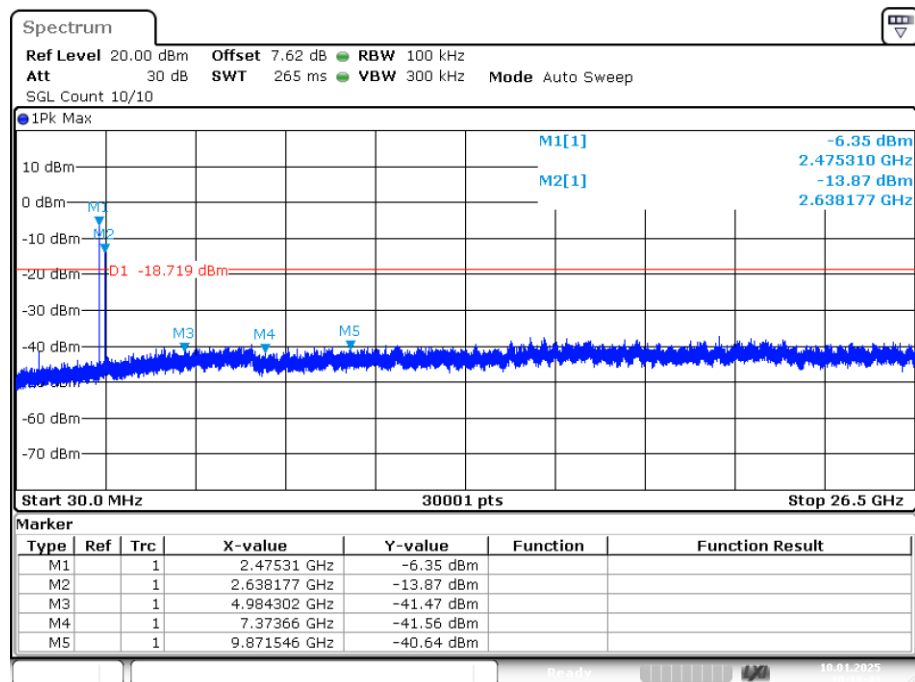

Date: 10.JAN.2025 10:18:42

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

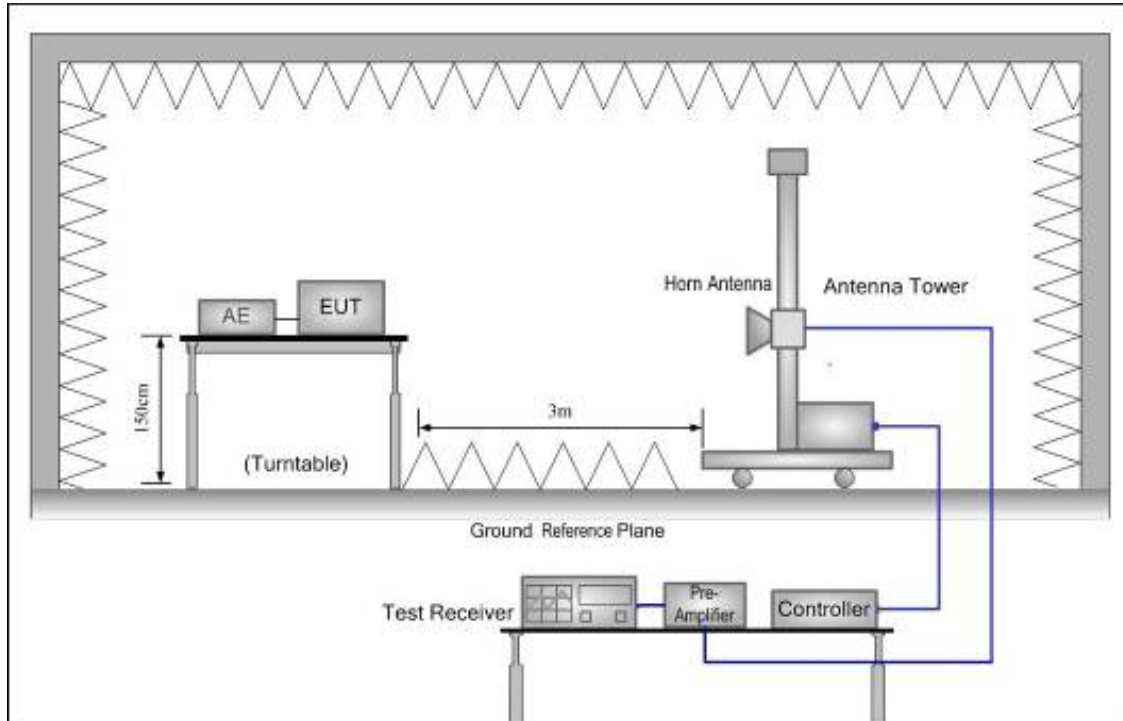

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

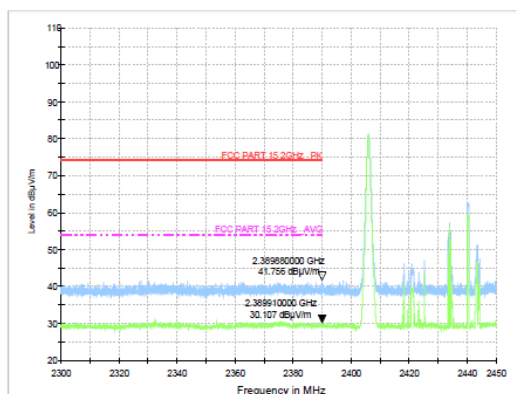


Test Mode: GFSK-High Hopping-off

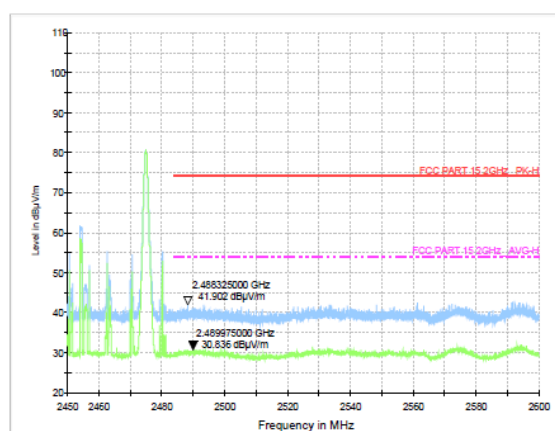

Test Mode: GFSK-Low Hopping-on


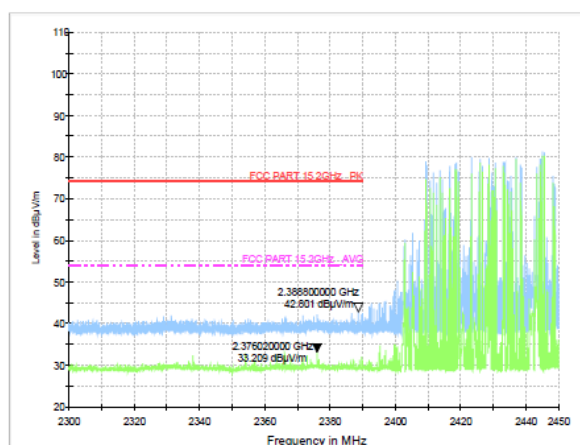


Test Mode: GFSK-High Hopping-on

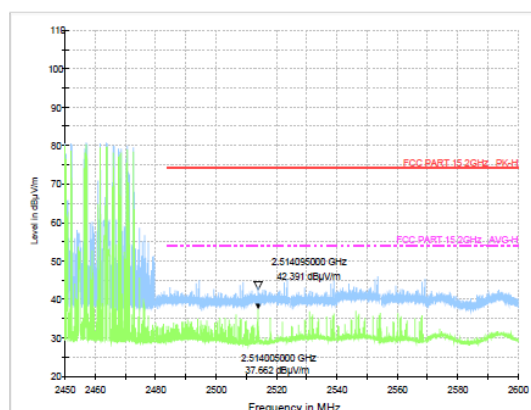


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

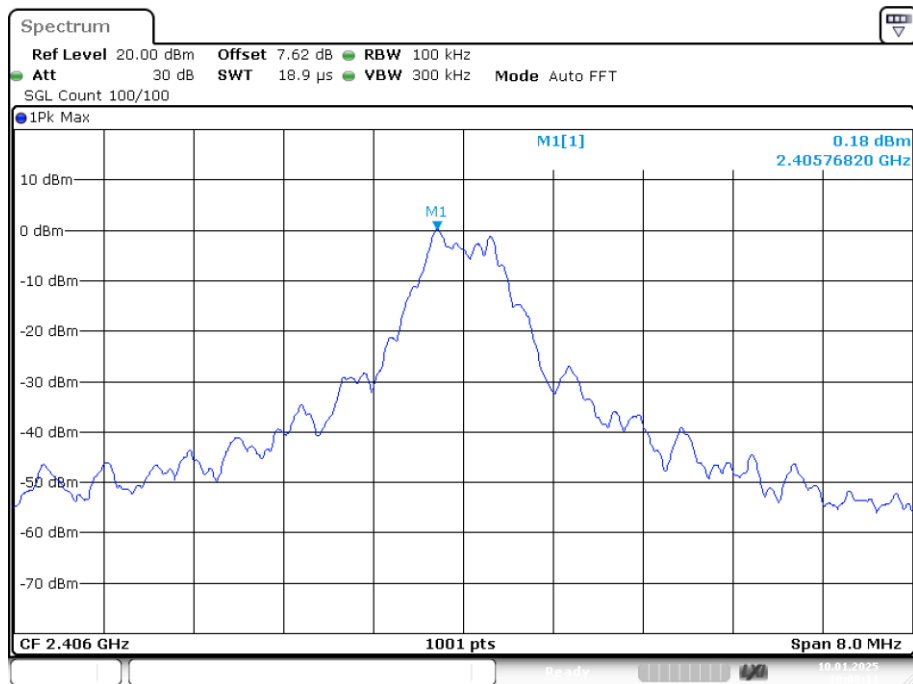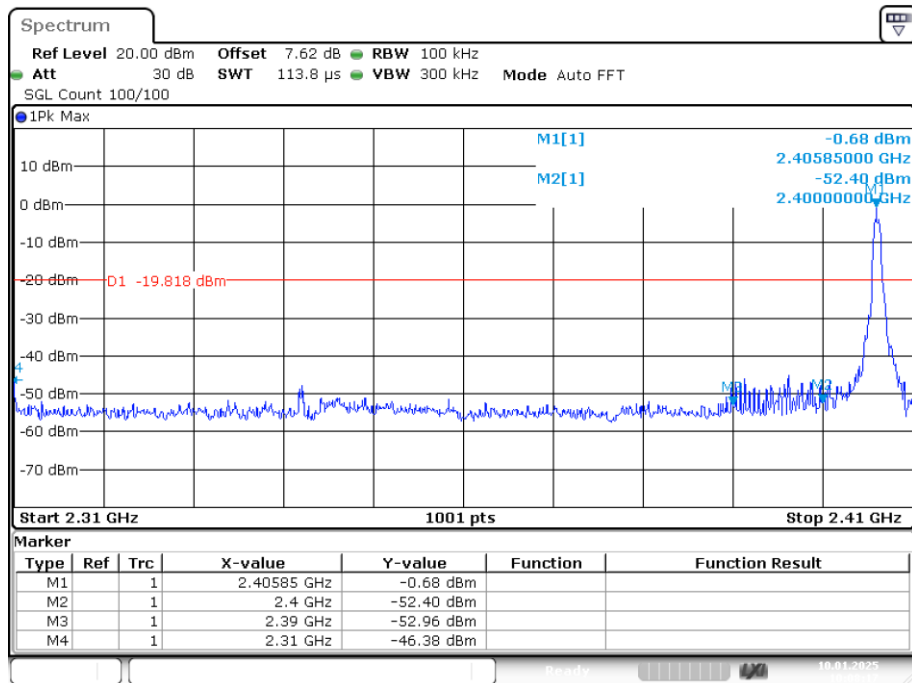
Conducted Method**GFSK Mode:****Band Edge NVNT 2.4G 2406MHz Ant1 No-Hopping Ref****Band Edge NVNT 2.4G 2406MHz Ant1 No-Hopping Emission**

Band Edge NVNT 2.4G 2475MHz Ant1 No-Hopping Ref

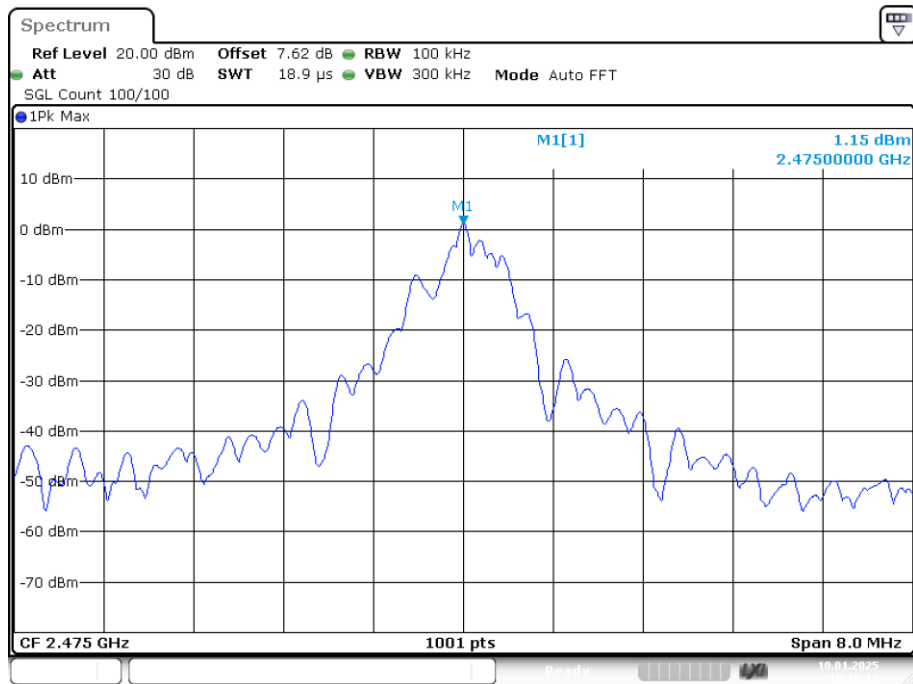


Date: 10.JAN.2025 10:18:12

Band Edge NVNT 2.4G 2475MHz Ant1 No-Hopping Emission

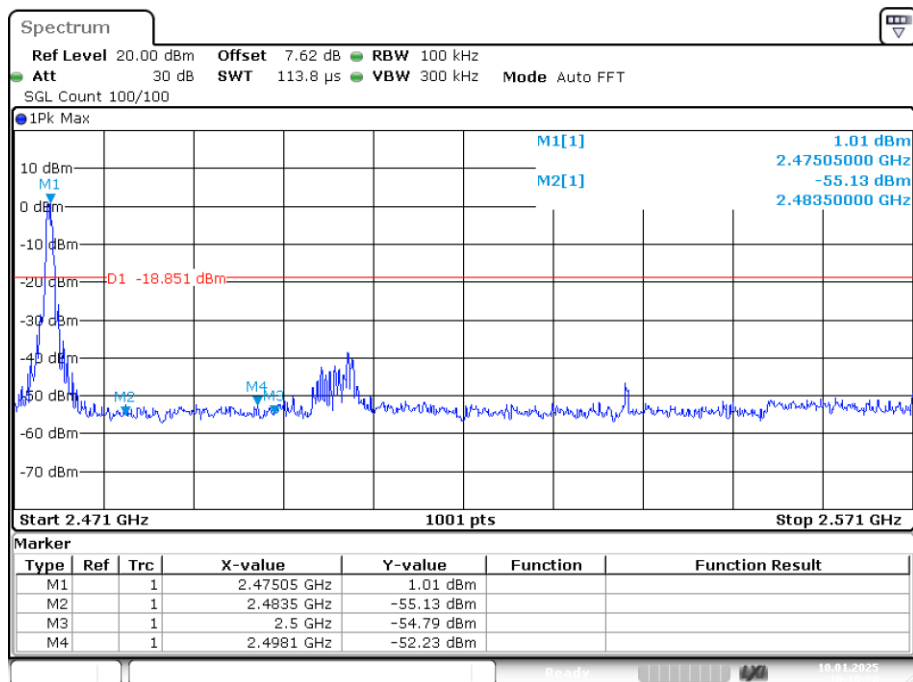


Date: 10.JAN.2025 10:18:19

Band Edge(Hopping) NVNT 2.4G 2406MHz Ant1 Hopping Ref

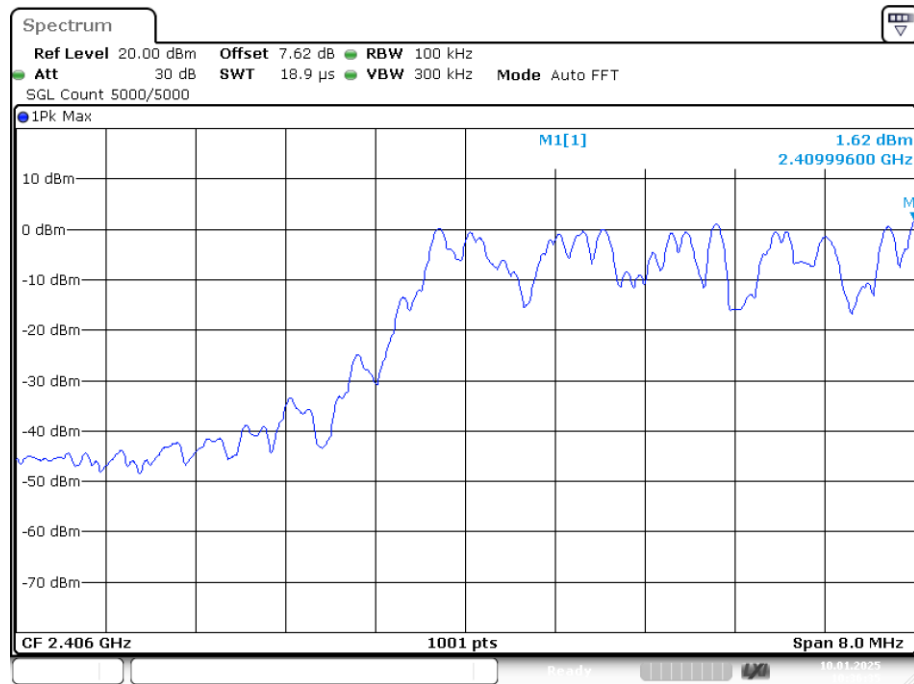


Date: 10.JAN.2025 10:36:35

Band Edge(Hopping) NVNT 2.4G 2406MHz Ant1 Hopping Emission

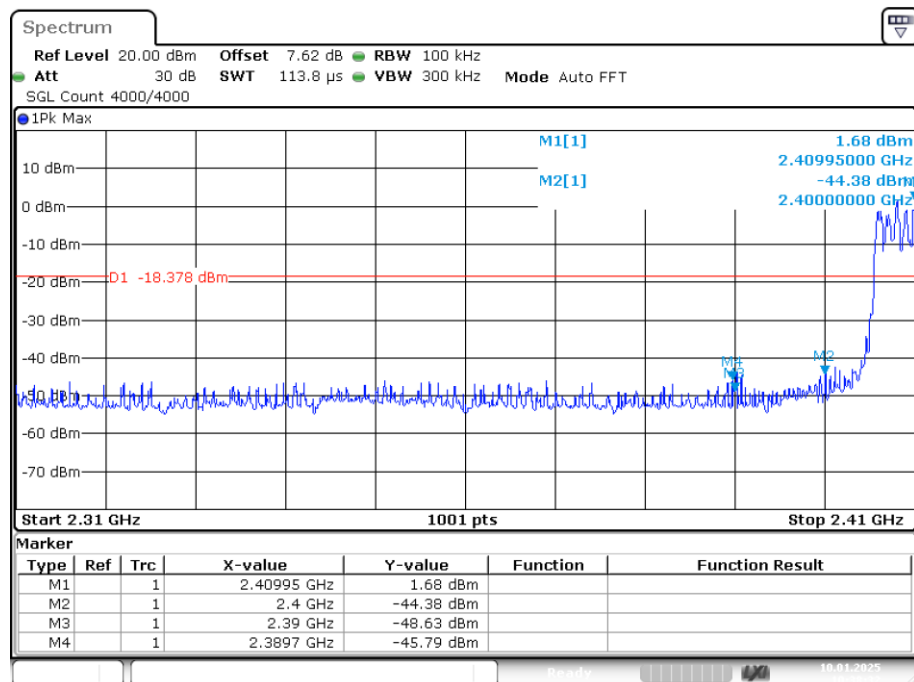


Date: 10.JAN.2025 10:38:31

Band Edge(Hopping) NVNT 2.4G 2475MHz Ant1 Hopping Ref

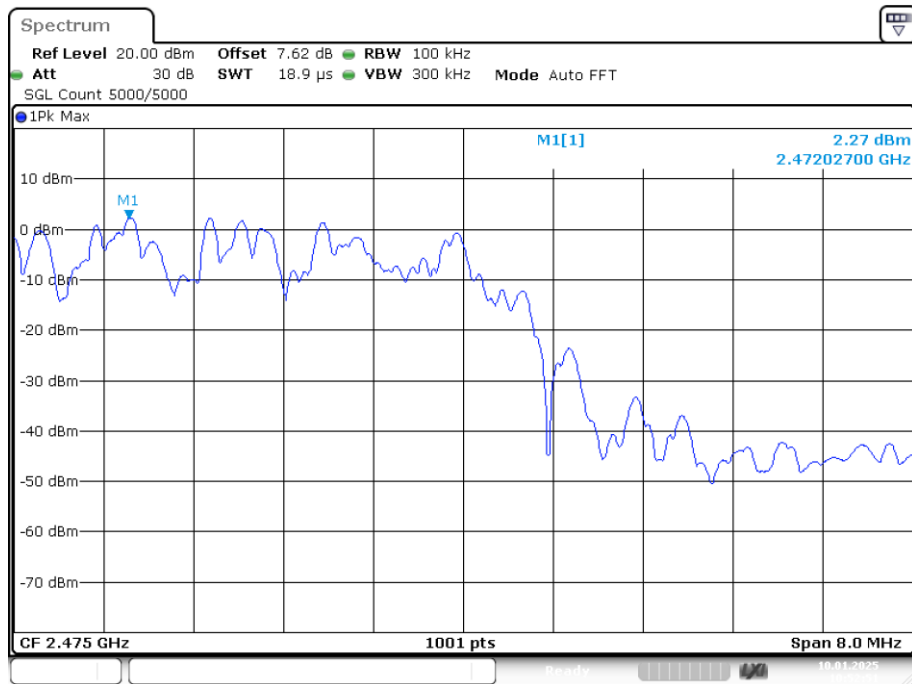

Date: 10.JAN.2025 10:52:51


Band Edge(Hopping) NVNT 2.4G 2475MHz Ant1 Hopping Emission

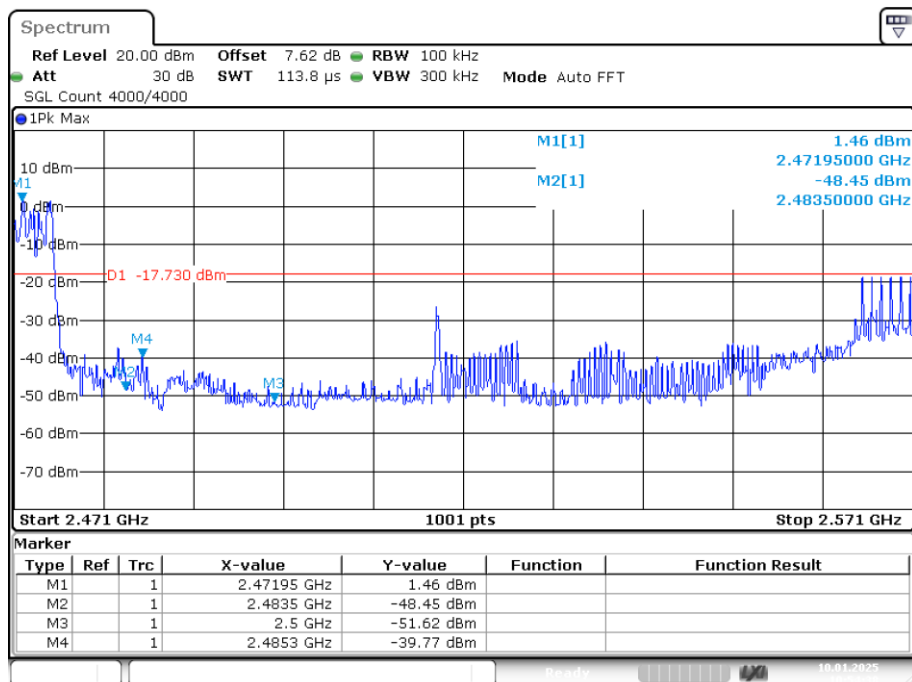

Date: 10.JAN.2025 10:54:38

10. POWER LINE CONDUCTED EMISSIONS

10.1. Block Diagram of Test Setup

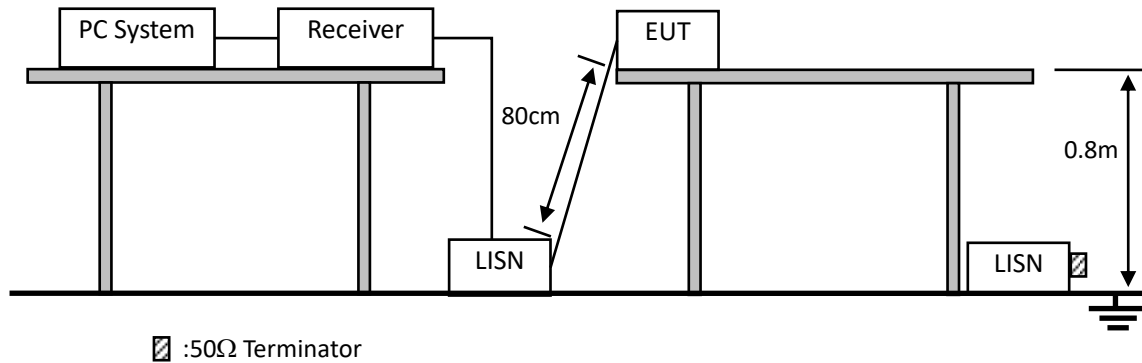

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

Not applicable for equipment operated with PC, battery, or DC Power Supply.

11. ANTENNA REQUIREMENTS

11.1.Limit



For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi..

11.2.Result

The EUT antenna is Dipole Antenna. It complies with the standard requirement.


12. TEST SETUP PHOTO

12.1. Photo of Radiated Emission test

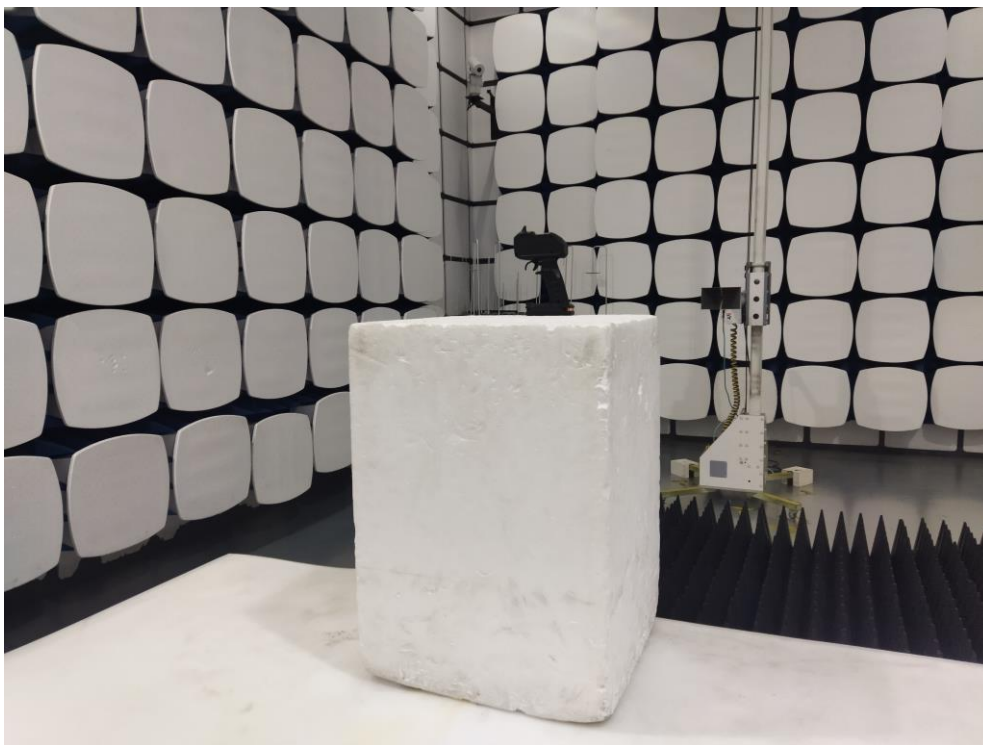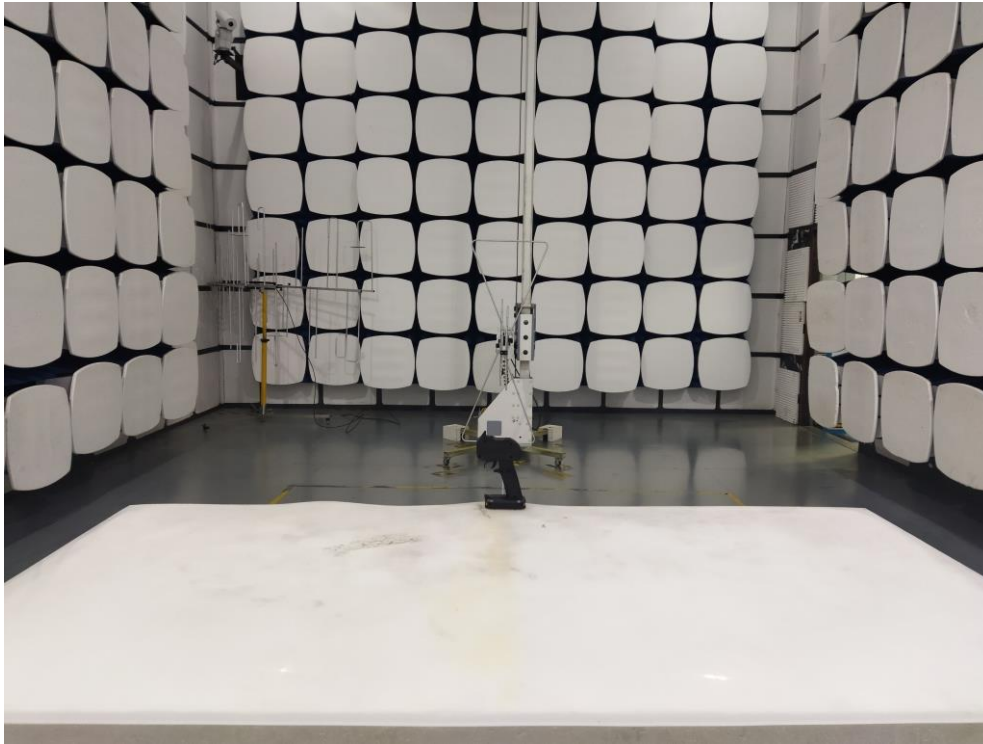


13. EUT Photo





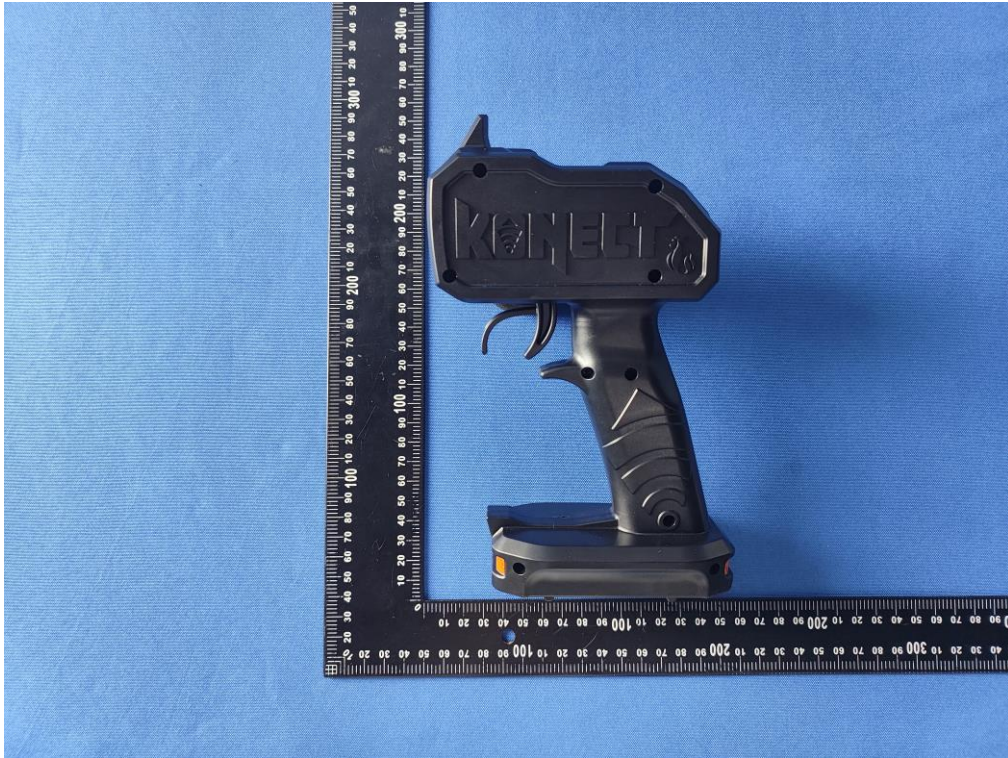






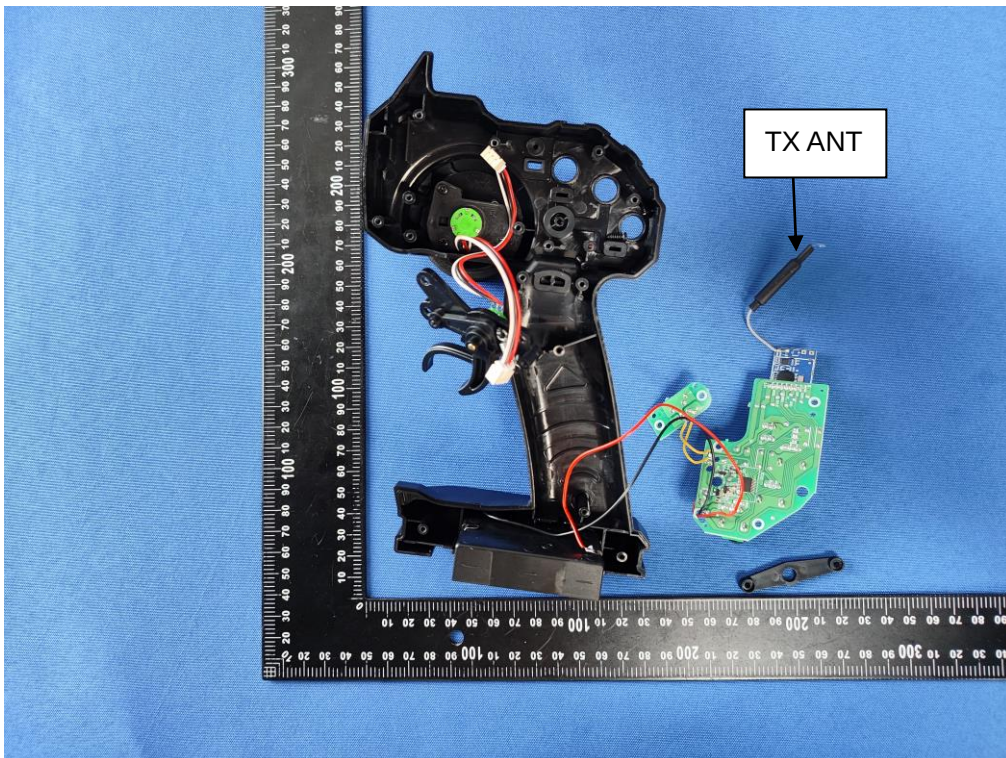

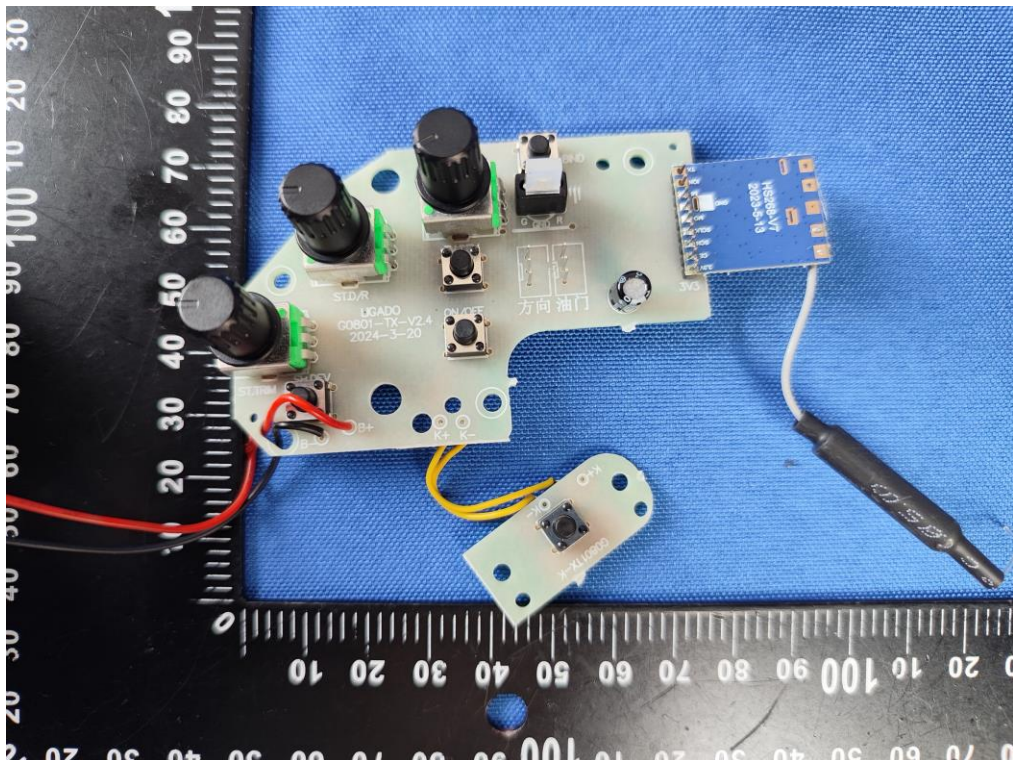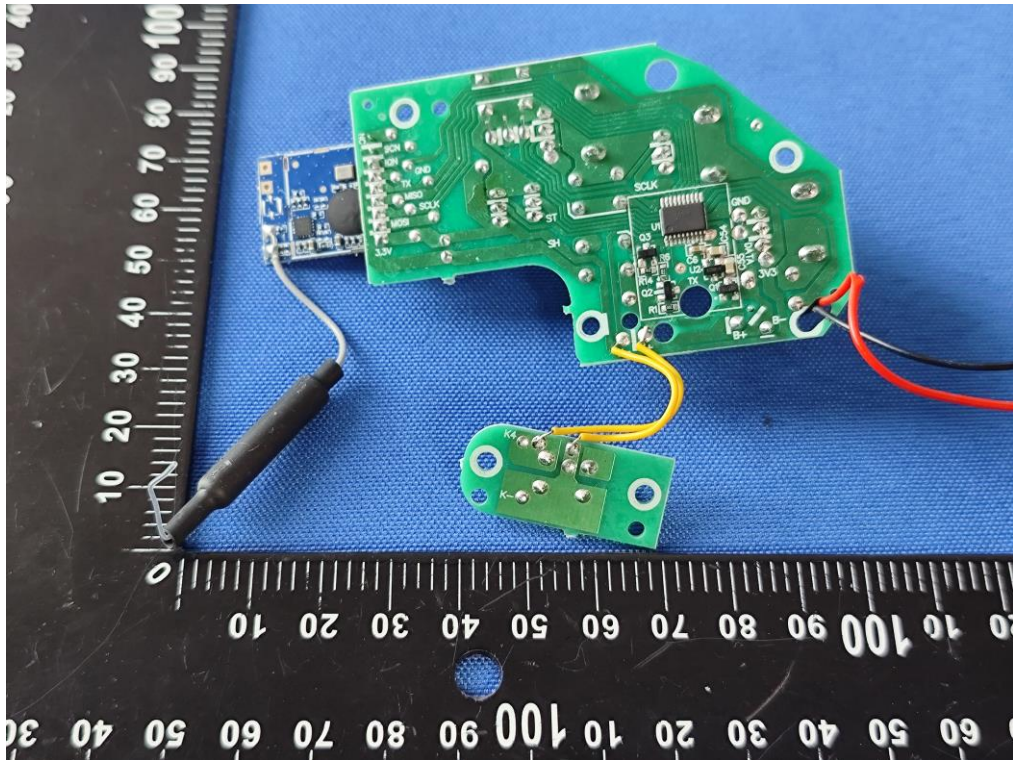

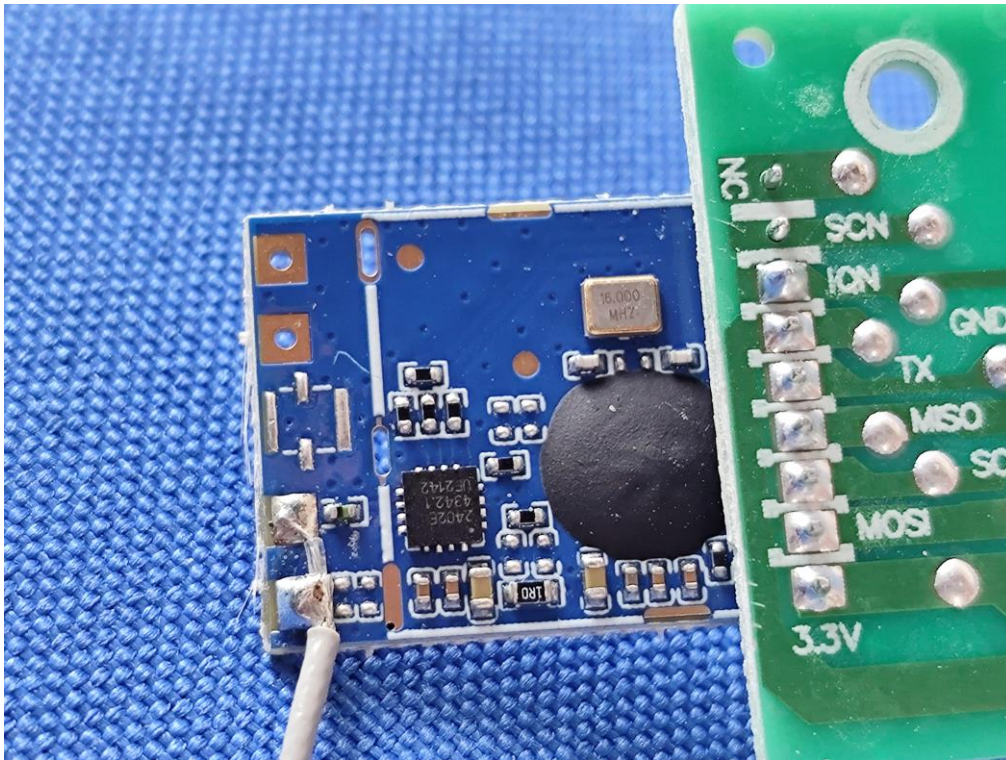

14. MODEL LIST

1.BXR.S2.RTR	1.BXR.S2-EVO.RTR	1.CRX2.RTR
1.CRX2-EVO.RTR	1.CRX-PERF.RTR-01	1.CRX-PERF.RTR-02
1.NXT.GP-2.0	1.NXT.MT-RTR-01	1.NXT.MT-RTR-02
1.NXT.RR-RTR-BL	1.NXT.RR-RTR-RD	1.NXT.RR-RTR-TU
1.NXT.RR-RTR-YE	1.NXT.TRG-RTR-01	1.NXT.TRG-RTR-02
1.OVER.D10-RTR-01	1.OVER.D10-RTR-02	1.OVER.D10-RTR-05
1.OVER.D10-RTR-06	1.ROGB.OR.RTR	1.ROGB.YE.RTR
1.ROG-SC.01.RTR	1.ROG-SC.02.RTR	1.ROGT.MAX.RTR-01
1.ROGT.MAX.RTR-02	1.ROGT.SP.BL	1.ROGT.SP.GR
1.XMID.RTR	1.XREAR.RTR	1.XT24-2WD-MT
1.XT24-2WD-BU	1.XT24-2WD-GT	1.XT24-2WD-SC
1.XT24-2WD-TR	1.XT24-4WD-MT	1.XT24-4WD-BU
1.XT24-4WD-GT	1.XT24-4WD-SC	1.XT24-4WD-TR
FTK-BAJA-BL-01	FTK-BAJA-BL-02	FTK-BUG-BL-01
FTK-BUG-BL-02	FTK-CR12-PERF-01	FTK-CR12-PERF-02
FTK-GT16-01	FTK-GT16-06	FTK-GT16-09
FTK-GT16-BU-01	FTK-GT16-BU-02	FTK-GT16-GT-01
FTK-GT16-GT-05	FTK-GT16-GT-08	FTK-GT16-MT-01
FTK-GT16-MT-02	FTK-GT16-SC-01	FTK-GT16-SC-02
FTK-GT16-TR-01	FTK-GT16-TR-02	FTK-STX-SPORT.GR
FTK-STX-SPORT.OR	FTK-STX-SPORT.PU	FTK-STX-SPORT.YE

-----END OF REPORT-----