

Test Information:

Sample No.:	2XL7-1	Test Date:	2025/02/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Lingling Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.5	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2024/04/01	2025/03/31
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


6dB Emission Bandwidth

BLE 1M

Channel	Result (MHz)	Limit (MHz)	Verdict
Low	0.688	≥ 0.5	Pass
Middle	0.682	≥ 0.5	Pass
High	0.694	≥ 0.5	Pass


BLE 1M

BLE_1M_Low_Channel

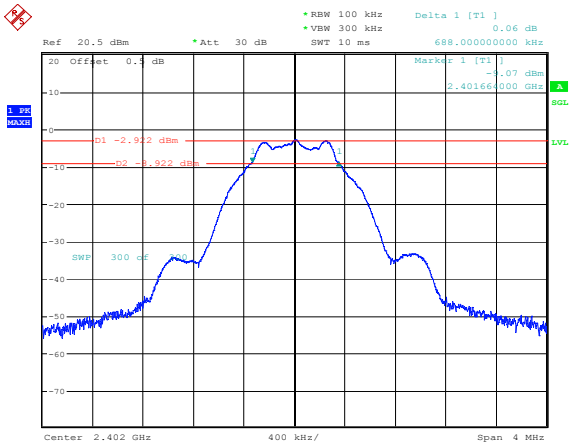


Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:53:53

BLE_1M_Middle_Channel

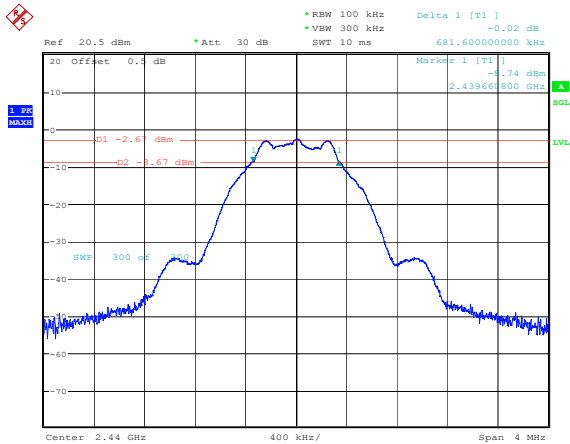

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:55:53

BLE_1M_High_Channel

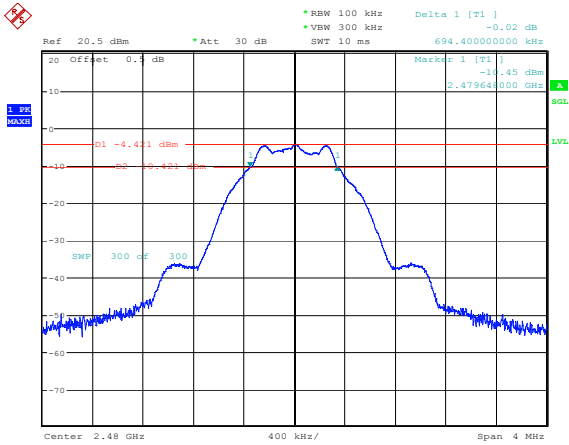

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:59:18


99% Occupied Bandwidth

BLE 1M

Channel	99% OBW (MHz)
Low	1.034
Middle	1.034
High	1.034


BLE 1M

BLE_1M_Low_Channel

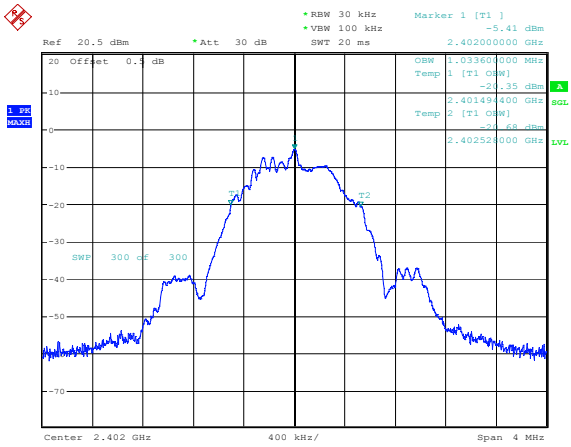


Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:54:23

BLE_1M_Middle_Channel

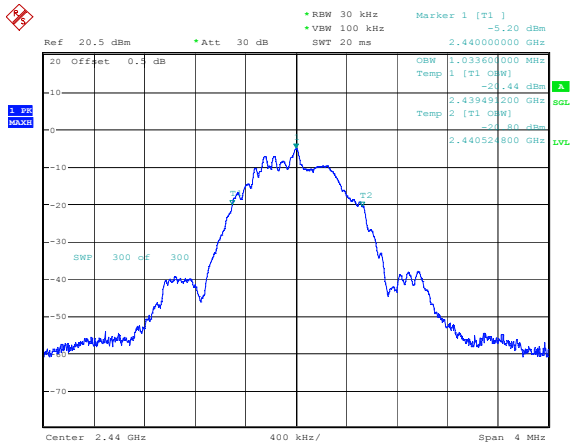

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:56:22

BLE_1M_High_Channel

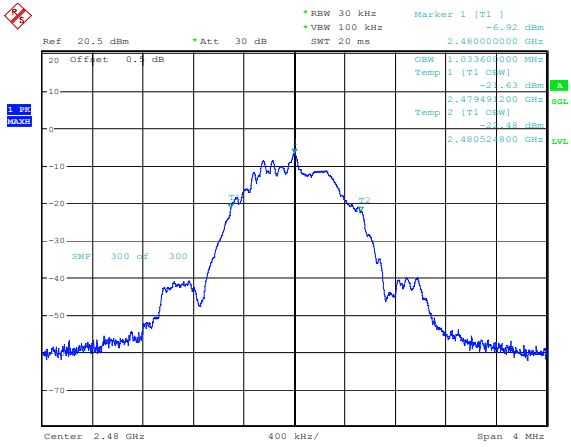

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:59:49


Maximum Conducted Output Power

BLE 1M

Channel	Result (dBm)	Limit (dBm)	Verdict
Low	-2.10	30.00	Pass
Middle	-1.99	30.00	Pass
High	-3.55	30.00	Pass


BLE 1M

BLE_1M_Low_Channel

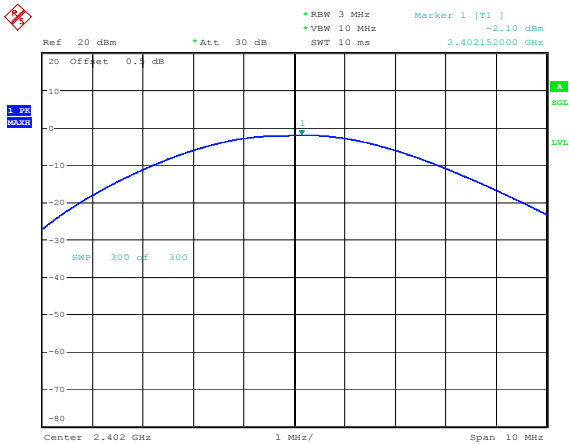


Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:54:49

BLE_1M_Middle_Channel

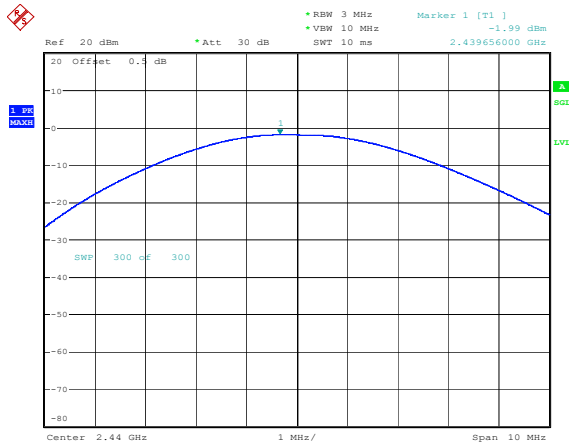

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:56:46

BLE_1M_High_Channel

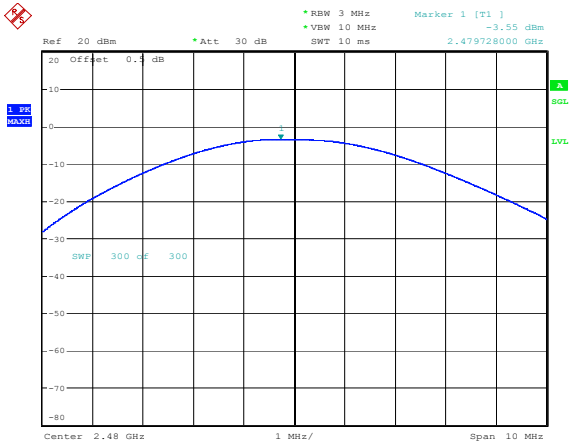

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 16:00:14


Power Spectral Density

BLE 1M

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	-17.60	8	Pass
Middle	-17.40	8	Pass
High	-19.02	8	Pass


BLE 1M

BLE_1M_Low_Channel

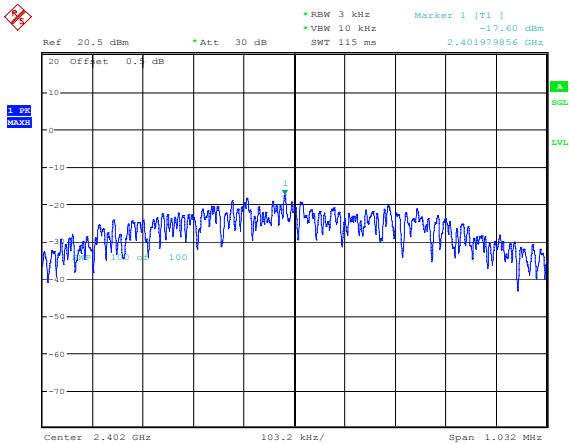


Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:55:14

BLE_1M_Middle_Channel

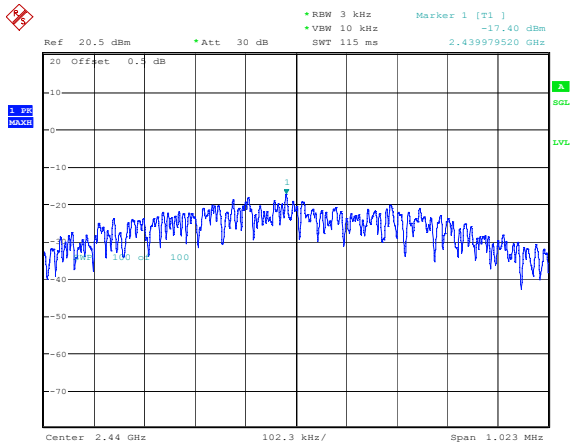

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:57:11

BLE_1M_High_Channel

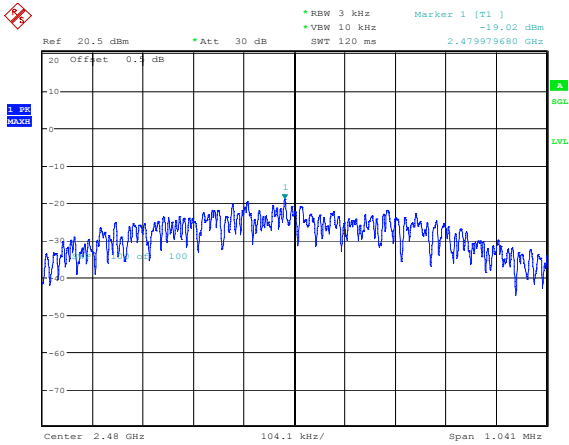

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 16:00:38


100 kHz Bandwidth of Frequency Band Edge

BLE 1M

Channel	Result (dB)	Limit (dB)	Verdict
Low	49.00	20	Pass
High	48.36	20	Pass


BLE 1M

BLE_1M_Low_Channel

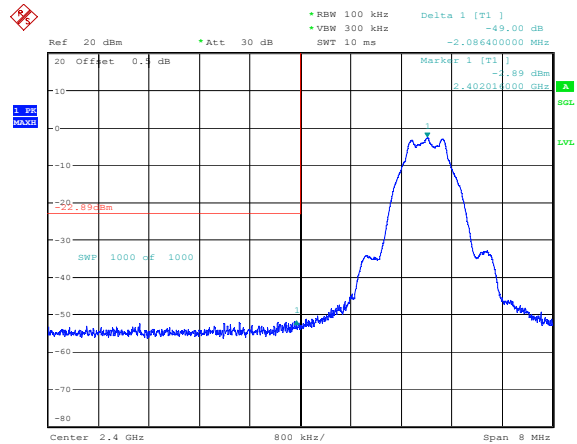

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:53:22

BLE_1M_High_Channel

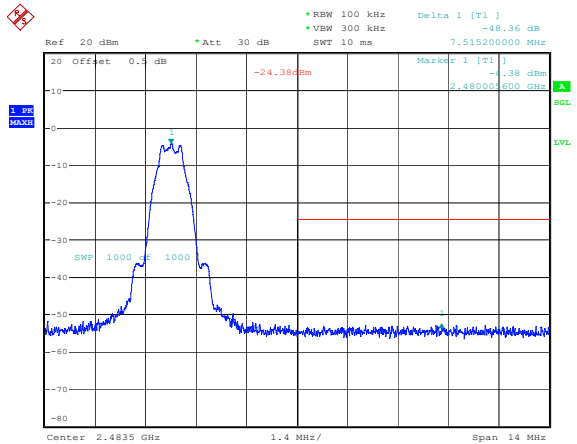

Comment: ProjectNo.:2503P42192E-RF Tester:Lingling Li
Date: 10.FEB.2025 15:58:45

Duty Cycle

BLE 1M

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
Middle	0.391	0.625	62.56	2.04	2558	3

BLE 1M

