

Antenna specification

Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Suo Da				
Sample name	DC320				
model	FPC				
Sample size	WIFI antenna: line length: 45mm 3rd generation line Silkscreen: DC320-WIFI-AH				
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirmation	
The following is to be completed by the client					

Shenzhen Aihui Technology Co. , Ltd.

Customer feedback	
Customer signature/seal	date:

Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	FPC		
Antenna form	PIFA	Polarization mode	Linear
Application	2400Mhz-2500Mhz 5100Mhz-5850Mhz		

Shenzhen Aihui Technology Co. , Ltd.

scenario			
Working band	2400Mhz-2500Mhz 5100Mhz-5850Mhz	VSWR	≤2
Power	Max : 2W	Impedance	50Ω
dBi	≥1dBi		
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		
Antenna Description: : 1. Grounding processing and picture description: no 2. Need to change the motherboard to match: no ● Test voltage: 3.6V, check the antenna contact is good before testing. ● The RF cable of the integrated tester is kept in a natural state and can not be curled. Specification:test the specified power level, all indicators must conform to the specifications.			

- 1.Project Image
- 2.Test Fixture
- 3.Antenna matching circuit
- 4.S11 test
- 5.Antenna passive efficiency and gain
- 6.Active antenna test data
- 7.Antenna passive test data
- 8.Antenna SWR
- 9.Antenna environment processing
- 10.Antenna mass production index
- 11.Structural drawings

1.Project Image


The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment

2.Test Fixture


Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end

of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

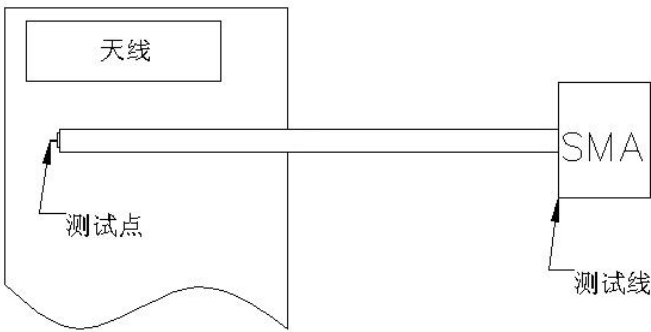

3、Antenna matching circuit

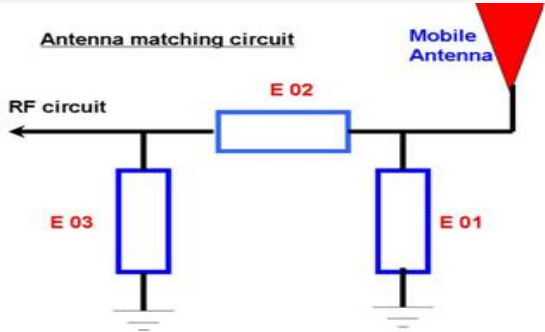


Modify

E01	E02	E03
No	No	No

Note: The match is unmodified.

4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

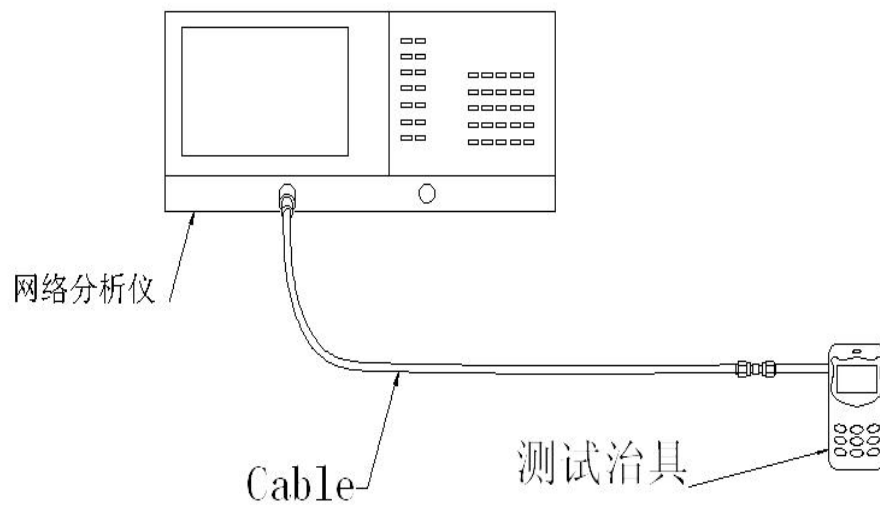


5. Test Equipment

Test system: shielded darkroom

The temperature was $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and the humidity was $50\% \pm 15\%$

Test equipment: when testing passive data, use the Network analyzer AGILENT E5071C to test active data, use the omnibus CMW500




Address: 402 TEL: 0755-23203433 FAX: 0755-23203433, BLOCK C, JUXIN Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen


6.Active antenna test data

Frequency Band	WIFI-2. 4G-B模			WIFI-2. 4G-G模		
channel	L	M	H	L	M	H
TRP	12. 56	12. 44	12. 30	11. 63	11. 41	11. 63
TIS			-80. 85			-69. 41
Frequency Band	WIFI-2. 4G-N模			WIFI-5. 8G-N模		
channel	L	M	H	L	M	H
TRP	10. 52	11. 63	11. 06	12. 32	13. 44	13. 63
TIS			-68. 41			-71. 61

7.Antenna passive test data

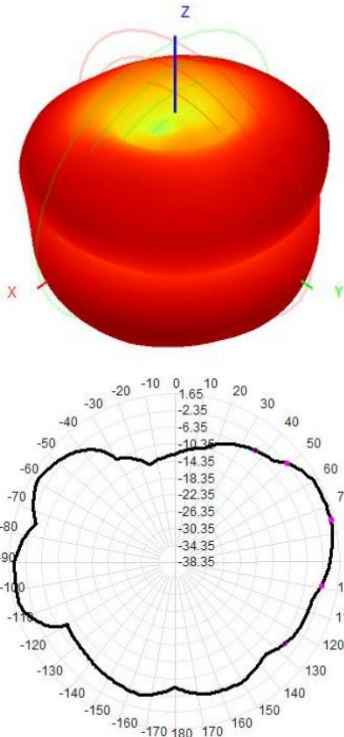

测试数据:		
WIFI 2. 4G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	55.25	1.25
2410	55.41	1.47
2420	57.65	1.35
2430	59.65	1.44
2440	61.41	1.54
2450	60.54	1.52
2460	62.63	1.44
2470	64.15	1.65
2480	59.64	1.23

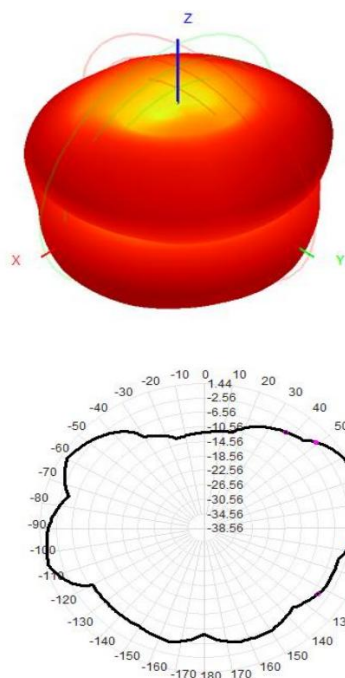


测试数据:

WIFI 5.8G

Freq(MHz)	Efficiency (%)	Gain (dBi)
5000	59.54	1.41
5100	57.85	1.30
5200	59.41	1.25
5300	54.71	1.40
5400	55.63	1.21
5500	57.15	1.31
5600	59.65	1.05
5700	60.22	1.30
5800	61.41	1.25
5850	62.30	1.44

8.Antenna SWR

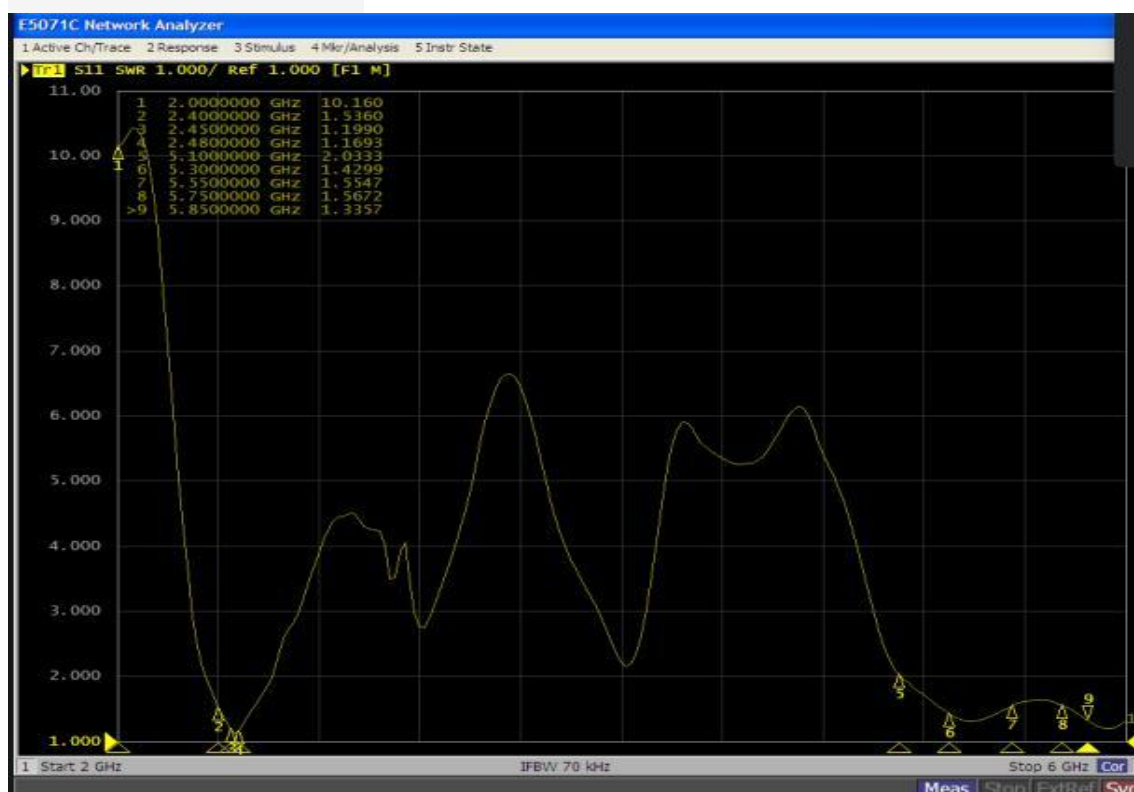

9. Antenna environment processing

**Retain prototype
environment processing.
None change**

10. Antenna mass production index

When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard.

Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400 MHZ -2500MHZ 5100MHZ-5850MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

11.Structural drawings

