

TEST REPORT

FCC LTE B41(38) Test for TM18FNROBMO
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2507-FC090-R1

DATE OF ISSUE
July 31, 2025

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401



TEST REPORT

REPORT NO.
HCT-RF-2507-FC090-R1

DATE OF ISSUE
July 31, 2025

Applicant **LG Electronics Inc.**
128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea

Product Name Telematics
Model Name TM18FNROBM0

Date of Test May 16, 2025 ~ July 22, 2025

Location of Test ☒ Permanent Testing Lab ☐ On Site Testing
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC ID 2B03LTM18FNROBM0

FCC Classification: PCS Licensed Transmitter (PCB)

Test Standard Used FCC Rule Part: § 27

Test Results PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 22, 2025	Initial Release
1	July 31, 2025	Correct typos on pages 29, 30, 35 and 36

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.

(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

CONTENTS

1. GENERAL INFORMATION	5
1.1. SUPPORTED BANDS PER ANTENNA PORT	6
1.2 MAXIMUM OUTPUT POWER.....	7
2. INTRODUCTION	8
2.1 DESCRIPTION OF EUT	8
2.2 MEASURING INSTRUMENT CALIBRATION	8
2.3 TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE.....	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS.....	11
3.4 PEAK- TO- AVERAGE RATIO	12
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 CHANNEL EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST).....	19
4. LIST OF TEST EQUIPMENT.....	20
5. MEASUREMENT UNCERTAINTY	23
6. SUMMARY OF TEST RESULTS	24
7. SAMPLE CALCULATION.....	25
8. TEST DATA (MIMO1).....	27
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	27
8.2 RADIATED SPURIOUS EMISSIONS.....	29
8.3 PEAK-TO-AVERAGE RATIO	33
8.4 OCCUPIED BANDWIDTH.....	34
8.5 CONDUCTED SPURIOUS EMISSIONS	35
8.6 CHANNEL EDGE	36
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	37
9. TEST DATA (Internal(BUA)).....	49
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	49
9.2 RADIATED SPURIOUS EMISSIONS.....	51
10. TEST PLOTS.....	55
11. ANNEX A_ TEST SETUP PHOTO	140

MEASUREMENT REPORT

1. GENERAL INFORMATION

Model(s):	TM18FNROBM0
Voltage:	4.2V
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
EUT Serial number:	Radiated : BMW ICON-25SF Radiated #5 Conducted : BMW ICON-25SF Conducted #17
Antenna Information	Please refer to the Antenna Specification document.

1.1. SUPPORTED BANDS PER ANTENNA PORT

Antenna Port	Supported bands
MIMO 1	- GSM850, 1900 - WCDMA: B2, 4, 5 - LTE: B4, 7, 12(17), 25(2), 26(5), 41(38), 42 - NR: n7, 41, 77(78) - ULCA: 7C
MIMO 2	- LTE: B42 - NR: n77(78)
MIMO 3	Only RX
MIMO 4	Only RX
Int. BUA (Back Up Antenna)	- GSM850, 1900 - WCDMA: B2, 4, 5 - LTE: B4, 7, 25(2), 26(5), 41(38) - NR: n7, 41 - ULCA: 7C

Note:

1. Since the Int. BUA uses the same antenna port as MIMO1, only radiated testing was performed.

1.2 MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted output power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41/38 (5)	2498.5 – 2687.5	4M49G7D	QPSK	0.248	23.95
		4M50W7D	16QAM	0.197	22.94
		4M49W7D	64QAM	0.141	21.50
		4M49W7D	256QAM	0.085	19.31
LTE – Band 41/38 (10)	2501.0 – 2685.0	8M96G7D	QPSK	0.244	23.88
		8M97W7D	16QAM	0.195	22.89
		8M96W7D	64QAM	0.142	21.52
		8M97W7D	256QAM	0.085	19.27
LTE – Band 41/38 (15)	2503.5 – 2682.5	13M4G7D	QPSK	0.246	23.91
		13M5W7D	16QAM	0.197	22.94
		13M4W7D	64QAM	0.143	21.55
		13M5W7D	256QAM	0.084	19.25
LTE – Band 41/38 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.248	23.95
		17M9W7D	16QAM	0.197	22.95
		17M9W7D	64QAM	0.146	21.63
		17M9W7D	256QAM	0.086	19.34

2. INTRODUCTION

2.1 DESCRIPTION OF EUT

Please refer to the [2G3G] Test Report.

2.2 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3 TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d (\text{dBm}) = P_g (\text{dBm}) - \text{cable loss} (\text{dB}) + \text{antenna gain} (\text{dB})$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

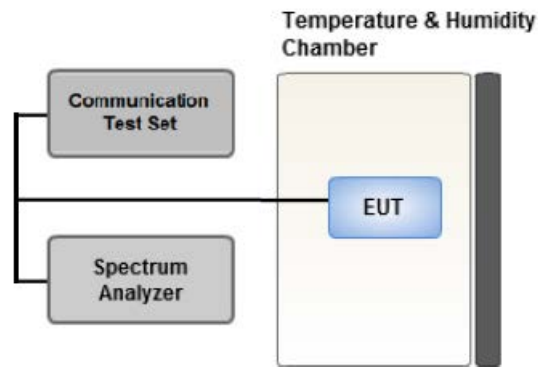


Test setup

CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

3.5 OCCUPIED BANDWIDTH.

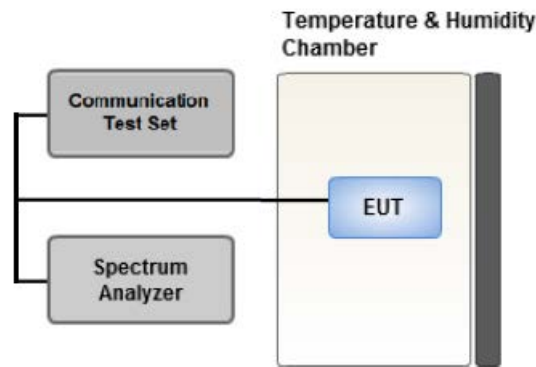

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

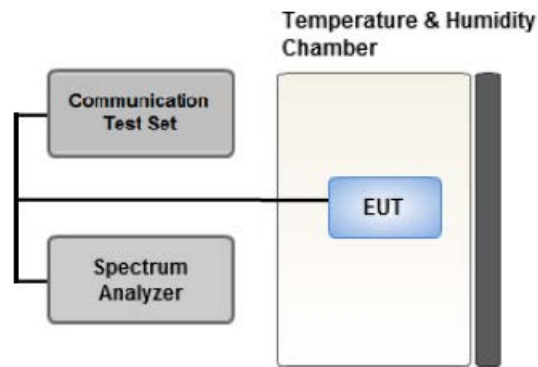

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 CHANNEL EDGE

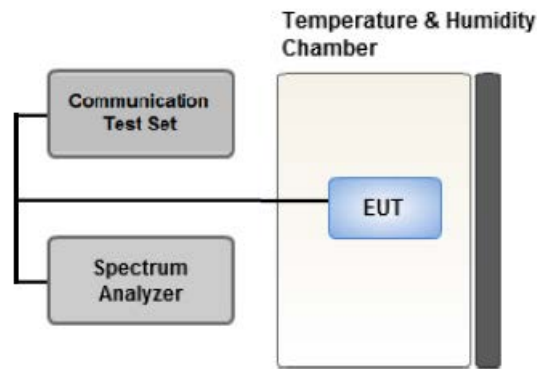

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. $VBW > 3 \times RBW$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average
8. Sweep time $> \text{Number of points in sweep} \times \text{Symbol period}$ (i.e., the transmit on-time + the off-time)
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6 MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

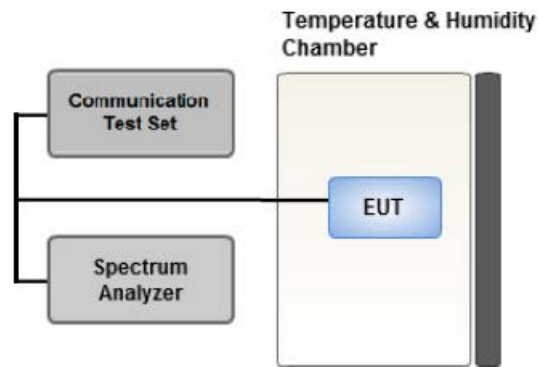

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- . - Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- . - For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data. Please refer to the table below.
 - MIMO3 and MIMO4 have three types of Rx antennas. Operating modes were investigated for all Rx antennas, and the worst-case configuration results were reported.
(Worst-case: FSA antenna)
 - LTE Band 41 (5 M/10 M/15 M/20 M) overlaps the entire frequency range of LTE Band 38(5 M/10 M/15 M/20 M) and they have the same Tune-up power.
- Therefore, test data provided in this report covers Band38 as well as Band 41.

[External(MIMO1) Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Y
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Y

[Internal(BUA) Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- Both 85% and 115% conditions were measured for the Frequency Stability test, and results for the worst-case configuration (85%) were reported.
- In accordance with the customer's specification of 3.7V as the lowest operating voltage, testing was performed at 3.7V instead of 85% (3.57V).
- LTE Band 41 (5 M/10 M/15 M/20 M) overlaps the entire frequency range of LTE Band 38(5 M/10 M/15 M/20 M) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band38 as well as Band 41.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	Full RB	0
			Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

[Radiated]

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switch System	FBSR-04C(3G HPF+LNA)	TNM System	S4L1	03/12/2026	Annual
RF Switch System	FBSR-04C(7G HPF+LNA)	TNM System	S4L5	03/12/2026	Annual
RF Switch System	FBSR-04C(LNA)	TNM System	S4L4	03/12/2026	Annual
RF Switch System	FBSR-04C(Thru)	TNM System	S4L6	03/12/2026	Annual
Antenna Position Tower	MA4640	Innco systems	S4AM	08/07/2025	Annual
Turn Table	DS2000-S	Innco systems	N/A	N/A	-
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1251/489 20320/P	N/A	-
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090002	N/A	-
RF Switching System	Switch box(1 G HPF+LNA)	HCT CO., LTD.,	F2L2	12/12/2025	Annual
RF Switching System	Switch box(3 G HPF+LNA)	HCT CO., LTD.,	F2L3	12/12/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F2L5	12/12/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F2L14	12/12/2025	Annual
HIGHPASS FILTER	WHKX10-900-1000-15000-40SS	WAINWRIGHT INSTRUMENTS	16	07/24/2025	Annual
LOW NOISE AMPLIFIER	310N	SONOMA Instrument	186169	02/05/2026	Annual
LOW NOISE AMPLIFIER	TK-PA1840H	TESTEK	170011-L	10/11/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/10/2026	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03197	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03201	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120	Schwarzbeck	937	02/07/2027	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101733	09/19/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/04/2026	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/27/2026	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	9168-0895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/14/2026	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Automation Software	FCC LTE Radiated	HCT CO., LTD	-	-	-
Automation Software	FCC NR Radiated	HCT CO., LTD	-	-	-

[Conducted]

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Power Splitter (DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/10/2026	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Chamber	SU-642	ESPEC	93008124	02/11/2026	Annual
ATTENUATOR (20 dB)	8493C	Hewlett Packard	17280	04/10/2026	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
UXM 5G Wireless Test Platform	E7515B	KEYSIGHT	MY60101126	02/10/2026	Annual
Signal Analyzer (2 Hz ~ 50.0 GHz)	N9030B	KEYSIGHT	MY56320554	02/03/2026	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.	-	-	-
Automation Software	FCC 2G/3G/4G Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC NR Conducted	HCT CO., LTD	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

-. The decision rule applies 'simple acceptance'

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(m)(4)	■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz	PASS
Conducted Output Power	§ 2.1046	N/A	Note ¹
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. Refer to the SAR report.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA (MIMO1)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2498.5	LTE B41(38) / 5 MHz	QPSK	-27.15	11.20	10.27	2.50	V	< 2.00	0.079	18.97	1	24
		16-QAM	-27.87	10.48	10.27	2.50	V		0.067	18.25		
		64-QAM	-28.80	9.55	10.27	2.50	V		0.054	17.32		
		256-QAM	-31.76	6.59	10.27	2.50	V		0.027	14.36		
2593.0		QPSK	-31.75	7.26	10.30	2.55	V		0.032	15.01	1	24
		16-QAM	-32.24	6.77	10.30	2.55	V		0.028	14.52		
		64-QAM	-33.86	5.15	10.30	2.55	V		0.019	12.90		
		256-QAM	-36.37	2.64	10.30	2.55	V		0.011	10.39		
2687.5		QPSK	-29.71	9.24	10.61	2.60	V		0.053	17.25	1	0
		16-QAM	-30.64	8.31	10.61	2.60	V		0.043	16.32		
		64-QAM	-31.79	7.16	10.61	2.60	V		0.033	15.17		
		256-QAM	-34.29	4.66	10.61	2.60	V		0.018	12.67		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2501.0	LTE B41(38) / 10 MHz	QPSK	-27.10	11.25	10.27	2.50	V	< 2.00	0.080	19.02	1	0
		16-QAM	-27.69	10.66	10.27	2.50	V		0.070	18.43		
		64-QAM	-28.87	9.48	10.27	2.50	V		0.053	17.25		
		256-QAM	-31.60	6.75	10.27	2.50	V		0.028	14.52		
2593.0		QPSK	-30.19	8.82	10.30	2.55	V		0.045	16.57	1	49
		16-QAM	-30.94	8.07	10.30	2.55	V		0.038	15.82		
		64-QAM	-32.08	6.93	10.30	2.55	V		0.029	14.68		
		256-QAM	-34.70	4.31	10.30	2.55	V		0.016	12.06		
2685.0		QPSK	-29.42	9.54	10.59	2.61	V		0.056	17.52	1	0
		16-QAM	-30.17	8.79	10.59	2.61	V		0.048	16.77		
		64-QAM	-31.09	7.87	10.59	2.61	V		0.038	15.85		
		256-QAM	-33.83	5.13	10.59	2.61	V		0.020	13.11		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2503.5	LTE B41(38) / 15 MHz	QPSK	-26.93	11.52	10.26	2.51	V	< 2.00	0.085	19.27	1	0
		16-QAM	-27.72	10.73	10.26	2.51	V		0.070	18.48		
		64-QAM	-29.14	9.31	10.26	2.51	V		0.051	17.06		
		256-QAM	-31.76	6.69	10.26	2.51	V		0.028	14.44		
2593.0		QPSK	-30.08	8.93	10.30	2.55	V		0.047	16.68	1	74
		16-QAM	-30.72	8.29	10.30	2.55	V		0.040	16.04		
		64-QAM	-31.79	7.22	10.30	2.55	V		0.031	14.97		
		256-QAM	-34.66	4.35	10.30	2.55	V		0.016	12.10		
2682.5		QPSK	-28.81	10.15	10.59	2.61	V		0.065	18.13	1	0
		16-QAM	-29.74	9.22	10.59	2.61	V		0.052	17.20		
		64-QAM	-30.81	8.15	10.59	2.61	V		0.041	16.13		
		256-QAM	-33.53	5.43	10.59	2.61	V		0.022	13.41		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2506.0	LTE B41(38) / 20 MHz	QPSK	-27.01	11.44	10.26	2.51	V	< 2.00	0.083	19.19	1	0
		16-QAM	-27.48	10.97	10.26	2.51	V		0.074	18.72		
		64-QAM	-29.21	9.24	10.26	2.51	V		0.050	16.99		
		256-QAM	-31.72	6.73	10.26	2.51	V		0.028	14.48		
2593.0		QPSK	-30.57	8.44	10.30	2.55	V		0.042	16.19	1	99
		16-QAM	-31.49	7.52	10.30	2.55	V		0.034	15.27		
		64-QAM	-32.67	6.34	10.30	2.55	V		0.026	14.09		
		256-QAM	-35.37	3.64	10.30	2.55	V		0.014	11.39		
2680.0		QPSK	-28.78	10.17	10.58	2.61	V		0.065	18.14	1	0
		16-QAM	-29.65	9.30	10.58	2.61	V		0.053	17.27		
		64-QAM	-30.68	8.27	10.58	2.61	V		0.042	16.24		
		256-QAM	-33.46	5.49	10.58	2.61	V		0.022	13.46		

8.2 RADIATED SPURIOUS EMISSIONS

☐ MODE: LTE B41(38)
☐ MODULATION SIGNAL: 5 MHz QPSK
☐ DISTANCE: 1 meters
☐ LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39675 (2498.5)	4 997.00	-56.59	10.92	-62.73	3.70	H	-55.51	1	24
	7 495.50	-55.84	11.55	-58.06	4.61	V	-51.12		
	9 994.00	-54.83	11.41	-54.14	5.47	H	-48.20		
	12 492.50	-56.56	13.17	-53.07	6.12	H	-46.02		
	14 991.00	-62.09	14.21	-44.30	6.79	V	-36.88		
40620 (2593.0)	5 186.00	-53.93	11.18	-61.46	3.80	H	-54.08	1	24
	7 779.00	-54.46	11.37	-55.02	4.70	H	-48.35		
	10 372.00	-53.76	11.67	-53.28	5.55	H	-47.16		
	12 965.00	-55.92	12.77	-51.08	6.35	H	-44.66		
	15 558.00	-62.51	15.76	-44.16	6.89	H	-35.29		
41565 (2687.5)	5 375.00	-54.13	11.60	-61.60	3.91	H	-53.91	1	0
	8 062.50	-55.41	11.34	-54.65	4.82	V	-48.13		
	10 750.00	-53.82	11.60	-53.54	5.64	V	-47.58		
	13 437.50	-58.83	12.86	-50.63	6.44	H	-44.21		
	16 125.00	-63.00	16.31	-47.20	7.07	H	-37.96		

■ MODE: LTE B41(38)
 ■ MODULATION SIGNAL: 10 MHz QPSK
 ■ DISTANCE: 1 meters
 ■ LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39700 (2501.0)	5 002.00	-54.83	10.91	-61.31	3.71	V	-54.11	1	0
	7 503.00	-54.52	11.58	-56.65	4.60	V	-49.67		
	10 004.00	-54.55	11.40	-54.18	5.47	H	-48.25		
	12 505.00	-56.33	13.17	-52.71	6.10	V	-45.64		
	15 006.00	-63.90	14.26	-45.88	6.78	H	-38.40		
40620 (2593.0)	5 186.00	-54.44	11.18	-61.97	3.80	H	-54.59	1	49
	7 779.00	-55.44	11.37	-56.00	4.70	H	-49.33		
	10 372.00	-55.74	11.67	-55.26	5.55	V	-49.14		
	12 965.00	-56.74	12.77	-51.90	6.35	H	-45.48		
	15 558.00	-62.66	15.76	-44.31	6.89	H	-35.44		
41540 (2685.0)	5 370.00	-55.62	11.59	-63.06	3.92	H	-55.39	1	0
	8 055.00	-55.50	11.32	-54.85	4.81	H	-48.34		
	10 740.00	-54.65	11.60	-54.08	5.64	H	-48.12		
	13 425.00	-57.98	12.88	-49.56	6.41	V	-43.09		
	16 110.00	-63.71	16.29	-47.95	7.10	V	-38.76		

MODE: LTE B41(38)
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39725 (2503.5)	5 007.00	-54.25	10.91	-60.79	3.71	V	-53.59	1	0
	7 510.50	-54.43	11.59	-56.54	4.60	H	-49.55		
	10 014.00	-54.59	11.39	-53.96	5.47	V	-48.04		
	12 517.50	-55.50	13.15	-52.08	6.09	H	-45.02		
	15 021.00	-62.29	14.29	-44.22	6.74	V	-36.67		
40620 (2593.0)	5 186.00	-54.75	11.18	-62.28	3.80	V	-54.90	1	74
	7 779.00	-54.51	11.37	-55.07	4.70	H	-48.40		
	10 372.00	-54.53	11.67	-54.05	5.55	V	-47.93		
	12 965.00	-56.25	12.77	-51.41	6.35	H	-44.99		
	15 558.00	-63.00	15.76	-44.65	6.89	H	-35.78		
41490 (2682.5)	5 365.00	-55.04	11.59	-62.55	3.91	H	-54.87	1	0
	8 047.50	-55.24	11.31	-54.88	4.81	H	-48.38		
	10 730.00	-54.41	11.60	-53.88	5.65	V	-47.93		
	13 412.50	-57.63	12.89	-49.78	6.40	H	-43.29		
	16 095.00	-61.78	16.28	-45.81	7.06	V	-36.59		

MODE: LTE B41(38)
 MODULATION SIGNAL: 20 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39750 (2506.0)	5 012.00	-56.11	10.91	-62.70	3.72	V	-55.51	1	0
	7 518.00	-55.46	11.60	-57.83	4.61	V	-50.84		
	10 024.00	-54.42	11.39	-53.67	5.47	V	-47.75		
	12 530.00	-57.09	13.14	-53.55	6.10	V	-46.51		
	15 036.00	-64.06	14.33	-46.23	6.74	H	-38.64		
40620 (2593.0)	5 186.00	-54.79	11.18	-62.32	3.80	H	-54.94	1	99
	7 779.00	-55.23	11.37	-55.79	4.70	V	-49.12		
	10 372.00	-55.93	11.67	-55.45	5.55	V	-49.33		
	12 965.00	-57.50	12.77	-52.66	6.35	H	-46.24		
	15 558.00	-62.44	15.76	-44.09	6.89	H	-35.22		
41490 (2680.0)	5 360.00	-56.16	11.58	-63.73	3.90	H	-56.05	1	0
	8 040.00	-54.96	11.29	-54.95	4.80	V	-48.46		
	10 720.00	-53.57	11.60	-53.42	5.64	V	-47.46		
	13 400.00	-56.90	12.91	-49.56	6.38	V	-43.03		
	16 080.00	-61.33	16.25	-45.00	7.02	H	-35.77		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)	Limit (dB)
41(38)	5 MHz	2593.0	QPSK	25	0	5.63	13.00
			16-QAM			6.27	
			64-QAM			6.35	
			256-QAM			6.42	
	10 MHz		QPSK	50		5.80	
			16-QAM			6.32	
			64-QAM			6.69	
			256-QAM			6.49	
	15 MHz		QPSK	75		5.61	
			16-QAM			6.30	
			64-QAM			6.54	
			256-QAM			6.40	
	20 MHz		QPSK	100		5.62	
			16-QAM			6.21	
			64-QAM			6.63	
			256-QAM			6.45	

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 56 ~ 71.
2. P.A.P.R is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41(38)	5 MHz	2593.0	QPSK	25	0	4.4871
			16-QAM			4.5029
			64-QAM			4.4898
			256-QAM			4.4933
	10 MHz		QPSK	50		8.9602
			16-QAM			8.9730
			64-QAM			8.9618
			256-QAM			8.9709
	15 MHz		QPSK	75		13.423
			16-QAM			13.471
			64-QAM			13.429
			256-QAM			13.451
	20 MHz		QPSK	100		17.926
			16-QAM			17.909
			64-QAM			17.923
			256-QAM			17.931

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 72 ~ 87.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41(38)	5	2498.5	6.62017	28.730	-68.54	-39.807	-25.00
		2593.0	3.14064	28.150	-67.71	-39.562	
		2687.5	4.78569	28.150	-67.46	-39.311	
	10	2501.0	4.77572	28.150	-67.01	-38.860	
		2593.0	3.93824	28.150	-68.17	-40.021	
		2685.0	2.73187	28.150	-57.39	-29.239	
	15	2503.5	4.83554	28.150	-68.41	-40.256	
		2593.0	3.88839	28.150	-68.61	-40.455	
		2682.5	3.94821	28.150	-68.55	-40.398	
	20	2506.0	2.80166	28.150	-67.35	-39.197	
		2593.0	4.76575	28.150	-67.93	-39.783	
		2680.0	4.76575	28.150	-68.05	-39.903	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 88 ~ 111.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
4. Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.250
1 – 5	29.320
5 – 10	29.910
10 – 15	30.530
15 – 20	31.840
Above 20	32.520

8.6 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E+1 MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E+1 MHz) ~ (C.E+5 MHz)	Below 2 490.5 MHz	(C.E+5 MHz) ~ (C.E+X MHz)	Above (C.E+X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-28.15	-28.02	-24.56	-24.73	-31.39	-30.65	-30.76
10 MHz	2501.0	QPSK	50/0	-30.20	-29.82	-26.26	-25.52	-29.93	-28.76	-31.74
15 MHz	2503.5	QPSK	75/0	-30.45	-29.74	-27.29	-26.85	-29.60	-28.62	-33.86
20 MHz	2506.0	QPSK	100/0	-30.44	-30.14	-27.91	-27.49	-30.09	-28.99	-34.97
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-28.82	-29.29	-26.30	-26.88
	2687.5	QPSK	25	0	-28.77	-29.41	-28.27	-28.66
10 MHz	2593.0	QPSK	50	0	-31.94	-31.76	-28.30	-28.67
	2685.0	QPSK	50	0	-32.28	-31.96	-30.07	-29.61
15 MHz	2593.0	QPSK	75	0	-32.93	-32.68	-30.47	-30.40
	2682.5	QPSK	75	0	-33.92	-33.71	-33.18	-32.80
20 MHz	2593.0	QPSK	100	0	-32.75	-32.96	-30.47	-31.29
	2680.0	QPSK	100	0	-34.51	-34.55	-33.24	-33.38
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-29.89	-30.37	-30.52	-30.87
	2687.5	QPSK	25	0	-30.31	-31.38	-31.03	-32.23
10 MHz	2593.0	QPSK	50	0	-29.42	-30.14	-33.62	-33.57
	2685.0	QPSK	50	0	-31.72	-32.55	-33.10	-34.57
15 MHz	2593.0	QPSK	75	0	-30.84	-31.33	-35.10	-34.90
	2682.5	QPSK	75	0	-34.01	-34.21	-34.13	-36.42
20 MHz	2593.0	QPSK	100	0	-31.75	-32.30	-36.22	-35.80
	2680.0	QPSK	100	0	-33.97	-35.48	-35.29	-38.42
Limit(dBm)					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. RB = Resource Block
5. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 3.979
6. Plots of the EUT's Channel Edge are shown Page 112 ~ 139. (1RB & Full RB)

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE 41(38)</u>
OPERATING FREQUENCY:	<u>2498,500,000 Hz</u>
BANDWIDTH:	<u>39675 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>4.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	2498 500 005	0.0	0.000 000	0.000
100 %		-30	2498 500 014	9.0	0.000 000	0.004
100 %		-20	2498 500 011	5.7	0.000 000	0.002
100 %		-10	2498 500 010	4.9	0.000 000	0.002
100 %		0	2498 500 014	8.9	0.000 000	0.004
100 %		+10	2498 500 012	6.8	0.000 000	0.003
100 %		+30	2498 500 009	4.3	0.000 000	0.002
100 %		+40	2498 500 011	6.1	0.000 000	0.002
100 %		+50	2498 500 002	-3.4	0.000 000	-0.001
Lowest voltage	3.700	+20	2498 499 999	-6.0	0.000 000	-0.002

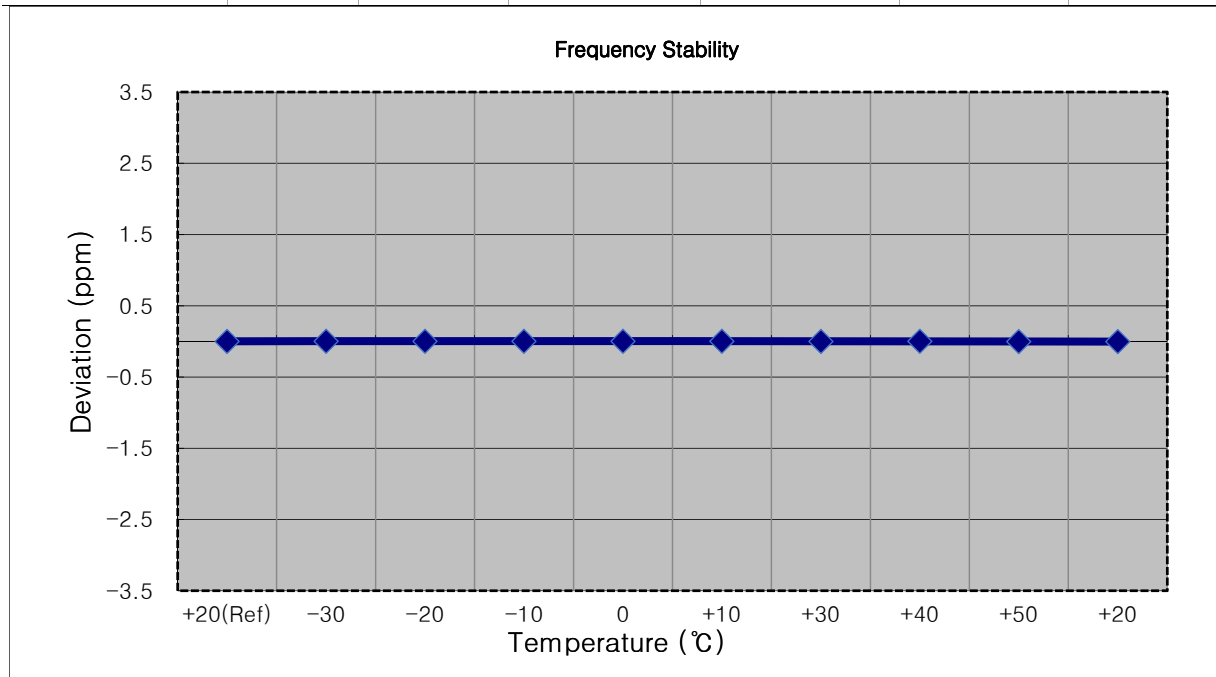


MODE: LTE 41(38)
 OPERATING FREQUENCY: 2501,000,000 Hz
 BANDWIDTH: 39700 (10 MHz)
 REFERENCE VOLTAGE: 4.200 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2500 999 994	0.0	0.000 000	0.000
100 %		-30	2500 999 998	3.8	0.000 000	0.002
100 %		-20	2501 000 001	7.2	0.000 000	0.003
100 %		-10	2501 000 005	10.6	0.000 000	0.004
100 %		0	2500 999 999	5.5	0.000 000	0.002
100 %		+10	2500 999 998	4.4	0.000 000	0.002
100 %		+30	2501 000 000	5.9	0.000 000	0.002
100 %		+40	2501 000 002	8.3	0.000 000	0.003
100 %		+50	2501 000 000	6.3	0.000 000	0.003
Lowest voltage	3.700	+20	2501 000 002	8.5	0.000 000	0.003

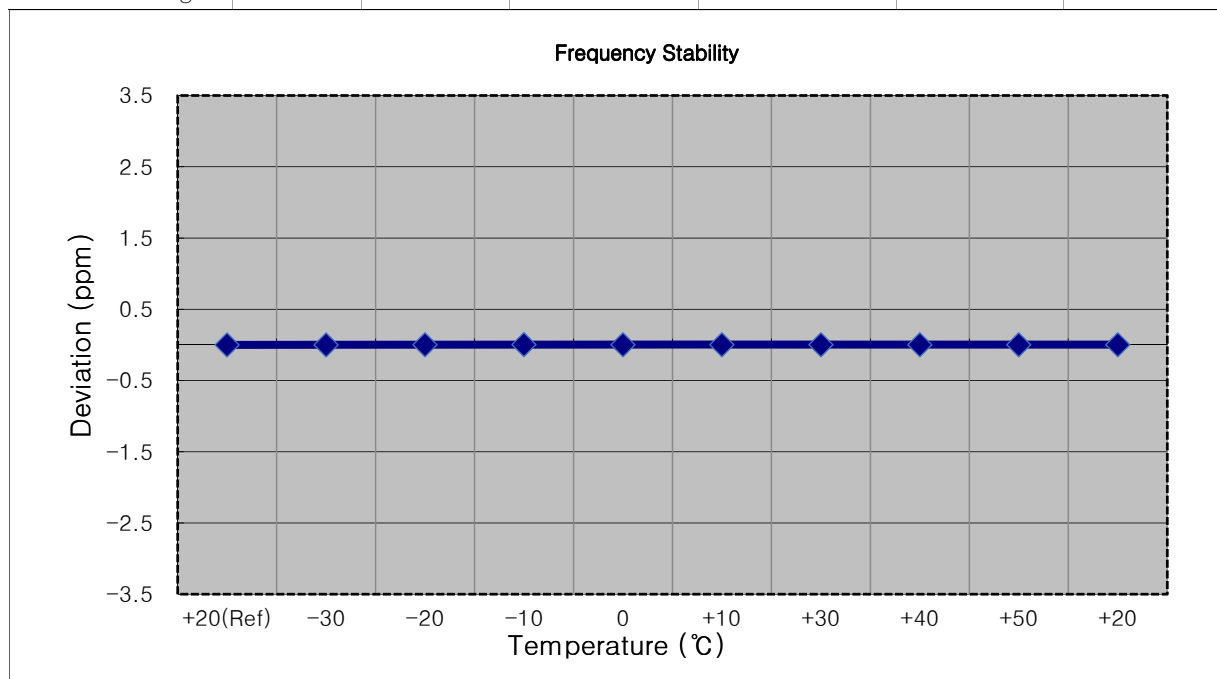


- ▣ MODE: LTE 41(38)
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2503 500 009	0.0	0.000 000	0.000
100 %		-30	2503 500 013	4.2	0.000 000	0.002
100 %		-20	2503 500 013	4.2	0.000 000	0.002
100 %		-10	2503 500 015	6.4	0.000 000	0.003
100 %		0	2503 500 015	6.6	0.000 000	0.003
100 %		+10	2503 500 004	-4.5	0.000 000	-0.002
100 %		+30	2503 500 020	11.4	0.000 000	0.005
100 %		+40	2503 500 016	6.8	0.000 000	0.003
100 %		+50	2503 500 001	-8.2	0.000 000	-0.003
Lowest voltage	3.700	+20	2503 500 002	-6.4	0.000 000	-0.003

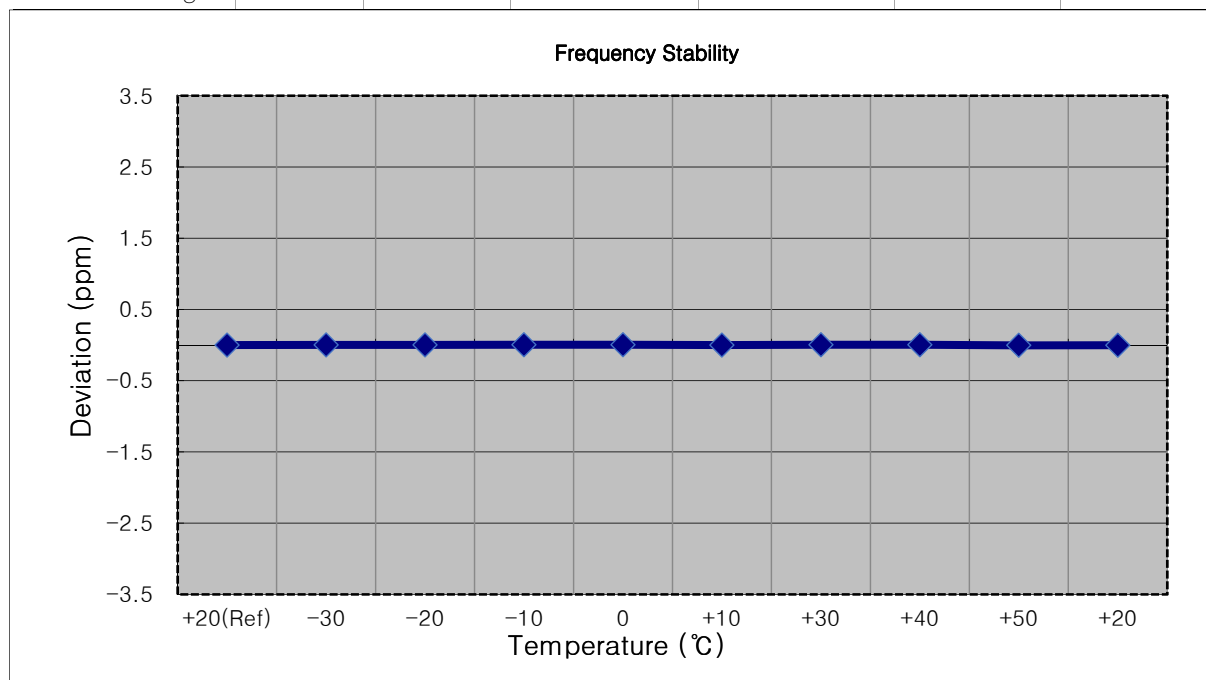


- ▣ MODE: LTE 41(38)
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2506 000 008	0.0	0.000 000	0.000
100 %		-30	2506 000 001	-6.9	0.000 000	-0.003
100 %		-20	2506 000 004	-3.6	0.000 000	-0.001
100 %		-10	2506 000 017	9.5	0.000 000	0.004
100 %		0	2506 000 013	5.6	0.000 000	0.002
100 %		+10	2506 000 012	4.6	0.000 000	0.002
100 %		+30	2506 000 013	4.7	0.000 000	0.002
100 %		+40	2506 000 014	6.6	0.000 000	0.003
100 %		+50	2506 000 001	-6.5	0.000 000	-0.003
Lowest voltage	3.700	+20	2506 000 013	5.1	0.000 000	0.002

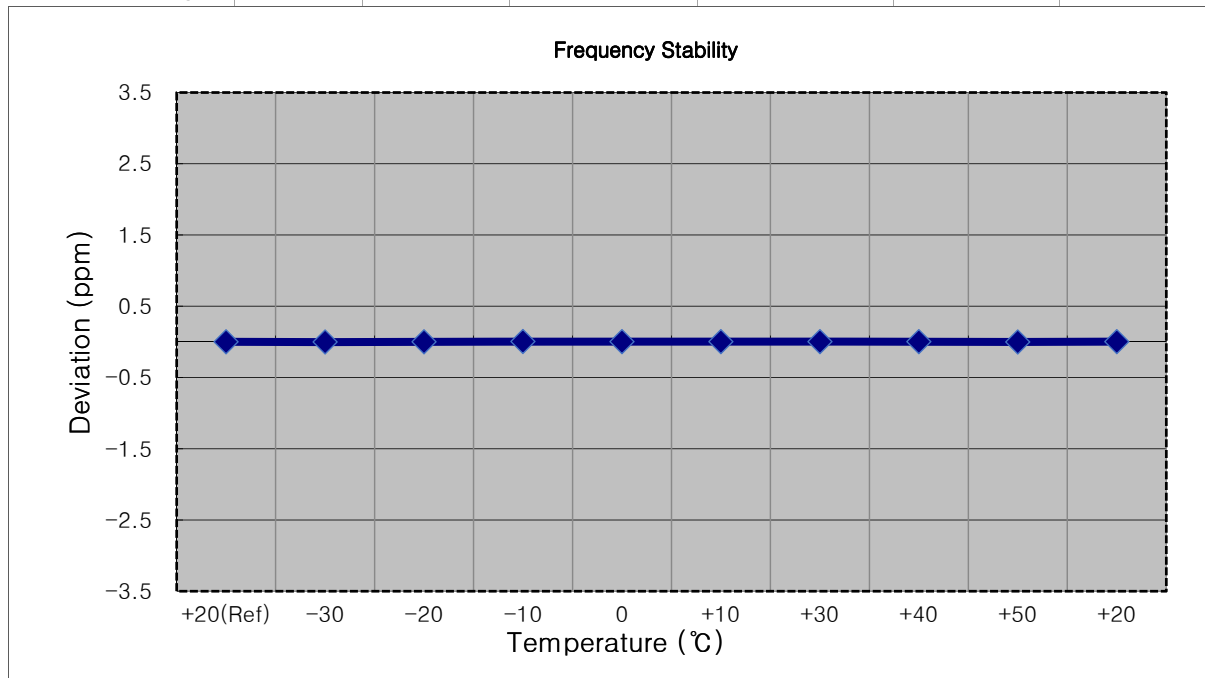


MODE:	<u>LTE 41(38)</u>
OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
BANDWIDTH:	<u>40620 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>4.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	2593 000 003	0.0	0.000 000	0.000
100 %		-30	2592 999 998	-5.1	0.000 000	-0.002
100 %		-20	2592 999 997	-6.1	0.000 000	-0.002
100 %		-10	2592 999 999	-4.0	0.000 000	-0.002
100 %		0	2593 000 007	4.2	0.000 000	0.002
100 %		+10	2593 000 009	6.2	0.000 000	0.002
100 %		+30	2593 000 007	4.2	0.000 000	0.002
100 %		+40	2592 999 999	-4.3	0.000 000	-0.002
100 %		+50	2593 000 011	7.5	0.000 000	0.003
Lowest voltage	3.700	+20	2592 999 996	-7.0	0.000 000	-0.003

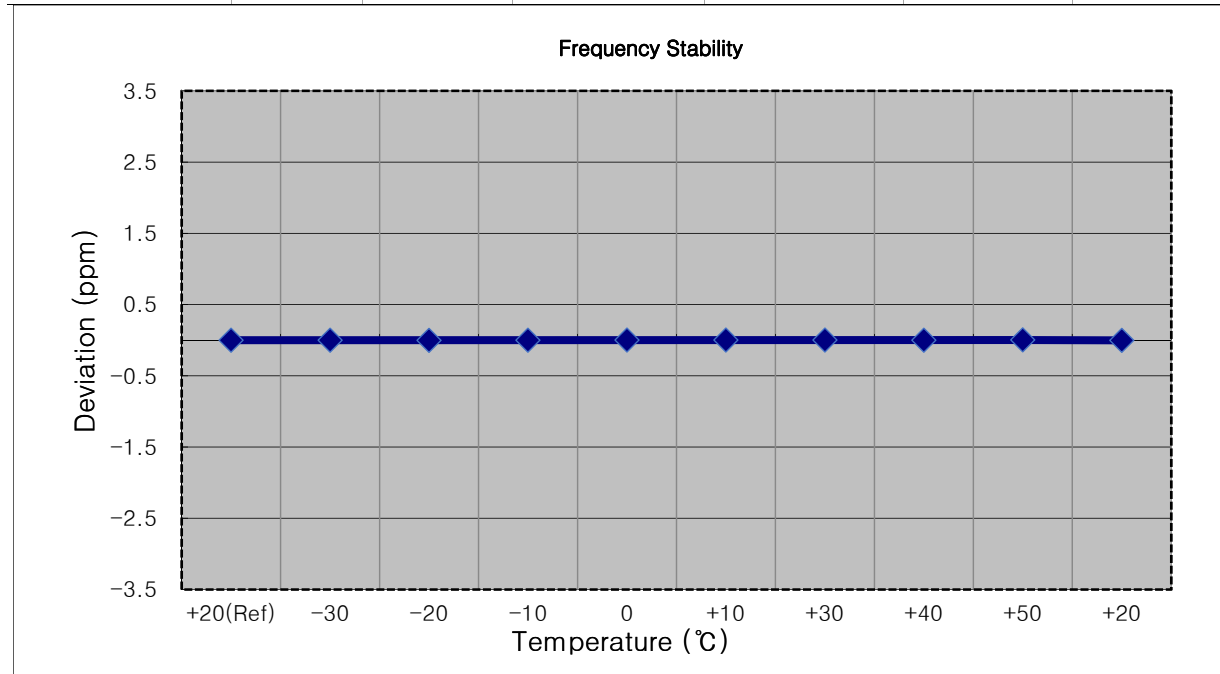


MODE: LTE 41(38)
 OPERATING FREQUENCY: 2593,000,000 Hz
 BANDWIDTH: 40620 (10 MHz)
 REFERENCE VOLTAGE: 4.200 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2592 999 996	0.0	0.000 000	0.000
100 %		-30	2593 000 002	6.2	0.000 000	0.002
100 %		-20	2593 000 002	6.4	0.000 000	0.002
100 %		-10	2593 000 002	6.0	0.000 000	0.002
100 %		0	2593 000 000	4.0	0.000 000	0.002
100 %		+10	2593 000 001	5.1	0.000 000	0.002
100 %		+30	2593 000 002	6.6	0.000 000	0.003
100 %		+40	2593 000 002	6.7	0.000 000	0.003
100 %		+50	2593 000 003	7.1	0.000 000	0.003
Lowest voltage	3.700	+20	2593 000 003	7.2	0.000 000	0.003

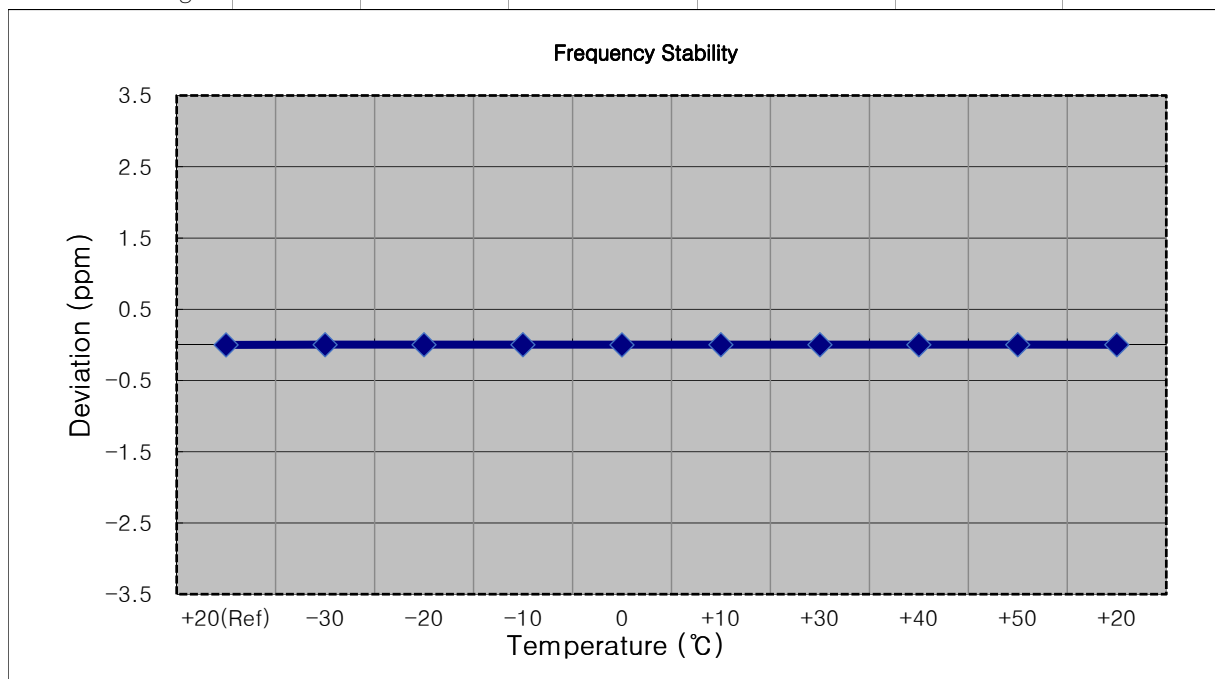


MODE: LTE 41(38)
 OPERATING FREQUENCY: 2593,000,000 Hz
 BANDWIDTH: 40620 (15 MHz)
 REFERENCE VOLTAGE: 4.200 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2593 000 004	0.0	0.000 000	0.000
100 %		-30	2593 000 009	5.0	0.000 000	0.002
100 %		-20	2592 999 997	-7.5	0.000 000	-0.003
100 %		-10	2592 999 999	-5.6	0.000 000	-0.002
100 %		0	2592 999 996	-8.0	0.000 000	-0.003
100 %		+10	2593 000 000	-4.1	0.000 000	-0.002
100 %		+30	2593 000 009	4.7	0.000 000	0.002
100 %		+40	2593 000 000	-3.8	0.000 000	-0.001
100 %		+50	2593 000 009	5.2	0.000 000	0.002
Lowest voltage	3.700	+20	2592 999 995	-9.2	0.000 000	-0.004

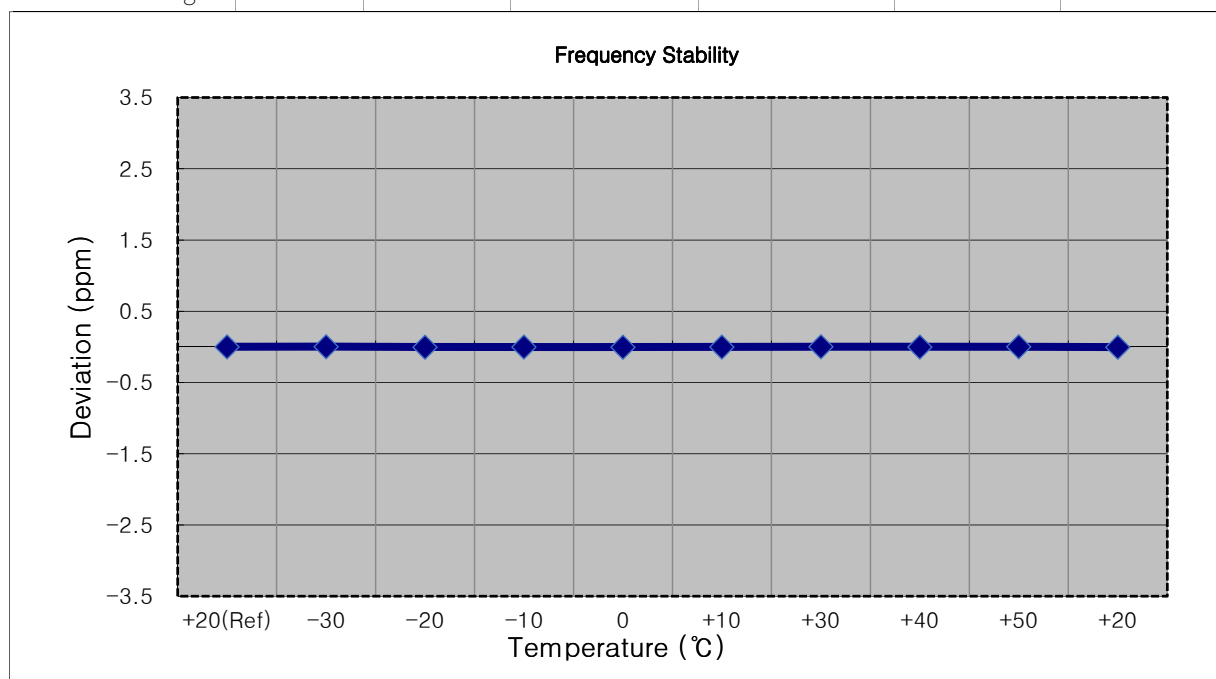


MODE:	<u>LTE 41(38)</u>
OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
BANDWIDTH:	<u>40620 (20 MHz)</u>
REFERENCE VOLTAGE:	<u>4.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2593 000 006	0.0	0.000 000	0.000
100 %		-30	2593 000 012	6.0	0.000 000	0.002
100 %		-20	2593 000 001	-5.3	0.000 000	-0.002
100 %		-10	2593 000 010	4.4	0.000 000	0.002
100 %		0	2593 000 011	4.6	0.000 000	0.002
100 %		+10	2593 000 013	7.1	0.000 000	0.003
100 %		+30	2593 000 011	5.4	0.000 000	0.002
100 %		+40	2593 000 011	5.3	0.000 000	0.002
100 %		+50	2593 000 012	6.4	0.000 000	0.002
Lowest voltage	3.700	+20	2593 000 012	6.0	0.000 000	0.002

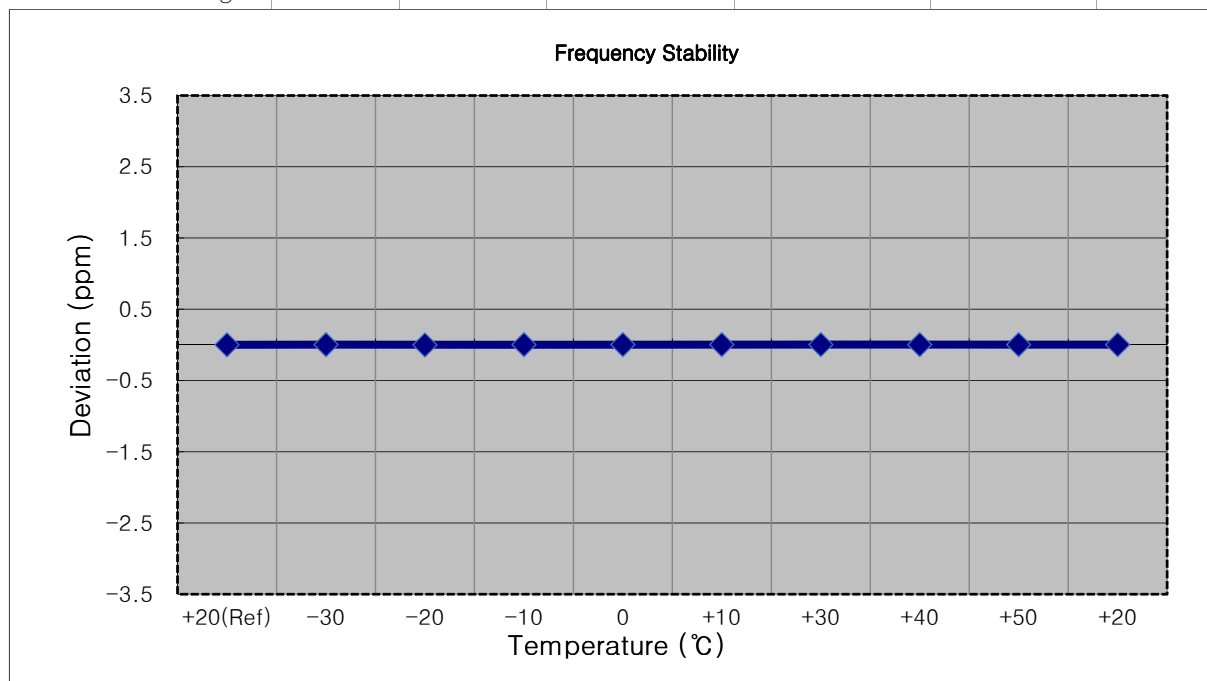


MODE: LTE 41(38)
 OPERATING FREQUENCY: 2687,500,000 Hz
 BANDWIDTH: 41565 (5 MHz)
 REFERENCE VOLTAGE: 4.200 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2687 499 993	0.0	0.000 000	0.000
100 %		-30	2687 500 001	7.5	0.000 000	0.003
100 %		-20	2687 499 989	-4.4	0.000 000	-0.002
100 %		-10	2687 499 998	4.8	0.000 000	0.002
100 %		0	2687 499 988	-4.8	0.000 000	-0.002
100 %		+10	2687 499 987	-6.1	0.000 000	-0.002
100 %		+30	2687 499 999	5.8	0.000 000	0.002
100 %		+40	2687 499 998	4.8	0.000 000	0.002
100 %		+50	2687 499 988	-5.5	0.000 000	-0.002
Lowest voltage	3.700	+20	2687 499 987	-5.9	0.000 000	-0.002

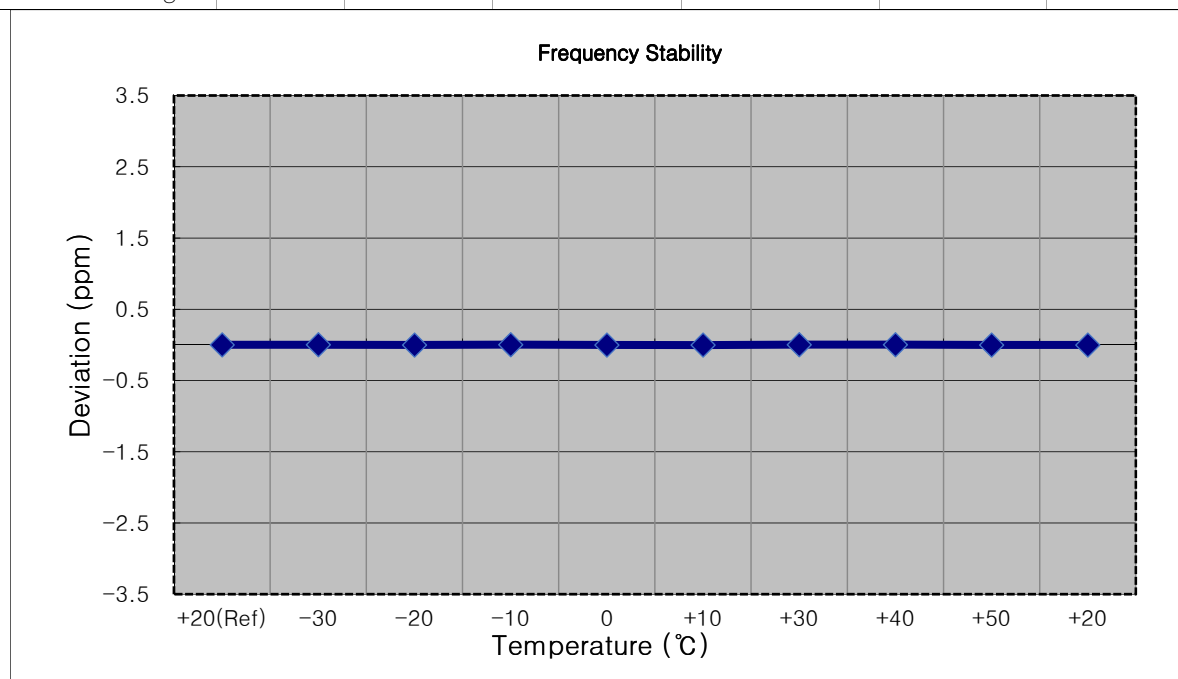


MODE: LTE 41(38)
 OPERATING FREQUENCY: 2685,000,000 Hz
 BANDWIDTH: 41540 (10 MHz)
 REFERENCE VOLTAGE: 4.200 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2684 999 995	0.0	0.000 000	0.000
100 %		-30	2684 999 988	-7.2	0.000 000	-0.003
100 %		-20	2684 999 990	-5.2	0.000 000	-0.002
100 %		-10	2684 999 990	-4.3	0.000 000	-0.002
100 %		0	2685 000 000	5.4	0.000 000	0.002
100 %		+10	2685 000 007	12.0	0.000 000	0.004
100 %		+30	2685 000 007	12.3	0.000 000	0.005
100 %		+40	2684 999 986	-8.5	0.000 000	-0.003
100 %		+50	2684 999 989	-6.0	0.000 000	-0.002
Lowest voltage	3.700	+20	2684 999 986	-9.0	0.000 000	-0.003

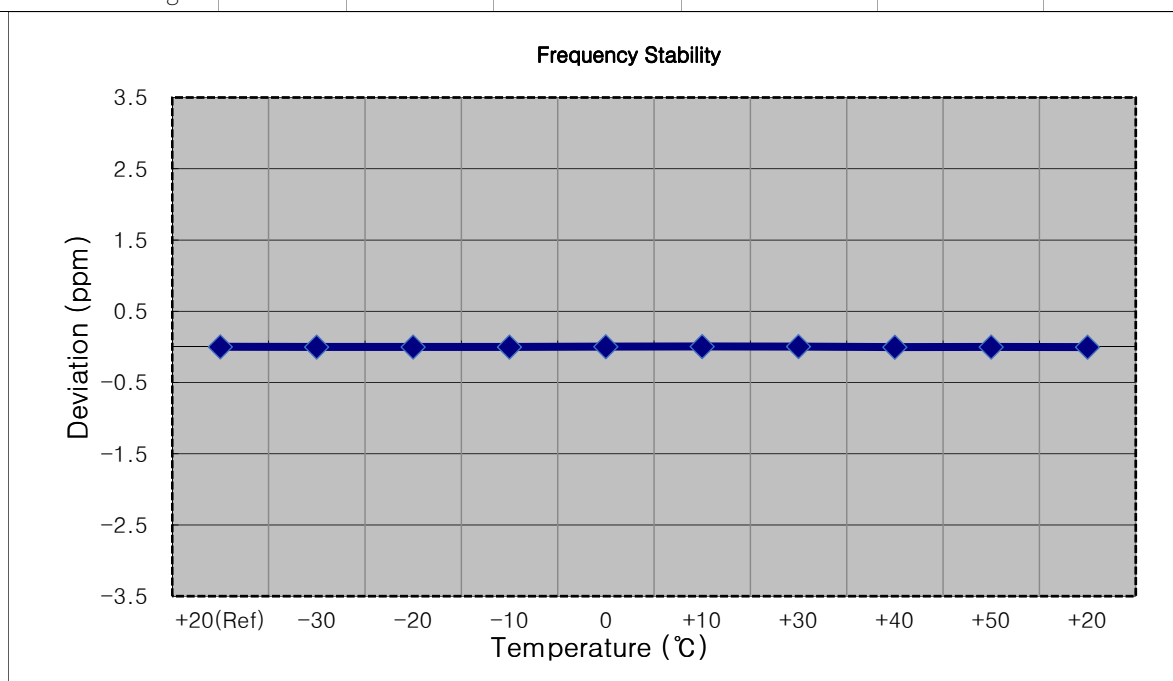


MODE: LTE 41(38)
 OPERATING FREQUENCY: 2682,500,000 Hz
 BANDWIDTH: 41515 (15 MHz)
 REFERENCE VOLTAGE: 4.200 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2682 500 011	0.0	0.000 000	0.000
100 %		-30	2682 500 006	-4.6	0.000 000	-0.002
100 %		-20	2682 500 020	9.3	0.000 000	0.003
100 %		-10	2682 500 018	6.7	0.000 000	0.002
100 %		0	2682 500 019	7.5	0.000 000	0.003
100 %		+10	2682 500 017	6.3	0.000 000	0.002
100 %		+30	2682 500 019	8.2	0.000 000	0.003
100 %		+40	2682 500 019	8.1	0.000 000	0.003
100 %		+50	2682 500 017	5.6	0.000 000	0.002
Lowest voltage	3.700	+20	2682 500 020	8.6	0.000 000	0.003

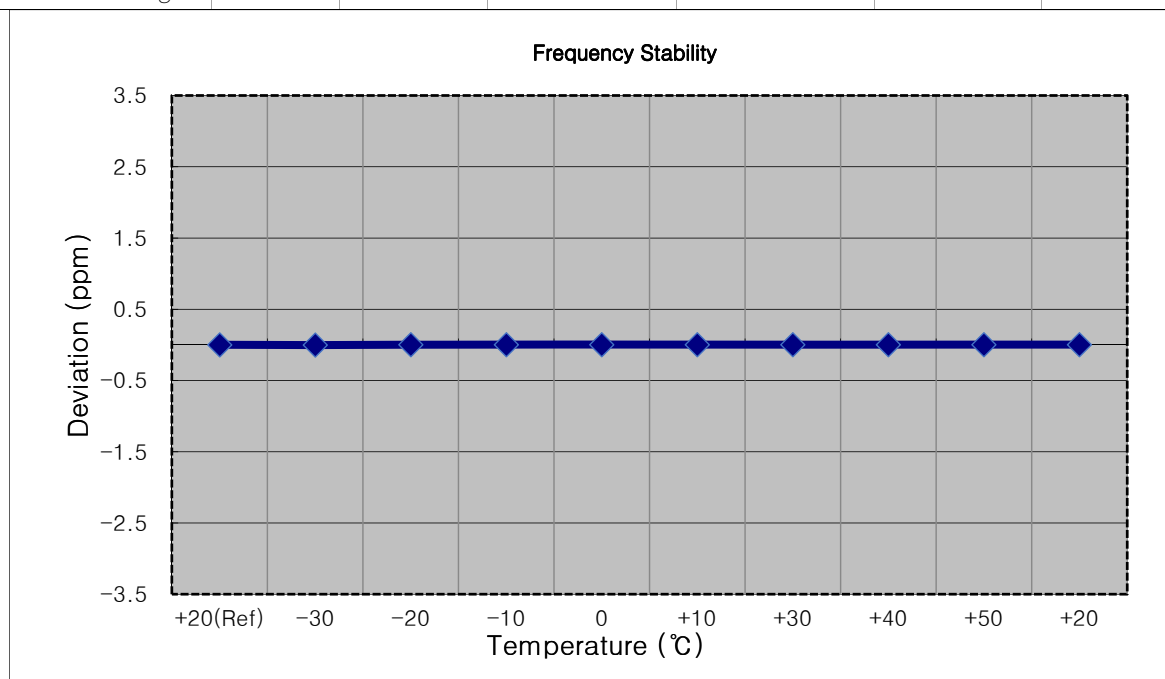

- ▣ MODE: LTE 41(38)
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	2680 000 006	0.0	0.000 000	0.000
100 %		-30	2680 000 012	6.8	0.000 000	0.003
100 %		-20	2679 999 999	-6.2	0.000 000	-0.002
100 %		-10	2680 000 000	-5.7	0.000 000	-0.002
100 %		0	2680 000 015	9.6	0.000 000	0.004
100 %		+10	2680 000 012	6.3	0.000 000	0.002
100 %		+30	2679 999 999	-6.3	0.000 000	-0.002
100 %		+40	2680 000 012	6.0	0.000 000	0.002
100 %		+50	2680 000 015	9.5	0.000 000	0.004
Lowest voltage	3.700	+20	2680 000 011	5.8	0.000 000	0.002

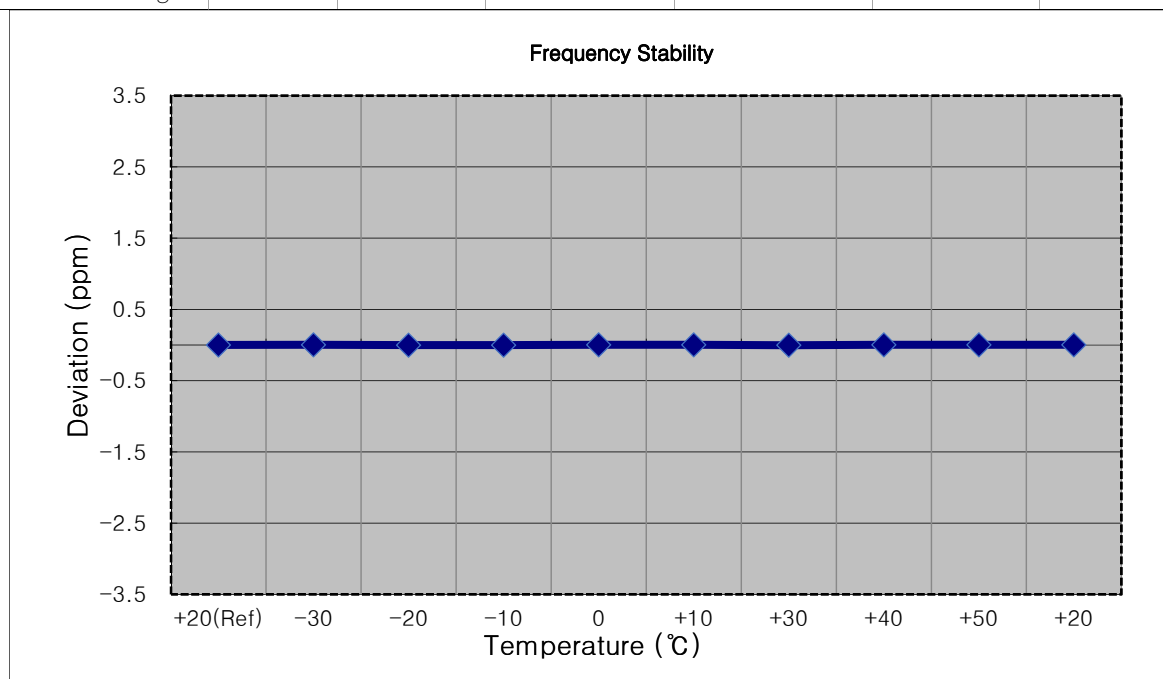

9. TEST DATA (Internal(BUA))

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2498.5	LTE B41(38) / 5 MHz	QPSK	-26.17	12.18	10.27	2.50	H	< 2.00	0.099	19.95	1	24
		16-QAM	-27.05	11.30	10.27	2.50	H		0.081	19.07		
		64-QAM	-28.17	10.18	10.27	2.50	H		0.062	17.95		
		256-QAM	-30.87	7.48	10.27	2.50	H		0.033	15.25		
2593.0		QPSK	-26.00	13.01	10.30	2.55	H		0.119	20.76	1	0
		16-QAM	-26.80	12.21	10.30	2.55	H		0.099	19.96		
		64-QAM	-27.94	11.07	10.30	2.55	H		0.076	18.82		
		256-QAM	-30.52	8.49	10.30	2.55	H		0.042	16.24		
2687.5		QPSK	-27.45	11.50	10.61	2.60	H		0.089	19.51	1	24
		16-QAM	-28.13	10.82	10.61	2.60	H		0.076	18.83		
		64-QAM	-29.16	9.79	10.61	2.60	H		0.060	17.80		
		256-QAM	-31.79	7.16	10.61	2.60	H		0.033	15.17		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2501.0	LTE B41(38) / 10 MHz	QPSK	-25.89	12.46	10.27	2.50	H	< 2.00	0.105	20.23	1	25
		16-QAM	-26.70	11.65	10.27	2.50	H		0.087	19.42		
		64-QAM	-28.03	10.32	10.27	2.50	H		0.064	18.09		
		256-QAM	-30.75	7.60	10.27	2.50	H		0.034	15.37		
2593.0		QPSK	-25.69	13.32	10.30	2.55	H		0.128	21.07	1	0
		16-QAM	-26.62	12.39	10.30	2.55	H		0.103	20.14		
		64-QAM	-27.78	11.23	10.30	2.55	H		0.079	18.98		
		256-QAM	-30.50	8.51	10.30	2.55	H		0.042	16.26		
2685.0		QPSK	-27.34	11.62	10.59	2.61	H		0.091	19.60	1	0
		16-QAM	-28.07	10.89	10.59	2.61	H		0.077	18.87		
		64-QAM	-29.17	9.79	10.59	2.61	H		0.060	17.77		
		256-QAM	-31.90	7.06	10.59	2.61	H		0.032	15.04		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2503.5	LTE B41(38) / 15 MHz	QPSK	-25.91	12.54	10.26	2.51	H	< 2.00	0.107	20.29	1	38
		16-QAM	-26.95	11.50	10.26	2.51	H		0.084	19.25		
		64-QAM	-27.90	10.55	10.26	2.51	H		0.068	18.30		
		256-QAM	-30.69	7.76	10.26	2.51	H		0.036	15.51		
2593.0		QPSK	-26.14	12.87	10.30	2.55	H		0.115	20.62	1	0
		16-QAM	-26.82	12.19	10.30	2.55	H		0.099	19.94		
		64-QAM	-28.09	10.92	10.30	2.55	H		0.074	18.67		
		256-QAM	-30.46	8.55	10.30	2.55	H		0.043	16.30		
2682.5		QPSK	-27.16	11.80	10.59	2.61	H		0.095	19.78	1	38
		16-QAM	-28.15	10.81	10.59	2.61	H		0.076	18.79		
		64-QAM	-29.18	9.78	10.59	2.61	H		0.060	17.76		
		256-QAM	-31.89	7.07	10.59	2.61	H		0.032	15.05		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2506.0	LTE B41(38) / 20 MHz	QPSK	-26.03	12.42	10.26	2.51	H	< 2.00	0.104	20.17	1	50
		16-QAM	-26.66	11.79	10.26	2.51	H		0.090	19.54		
		64-QAM	-27.91	10.54	10.26	2.51	H		0.067	18.29		
		256-QAM	-30.65	7.80	10.26	2.51	H		0.036	15.55		
2593.0		QPSK	-25.90	13.11	10.30	2.55	H		0.122	20.86	1	0
		16-QAM	-26.56	12.45	10.30	2.55	H		0.105	20.20		
		64-QAM	-27.70	11.31	10.30	2.55	H		0.081	19.06		
		256-QAM	-30.42	8.59	10.30	2.55	H		0.043	16.34		
2680.0		QPSK	-27.46	11.49	10.58	2.61	H		0.088	19.46	1	99
		16-QAM	-28.03	10.92	10.58	2.61	H		0.077	18.89		
		64-QAM	-29.06	9.89	10.58	2.61	H		0.061	17.86		
		256-QAM	-31.63	7.32	10.58	2.61	H		0.034	15.29		

9.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B41(38)
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39675 (2498.5)	4 997.00	-55.90	10.92	-62.04	3.70	H	-54.82	1	24
	7 495.50	-55.49	11.55	-57.71	4.61	H	-50.77		
	9 994.00	-54.61	11.41	-53.92	5.47	H	-47.98		
	12 492.50	-56.31	13.17	-52.82	6.12	V	-45.77		
	14 991.00	-63.09	14.21	-45.30	6.79	V	-37.88		
40620 (2593.0)	5 186.00	-55.14	11.18	-62.67	3.80	V	-55.29	1	0
	7 779.00	-55.47	11.37	-56.03	4.70	H	-49.36		
	10 372.00	-54.85	11.67	-54.37	5.55	V	-48.25		
	12 965.00	-58.01	12.77	-53.17	6.35	H	-46.75		
	15 558.00	-63.56	15.76	-45.21	6.89	V	-36.34		
41565 (2687.5)	5 375.00	-54.84	11.60	-62.31	3.91	H	-54.62	1	24
	8 062.50	-55.87	11.34	-55.11	4.82	V	-48.59		
	10 750.00	-53.50	11.60	-53.22	5.64	V	-47.26		
	13 437.50	-59.29	12.86	-51.09	6.44	V	-44.67		
	16 125.00	-63.14	16.31	-47.34	7.07	H	-38.10		

■ MODE: LTE B41(38)
 ■ MODULATION SIGNAL: 10 MHz QPSK
 ■ DISTANCE: 1 meters
 ■ LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39700 (2501.0)	5 002.00	-53.21	10.91	-59.69	3.71	H	-52.49	1	25
	7 503.00	-54.20	11.58	-56.33	4.60	H	-49.35		
	10 004.00	-52.96	11.40	-52.59	5.47	V	-46.66		
	12 505.00	-56.52	13.17	-52.90	6.10	H	-45.83		
	15 006.00	-62.32	14.26	-44.30	6.78	V	-36.82		
40620 (2593.0)	5 186.00	-54.50	11.18	-62.03	3.80	H	-54.65	1	0
	7 779.00	-53.67	11.37	-54.23	4.70	V	-47.56		
	10 372.00	-53.28	11.67	-52.80	5.55	H	-46.68		
	12 965.00	-56.77	12.77	-51.93	6.35	H	-45.51		
	15 558.00	-61.50	15.76	-43.15	6.89	V	-34.28		
41540 (2685.0)	5 370.00	-54.74	11.59	-62.18	3.92	V	-54.51	1	0
	8 055.00	-54.56	11.32	-53.91	4.81	V	-47.40		
	10 740.00	-53.28	11.60	-52.71	5.64	V	-46.75		
	13 425.00	-57.66	12.88	-49.24	6.41	H	-42.77		
	16 110.00	-62.17	16.29	-46.41	7.10	V	-37.22		

MODE: LTE B41(38)
 MODULATION SIGNAL: 15 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm


Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39725 (2503.5)	5 007.00	-54.08	10.91	-60.62	3.71	H	-53.42	1	38
	7 510.50	-54.73	11.59	-56.84	4.60	H	-49.85		
	10 014.00	-54.34	11.39	-53.71	5.47	V	-47.79		
	12 517.50	-57.10	13.15	-53.68	6.09	H	-46.62		
	15 021.00	-63.16	14.29	-45.09	6.74	H	-37.54		
40620 (2593.0)	5 186.00	-54.37	11.18	-61.90	3.80	V	-54.52	1	0
	7 779.00	-55.00	11.37	-55.56	4.70	H	-48.89		
	10 372.00	-55.07	11.67	-54.59	5.55	H	-48.47		
	12 965.00	-57.02	12.77	-52.18	6.35	H	-45.76		
	15 558.00	-63.11	15.76	-44.76	6.89	H	-35.89		
41490 (2682.5)	5 365.00	-53.82	11.59	-61.33	3.91	V	-53.65	1	38
	8 047.50	-54.87	11.31	-54.51	4.81	V	-48.01		
	10 730.00	-53.21	11.60	-52.68	5.65	V	-46.73		
	13 412.50	-56.16	12.89	-48.31	6.40	V	-41.82		
	16 095.00	-61.96	16.28	-45.99	7.06	H	-36.77		

MODE: LTE B41(38)
 MODULATION SIGNAL: 20 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ - 25 dBm


Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	RB	
								Size	Offset
39750 (2506.0)	5 012.00	-54.73	10.91	-61.32	3.72	H	-54.13	1	50
	7 518.00	-54.08	11.60	-56.45	4.61	H	-49.46		
	10 024.00	-54.37	11.39	-53.62	5.47	V	-47.70		
	12 530.00	-55.87	13.14	-52.33	6.10	V	-45.29		
	15 036.00	-62.55	14.33	-44.72	6.74	H	-37.13		
40620 (2593.0)	5 186.00	-54.03	11.18	-61.56	3.80	V	-54.18	1	0
	7 779.00	-54.83	11.37	-55.39	4.70	V	-48.72		
	10 372.00	-55.51	11.67	-55.03	5.55	V	-48.91		
	12 965.00	-56.82	12.77	-51.98	6.35	H	-45.56		
	15 558.00	-62.58	15.76	-44.23	6.89	V	-35.36		
41490 (2680.0)	5 360.00	-55.67	11.58	-63.24	3.90	V	-55.56	1	99
	8 040.00	-55.08	11.29	-55.07	4.80	H	-48.58		
	10 720.00	-54.74	11.60	-54.59	5.64	H	-48.63		
	13 400.00	-58.37	12.91	-51.03	6.38	V	-44.50		
	16 080.00	-61.55	16.25	-45.22	7.02	H	-35.99		

10. TEST PLOTS


LTE B41_5 M_PAR_Mid_QPSK_FullRB

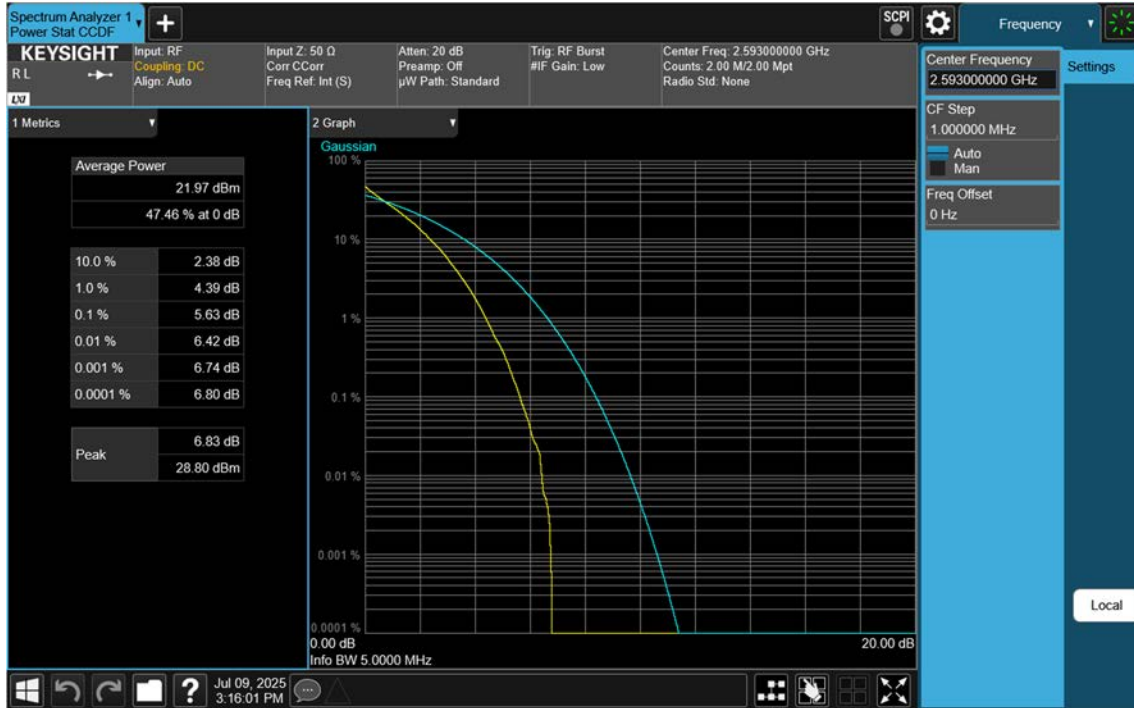


LTE B41_5 M_PAR_Mid_16QAM_FullRB

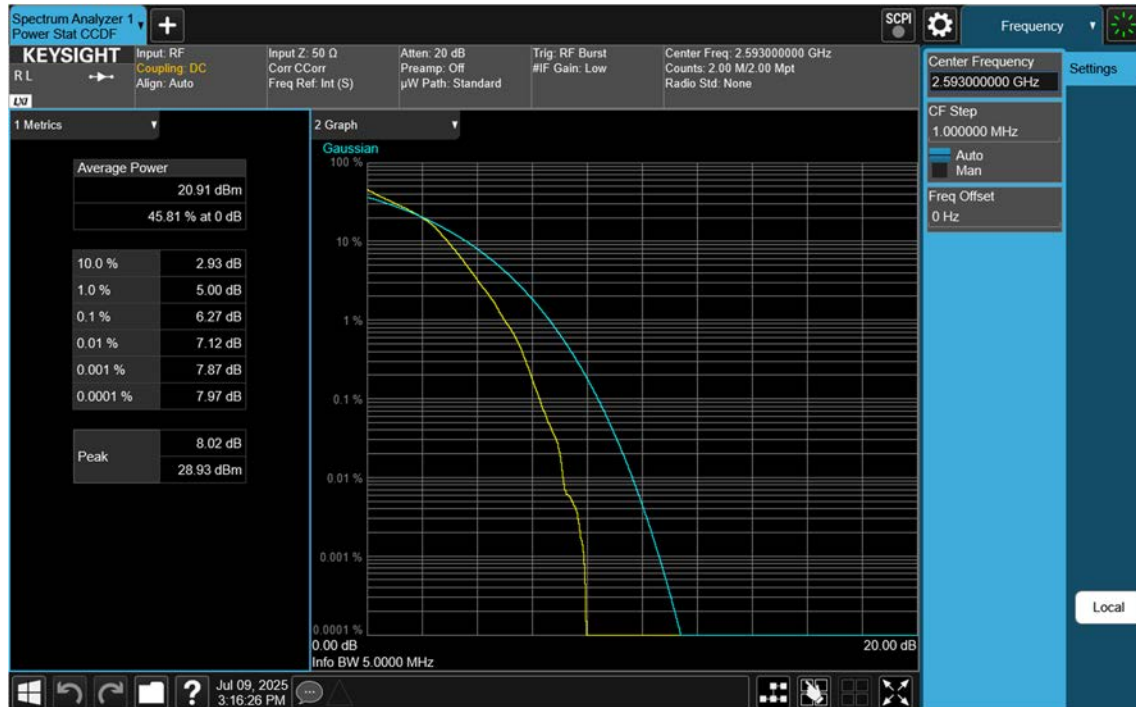


LTE B41_5 M_PAR_Mid_64QAM_FullRB

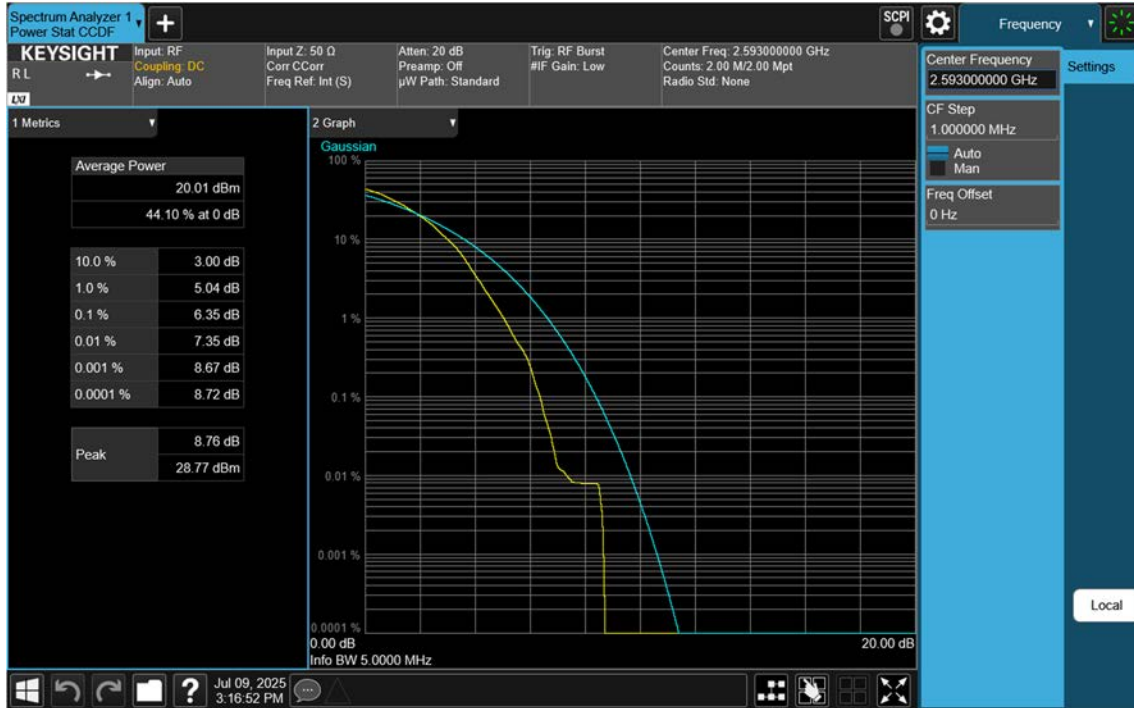


LTE B41_5 M_PAR_Mid_256QAM_FullRB

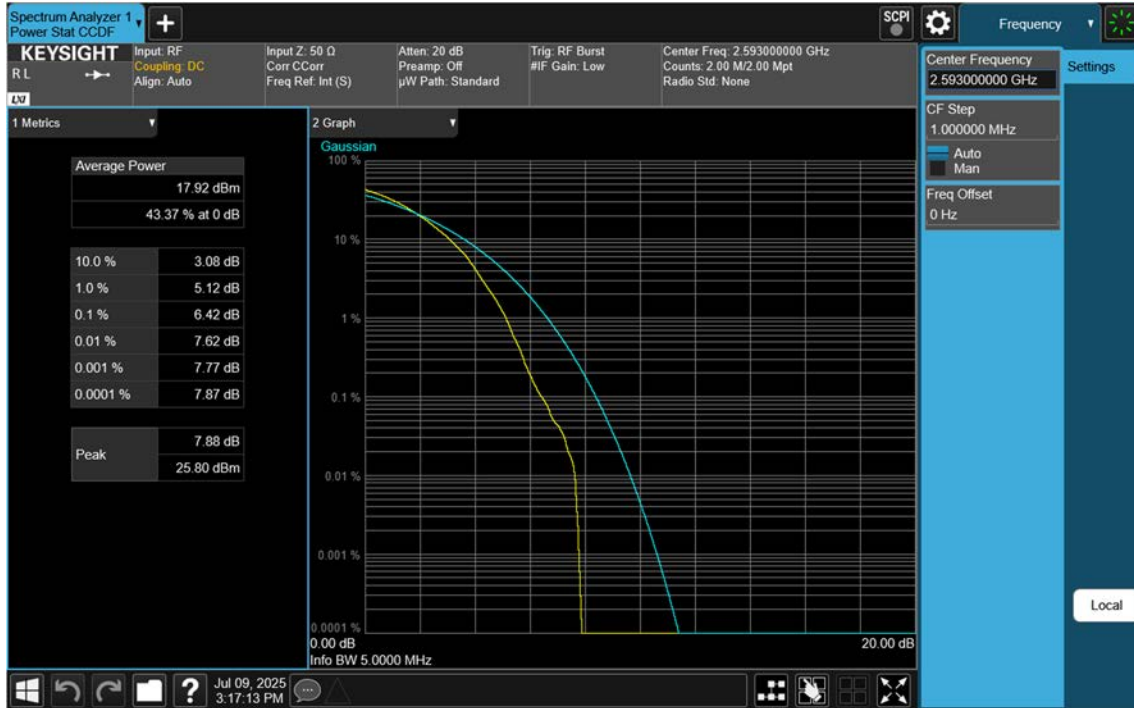


LTE B41_10 M_PAR_Mid_QPSK_FullRB

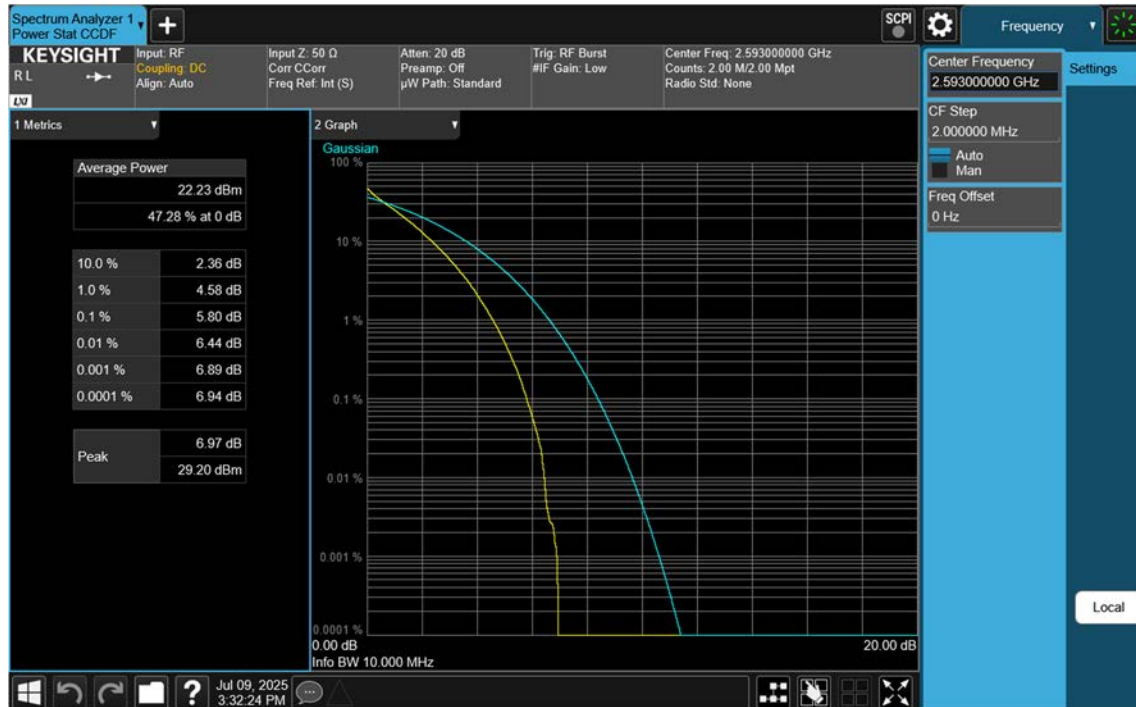


LTE B41_10 M_PAR_Mid_16QAM_FullRB

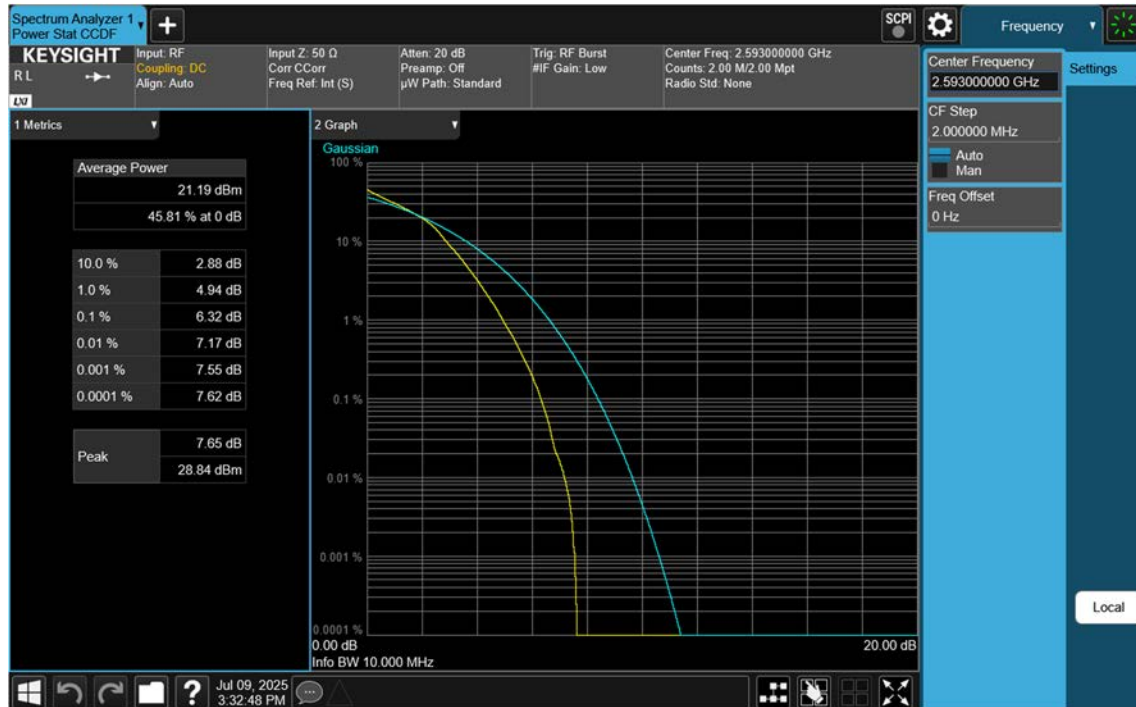


LTE B41_10 M_PAR_Mid_64QAM_FullRB

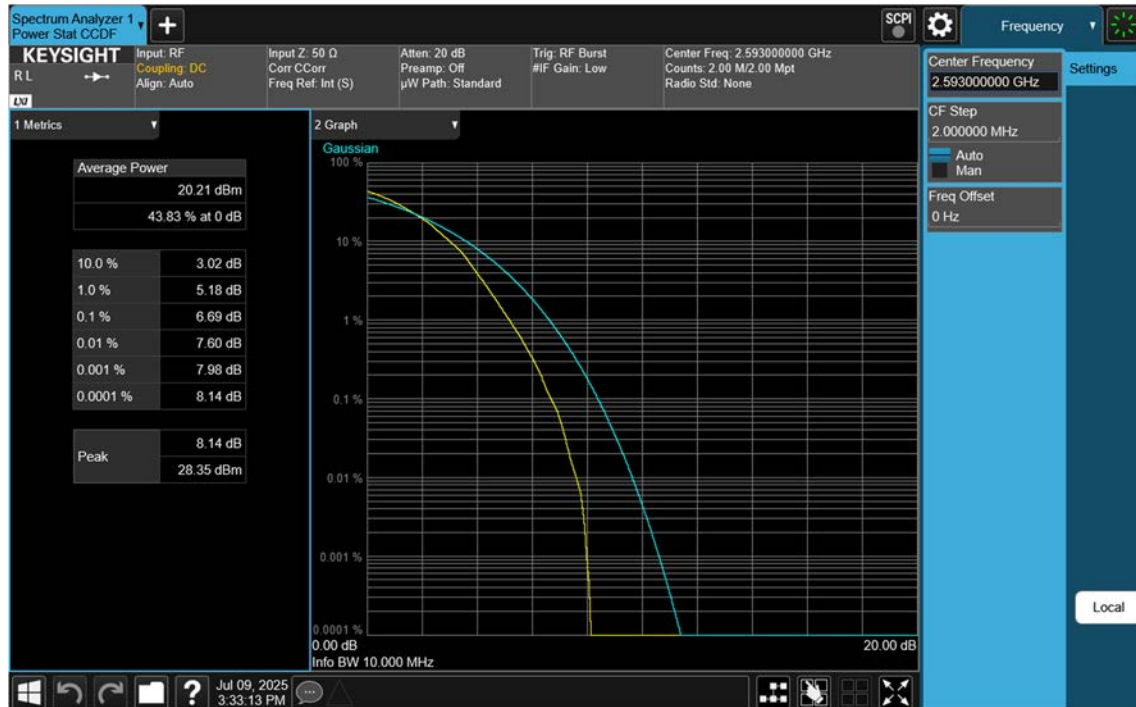


LTE B41_10 M_PAR_Mid_256QAM_FullRB

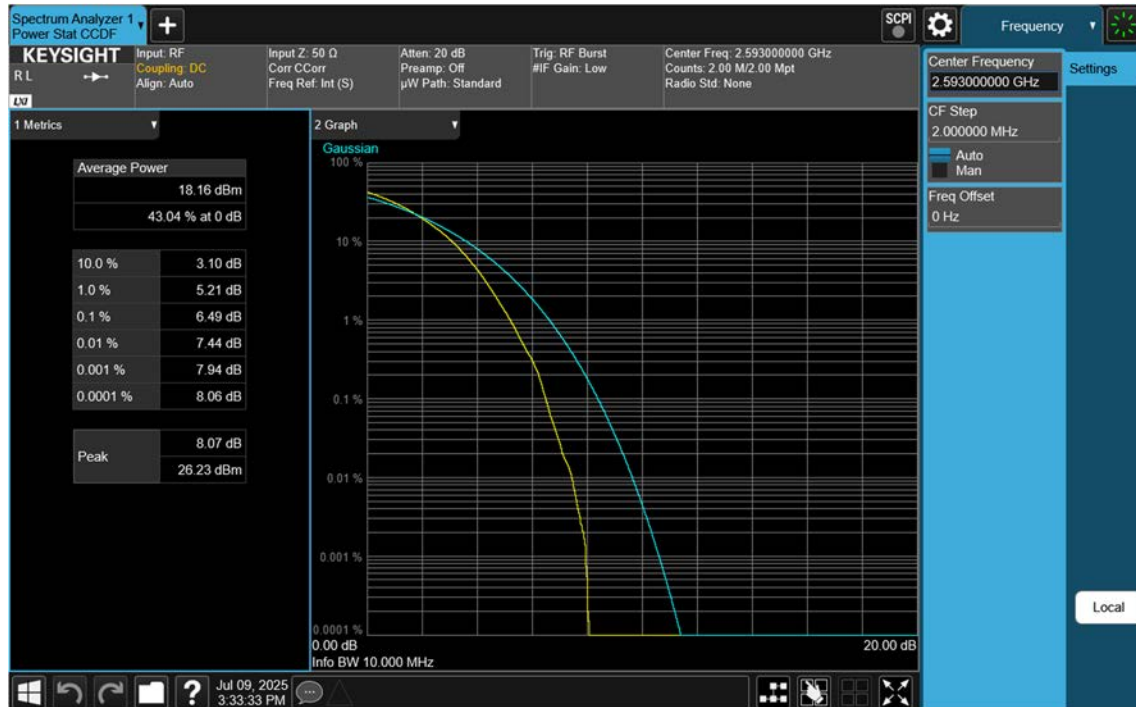


LTE B41_15 M_PAR_Mid_QPSK_FullRB

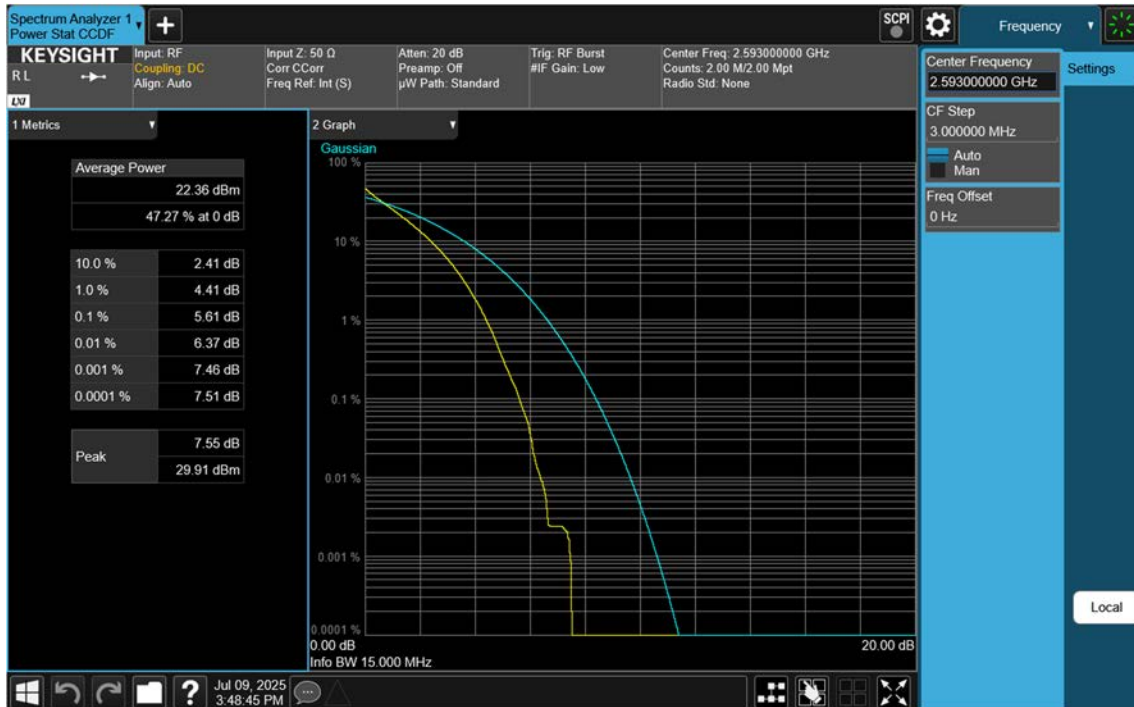


LTE B41_15 M_PAR_Mid_16QAM_FullRB

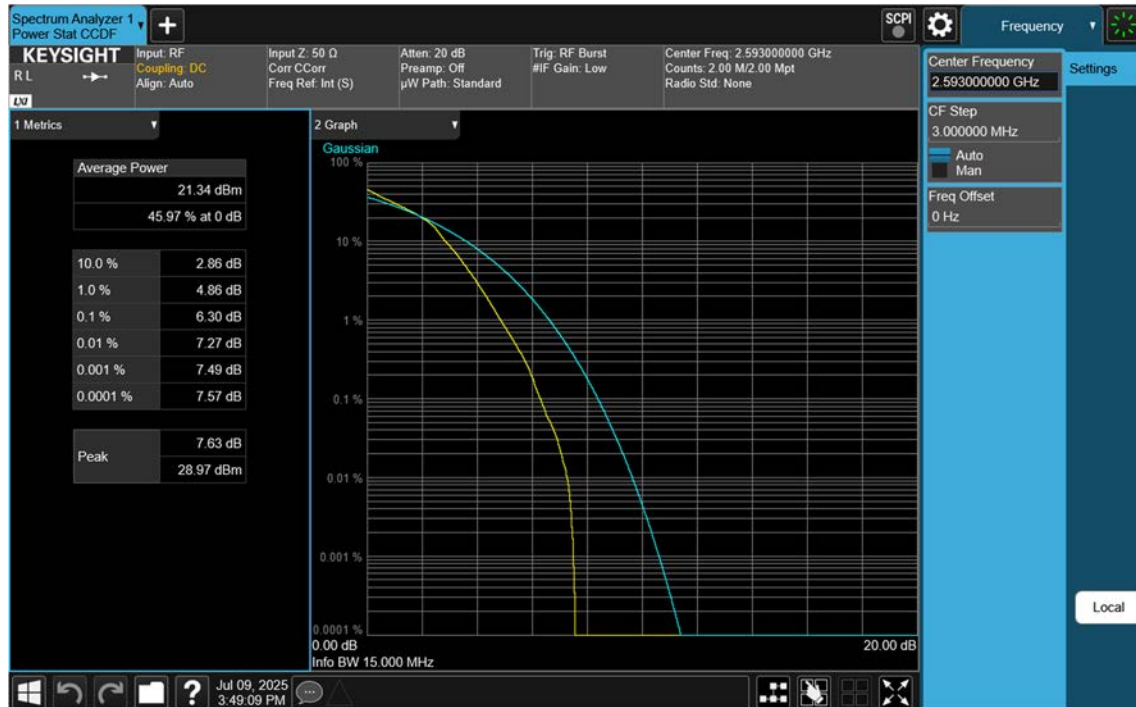


LTE B41_15 M_PAR_Mid_64QAM_FullRB

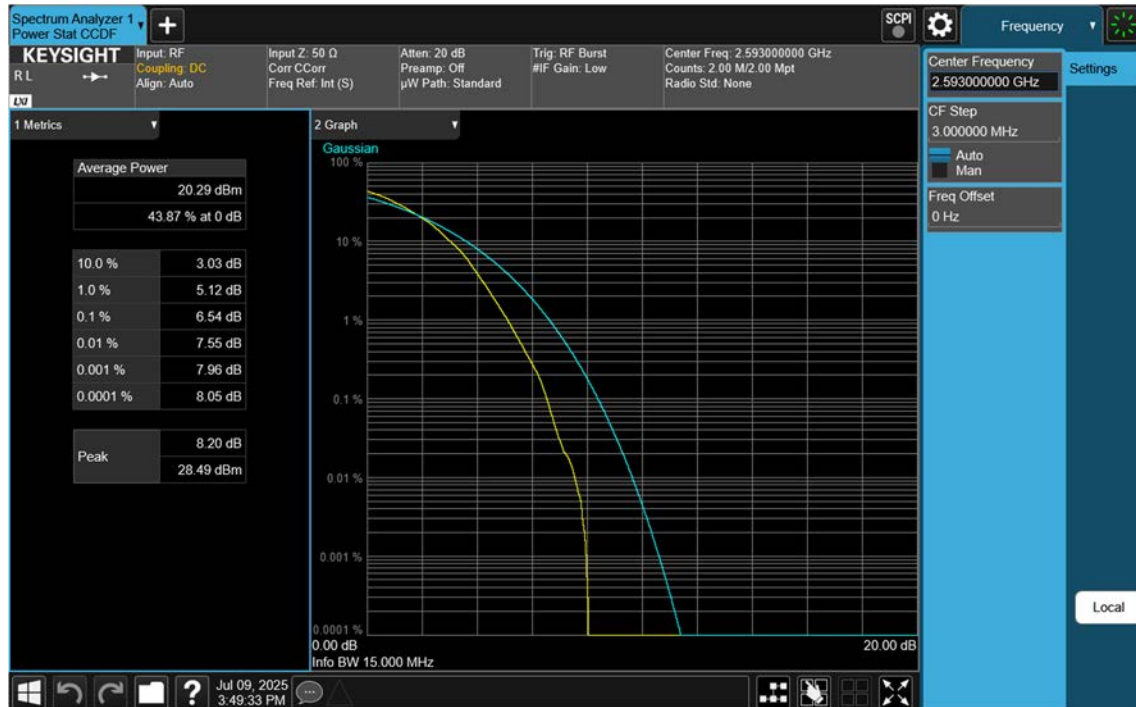


LTE B41_15 M_PAR_Mid_256QAM_FullRB

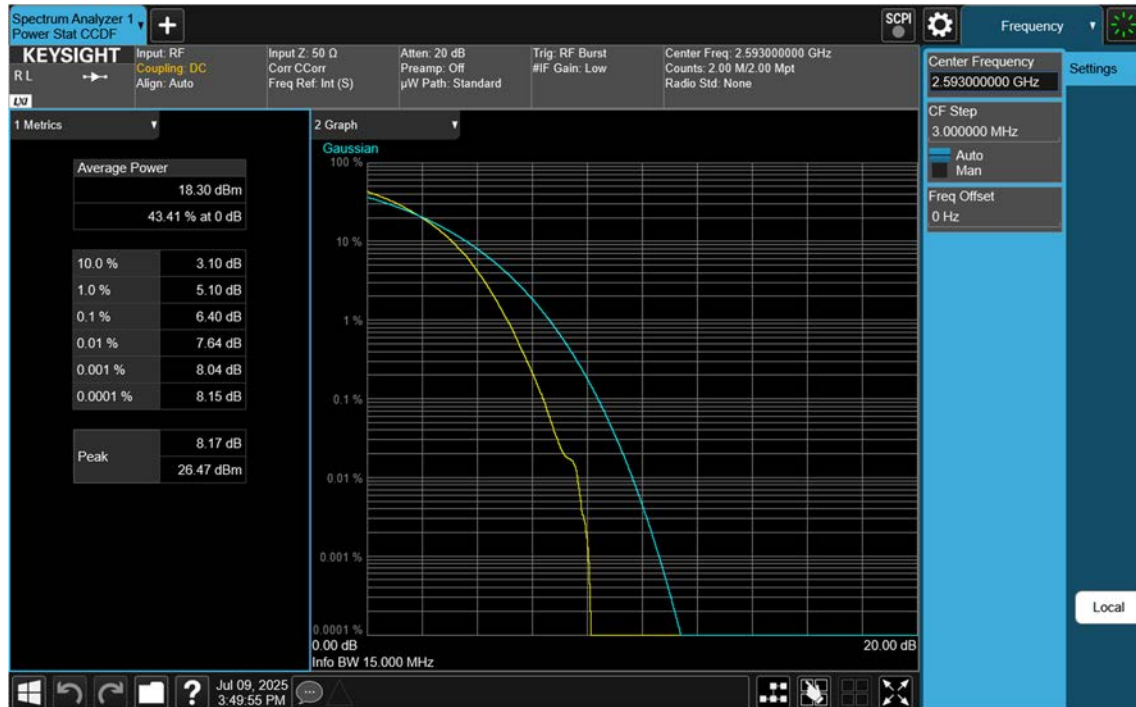


LTE B41_20 M_PAR_Mid_QPSK_FullRB

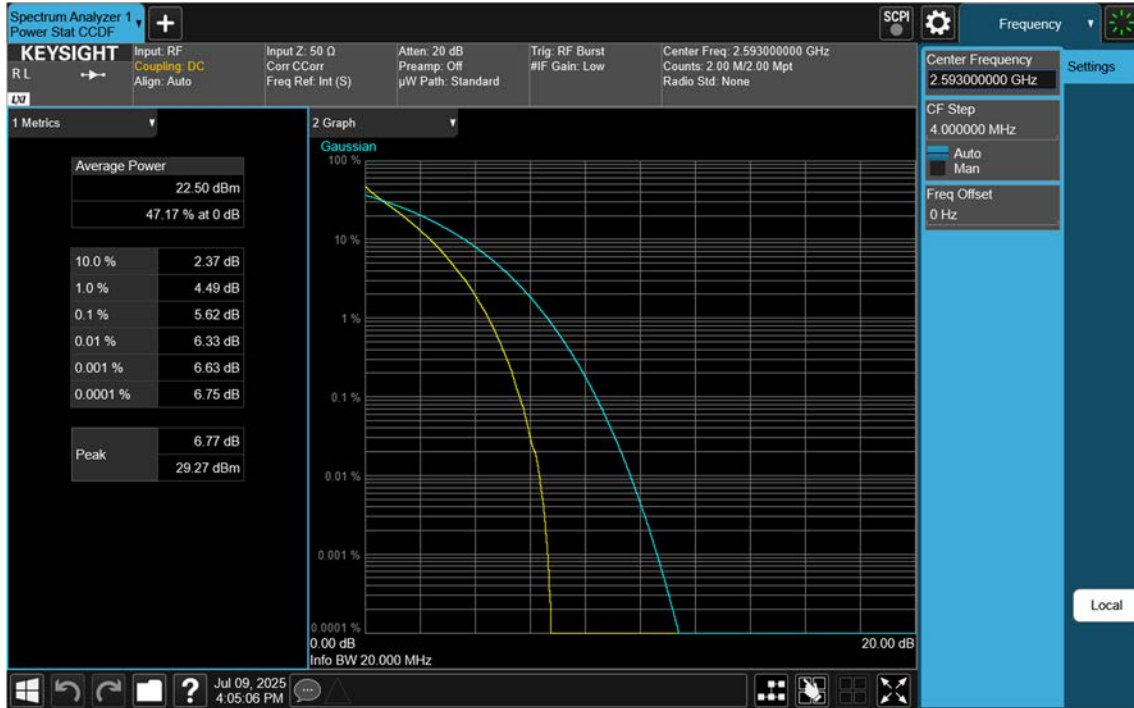


LTE B41_20 M_PAR_Mid_16QAM_FullRB

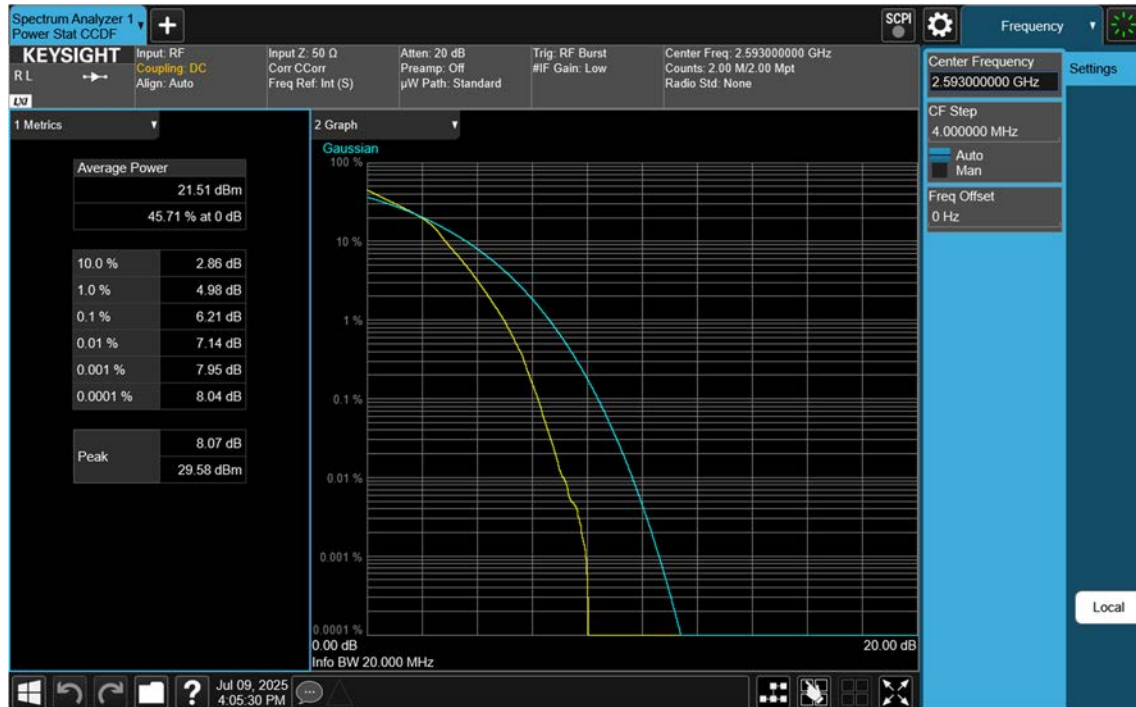

LTE B41_20 M_PAR_Mid_64QAM_FullRB

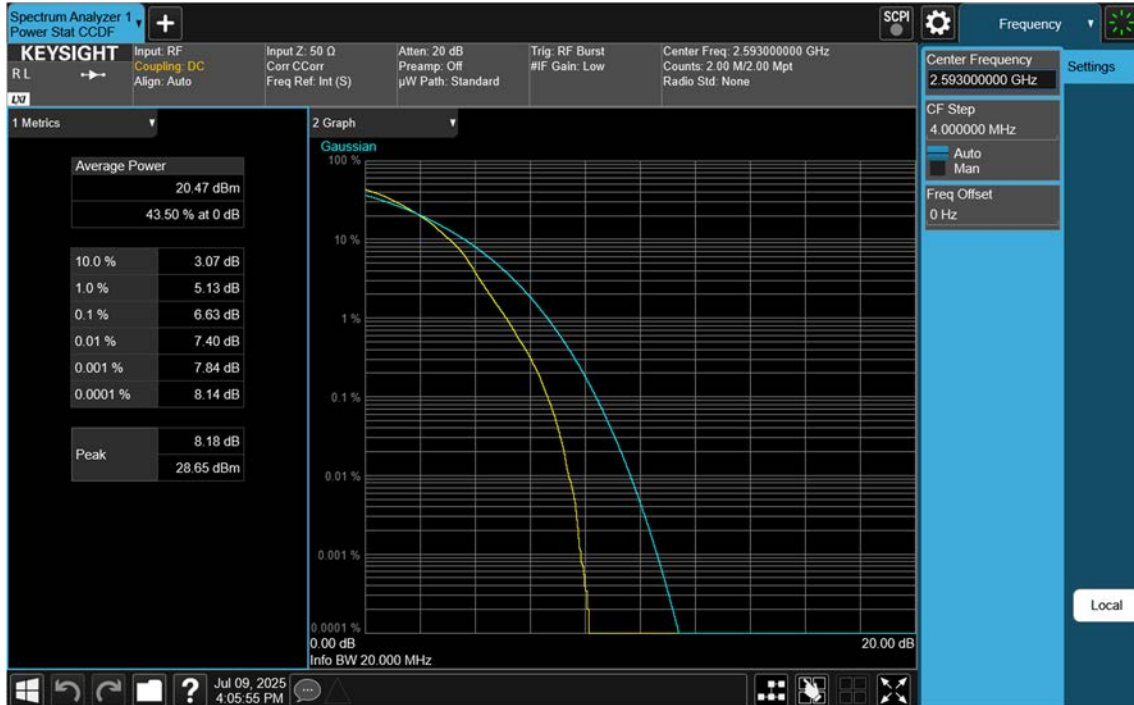

LTE B41_20 M_PAR_Mid_256QAM_FullRB

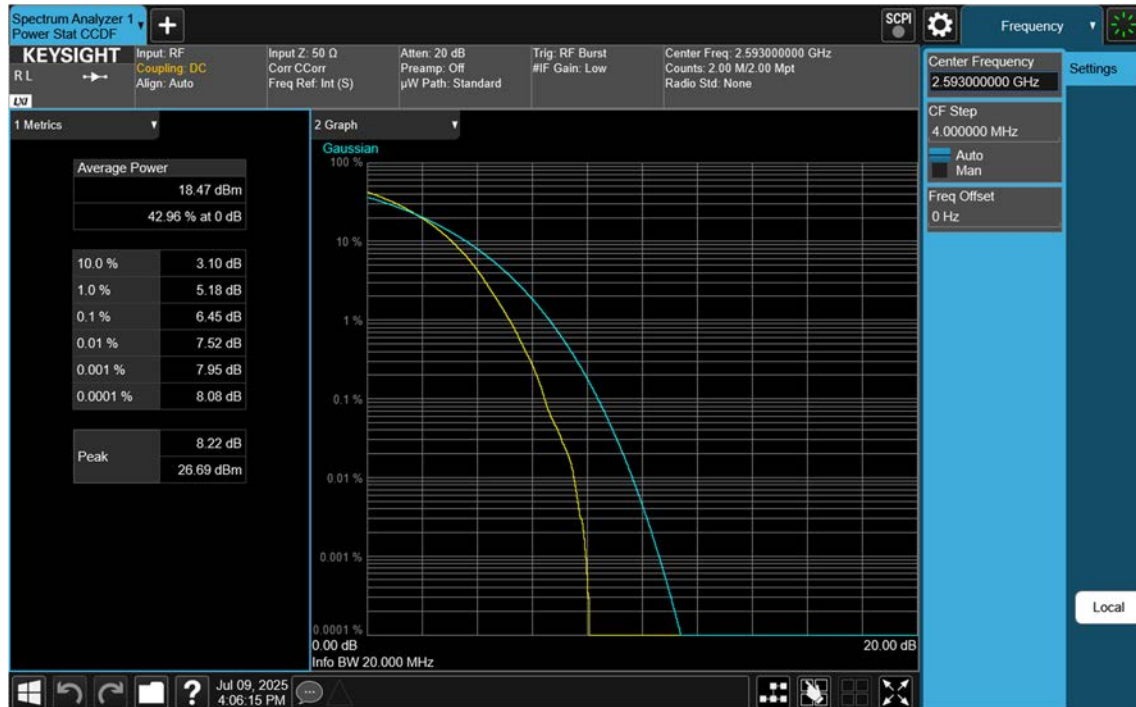

LTE B41_5 M_OBW_Mid_QPSK_FullRB



LTE B41_5 M_OBW_Mid_16QAM_FullRB




LTE B41_5 M_OBW_Mid_64QAM_FullRB




LTE B41_5 M_OBW_Mid_256QAM_FullRB




LTE B41_10 M_OBW_Mid_QPSK_FullRB

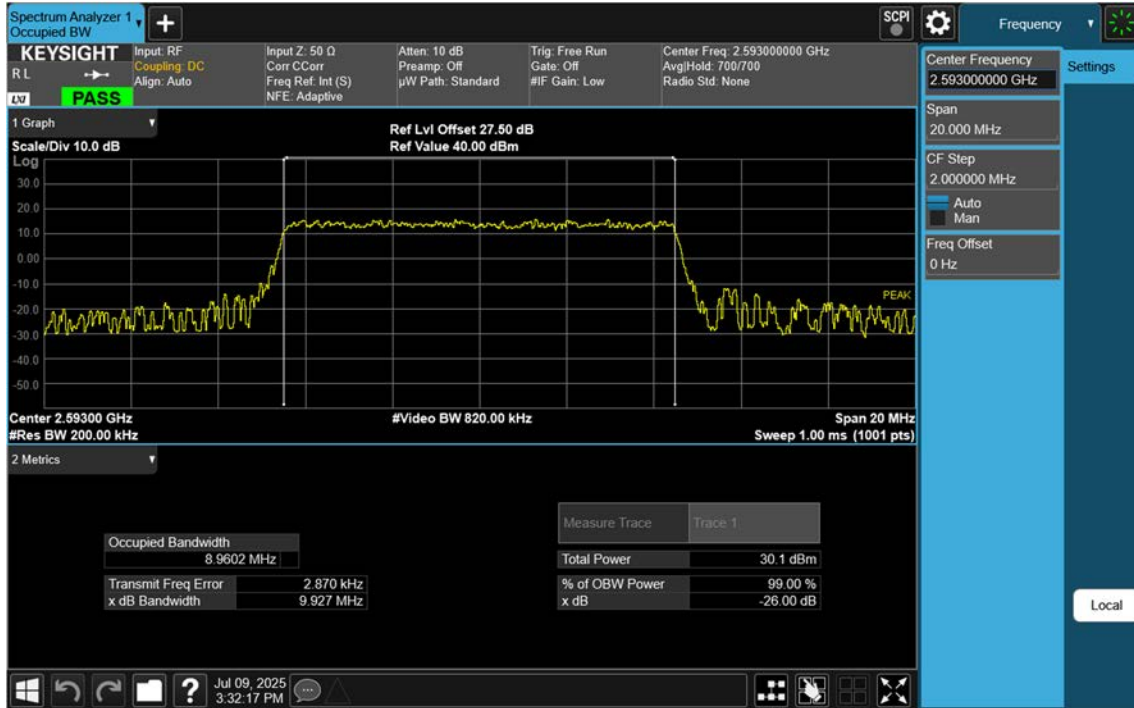


LTE B41_10 M_OBW_Mid_16QAM_FullRB

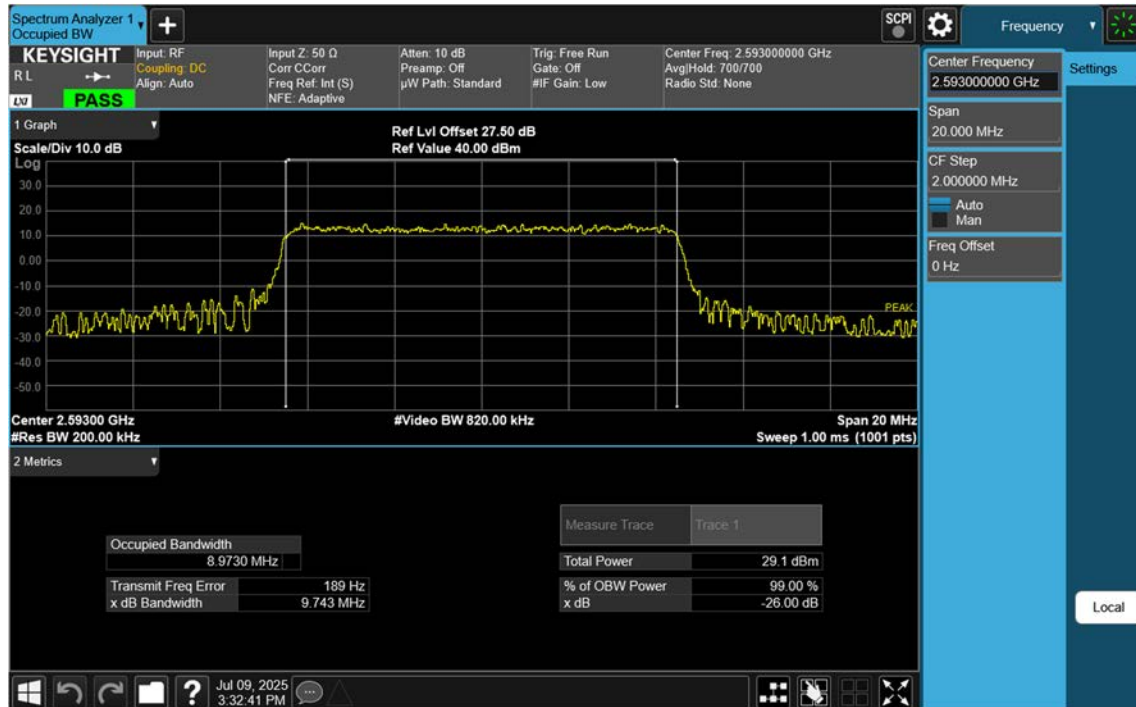

LTE B41_10 M_OBW_Mid_64QAM_FullRB

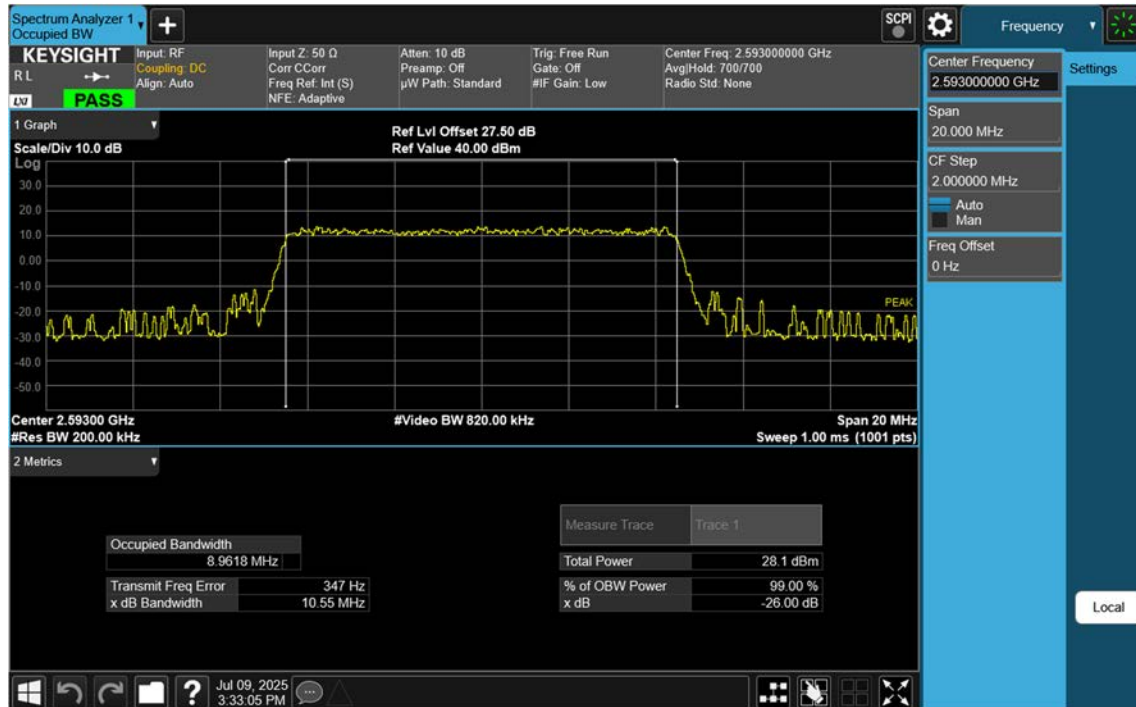

LTE B41_10 M_OBW_Mid_256QAM_FullRB

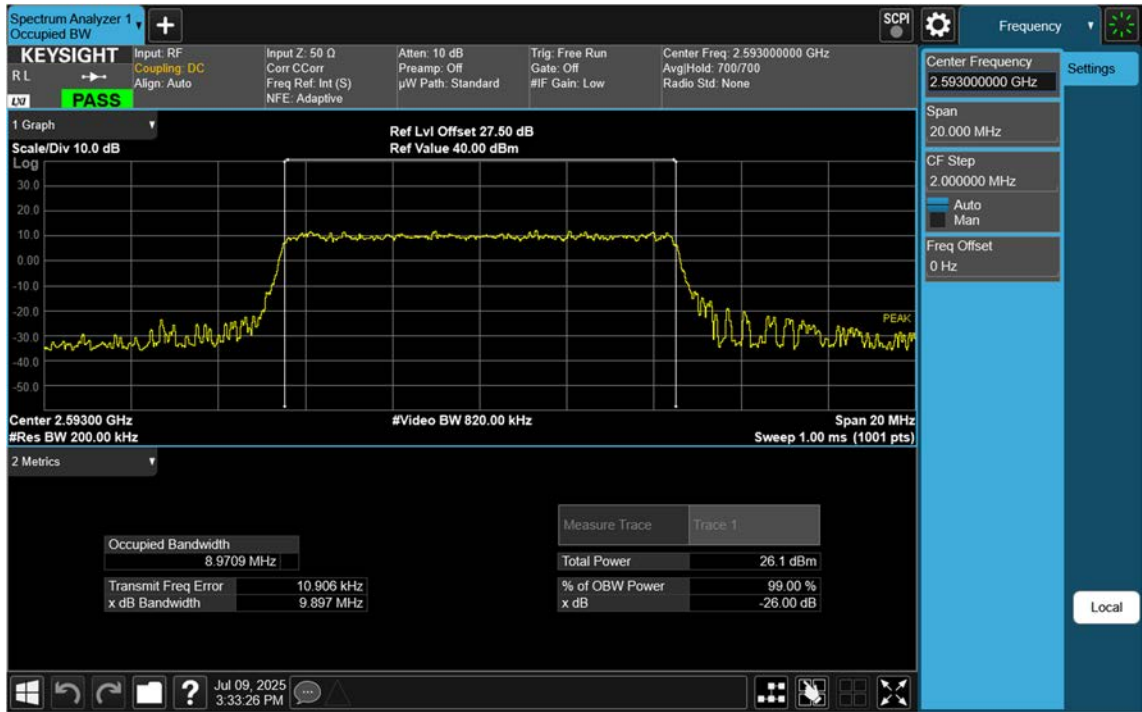

LTE B41_15 M_OBW_Mid_QPSK_FullRB



LTE B41_15 M_OBW_Mid_16QAM_FullRB



LTE B41_15 M_OBW_Mid_64QAM_FullRB



LTE B41_15 M_OBW_Mid_256QAM_FullRB




LTE B41_20 M_OBW_Mid_QPSK_FullRB




LTE B41_20 M_OBW_Mid_16QAM_FullRB




LTE B41_20 M_OBW_Mid_64QAM_FullRB

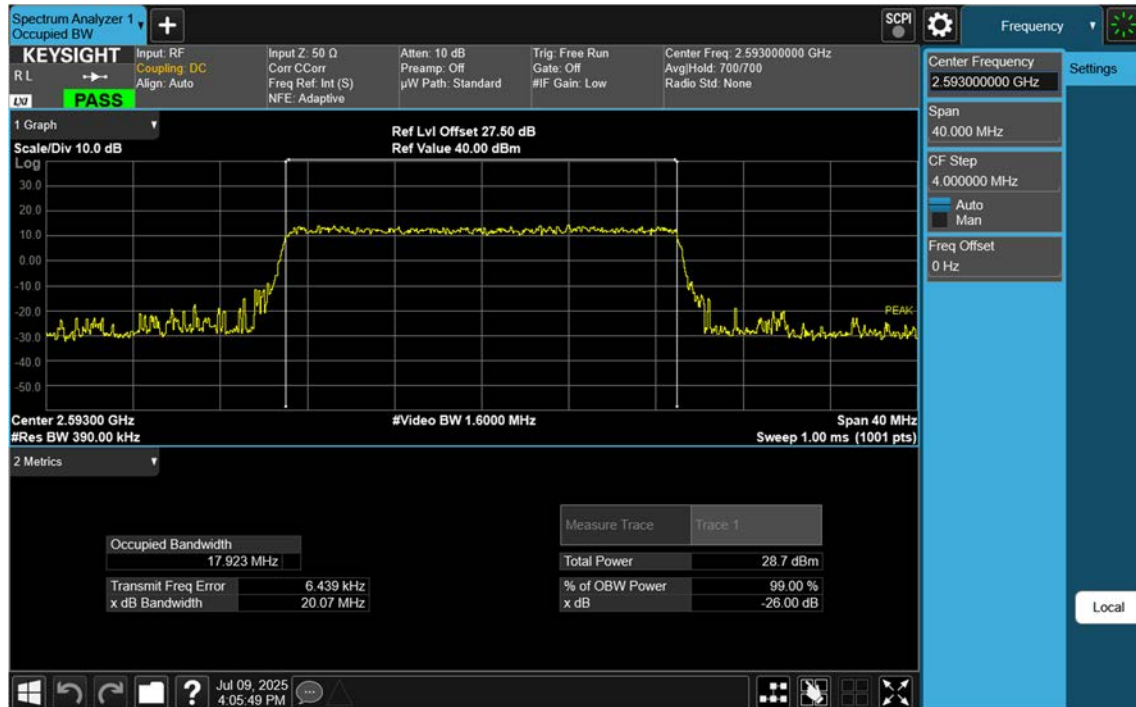


LTE B41_20 M_OBW_Mid_256QAM_FullRB

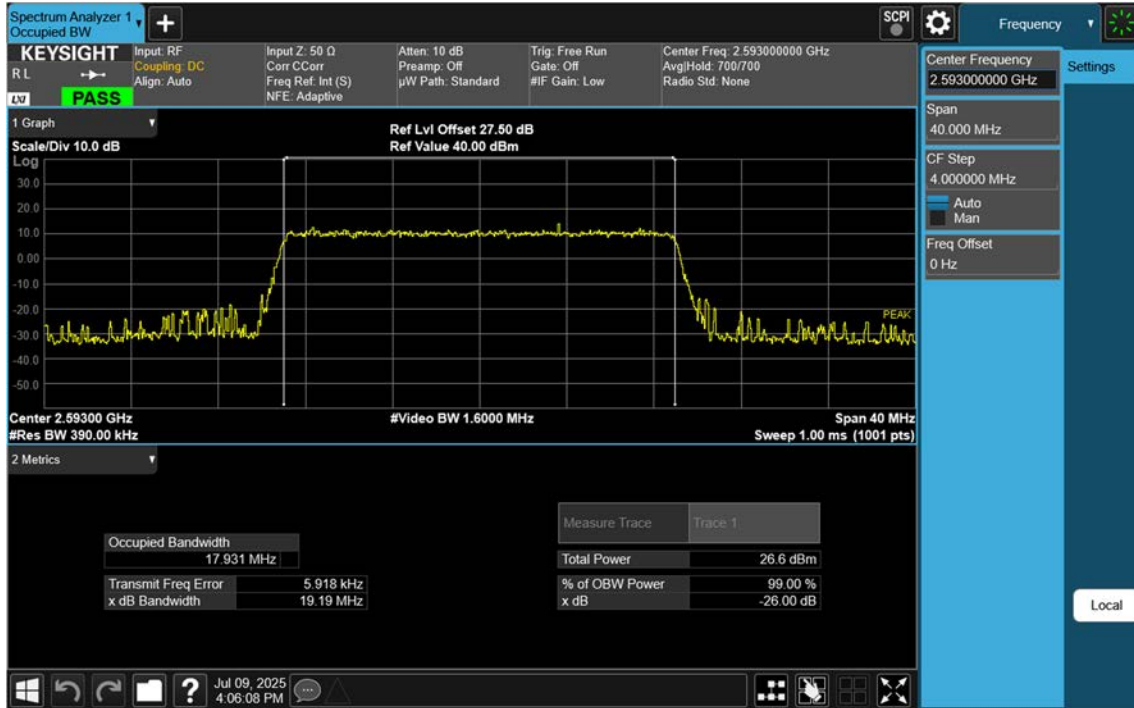


LTE B41_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

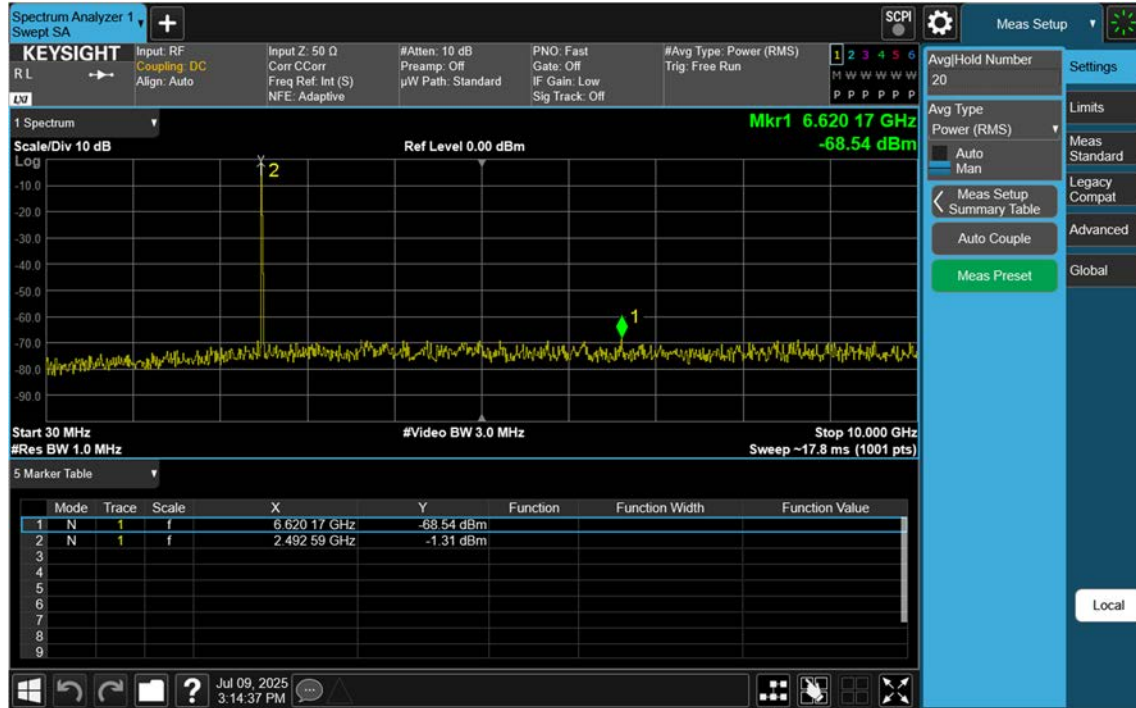


LTE B41_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

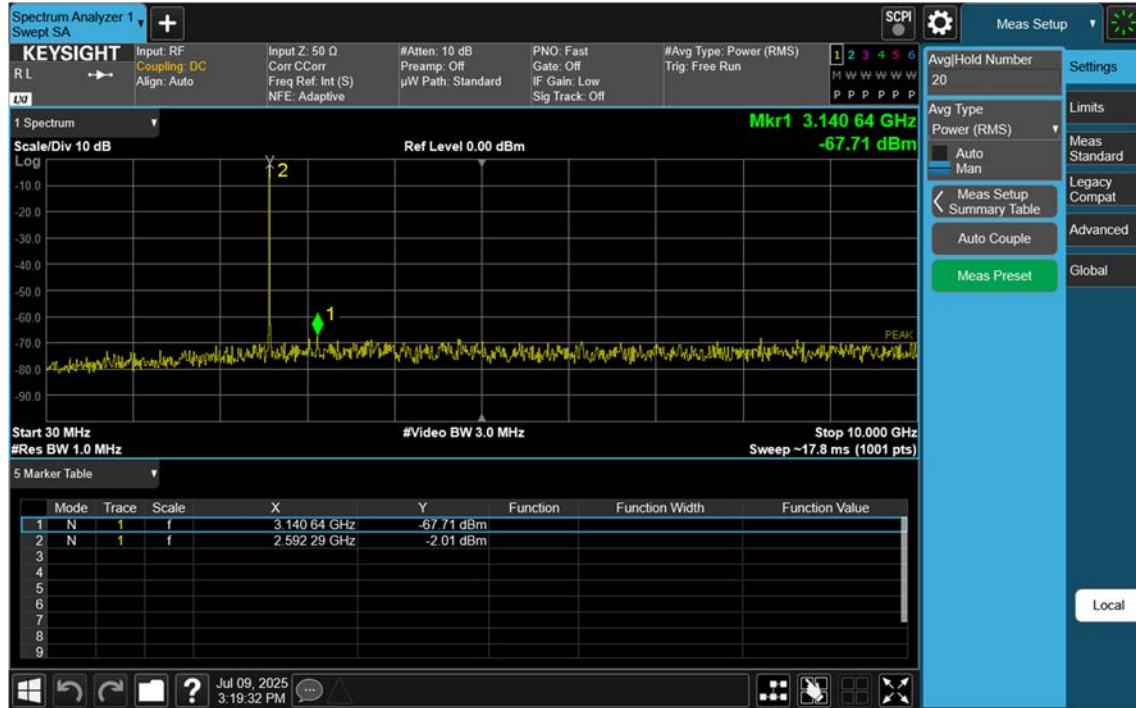


LTE B41_5 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

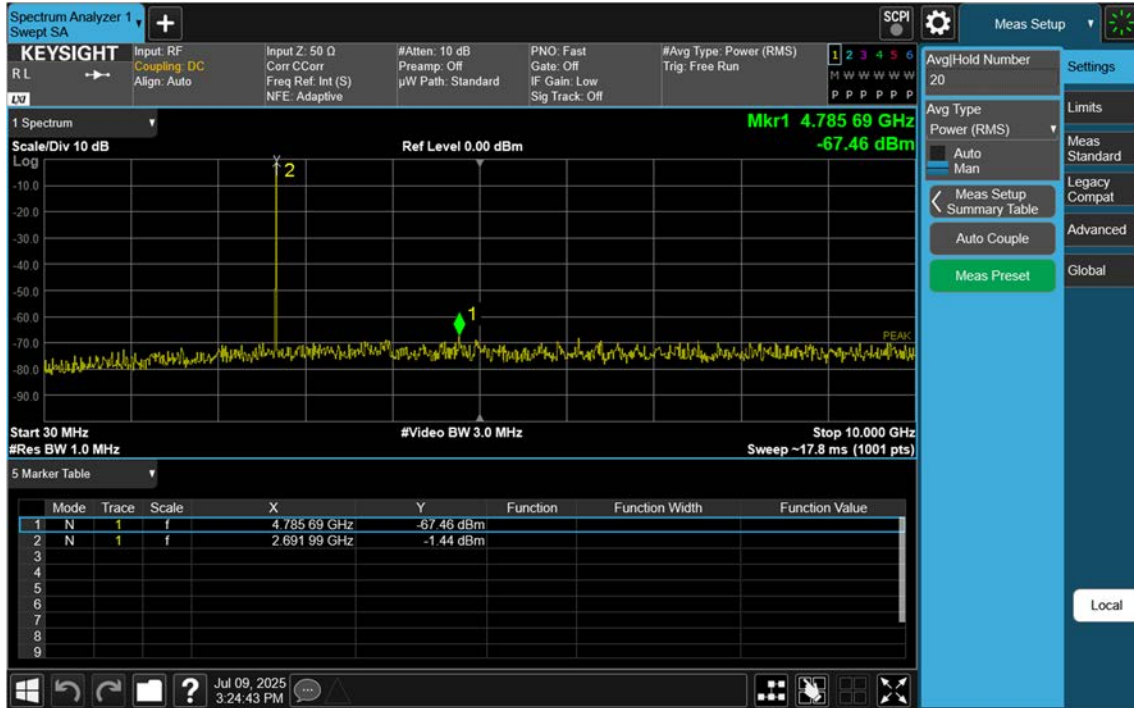


LTE B41_10 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

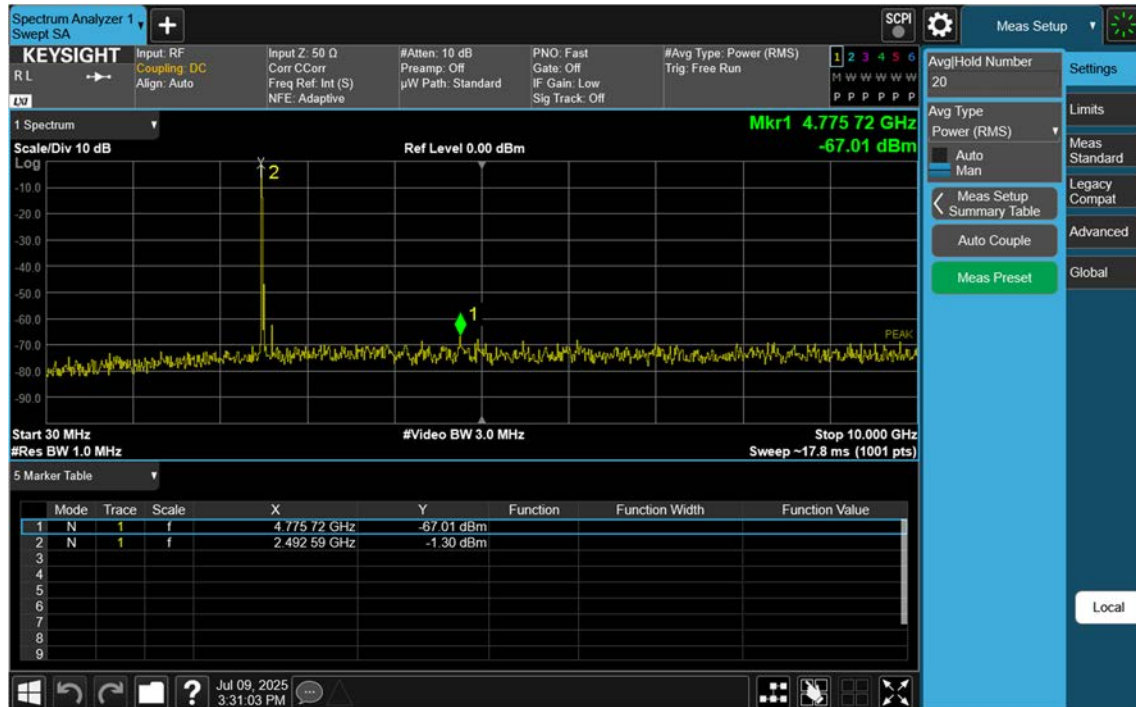


LTE B41_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

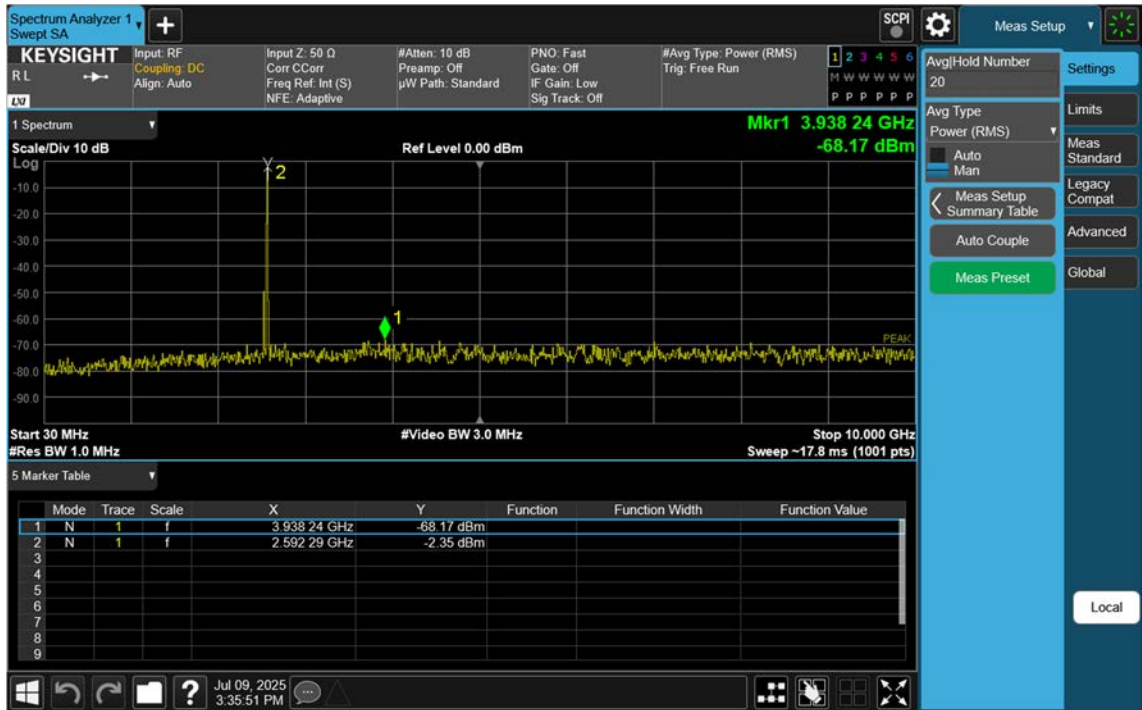


LTE B41_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

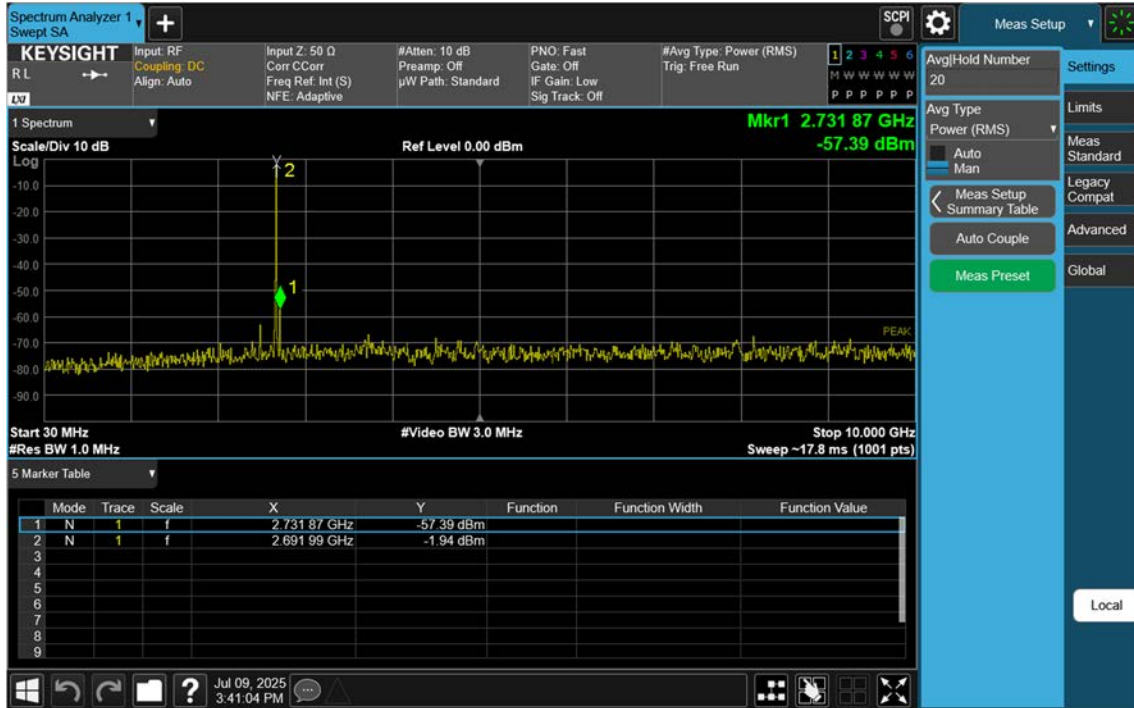


LTE B41_15 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

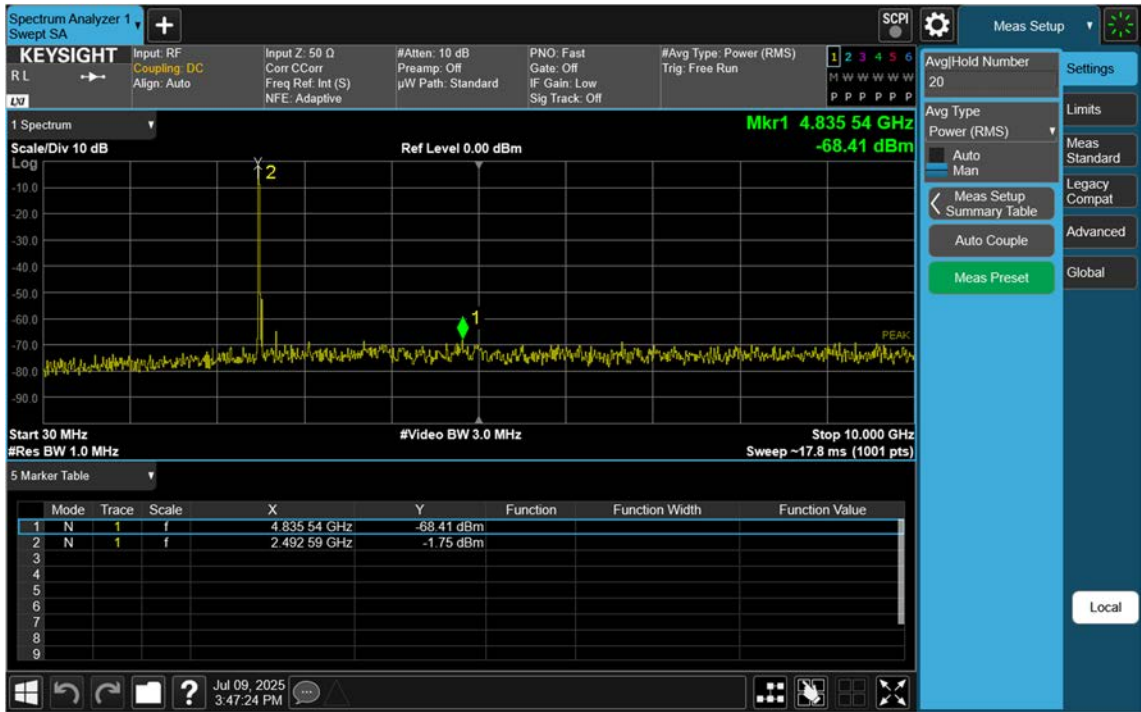


LTE B41_15 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

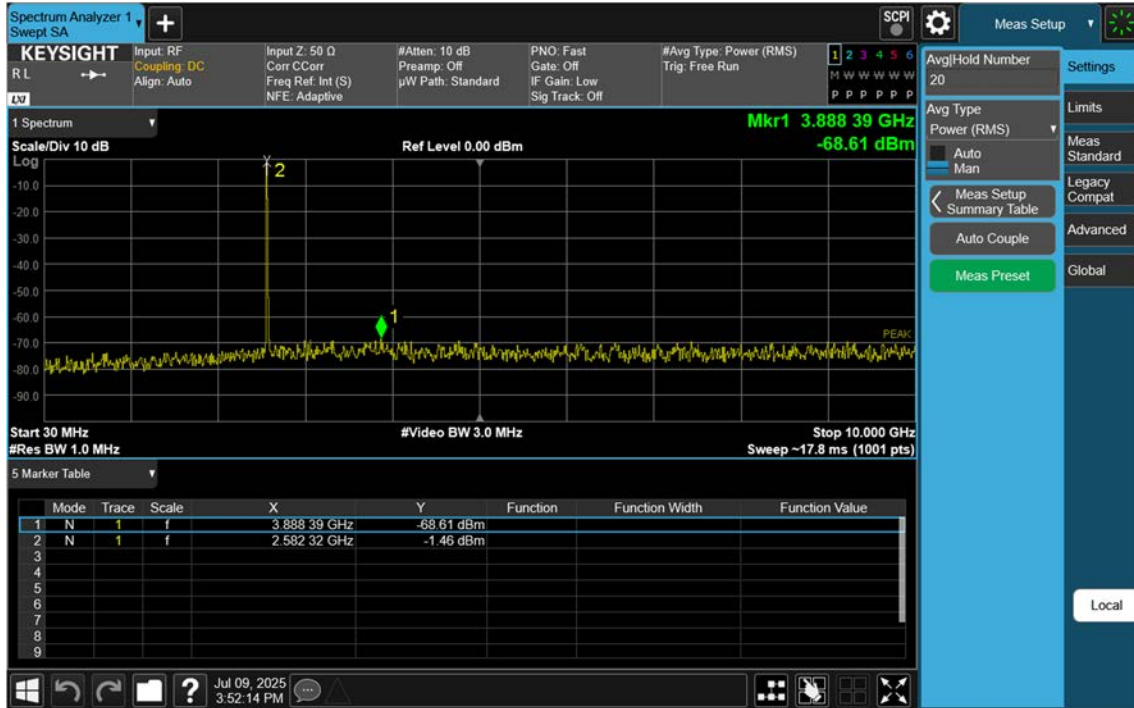


LTE B41_15 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

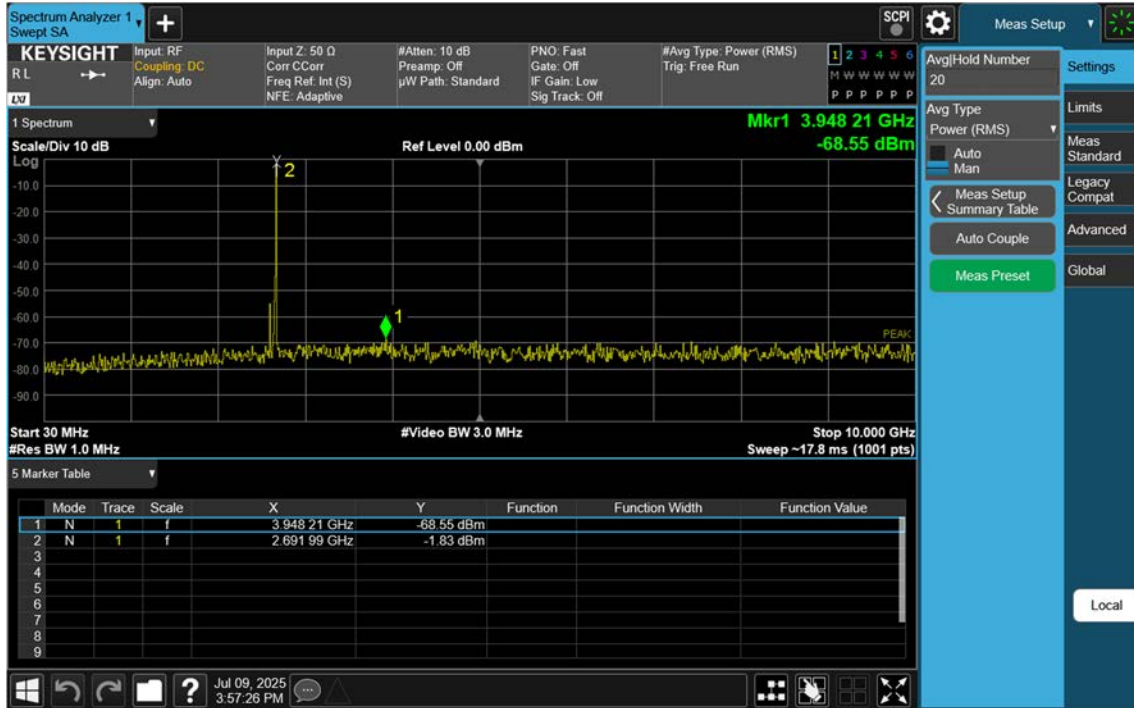


LTE B41_20 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

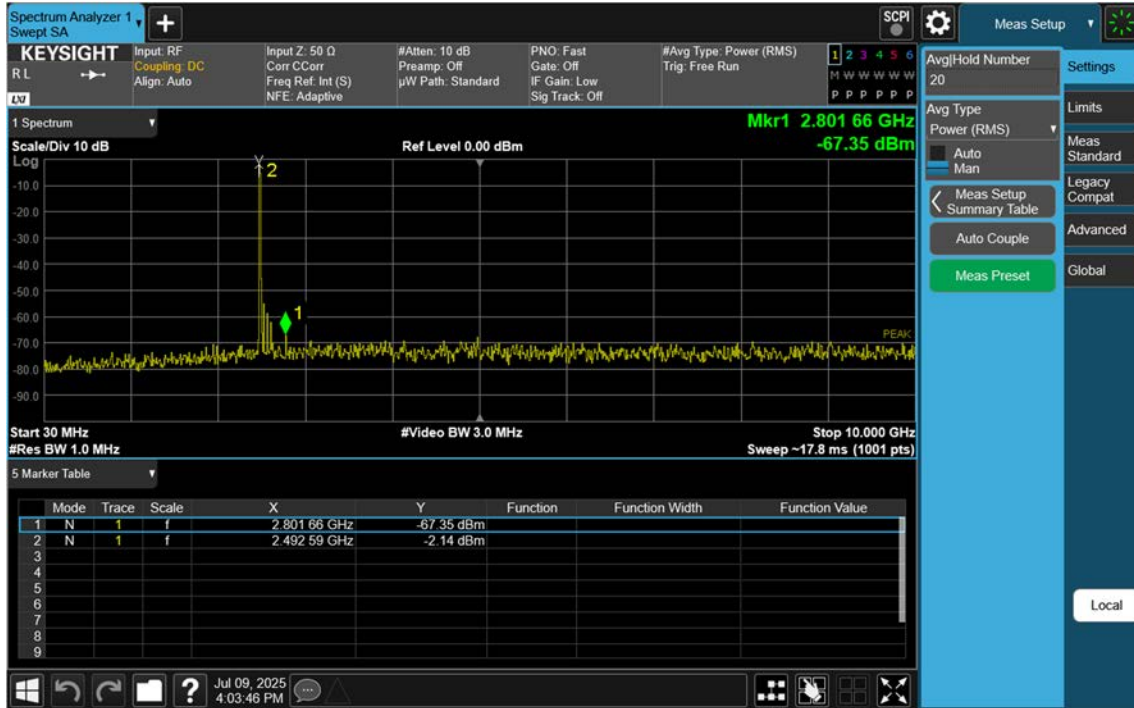


LTE B41_20 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

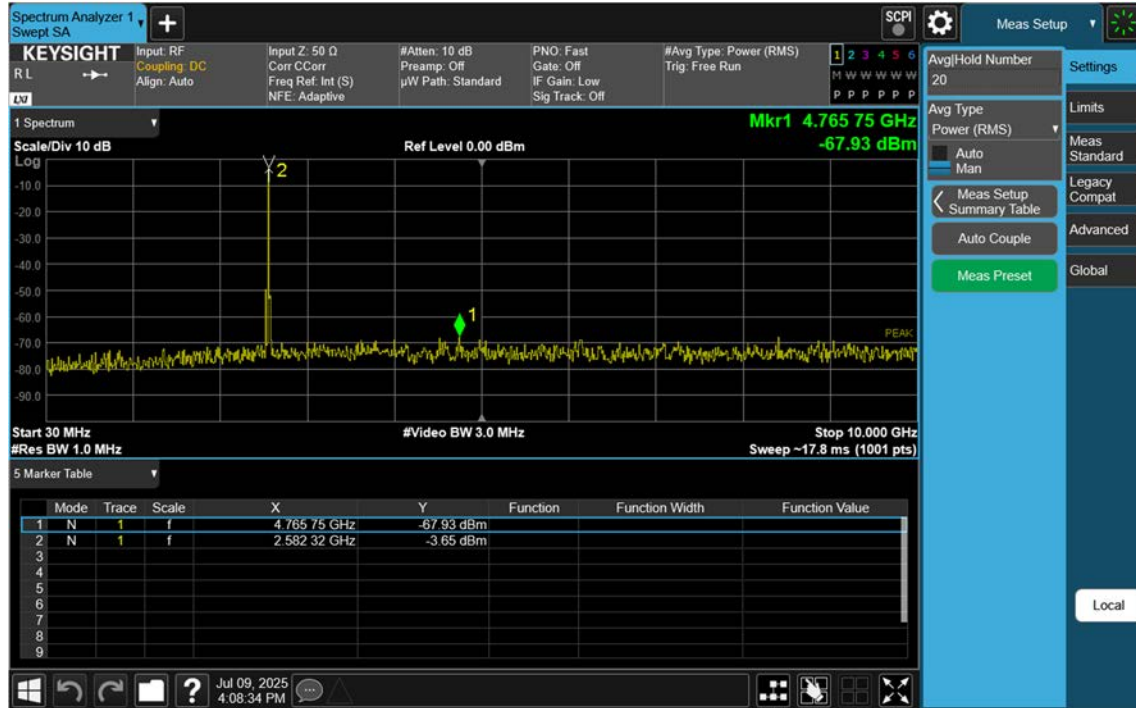


LTE B41_20 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

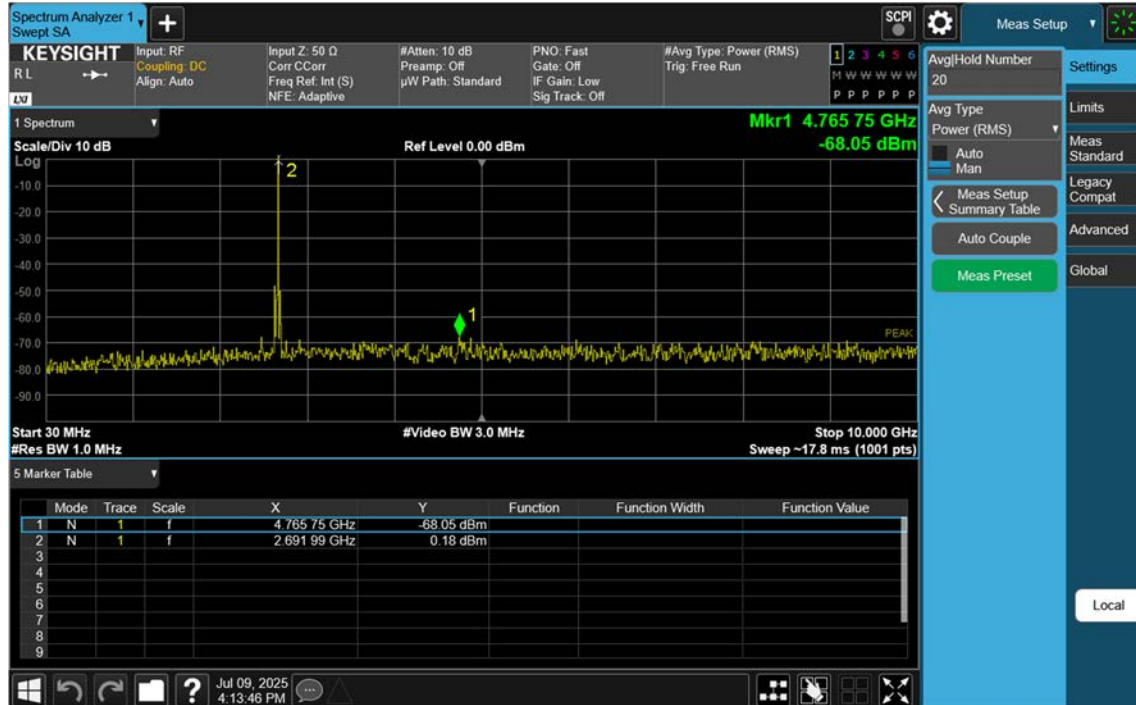


LTE B41_5 M_Conducted Spurious(Above10 G)_Low_QPSK_1RB

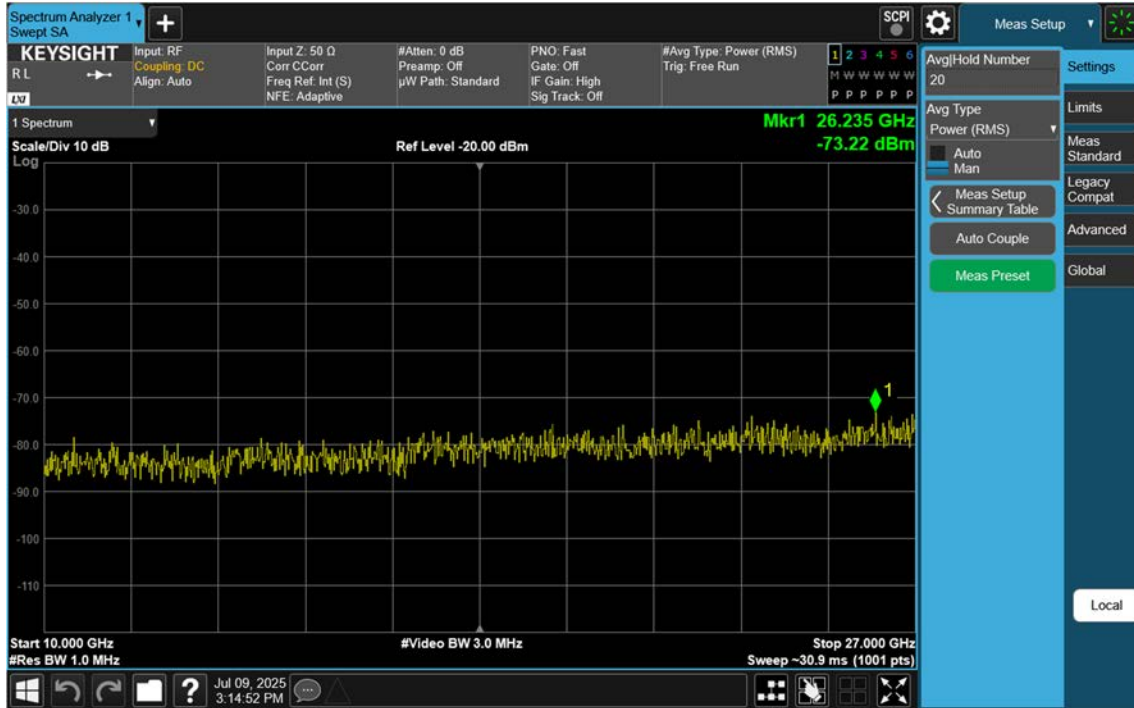


LTE B41_5 M_Conducted Spurious(Above10 G)_Mid_QPSK_1RB

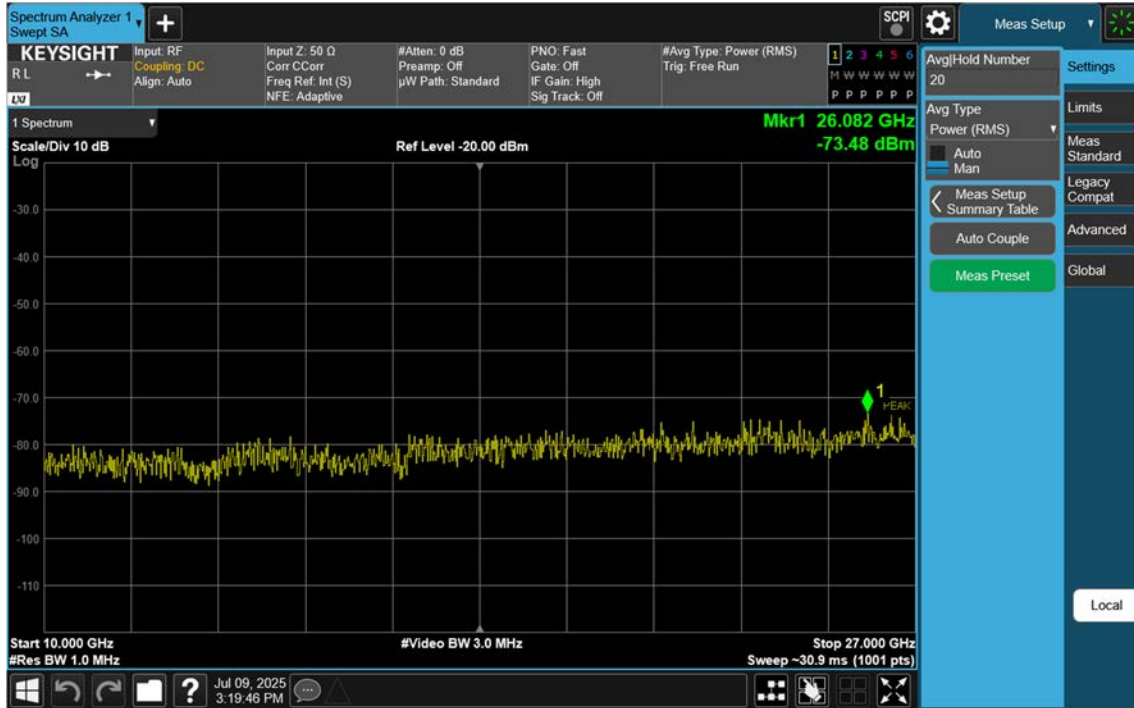


LTE B41_5 M_Conducted Spurious(Above10 G)_High_QPSK_1RB

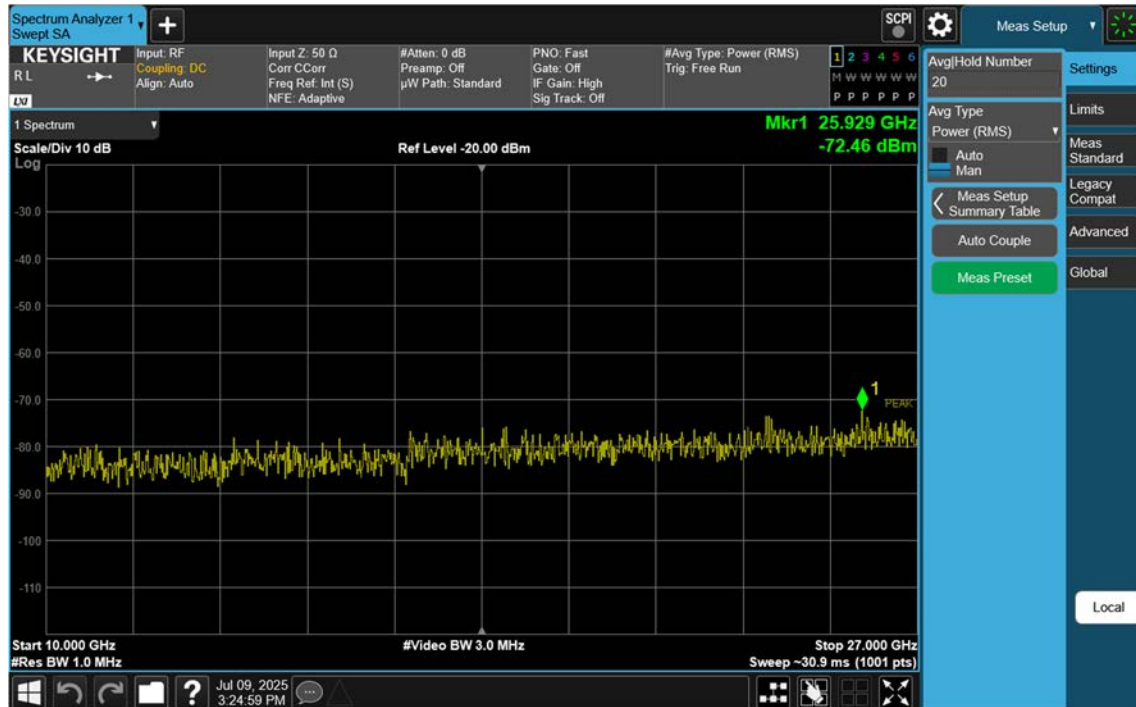


LTE B41_10 M_Conducted Spurious(Above10 G)_Low_QPSK_1RB

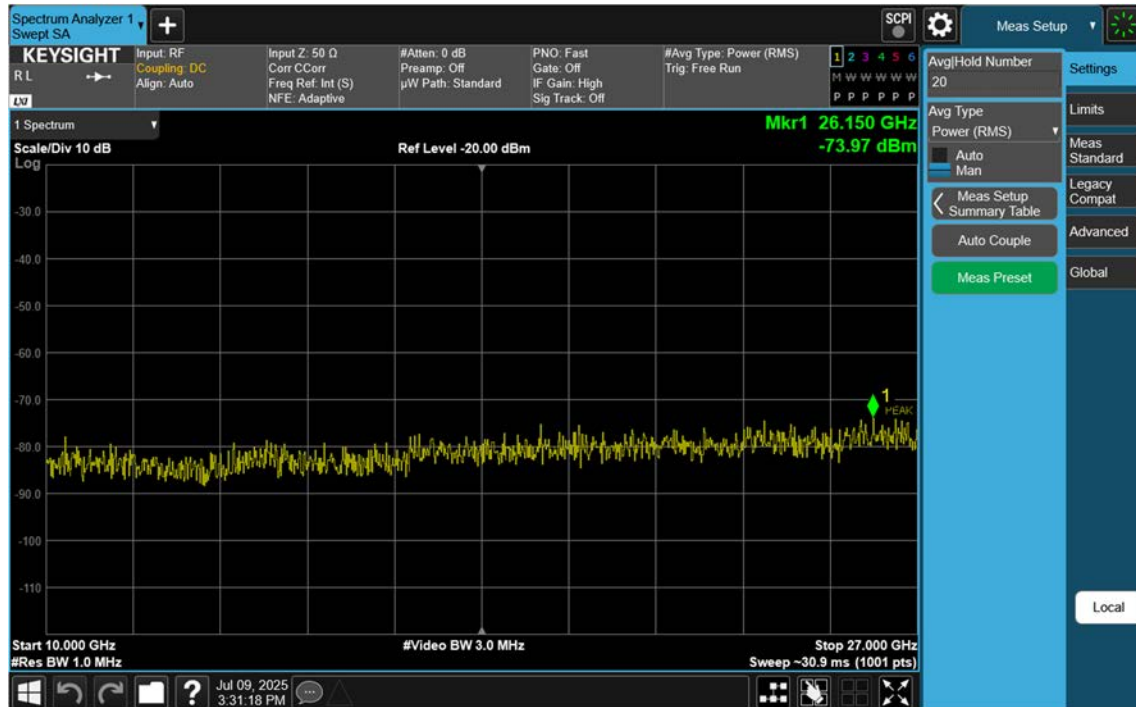


LTE B41_10 M_Conducted Spurious(Above10 G)_Mid_QPSK_1RB

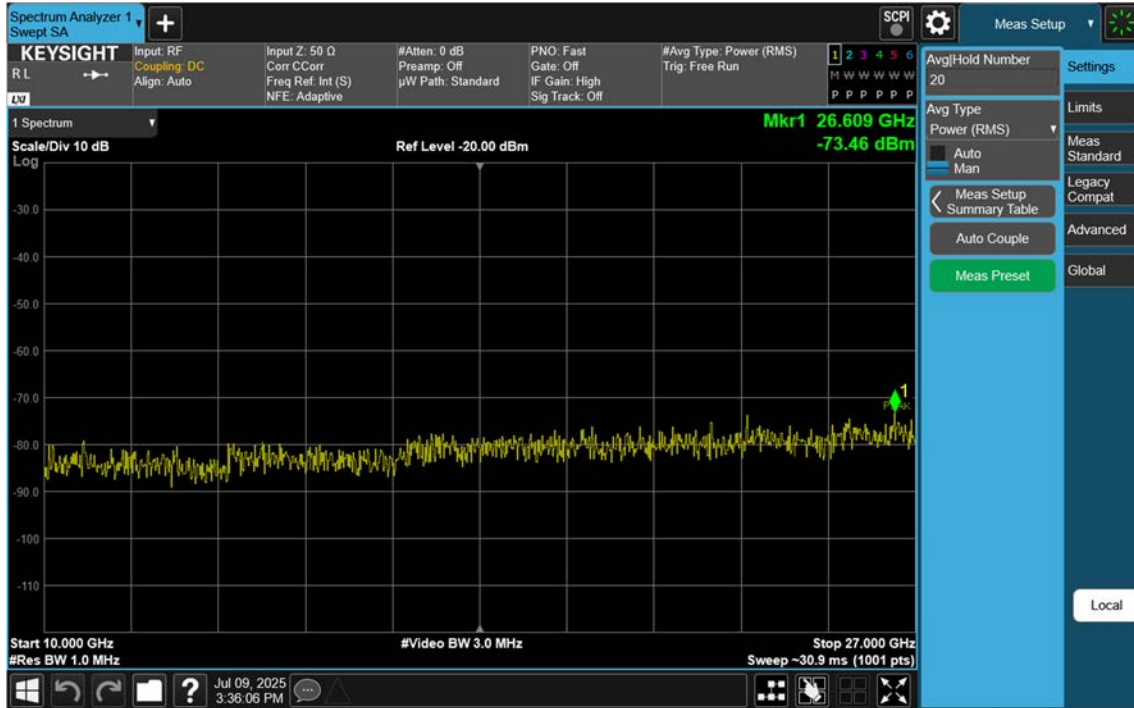


LTE B41_10 M_Conducted Spurious(Above10 G)_High_QPSK_1RB

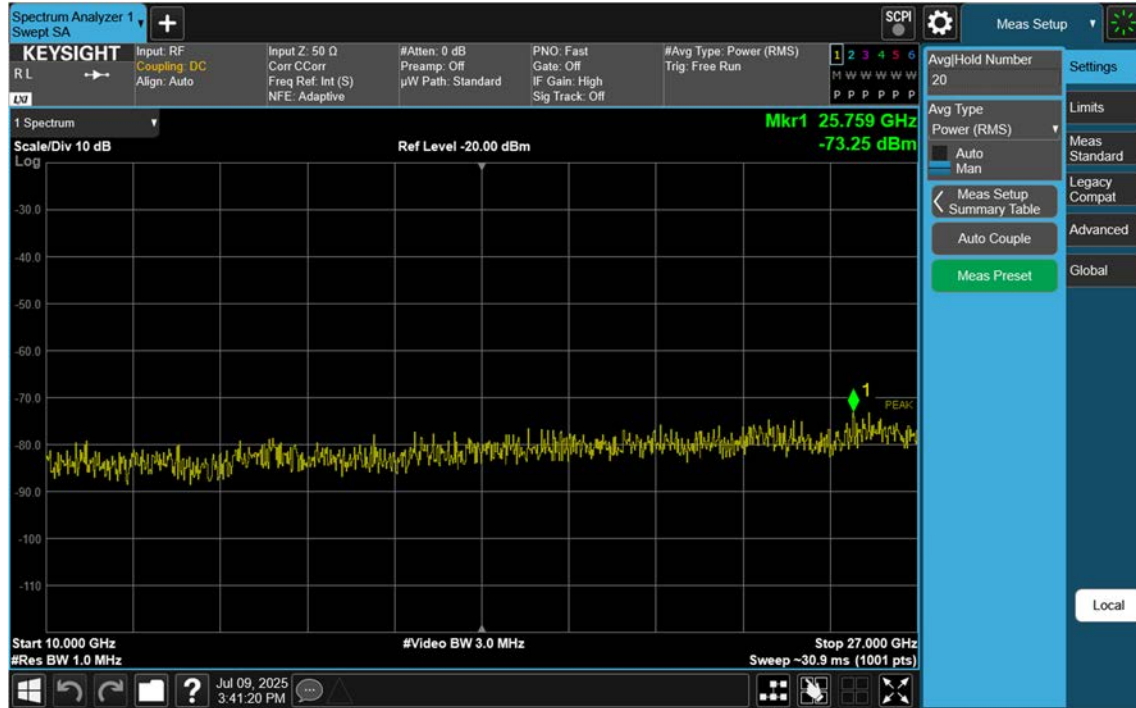


LTE B41_15 M_Conducted Spurious(Above10 G)_Low_QPSK_1RB

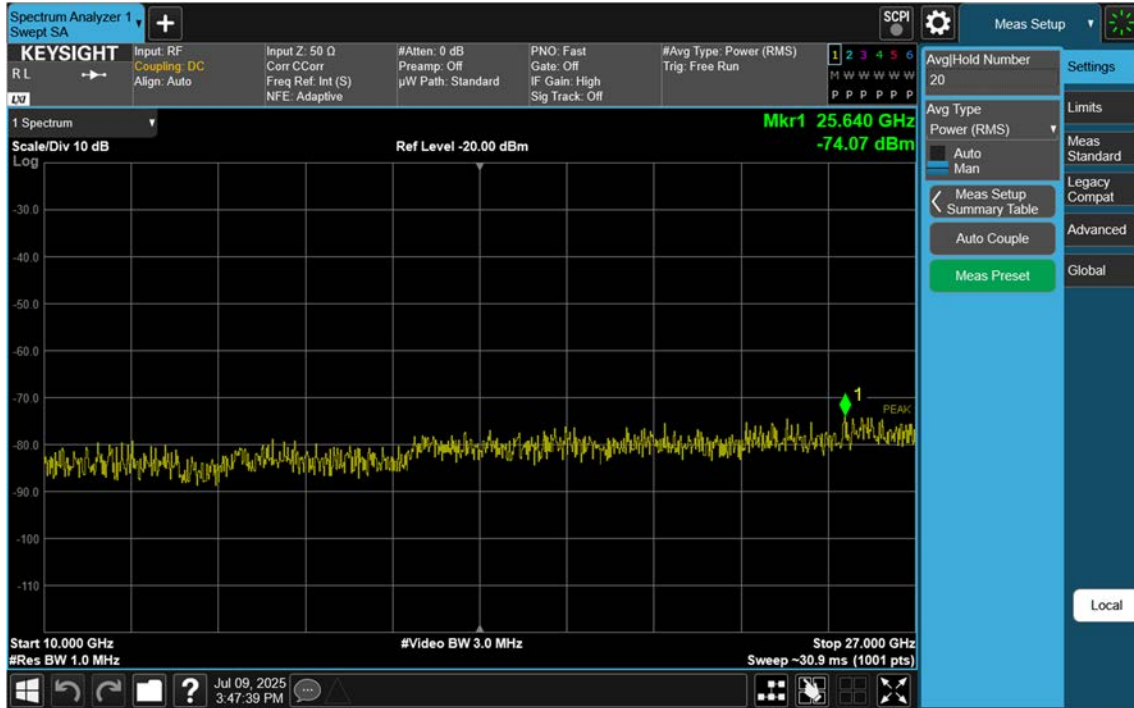


LTE B41_15 M_Conducted Spurious(Above10 G)_Mid_QPSK_1RB

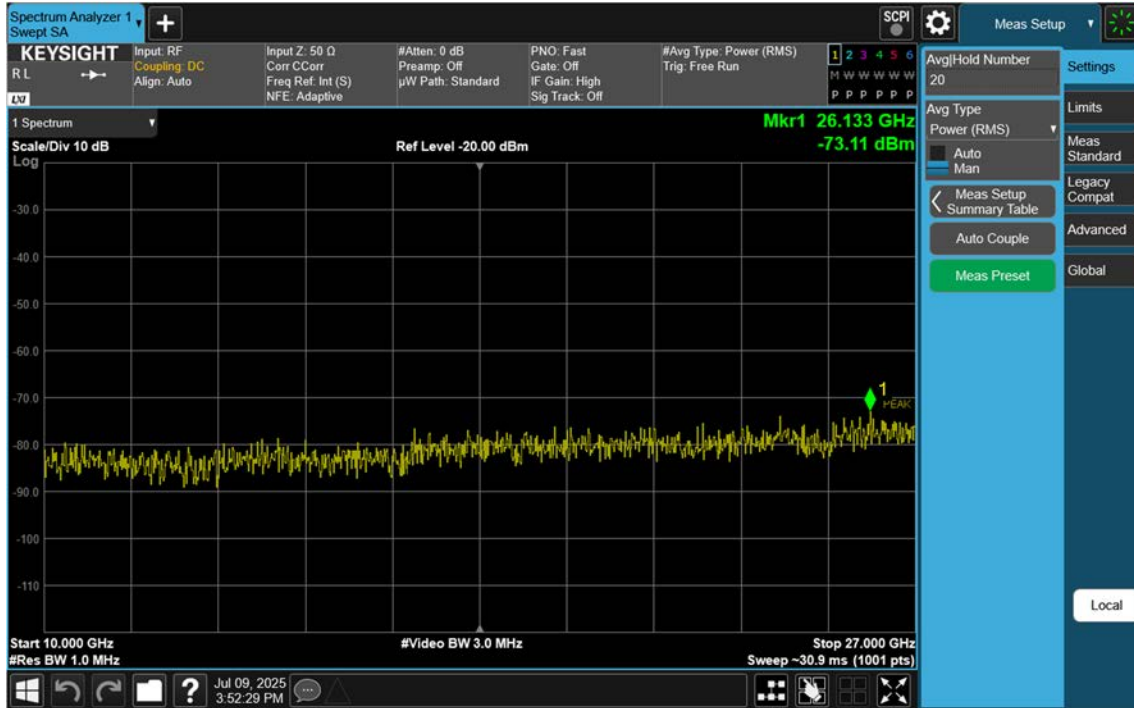


LTE B41_15 M_Conducted Spurious(Above10 G)_High_QPSK_1RB

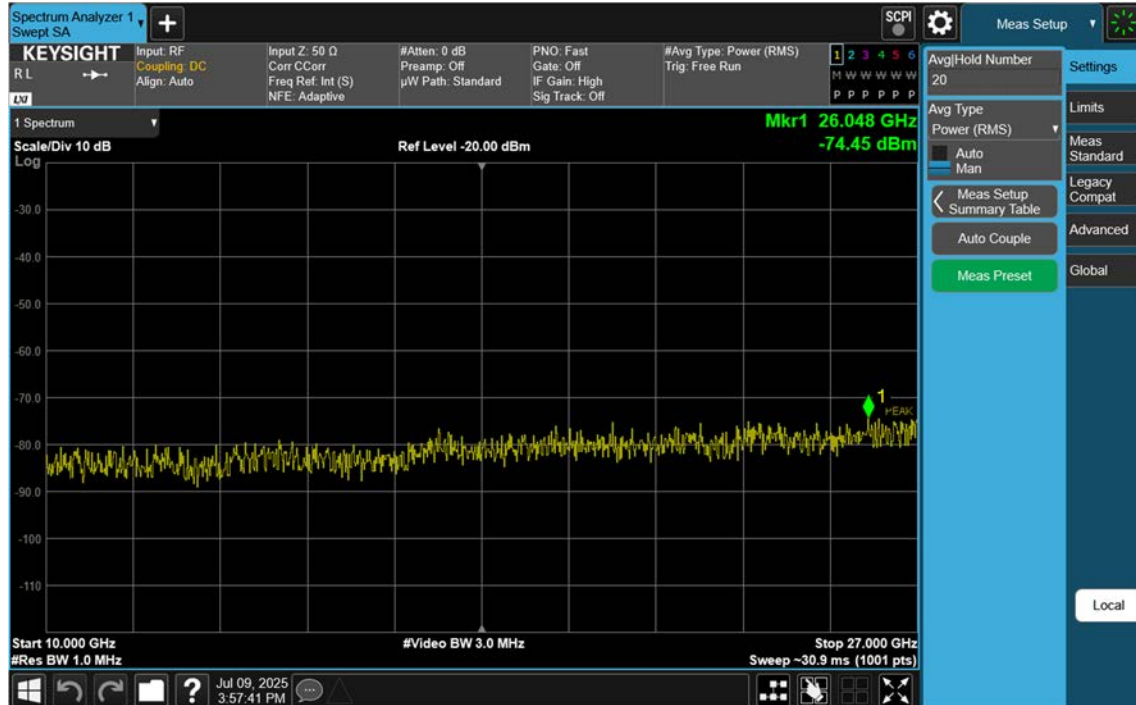


LTE B41_20 M_Conducted Spurious(Above10 G)_Low_QPSK_1RB

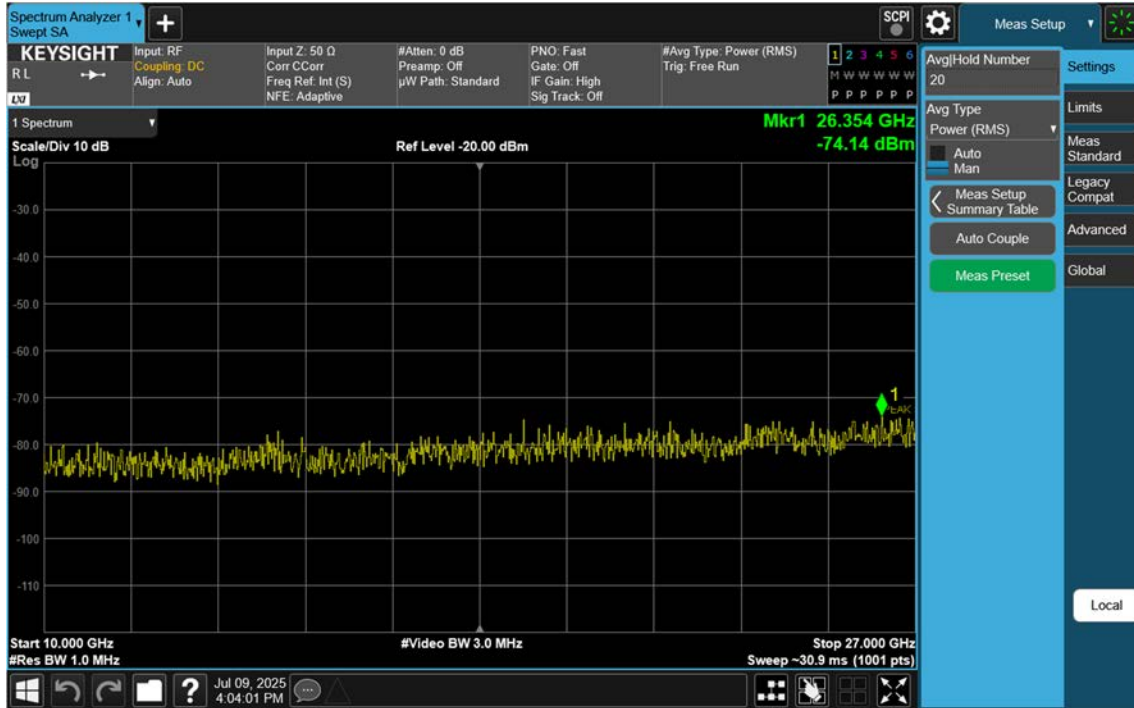


LTE B41_20 M_Conducted Spurious(Above10 G)_Mid_QPSK_1RB

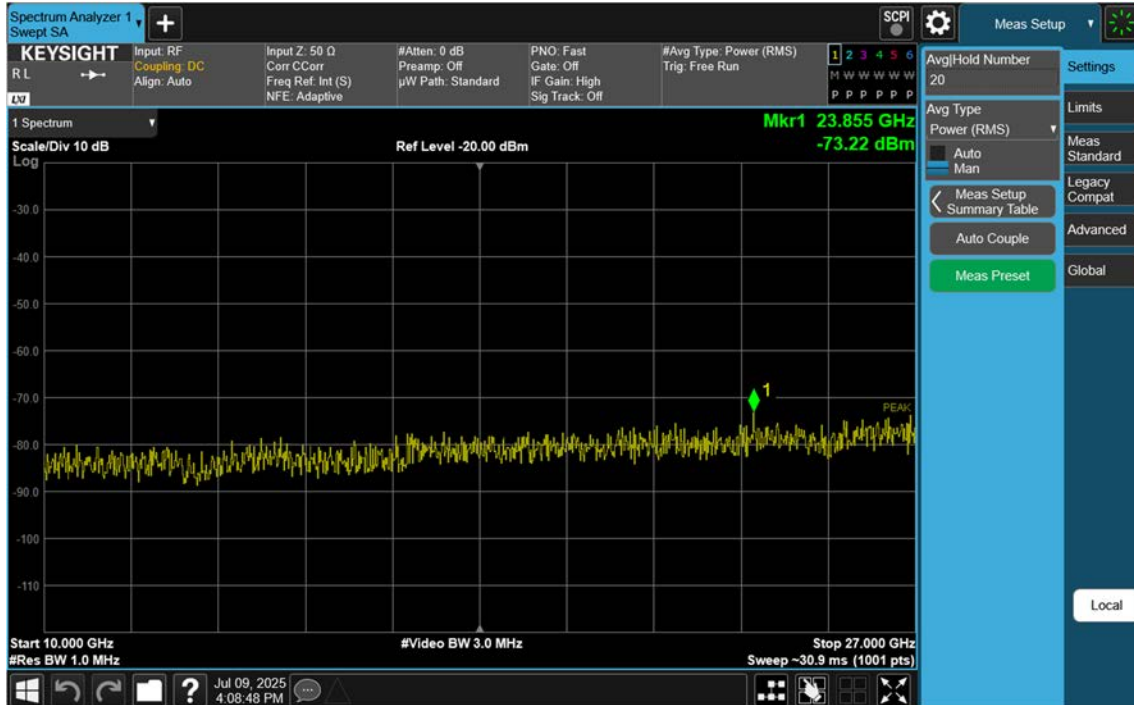

LTE B41_20 M_Conducted Spurious(Above10 G)_High_QPSK_1RB

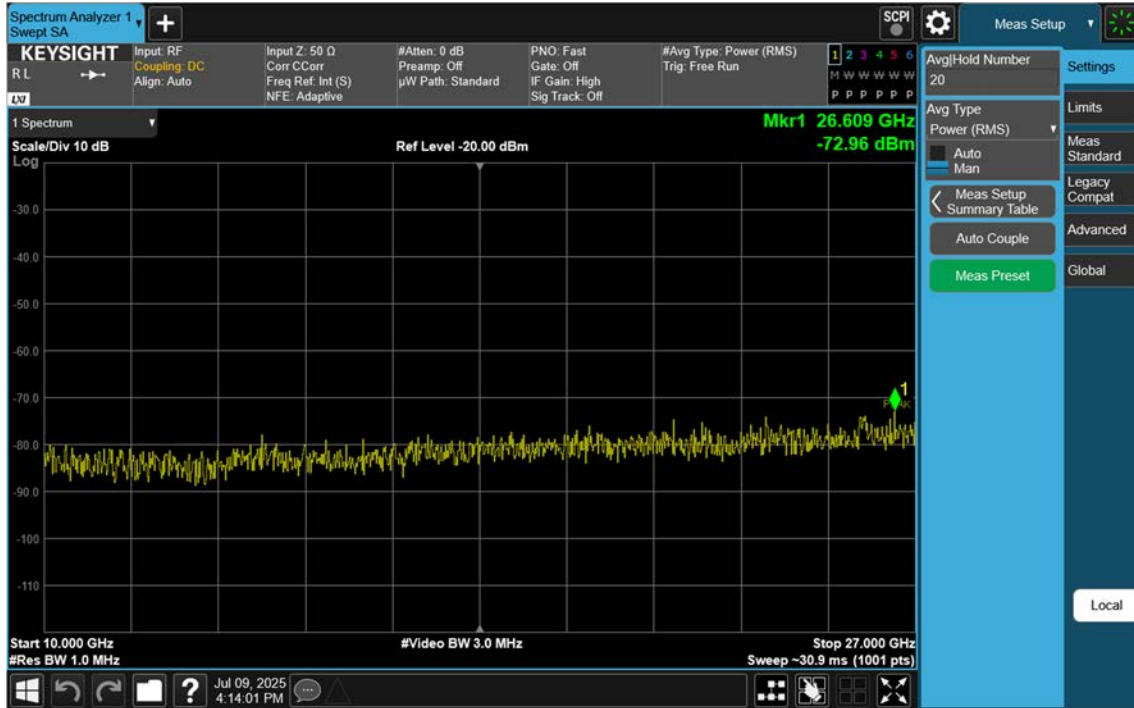

LTE B41_5 M_Channel Edge_Lower_Low_QPSK_1RB

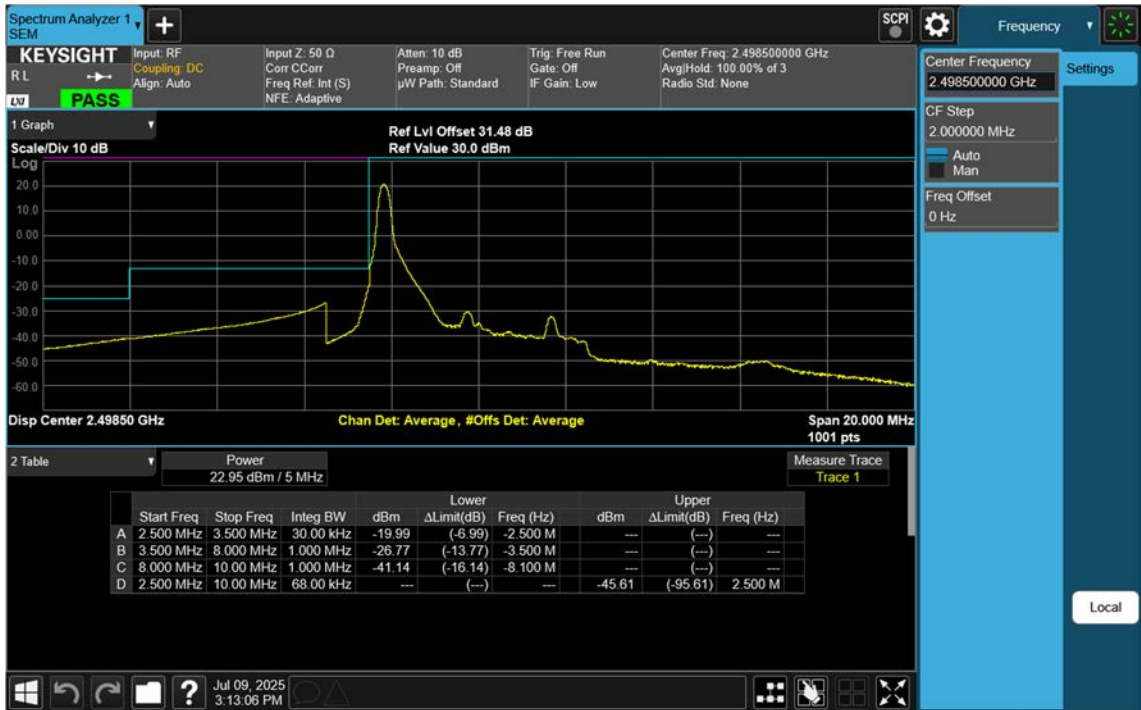

LTE B41_5 M_Channel Edge_Upper_Low_QPSK_1RB




LTE B41_5 M_Channel Edge_Lower_Low_QPSK_FullIRB




LTE B41_5 M_Channel Edge_Upper_Low_QPSK_FullIRB




LTE B41_5 M_Channel Edge_Mid_QPSK_FullRB

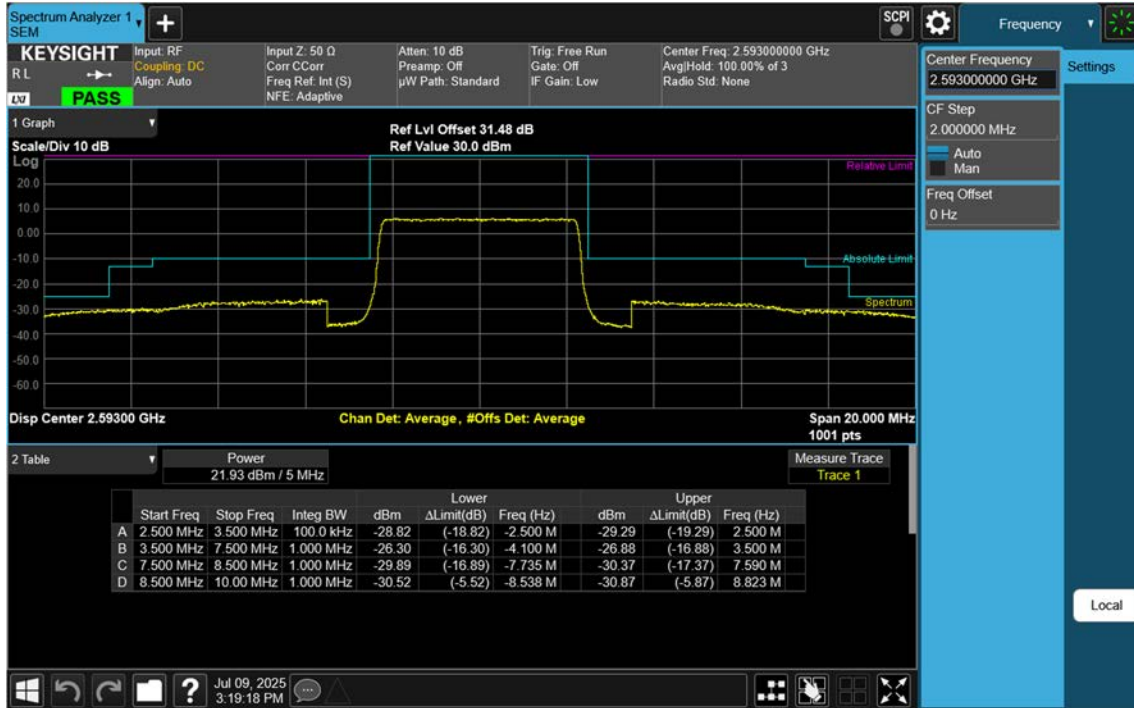

LTE B41_5 M_Channel Edge_High_QPSK_1RB

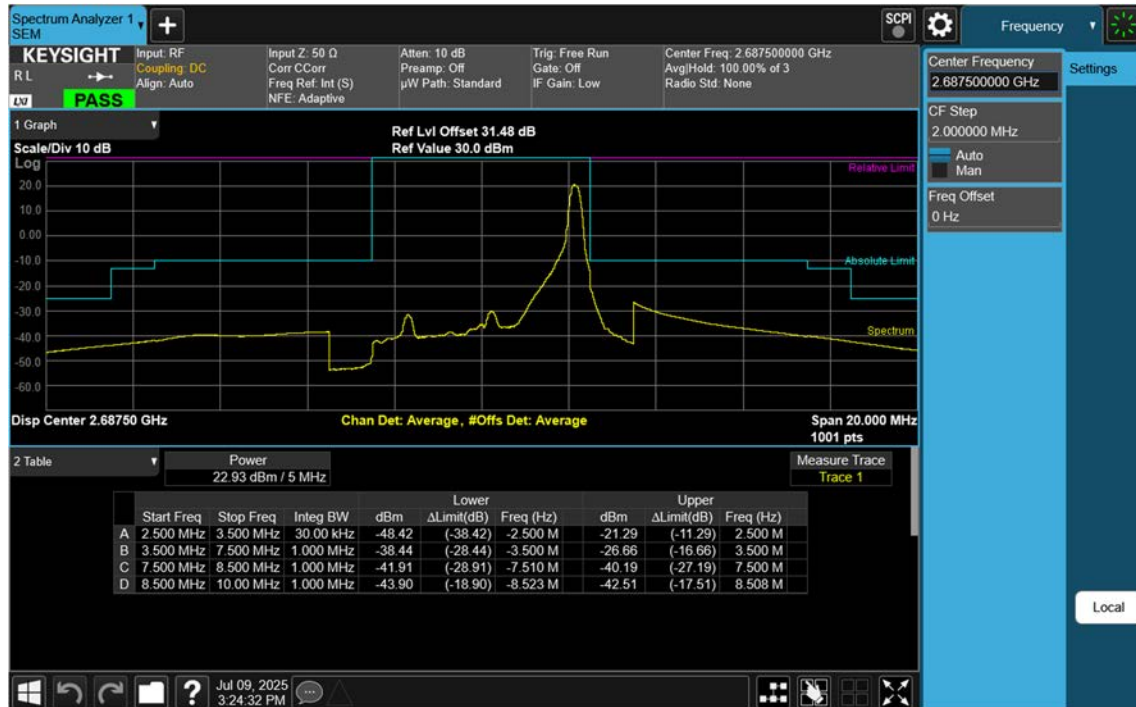

LTE B41_5 M_Channel Edge_High_QPSK_FullRB

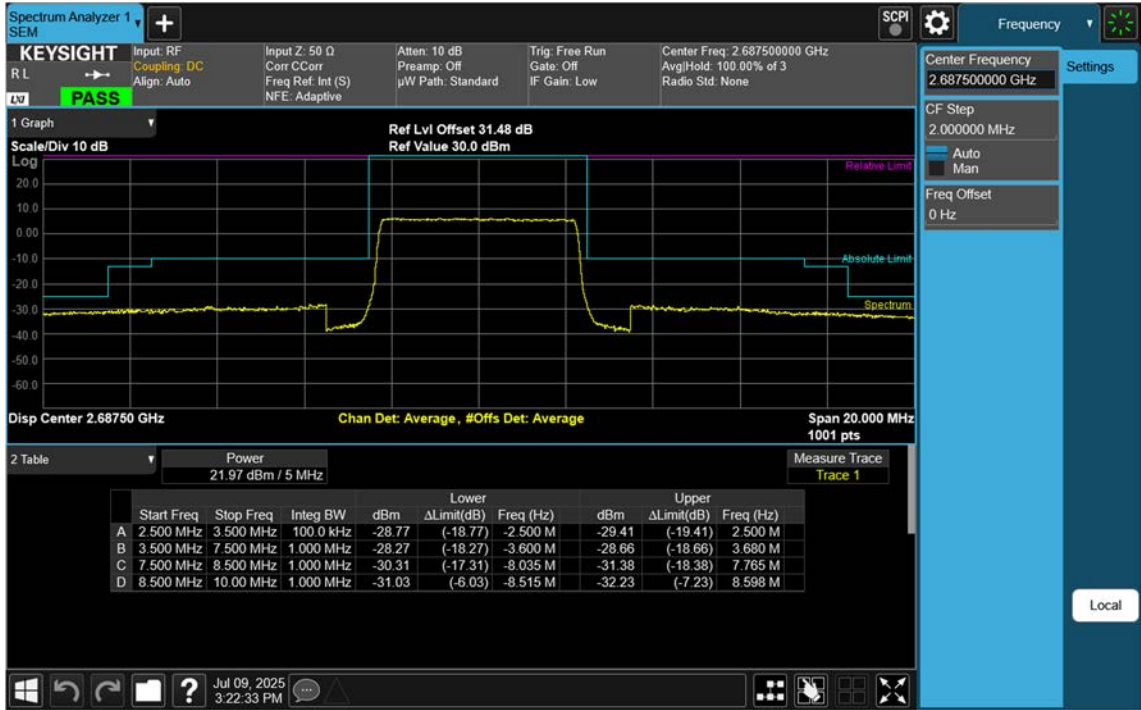

LTE B41_10 M_Channel Edge_Lower_Low_QPSK_1RB

