



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



# SAR TEST REPORT

**Applicant: NOVISOLUTIONS CIA LTDA**

Address: Ponceano N73 y Mariano Paredes QUITO ECUADOR Ecuador

**FCC ID: 2BO97ENVNOTE**

**Product Name: smartphone**

**Standard(s): 47 CFR Part 2(2.1093)**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: 2503S14680E-20**

**Date Of Issue: 2025/05/13**

**Reviewed By: Ken Zong** *Ken Zong*

Title: SAR Engineer

**Approved By: Karl Gong** *Karl Gong*

Title: SAR Engineer

**Test Laboratory:** **China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China

Tel: +86-769-83085888

[www.cctt.com.cn](http://www.cctt.com.cn)

## SAR TEST RESULT SUMMARY

Mode		Max. Reported SAR Level(s) (W/kg)	Limit (W/kg)
GSM 850	1g Head SAR	<b>0.24</b>	1.6
	1g Body SAR	0.39	
GSM 1900	1g Head SAR	0.18	1.6
	1g Body SAR	0.63	
WCDMA Band 2	1g Head SAR	0.19	1.6
	1g Body SAR	<b>1.18</b>	
WCDMA Band 5	1g Head SAR	0.15	1.6
	1g Body SAR	0.39	
LTE Band 2	1g Head SAR	0.19	1.6
	1g Body SAR	0.96	
LTE Band 4	1g Head SAR	0.04	1.6
	1g Body SAR	0.45	
WIFI 2.4G	1g Head SAR	<b>0.79</b>	1.6
	1g Body SAR	0.22	

Maximum Simultaneous Transmission SAR				
Items		Highest Reported SAR(W/kg)	Limit (W/kg)	
Simultaneous	1g Head SAR	1.03	1.6	
	1g Body SAR	1.40		
	1g Body SAR	1.40(Hotspot)		
EUT Received Date:	2025/04/10			
Tested Date:	2025/04/16~2025/04/19			
Tested Result:	PASS			

### The Dipole calibration methods and procedures used were as detailed in:

FCC KDB Publication Number: "KDB865664 D01 SAR Measurement 100 MHz to 6 GHz"

1. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20 dB minimum return-loss requirement.
2. The measurement of real or imaginary parts of impedance does not deviate more than  $5\Omega$  from the previous measurement.

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. :442868, the FCC Designation No. : CN1314.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>6</b>
<b>1. GENERAL INFORMATION .....</b>	<b>7</b>
1.1 PRODUCT DESCRIPTION FOR DEVICE UNDER TEST (EUT).....	7
1.2 TEST SPECIFICATION, METHODS AND PROCEDURES.....	8
1.3 SAR LIMITS .....	9
1.4 FACILITIES.....	10
<b>2. SAR MEASUREMENTS SYSTEM .....</b>	<b>11</b>
<b>3. EQUIPMENT LIST AND CALIBRATION .....</b>	<b>18</b>
3.1 EQUIPMENTS LIST & CALIBRATION INFORMATION .....	18
<b>4. SAR MEASUREMENT SYSTEM VERIFICATION .....</b>	<b>19</b>
4.1 LIQUID VERIFICATION .....	19
4.2 LIQUID VERIFICATION RESULTS.....	19
4.3 SYSTEM ACCURACY VERIFICATION .....	21
4.4 SYSTEM ACCURACY CHECK RESULTS.....	21
4.5 SAR SYSTEM VALIDATION DATA.....	22
<b>5. EUT TEST STRATEGY AND METHODOLOGY .....</b>	<b>26</b>
5.1 TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR.....	26
5.2 CHEEK/TOUCH POSITION.....	27
5.3 EAR/TILT POSITION .....	27
5.4 TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	28
5.5 TEST DISTANCE FOR SAR EVALUATION .....	29
5.6 SAR EVALUATION PROCEDURE.....	29
<b>6. CONDUCTED OUTPUT POWER MEASUREMENT .....</b>	<b>30</b>
6.1 TEST PROCEDURE.....	30
6.2 DESCRIPTION OF TEST CONFIGURATION.....	31
6.3 MAXIMUM TARGET OUTPUT POWER .....	35
6.4 TEST RESULTS: .....	36
<b>7. Standalone SAR test exclusion considerations .....</b>	<b>45</b>
7.1 ANTENNAS LOCATION: .....	45
7.2 ANTENNA DISTANCE TO EDGE .....	45
7.3 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....	45
7.4 STANDALONE SAR ESTIMATION:.....	46
7.5 SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT.....	46

<b>8. SAR MEASUREMENT RESULTS .....</b>	<b>47</b>
<b>8.1 SAR TEST DATA .....</b>	<b>47</b>
<b>9. Measurement Variability .....</b>	<b>56</b>
<b>10. DUT HOLDER PERTURBATIONS .....</b>	<b>57</b>
<b>11. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION .....</b>	<b>58</b>
<b>11.1 SIMULTANEOUS TRANSMISSION: .....</b>	<b>58</b>
<b>11.2 SIMULTANEOUS SAR TEST EXCLUSION CONSIDERATIONS: .....</b>	<b>58</b>
<b>12. SAR Plots .....</b>	<b>59</b>
<b>APPENDIX A MEASUREMENT UNCERTAINTY .....</b>	<b>60</b>
<b>APPENDIX B EUT TEST POSITION PHOTOS.....</b>	<b>61</b>
<b>APPENDIX C CALIBRATION CERTIFICATES .....</b>	<b>62</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2503S14680E-20	Original Report	2025/05/13

## 1. GENERAL INFORMATION

### 1.1 Product Description for Device under Test (EUT)

<b>EUT Name:</b>	smartphone
<b>EUT Model:</b>	ENV NOTE X
<b>Multiple Models:</b>	NA
<b>Device Type:</b>	Portable
<b>Exposure Category:</b>	Population / Uncontrolled
<b>Antenna Type(s):</b>	Internal Antenna
<b>Body-Worn Accessories:</b>	None
<b>Proximity Sensor:</b>	None
<b>Carrier Aggregation:</b>	None
<b>Operation modes:</b>	GSM Voice, GPRS/EDGE Data, WCDMA( R99 (Voice+Data), HSUPA/HSDPA), FDD-LTE, WLAN, Bluetooth
<b>Frequency Band:</b>	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755MHz(TX) ; 2110-2155 MHz(RX) WLAN 2.4G: 2412-2462 MHz (TX/RX) Bluetooth(BDR/EDR): 2402-2480MHz(TX/RX) BLE_1M: 2402-2480MHz(TX/RX)
<b>Dimensions (L*W*H):</b>	170mm (L) *77mm (W) *8mm (H)
<b>Rated Input Voltage:</b>	DC3.84V from Rechargeable Battery
<b>Sample Number:</b>	31B2-1
<b>Normal Operation:</b>	Head and Body

## **1.2 Test Specification, Methods and Procedures**

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528-2013, the following FCC Published RF exposure KDB procedures:

KDB 447498 D01 General RF Exposure Guidance v06  
KDB 648474 D04 Handset SAR v01r03  
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04  
KDB 865664 D02 RF Exposure Reporting v01r02  
KDB 941225 D01 3G SAR Procedures v03r01  
KDB 941225 D05 SAR for LTE Devices v02r05  
KDB 941225 D06 Hotspot Mode v02r01  
KDB 248227 D01 802.11 Wi-Fi SAR v02r02

TCB Workshop April 2019: RF Exposure Procedures

### 1.3 SAR Limits

#### FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	<b>1.6</b>	8
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4	20

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that maybe incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) applied to the EUT.

## 1.4 FACILITIES

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The test sites and measurement facilities used to collect data are located at:

<input checked="" type="checkbox"/> SAR Lab 1	<input type="checkbox"/> SAR Lab 2
---	------------------------------------


## 2. SAR MEASUREMENTSYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

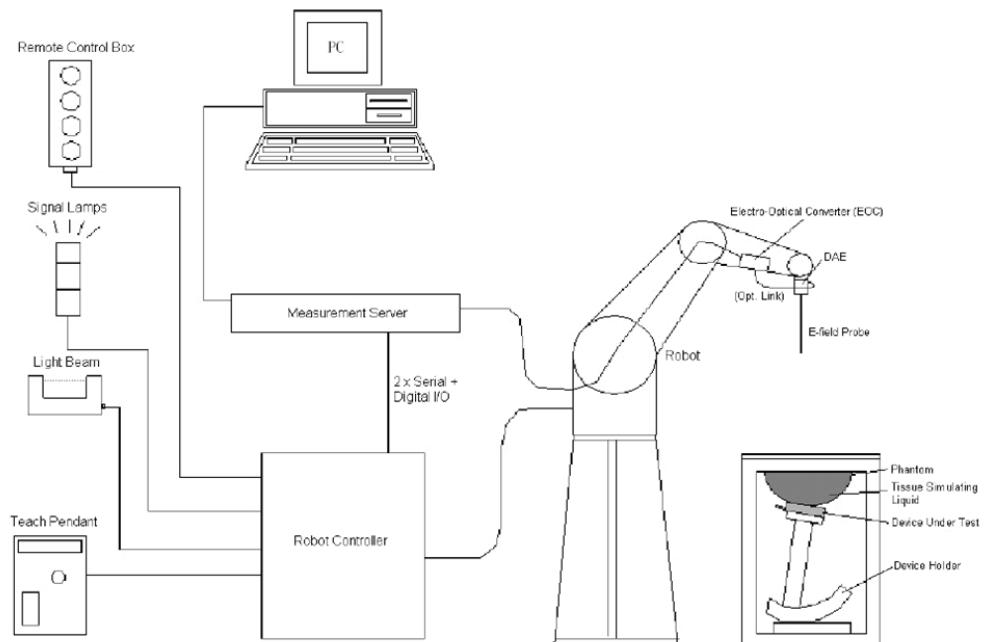

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **DASY5 Measurement Server**

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

**ES3DV3 E-Field Probes**

<b>Frequency</b>	10 MHz - 4 GHz Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	5 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 2.0 mm
<b>Application</b>	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
<b>Compatibility</b>	DASY3, DASY4, DASY52, DASY6, DASY8 SAR, EASY6, EASY4/MRI

### SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- Left Head
- Right Head
- Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H).

For easy dislocation these tables have fork lift cut outs at the bottom. The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible.

Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

### Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

## SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm<sup>2</sup> step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**Step 3: Zoom Scan (Cube Scan Averaging)**

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 5mm, with the side length of the 10g cube is 21.5mm.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n > 1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

\* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

**Step 4: Power Drift Measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

**Tissue Dielectric Parameters for Head and Body Phantoms**

The head tissue dielectric parameters recommended by the IEEE 1528-2013

**Recommended Tissue Dielectric Parameters for Head liquid**

**Table 3—Target dielectric properties of head tissue-equivalent material in the 300 MHz to 6000 MHz frequency range**

Frequency (MHz)	Relative permittivity ( $\epsilon'_r$ )	Conductivity ( $\sigma$ ) (S/m)
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1500	40.4	1.23
1640	40.2	1.31
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48

NOTE—For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.


### 3. EQUIPMENT LIST AND CALIBRATION

#### 3.1 Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.10	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 4.5.12	1567	NCR	NCR
Data Acquisition Electronics	DAE4	1354	2024/12/3	2025/12/2
Probe	ES3DV3	3157	2024/11/22	2025/11/21
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
Twin SAM	Twin SAM V5.0	1412	NCR	NCR
Dipole, 750 MHz	D750V3	1230	2023/3/24	2026/3/23
Dipole, 1750 MHz	D1750V2	1200	2023/3/27	2026/3/26
Dipole, 1900 MHz	D1900V2	5d251	2023/3/27	2026/3/26
Dipole, 2450 MHz	D2450V2	1102	2023/3/27	2026/3/26
Simulated Tissue Liquid Head(500-9500 MHz)	HBBL600-10000V6	220420-2	Each Time	/
Network Analyzer	8753B	2828A00170	2024/10/17	2025/10/16
Dielectric assessment kit	DAK-3.5	1319	NCR	NCR
MXG Vector Signal Generator	N5182B	MY51350142	2025/1/9	2026/1/8
Power Meter	ML2495A	1106009	2024/8/3	2025/8/2
USB Average Power Sensor	U2001H	MY50000432	2025/3/31	2026/3/30
Power Amplifier	ZVE-6W-83+	SN637202210	NCR	NCR
Power Amplifier	ZHL-5W-202-S+	416402204	NCR	NCR
Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
Directional Coupler	441493	520Z	NCR	NCR
Attenuator	6dB, 150W	2754	NCR	NCR
Attenuator	20dB, 100W	LN749	NCR	NCR
Thermometer	DTM3000	3892	2024/4/22	2025/4/21
Thermo-hygrometer	HTC-1	NA	2024/4/22	2025/4/21
Radio Communication Analyzer	MT8820C	6201181458	2024/10/10	2025/10/9
Spectrum Analyzer	FSU26	100147	2025/3/31	2026/3/30

## 4. SAR MEASUREMENT SYSTEM VERIFICATION

### 4.1 Liquid Verification

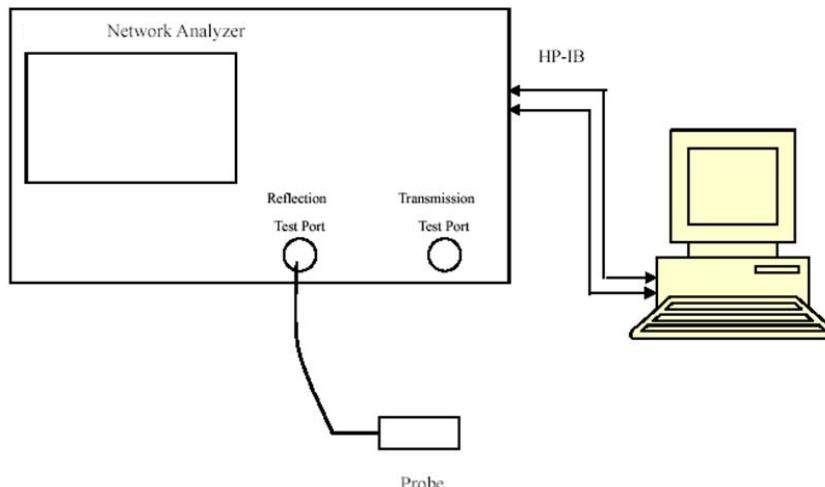

Liquid Verification Setup Block Diagram

### 4.2 Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
750	Simulated Tissue Liquid Head	42.856	0.878	41.90	0.89	2.28	-1.35	$\pm 5$
824.2	Simulated Tissue Liquid Head	42.369	0.886	41.55	0.90	1.97	-1.56	$\pm 5$
826.4	Simulated Tissue Liquid Head	42.279	0.890	41.54	0.90	1.78	-1.11	$\pm 5$
836.6	Simulated Tissue Liquid Head	42.099	0.908	41.50	0.90	1.44	0.89	$\pm 5$
846.6	Simulated Tissue Liquid Head	41.885	0.922	41.50	0.91	0.93	1.32	$\pm 5$
848.8	Simulated Tissue Liquid Head	41.802	0.927	41.50	0.91	0.73	1.87	$\pm 5$

\*Liquid Verification above was performed on 2025/04/16

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1720	Simulated Tissue Liquid Head	41.223	1.337	40.13	1.35	2.72	-0.96	$\pm 5$
1732.5	Simulated Tissue Liquid Head	40.729	1.349	40.12	1.36	1.52	-0.81	$\pm 5$
1745	Simulated Tissue Liquid Head	40.581	1.358	40.10	1.37	1.20	-0.88	$\pm 5$
1750	Simulated Tissue Liquid Head	40.434	1.362	40.10	1.37	0.83	-0.58	$\pm 5$

\*Liquid Verification above was performed on 2025/04/17

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Simulated Tissue Liquid Head	41.276	1.385	40.00	1.40	3.19	-1.07	$\pm 5$
1852.4	Simulated Tissue Liquid Head	41.252	1.389	40.00	1.40	3.13	-0.79	$\pm 5$
1860	Simulated Tissue Liquid Head	41.164	1.408	40.00	1.40	2.91	0.57	$\pm 5$
1880	Simulated Tissue Liquid Head	40.899	1.425	40.00	1.40	2.25	1.79	$\pm 5$
1900	Simulated Tissue Liquid Head	40.584	1.438	40.00	1.40	1.46	2.71	$\pm 5$
1907.6	Simulated Tissue Liquid Head	40.196	1.442	40.00	1.40	0.49	3.00	$\pm 5$
1909.8	Simulated Tissue Liquid Head	40.125	1.445	40.00	1.40	0.31	3.21	$\pm 5$

\*Liquid Verification above was performed on 2025/04/18

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2412	Simulated Tissue Liquid Head	40.111	1.734	39.28	1.77	2.12	-2.03	$\pm 5$
2437	Simulated Tissue Liquid Head	40.065	1.764	39.23	1.79	2.13	-1.45	$\pm 5$
2450	Simulated Tissue Liquid Head	39.626	1.817	39.20	1.80	1.09	0.94	$\pm 5$
2462	Simulated Tissue Liquid Head	39.365	1.839	39.18	1.81	0.47	1.60	$\pm 5$

\*Liquid Verification above was performed on 2025/04/19


### 4.3 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a)  $s = 15 \text{ mm} \pm 0,2 \text{ mm}$  for  $300 \text{ MHz} \leq f \leq 1 \text{ 000 MHz}$ ;
- b)  $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $1 \text{ 000 MHz} < f \leq 3 \text{ 000 MHz}$ ;
- c)  $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $3 \text{ 000 MHz} < f \leq 6 \text{ 000 MHz}$ .

#### System Verification Setup Block Diagram

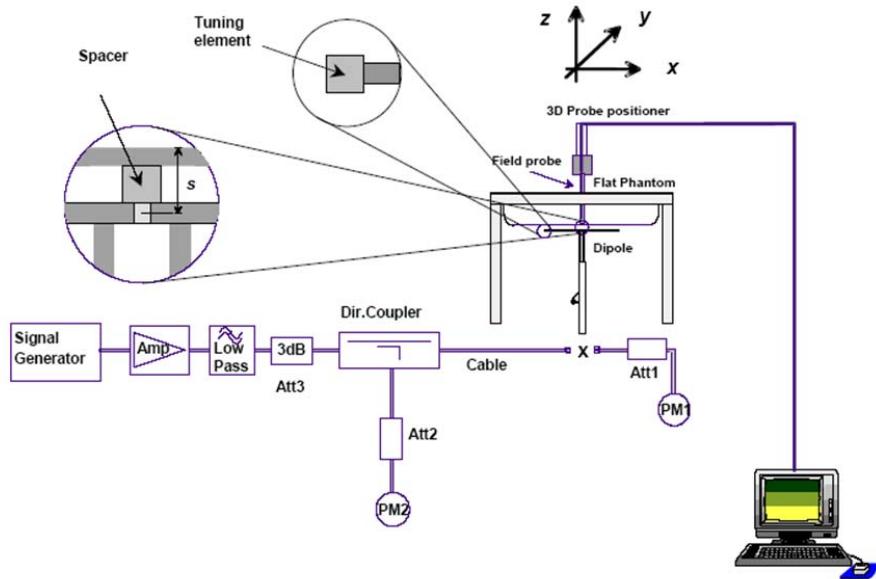

### 4.4 System Accuracy Check Results

Date	Frequency Band (MHz)	Liquid Type	Input Power (mW)	Measured SAR (W/kg)	Normalized to 1W (W/kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)
2025/04/16	750	Head	100	1g 0.838	8.38	8.49	-1.296	$\pm 10$
2025/04/17	1750	Head	100	1g 3.71	37.1	35.8	3.631	$\pm 10$
2025/04/18	1900	Head	100	1g 3.74	37.4	38.9	-3.856	$\pm 10$
2025/04/19	2450	Head	100	1g 4.85	48.5	50.9	-4.715	$\pm 10$

#### Note:

All the SAR values are normalized to 1Watt forward power.

## 4.5 SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head was performed on 2025/04/16

DUT: D750V3; Type: 750 MHz; Serial: 1230

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.878$  S/m;  $\epsilon_r = 42.856$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.45, 6.45, 6.45) @750 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan(7x15x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.943 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.83 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.838 W/kg; SAR(10 g) = 0.552 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

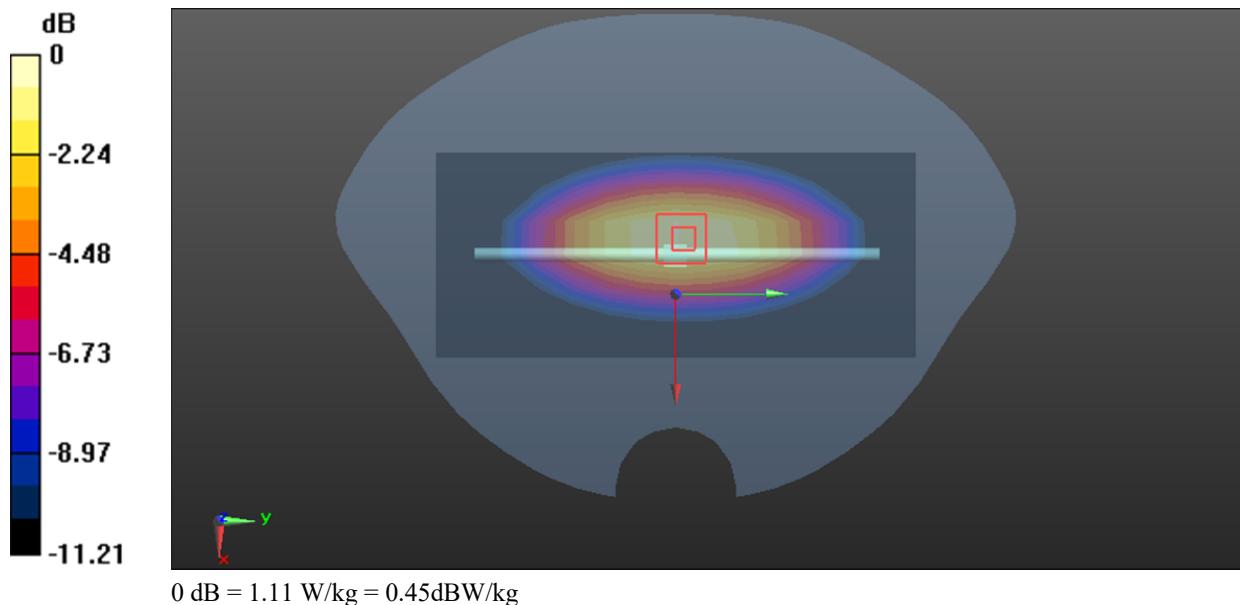

System Performance 1750 MHz Head was performed on 2025/04/17

DUT: D1750V2; Type: 1750 MHz; Serial: 1200

Communication System: CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.362$  S/m;  $\epsilon_r = 40.434$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.41, 5.41, 5.41) @1750 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan(5x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 3.59 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.43 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 6.44 W/kg

**SAR(1 g) = 3.71 W/kg; SAR(10 g) = 2.02 W/kg**

Maximum value of SAR (measured) = 4.15 W/kg

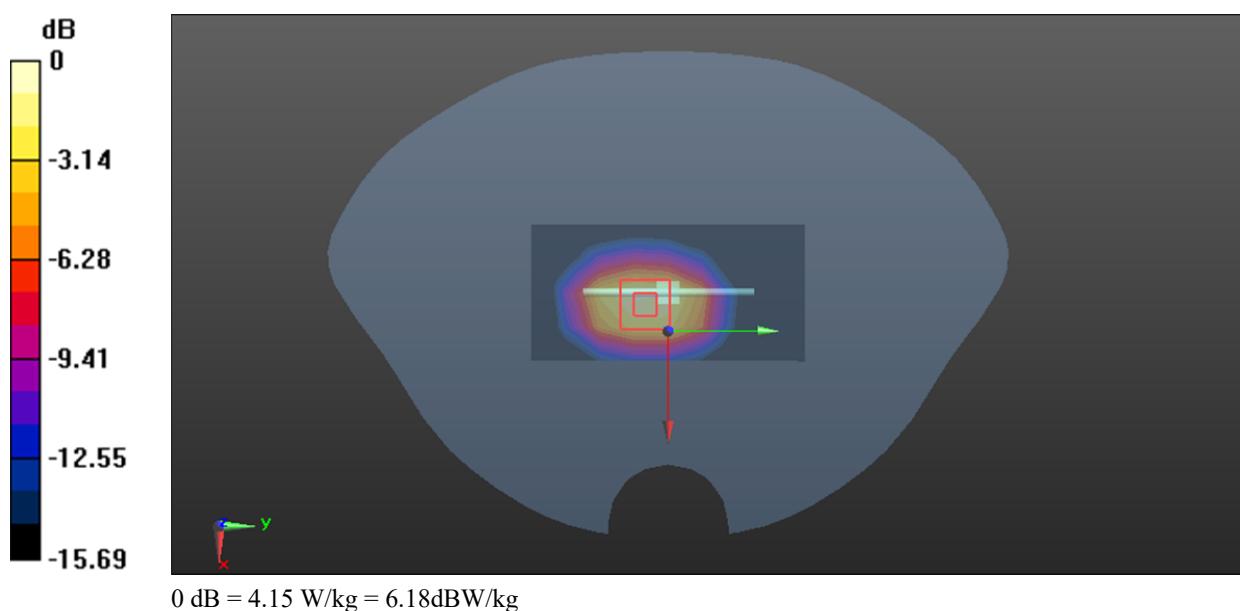

System Performance 1900 MHz Head was performed on 2025/04/18

DUT: D1900V2; Type: 1900 MHz; Serial: 5d251

Communication System: CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.438$  S/m;  $\epsilon_r = 40.584$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.15, 5.15, 5.15) @1900 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan(5x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 5.34 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.10 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 6.63 W/kg

**SAR(1 g) = 3.74 W/kg; SAR(10 g) = 1.96 W/kg**

Maximum value of SAR (measured) = 5.58 W/kg

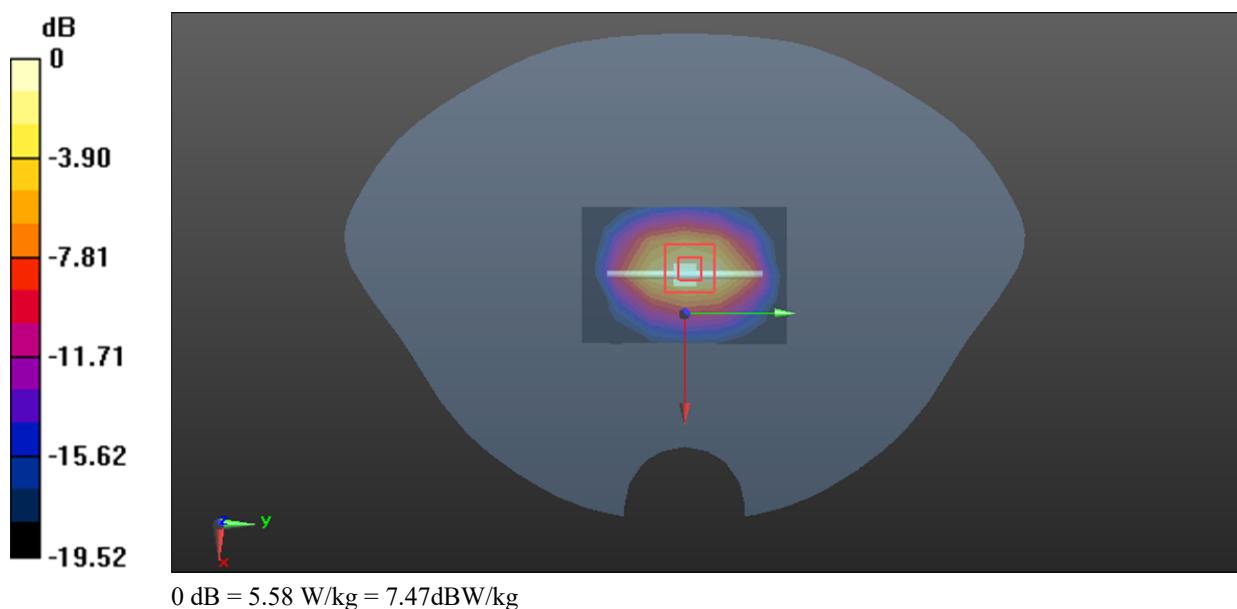

System Performance 2450 MHz Head was performed on 2025/04/19

DUT: D2450V2; Type: 2450 MHz; Serial: 1102

Communication System: CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.817$  S/m;  $\epsilon_r = 39.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.75, 4.75, 4.75) @2450 MHz; Calibrated: 2024/11/22
- Sensor-Surface: 3mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan(6x9x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 8.11 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.82 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 10.1 W/kg

**SAR(1 g) = 4.85 W/kg; SAR(10 g) = 2.22 W/kg**

Maximum value of SAR (measured) = 7.82 W/kg

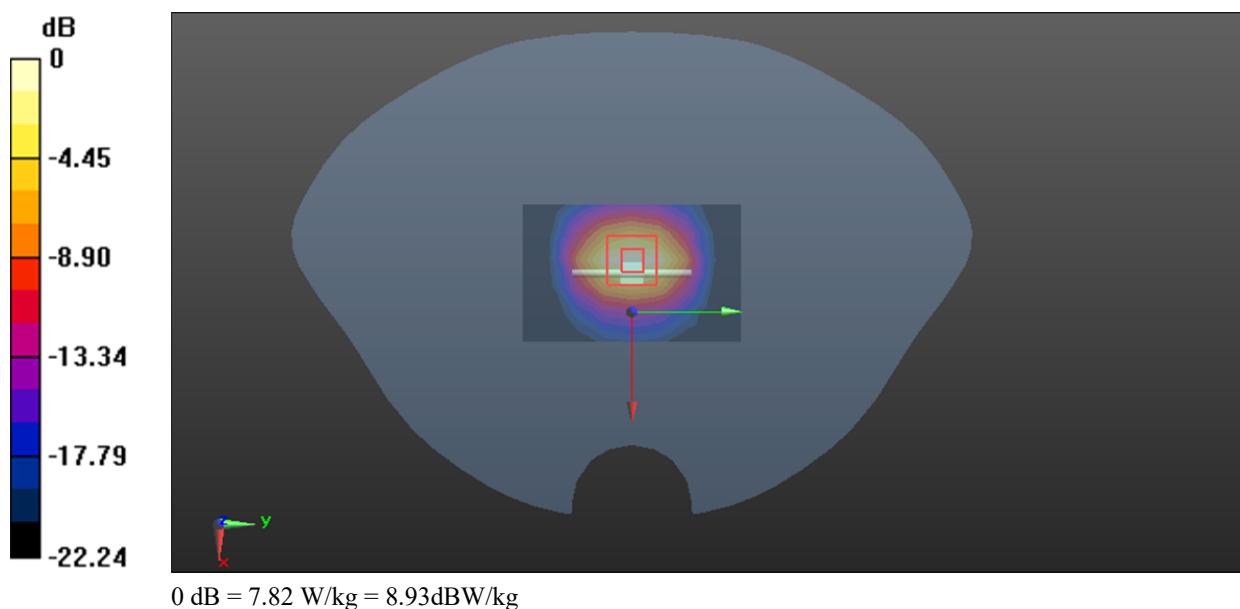


## 5. EUT TEST STRATEGY AND METHODOLOGY

### 5.1 Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.


A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

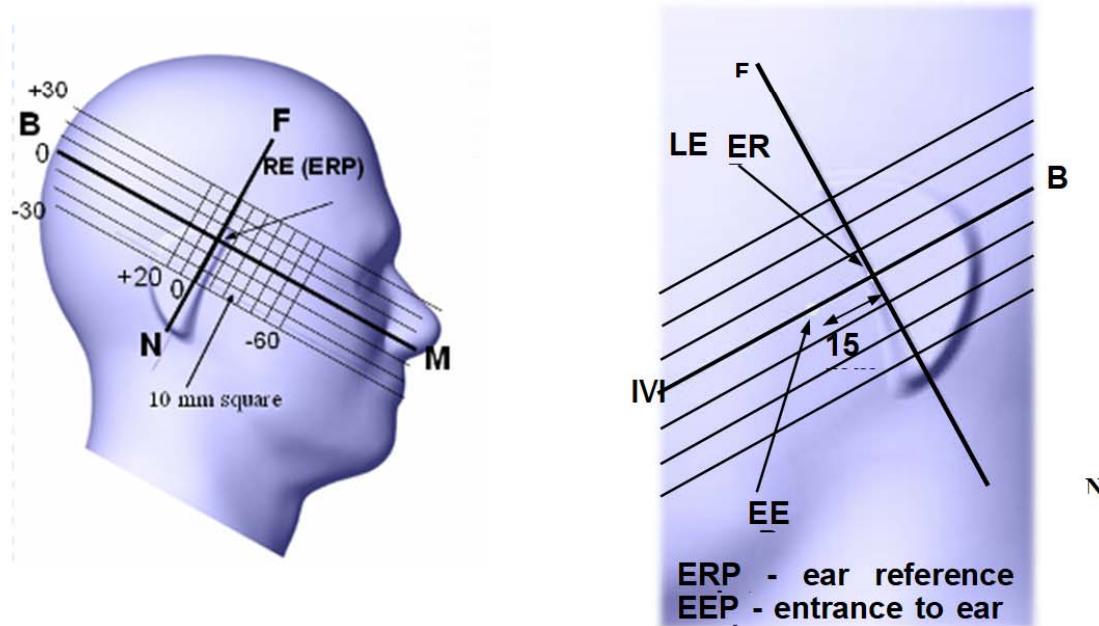

## 5.2Cheek/Touch Position

1. The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.
2. This test position is established:
  3. When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
  4. (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.
  5. For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

### Cheek /Touch Position

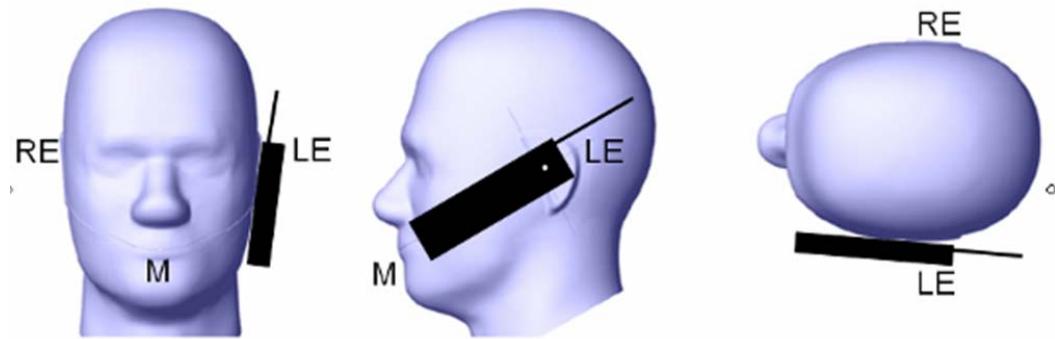

## 5.3Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

- 1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These

test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

#### Ear /Tilt 15° Position

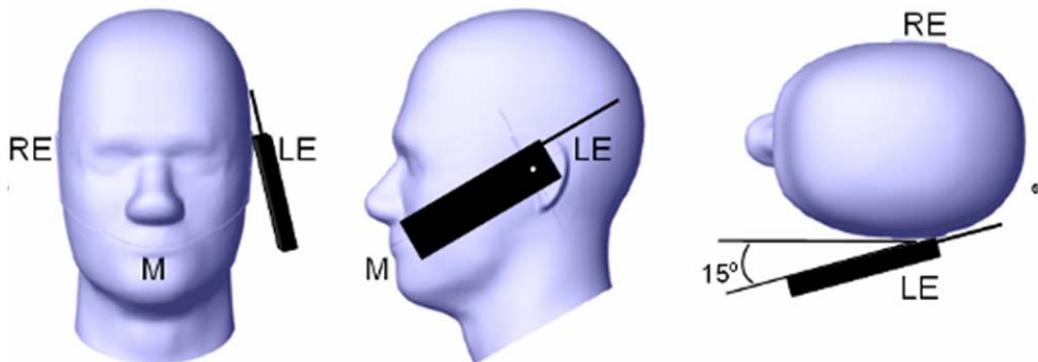

#### 5.4 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

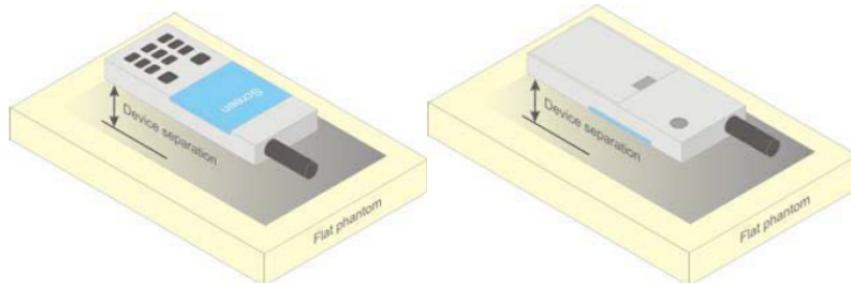


Figure 5 – Test positions for body-worn devices

## 5.5 Test Distance for SAR Evaluation

In this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm(Body).

## 5.6 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


## 6. CONDUCTED OUTPUT POWER MEASUREMENT

### 6.1 Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Connector.

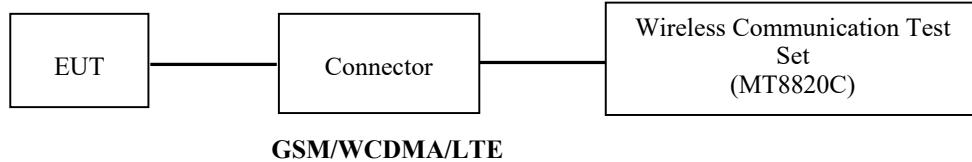

The RF output of the transmitter was connected to the input port of the USB Average Power Sensor through Connector.

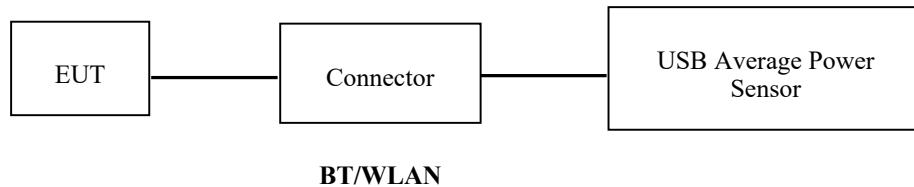

## **6.2 Description of Test Configuration**

### **GSM/GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

- > Slot configuration > Uplink/Gamma
- > 33 dBm for GPRS 850
- > 30 dBm for GPRS 1900
- > 27 dBm for EGPRS 850
- > 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

**WCDMA Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1		
	Rel99 RMC	12.2kbps RMC		
	Power Control Algorithm	Algorithm2		
	$\beta_c/\beta_d$	8/15		

**HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d(SF)$	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR(dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
		Ahs= $\beta_{hs}/\beta_c$			

**HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	<b>Mode</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>
	<b>Subset</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
<b>HSDPA Specific Settings</b>	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
<b>HSUPA Specific Settings</b>	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
<b>HSUPA Specific Settings</b>	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCl	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO4 E-TFCI 71 E-TFCI 92 E-TFCI 75 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

**FDD-LTE**

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3**

Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
NS_32	-	-	-	-	-

### 6.3 Maximum Target Output Power

Mode/Band	Max Target Power(dBm)		
	Low	Middle	High
GSM 850	33.0	33.0	33.0
GPRS 1 TX Slot	33.0	33.0	33.0
GPRS 2 TX Slot	30.5	30.5	30.5
GPRS 3 TX Slot	28.5	28.5	28.5
GPRS 4 TX Slot	26.5	26.5	26.5
EDGE 1 TX Slot	26.4	26.4	26.4
EDGE 2 TX Slot	25.7	25.7	25.7
EDGE 3 TX Slot	24.3	24.3	24.3
EDGE 4 TX Slot	21.9	21.9	21.9
GSM 1900	30.5	30.5	30.5
GPRS 1 TX Slot	30.5	30.0	30.0
GPRS 2 TX Slot	28.0	28.0	28.0
GPRS 3 TX Slot	26.0	26.0	26.0
GPRS 4 TX Slot	24.0	24.0	24.0
EDGE 1 TX Slot	27.2	27.2	27.2
EDGE 2 TX Slot	26.7	26.7	26.7
EDGE 3 TX Slot	25.2	25.2	25.2
EDGE 4 TX Slot	23.0	23.0	23.0
WCDMA Band 2	24.5	24.5	24.5
HSDPA	24.5	24.5	24.5
HSUPA	24.5	24.5	24.5
WCDMA Band 5	24.0	24.0	24.0
HSDPA	24.0	24.0	24.0
HSUPA	24.0	24.0	24.0
LTE Band 2	23.8	23.8	23.8
LTE Band 4	23.0	23.0	23.0
WIFI 2.4G(802.11b)	15.3	15.3	15.3
WIFI 2.4G(802.11g)	14.0	14.0	15.0
WIFI 2.4G(802.11n20)	13.5	14.0	15.0
BT (GFSK)	9.0	8.5	7.5
BT ( $\pi/4$ -DQPSK)	8.5	8.5	8.5
BT (8DPSK)	9.0	9.0	9.0
BLE 1M	0.5	3.5	2.5

Note: The Maximum Target Power for LTE bands corresponds to their maximum power in QPSK modes with maximum bandwidth.

**6.4 Test Results:****GSM:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	32.67
	190	836.6	32.55
	251	848.8	<b>32.87</b>
GSM 1900	512	1850.2	<b>30.27</b>
	661	1880	29.91
	810	1909.8	29.89

**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	32.71	30.25	28.30	25.98
	190	836.6	32.59	30.27	28.12	25.95
	251	848.8	<b>32.82</b>	30.29	28.31	26.16
GSM 1900	512	1850.2	<b>30.21</b>	27.74	25.85	23.80
	661	1880	29.82	27.31	25.55	23.46
	810	1909.8	29.77	27.18	25.41	23.34

**EDGE:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	26.25	25.61	24.23	21.80
	190	836.6	26.03	25.49	24.00	21.81
	251	848.8	25.95	25.52	23.97	21.63
GSM 1900	512	1850.2	27.04	26.56	25.02	22.92
	661	1880	26.91	26.21	24.76	22.51
	810	1909.8	26.64	26.04	24.57	22.35

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

**The time based average power for GSM**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	23.67
	190	836.6	23.55
	251	848.8	<b>23.87</b>
GSM 1900	512	1850.2	<b>21.27</b>
	661	1880	20.91
	810	1909.8	20.89

**The time based average power for GPRS**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	23.71	24.25	24.05	22.98
	190	836.6	23.59	24.27	23.87	22.95
	251	848.8	23.82	<b>24.29</b>	24.06	23.16
GSM 1900	512	1850.2	21.21	<b>21.74</b>	21.60	20.80
	661	1880	20.82	21.31	21.30	20.46
	810	1909.8	20.77	21.18	21.16	20.34

**The time based average power for EDGE**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	17.25	19.61	<b>19.98</b>	18.8
	190	836.6	17.03	19.49	19.75	18.81
	251	848.8	16.95	19.52	19.72	18.63
GSM 1900	512	1850.2	18.04	20.56	<b>20.77</b>	19.92
	661	1880	17.91	20.21	20.51	19.51
	810	1909.8	17.64	20.04	20.32	19.35

**Note:**

1. Radio Communication Analyzer (MT8820C) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. For EGPRS, 1, 2, 3 and 4timeslots has been activated separately with power level 6(850 MHz band) and 5(1900 MHz band).

**WCDMA:****WCDMA Band 2:**

Test Mode	Conducted Average Output Power(dBm)		
	Lowest Channel	Middle Channel	Highest Channel
WCDMA	<b>24.07</b>	24.05	23.83
HSDPA Subset 1	23.98	23.93	23.56
HSDPA Subset 2	23.91	23.77	23.44
HSDPA Subset 3	23.90	23.78	23.48
HSDPA Subset 4	23.88	23.90	23.33
HSUPA Subset 1	23.91	23.82	23.36
HSUPA Subset 2	24.04	23.85	23.60
HSUPA Subset 3	23.89	23.88	23.40
HSUPA Subset 4	23.83	23.81	23.44
HSUPA Subset 5	23.90	23.94	23.40

**WCDMA Band 5:**

Test Mode	Conducted Average Output Power(dBm)		
	Lowest Channel	Middle Channel	Highest Channel
WCDMA	23.65	23.73	23.51
HSDPA Subset 1	22.94	23.11	22.92
HSDPA Subset 2	23.10	23.02	22.97
HSDPA Subset 3	22.95	<b>23.96</b>	22.85
HSDPA Subset 4	23.04	23.93	23.01
HSUPA Subset 1	22.97	22.97	22.98
HSUPA Subset 2	23.03	23.94	23.08
HSUPA Subset 3	22.95	23.84	22.88
HSUPA Subset 4	22.97	23.91	22.82
HSUPA Subset 5	22.90	23.86	22.89

**Note:**

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in All 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than  $\frac{1}{4}$  dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

**LTE Band 2:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	23.48	23.40	23.29
		RB1#3	23.54	23.38	23.17
		RB1#5	23.50	23.35	23.06
		RB3#0	23.27	23.28	22.97
		RB3#1	23.29	23.31	22.97
		RB3#3	23.32	23.22	22.97
		RB6#0	22.42	22.28	21.86
	16QAM	RB1#0	22.70	22.84	23.32
		RB1#3	22.80	22.79	23.20
		RB1#5	22.80	22.67	23.33
		RB3#0	22.17	22.21	21.90
		RB3#1	22.15	22.42	21.95
		RB3#3	22.18	22.26	21.91
		RB6#0	21.40	21.06	20.78
3M	QPSK	RB1#0	23.39	23.41	23.01
		RB1#8	23.31	23.41	23.02
		RB1#14	23.52	23.38	22.84
		RB8#0	22.28	22.24	21.91
		RB8#4	22.39	22.28	21.89
		RB8#7	22.3	22.17	21.96
		RB15#0	22.35	22.13	21.83
	16QAM	RB1#0	22.89	22.85	23.10
		RB1#8	22.74	22.89	23.15
		RB1#14	22.68	22.76	22.95
		RB8#0	21.25	21.17	20.51
		RB8#4	21.34	21.04	20.70
		RB8#7	21.27	21.19	20.73
		RB15#0	21.17	21.15	20.73
5M	QPSK	RB1#0	23.61	23.11	22.7
		RB1#12	23.48	23.18	22.78
		RB1#24	23.45	22.9	22.93
		RB12#0	22.31	22.26	21.96
		RB12#7	22.32	22.19	21.84
		RB12#13	22.31	22.15	21.97
		RB25#0	22.35	22.28	21.93
	16QAM	RB1#0	22.75	22.87	22.33
		RB1#12	22.81	22.73	22.10
		RB1#24	22.84	22.66	22.16
		RB12#0	20.99	21.24	20.72
		RB12#7	20.99	21.05	20.82
		RB12#13	21.20	21.04	20.60
		RB25#0	21.37	21.12	20.93

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	23.41	23.34	22.98
		RB1#25	23.2	23.25	22.77
		RB1#49	23.28	23.19	22.84
		RB25#0	22.37	22.21	22.01
		RB25#12	22.24	22.1	21.86
		RB25#25	22.33	22.29	21.8
		RB50#0	22.44	22.18	22.01
	16QAM	RB1#0	23.33	22.76	22.98
		RB1#25	23.36	22.85	22.99
		RB1#49	23.35	22.83	23.08
		RB25#0	21.33	21.09	20.82
		RB25#12	21.27	21.06	20.74
		RB25#25	21.24	21.20	20.73
		RB50#0	21.36	21.25	20.85
15M	QPSK	RB1#0	23.4	23.34	23.07
		RB1#37	23.38	23.23	23.01
		RB1#74	23.13	23.29	22.92
		RB36#0	22.43	22.24	21.92
		RB36#20	22.24	22.24	21.86
		RB36#39	22.19	22.28	21.84
		RB75#0	22.3	22.09	21.94
	16QAM	RB1#0	23.46	23.69	23.08
		RB1#37	23.41	<b>23.72</b>	23.14
		RB1#74	23.45	23.66	23.16
		RB36#0	21.12	21.20	21.42
		RB36#20	21.21	21.10	20.98
		RB36#39	21.68	21.18	20.86
		RB75#0	21.14	21.18	20.92
20M	QPSK	RB1#0	23.47	23.42	23.17
		RB1#49	23.51	23.59	23.28
		RB1#99	23.48	23.43	23.27
		RB50#0	22.68	22.53	22.34
		RB50#24	22.79	22.96	22.44
		RB50#50	22.64	22.56	22
		RB100#0	22.29	22.42	22.02
	16QAM	RB1#0	22.99	22.22	22.48
		RB1#49	22.93	22.28	22.46
		RB1#99	22.80	22.21	22.35
		RB50#0	21.41	21.06	21.28
		RB50#24	21.25	21.15	21.26
		RB50#50	21.36	21.10	20.92
		RB100#0	21.28	21.19	21.29

## LTE Band 4:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	22.45	22.7	22.7
		RB1#3	22.54	<b>22.87</b>	22.71
		RB1#5	22.33	22.65	22.72
		RB3#0	22.46	22.43	22.57
		RB3#1	22.55	22.39	22.6
		RB3#3	22.42	22.46	22.52
		RB6#0	21.54	21.4	21.47
	16QAM	RB1#0	22.51	22.20	22.78
		RB1#3	22.42	22.17	22.73
		RB1#5	22.55	22.24	22.76
		RB3#0	21.12	21.52	22.04
		RB3#1	21.25	21.36	21.87
		RB3#3	21.19	21.50	21.99
		RB6#0	20.25	20.12	20.41
3M	QPSK	RB1#0	22.5	22.67	22.23
		RB1#8	22.4	22.76	22.5
		RB1#14	22.28	22.68	22.35
		RB8#0	21.39	21.49	21.47
		RB8#4	21.44	21.45	21.62
		RB8#7	21.3	21.41	21.47
		RB15#0	21.38	21.48	21.52
	16QAM	RB1#0	22.49	22.35	22.09
		RB1#8	22.36	22.20	22.08
		RB1#14	22.36	22.19	22.06
		RB8#0	20.40	20.41	20.14
		RB8#4	20.54	20.27	20.17
		RB8#7	20.73	20.32	20.25
		RB15#0	20.41	20.21	20.40
5M	QPSK	RB1#0	22.72	22.32	22.57
		RB1#12	22.68	22.2	22.56
		RB1#24	22.52	22.45	22.7
		RB12#0	21.41	21.51	21.63
		RB12#7	21.48	21.43	21.59
		RB12#13	21.37	21.54	21.62
		RB25#0	21.33	21.43	21.65
	16QAM	RB1#0	21.38	21.85	21.75
		RB1#12	21.23	21.82	21.76
		RB1#24	21.33	21.87	21.80
		RB12#0	20.21	20.36	20.29
		RB12#7	20.57	20.32	20.35
		RB12#13	20.41	20.29	20.33
		RB25#0	20.71	20.28	20.55


Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	22.42	22.48	22.24
		RB1#25	22.3	22.61	22.27
		RB1#49	22.34	22.58	22.35
		RB25#0	21.32	21.44	21.6
		RB25#12	21.25	21.42	21.56
		RB25#25	21.47	21.61	21.65
		RB50#0	21.21	21.3	21.54
	16QAM	RB1#0	21.72	21.97	22.44
		RB1#25	21.65	22.06	22.51
		RB1#49	21.68	22.14	22.72
		RB25#0	20.59	20.40	20.33
		RB25#12	20.26	20.22	20.20
		RB25#25	20.38	20.41	20.50
		RB50#0	20.15	20.32	20.39
15M	QPSK	RB1#0	22.48	22.42	22.32
		RB1#37	22.32	22.46	22.41
		RB1#74	22.4	22.54	22.45
		RB36#0	21.44	21.44	21.54
		RB36#20	21.42	21.34	21.64
		RB36#39	21.35	21.54	21.57
		RB75#0	21.3	21.38	21.51
	16QAM	RB1#0	21.85	22.66	22.82
		RB1#37	21.65	22.65	22.67
		RB1#74	21.73	22.79	22.75
		RB36#0	20.11	20.41	20.57
		RB36#20	20.10	20.38	20.64
		RB36#39	20.29	20.71	20.54
		RB75#0	20.22	20.30	20.39
20M	QPSK	RB1#0	22.56	22.54	22.69
		RB1#49	22.4	22.58	22.64
		RB1#99	22.75	22.72	22.73
		RB50#0	21.72	21.64	21.62
		RB50#24	21.89	21.87	21.76
		RB50#50	21.65	21.78	21.55
		RB100#0	21.51	21.43	21.47
	16QAM	RB1#0	21.91	21.44	22.05
		RB1#49	21.78	21.48	22.06
		RB1#99	22.12	21.74	22.14
		RB50#0	20.18	20.20	20.22
		RB50#24	20.19	20.17	20.29
		RB50#50	20.76	20.70	20.38
		RB100#0	20.10	20.22	20.38

## WLAN: 2.4G

Mode	Channel frequency (MHz)	Data Rate	Duty cycle (%)	RF Average Output Power(dBm)
802.11b	2412	1M	99.49	14.97
	2437			14.71
	2462			<b>15.16</b>
802.11g	2412	6M	/	13.86
	2437			13.64
	2462			14.55
802.11n20	2412	MCS0	/	13.35
	2437			13.53
	2462			14.68

Note: 802.11b mode duty cycle is 99.49%, as shown below

Mode	Test frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)
802.11b	2437	8.507	8.551	99.49

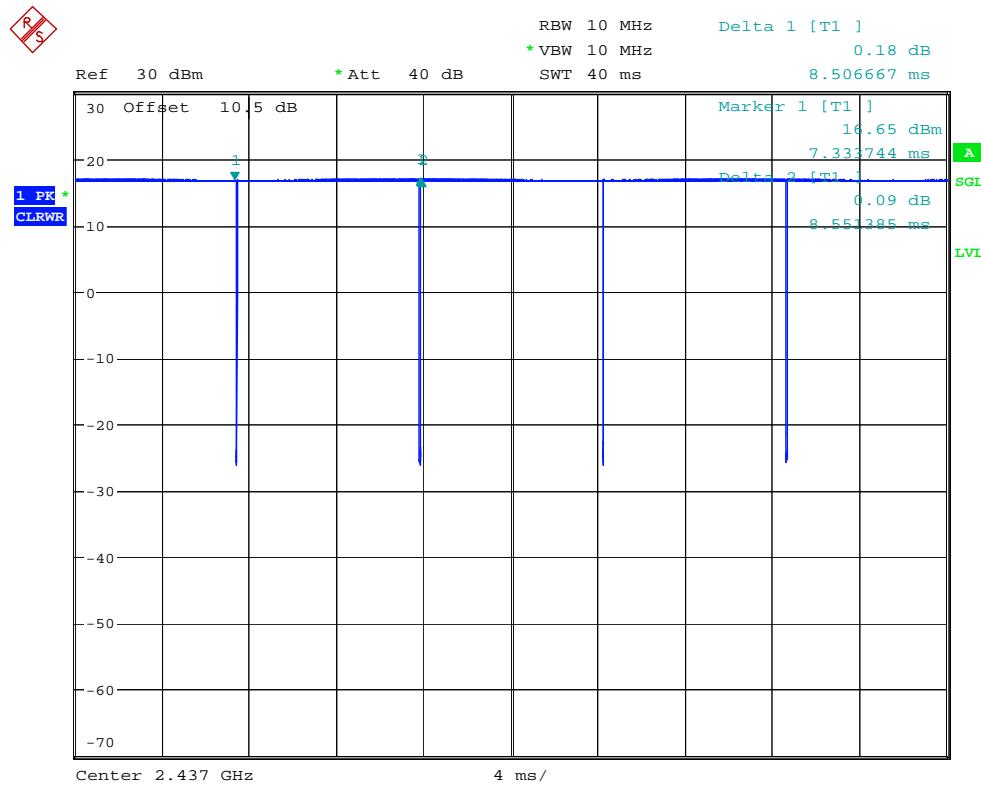

Comment: ProjectNo.:2503S14680E Tester:Ken  
 Date: 14.APR.2025 13:16:23

**Bluetooth:**

Mode	Channel frequency (MHz)	RF Output Power (dBm)
GFSK	2402	<b>8.68</b>
	2441	8.18
	2480	7.05
$\pi/4$ -DQPSK	2402	7.94
	2441	7.90
	2480	7.65
8DPSK	2402	8.46
	2441	8.46
	2480	8.16
BLE 1M	2402	0.40
	2440	3.07
	2480	2.44

## 7. Standalone SAR test exclusion considerations

### 7.1 Antennas Location:



**Note:** The LTE DIV Antenna cannot transmit and is receiving only.

### 7.2 Antenna Distance To Edge

Antenna Distance To Edge(mm)						
Antenna	Back	Front	Left	Right	Top	Bottom
WWAN Main Ant	< 5	< 5	< 5	< 5	152	< 5
WLAN&BT Ant	< 5	< 5	60	< 5	< 5	154

### 7.3 Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WIFI 2.4G	2462	15.3	33.88	0	10.6	3	NO
BT	2480	9	7.94	0	2.5	3	YES

Note: The WLAN based average power for calculation. and bluetooth based peak output power for calculation.

#### 7.4 Standalone SAR estimation:

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Estimated (W/kg)
BT Head	2480	9	7.94	0	0.33@1g
BT Body	2480	9	7.94	10	0.17@1g

Note: The bluetooth based peak power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$$

W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion

#### 7.5 SAR test exclusion for the EUT edge considerations Result

Mode	Front	Back	Left	Right	Top	Bottom
WWAN(GSM/WCDMA/LTE)	Required	Required	Required	Required	Exclusion	Required
WLAN	Required	Required	Exclusion	Required	Required	Exclusion
BT	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*

Note:

**Required:** The distance to Edge is less than 25mm, testing is required.

**Exclusion\*:** SAR test exclusion evaluation has been done above.

**Exclusion:** The distance to Edge is more than 25 mm, testing is not required.

#### Extremity Exposure Considerations

Per KDB 648474 D04v01r03, this device is considered a “Phablet” since the diagonal dimension is  $>160$ mm and  $<200$ mm, when hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance is 1g SAR  $> 1.2$ W/kg)

Extremity Exposure Condition		
Worst Mode	Hotspot SAR value	Extremity Condition Test
WCDMA Band 2	1.18W/kg	Exclusion

## 8. SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

### 8.1 SAR Test Data

#### Environmental Conditions

<b>Temperature:</b>	22.8-23.4°C	23.0-23.5°C	22.9-23.2°C	23.1-23.5°C	/
<b>Relative Humidity:</b>	49%	52%	43%	40%	/
<b>ATM Pressure:</b>	101.1kPa	101.2kPa	100.4kPa	100.1kPa	/
<b>Test Date:</b>	2025/4/16	2025/4/17	2025/4/18	2025/4/19	/

*Testing was performed by Wen Chen, Ken Zong, Aixlee Li.*

## GSM 850:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.185	0.19	/
	848.8	GPRS	/	/	/	/	/	/
Head Left Tilt	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.107	0.11	/
	848.8	GPRS	/	/	/	/	/	/
Head Right Cheek	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.227	<b>0.24</b>	1#
	848.8	GPRS	/	/	/	/	/	/
Head Right Tilt	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.128	0.13	/
	848.8	GPRS	/	/	/	/	/	/
Body Front (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.259	0.27	/
	848.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.370	<b>0.39</b>	2#
	848.8	GPRS	/	/	/	/	/	/
Body Left (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.142	0.15	/
	848.8	GPRS	/	/	/	/	/	/
Body Right (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.155	0.16	/
	848.8	GPRS	/	/	/	/	/	/
Body Bottom (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	30.27	30.5	1.054	0.295	0.31	/
	848.8	GPRS	/	/	/	/	/	/

The data above was performed on 2025/04/16

## Note:

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is  $> 0.5\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
6. The max. time based average power of GSM/GPRS/EDGE mode was selected to Head and Body SAR testing.

## GSM 1900:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.156	<b>0.18</b>	3#
	1909.8	GPRS	/	/	/	/	/	/
Head Left Tilt	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.103	0.12	/
	1909.8	GPRS	/	/	/	/	/	/
Head Right Cheek	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.108	0.13	/
	1909.8	GPRS	/	/	/	/	/	/
Head Right Tilt	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.124	0.15	/
	1909.8	GPRS	/	/	/	/	/	/
Body Front (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.186	0.22	/
	1909.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.350	0.41	/
	1909.8	GPRS	/	/	/	/	/	/
Body Left (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.140	0.16	/
	1909.8	GPRS	/	/	/	/	/	/
Body Right (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.056	0.07	/
	1909.8	GPRS	/	/	/	/	/	/
Body Bottom (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	27.31	28.0	1.172	0.536	<b>0.63</b>	4#
	1909.8	GPRS	/	/	/	/	/	/

The data above was performed on 2025/04/18

## Note:

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is  $> 0.5\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
6. The max. time based average power of GSM/GPRS/EDGE mode was selected to Head and Body SAR testing.

## WCDMA Band 2:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.174	<b>0.19</b>	5#
	1907.6	RMC	/	/	/	/	/	/
Head Left Tilt	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.117	0.13	/
	1907.6	RMC	/	/	/	/	/	/
Head Right Cheek	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.132	0.15	/
	1907.6	RMC	/	/	/	/	/	/
Head Right Tilt	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.128	0.14	/
	1907.6	RMC	/	/	/	/	/	/
Body Front (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.511	<b>0.57</b>	/
	1907.6	RMC	/	/	/	/	/	/
Body Back (10mm)	1852.4	RMC	24.07	24.5	1.104	1.07	1.18	6#
	1880	RMC	24.05	24.5	1.109	1.06	1.18	/
	1907.6	RMC	23.83	24.5	1.167	1.01	1.18	/
Body Left (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.235	0.27	/
	1907.6	RMC	/	/	/	/	/	/
Body Right (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	24.05	24.5	1.109	0.043	0.05	/
	1907.6	RMC	/	/	/	/	/	/
Body Bottom (10mm)	1852.4	RMC	24.07	24.5	1.104	1.07	1.18	/
	1880	RMC	24.05	24.5	1.109	0.928	1.03	/
	1907.6	RMC	23.83	24.5	1.167	0.854	1.00	/

The data above was performed on 2025/04/18

## WCDMA Band 5:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.112	0.12	/
	846.6	RMC	/	/	/	/	/	/
Head Left Tilt	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.057	0.06	/
	846.6	RMC	/	/	/	/	/	/
Head Right Cheek	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.137	<b>0.15</b>	7#
	846.6	RMC	/	/	/	/	/	/
Head Right Tilt	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.084	0.09	/
	846.6	RMC	/	/	/	/	/	/
Body Front (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.290	0.31	/
	846.6	RMC	/	/	/	/	/	/
Body Back (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.365	<b>0.39</b>	8#
	846.6	RMC	/	/	/	/	/	/
Body Left (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.067	0.07	/
	846.6	RMC	/	/	/	/	/	/
Body Right (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.150	0.16	/
	846.6	RMC	/	/	/	/	/	/
Body Bottom (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	23.73	24.0	1.064	0.212	0.23	/
	846.6	RMC	/	/	/	/	/	/

The data above was performed on 2025/04/16

## Note:

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC(reference measurement Channel) Configured in All 1.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than  $\frac{1}{4}$  dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

## LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.181	<b>0.19</b>	9#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.134	0.16	/
Head Left Tilt	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.093	0.10	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.065	0.08	/
Head Right Cheek	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.108	0.11	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.087	0.11	/
Head Right Tilt	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.107	0.11	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.087	0.11	/
Body Front (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.332	0.35	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.265	0.32	/
Body Back (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.763	0.8	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.611	0.74	/
Body Left (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.182	0.19	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.143	0.17	/
Body Right (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	23.59	23.8	1.05	0.033	0.03	/
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	22.96	23.8	1.213	0.027	0.03	/
Body Bottom (10mm)	1860	20	1RB	23.51	23.8	1.069	0.898	0.96	10#
	1880	20	1RB	23.59	23.8	1.05	0.81	0.85	/
	1900	20	1RB	23.28	23.8	1.127	0.849	0.96	/
	1880	20	50%RB	22.96	23.8	1.213	0.658	0.8	/
	1880	20	100%RB	22.42	23.8	1.374	0.642	0.88	/

The data above was performed on 2025/04/18

## LTE Band 4:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.021	0.02	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.018	0.02	/
Head Left Tilt	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.019	0.02	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.018	0.02	/
Head Right Cheek	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.035	<b>0.04</b>	11#
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.028	0.04	/
Head Right Tilt	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.016	0.02	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.013	0.02	/
Body Front (10mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.129	0.14	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.105	0.14	/
Body Back (10mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.241	0.26	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.197	0.26	/
Body Left (10mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.061	0.07	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.050	0.06	/
Body Right (10mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.023	0.02	/
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.018	0.02	/
Body Bottom (10mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.72	23.0	1.067	0.422	<b>0.45</b>	12#
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	21.87	23.0	1.297	0.349	0.45	/

The data above was performed on 2025/04/17

## Note:

- When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
- SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r05.
- KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 0.5\text{ dB}$  higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45\text{ W/kg}$

4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is  $<1.45$  W/kg, tests for the remaining required test channels are optional.
- 5.KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> 0.5$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

## WIFI 2.4G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Scaled Factor	Duty cycle Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.682	<b>0.79</b>	13#
	2462	802.11b	/	/	/	/	/	/	/
Head Left Tilt	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.602	<b>0.69</b>	/
	2462	802.11b	/	/	/	/	/	/	/
Head Right Cheek	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.308	0.35	/
	2462	802.11b	/	/	/	/	/	/	/
Head Right Tilt	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.333	0.38	/
	2462	802.11b	/	/	/	/	/	/	/
Body Front (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.116	0.13	/
	2462	802.11b	/	/	/	/	/	/	/
Body Back (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.192	<b>0.22</b>	14#
	2462	802.11b	/	/	/	/	/	/	/
Body Right (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.140	0.16	/
	2462	802.11b	/	/	/	/	/	/	/
Body Top (10mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.71	15.3	1.146	1.005	0.137	0.16	/
	2462	802.11b	/	/	/	/	/	/	/

The data above was performed on 2025/04/19

## Note:

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. According KDB 248227 D01, for SAR testing of 2.4 WIFI 802.11b signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to “1/( duty cycle)”.

## 9. Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

*Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.*

### The Highest Measured SAR Configuration in Each Frequency Band

#### Head

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

#### Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
1900 MHz	WCDMA Band 2	1852.4	Body Back	1.07	1.04	1.03

#### Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

## 10. DUT HOLDER PERTURBATIONS

In accordance with TCB workshop October 2016:

- 1) SAR perturbation due to test device holders, depending on antenna locations, buttons locations on phones or device, form factor (e.g. dongles etc.), the measured SAR could be influenced by the relative positions of the test device and its holder
- 2) SAR measurement standards have included protocols to evaluate this with a flat phantom, with and without the device holder
- 3) When the highest reported SAR of an antenna is  $> 1.2 \text{ W/kg}$ , holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands in the same exact device and holder positions used for head and body SAR measurements; i.e. same device/button locations in the holder

Per IEEE 1528: 2013/Annex E/E.4.1.1:Device holder perturbation tolerance for a specific test device: Type B  
When it is unknown if a device holder perturbs the fields of a test device, the SAR uncertainty shall be assessed with a flat phantom (see Clause 5) by comparing the SAR with and without the device holder according to the following tests:

The SAR tolerance for device holder disturbance is computed using Equation (E.21) and entered in the corresponding row of the appropriate uncertainty table with an assumed rectangular probability distribution and  $vi = \infty$  degrees of freedom:

$$SAR_{tolerance} [\%] = 100 \times \left( \frac{SAR_{w/holder} - SAR_{w/o holder}}{SAR_{w/o holder}} \right) \quad (E.21)$$

### The Highest Measured SAR Configuration among all applicable Frequency Band

Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		The Device holder perturbation uncertainty
			With holder	Without holder	
/	/	/	/	/	/

## 11. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### 11.1 Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(GSM/WCDMA/LTE) + WLAN 2.4G	√	√
WWAN(GSM/WCDMA/LTE) + BT	√	✗
WLAN 2.4G + BT	✗	✗

Note: In a WWAN antenna, only a single antenna in one band operates at a time.

### 11.2 Simultaneous SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
WWAN(GSM/WCDMA/LTE) + WLAN 2.4G	Head	0.24	0.79	1.03
	Body	1.18	0.22	1.40
	Body (Hotspot)	1.18	0.22	1.40
WWAN(GSM/WCDMA/LTE) + BT	Head	0.24	0.33	0.57
	Body	1.18	0.17	1.35

#### Conclusion:

Sum of SAR:  $\Sigma\text{SAR} \leq 1.6 \text{ W/kg}$  therefore simultaneous transmission SAR with Volume Scans is **not required**.

## **12. SAR Plots**

**Please Refer to the Attachment.**

## APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

### Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
<b>Measurement system</b>							
Probe calibration	6.55	N	1	1	1	6.3	6.3
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions – reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
<b>Test sample related</b>							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
<b>Phantom and set-up</b>							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.1	23.7

---

## APPENDIX B EUT TEST POSITION PHOTOS

---

**Please Refer to the Attachment.**

---

## **APPENDIX C CALIBRATION CERTIFICATES**

---

**Please Refer to the Attachment.**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***