

Manufacture:Shenzhen Qianmu Communication Technology Co.,Ltd.
Address:No.410, Building D2,Luogang Agile Plaza,Shui West Road,Science City, Huangpu District,Guangzhou,china

APPROVAL

客 户
CUSTOMER: QINGFENG ELETRONIC CO.,LIMITED

品 名 规 格
DESCRIPTION:

料 号
PART NO.:

客 户 料 号
CUS PART NO.:

日 期
D A T E: 2022-5-20

深超呈样签章

工 程 ENGINEERING DEPARTMENT	品 保 Q C DEPARTMENT	业 务 SALES DEPARTMENT
Chen Mingliang	Liu Baoguo	He shaofen

客户承认签章

工 程 ENGINEERING DEPARTMENT	品 保 Q C DEPARTMENT	采 购 PURCHASING DEPARTMENT

联系电话:

✘ 承认书一式三份，惠蒙贵司承认签章

✘ Approval in duplicate, please signed by your company.

1.测试项目与设备Test items and equipment

	测试项目Test items	设备equipment
1. S11 参数 (S-parameter)	1. 回波损耗 (Return Loss) 2. 电压驻波比 (VSWR)	网络分析仪: Agilent E5071B HP 8753D
2. 有源测试 (Active)	1. 发射功率 (TRP) 2. 接收灵敏度 (TIS)	1. 暗室: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. 综合测试仪: Agilent 8960 E5515B ×2 StarPoint SP6011
3. 无源测试 (Passive)	1. 天线增益 (Gain) 2. 天线效率 (Efficiency)	1. 暗室: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. 网络分析仪: Agilent E5071B HP 8753D



2. WiFi 天线性能

Wifi antenna performance





3. WiFi 天线增益与效率


Wifi antenna gain and efficiency

Passive Test For WIFI										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	52.5	-2.8	1.77	-0.38	33.79	18.711	1.77	-16.22	48.09	47.94
2410	52.19	-2.82	1.65	-0.5	33.644	18.548	1.65	-15.92	48.07	47.87
2420	51.69	-2.87	1.5	-0.65	33.325	18.362	1.5	-15.32	48.18	48
2430	50.49	-2.97	1.33	-0.82	32.605	17.886	1.33	-15.32	48.17	47.99
2440	52.25	-2.82	1.49	-0.66	33.893	18.354	1.49	-15.44	48.33	48.11
2450	54.16	-2.66	1.64	-0.51	35.564	18.592	1.64	-15.72	48.44	48.14
2460	53.18	-2.74	1.53	-0.62	35.419	17.761	1.53	-16.88	48.41	48.06
2470	53.35	-2.73	1.51	-0.64	35.958	17.389	1.51	-17.44	48.49	48.11
2480	54.2	-2.66	1.5	-0.65	36.806	17.391	1.5	-16.88	48.63	48.18
2490	54.75	-2.62	1.43	-0.72	37.292	17.459	1.43	-16.87	48.76	48.29
2500	51.65	-2.87	1	-1.15	35.18	16.467	1	-17.68	48.69	48.16


2400.000MHz

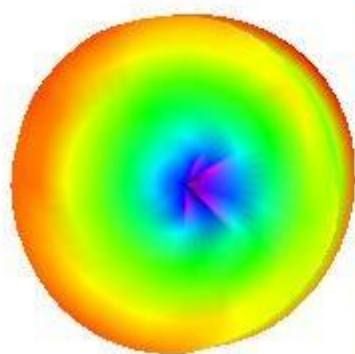


2400.000MHz H

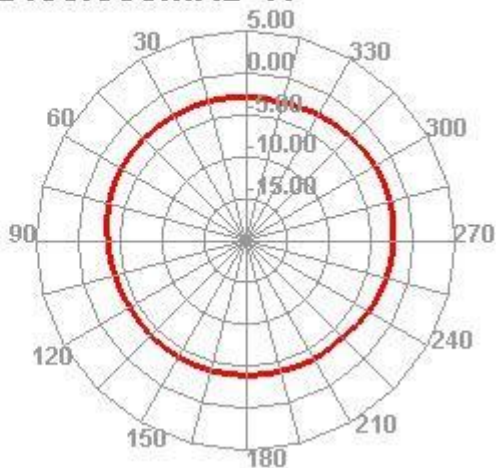


2400.000MHz E1

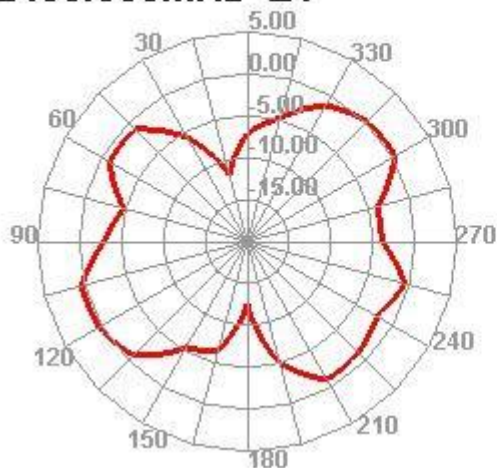

2400.000MHz E2

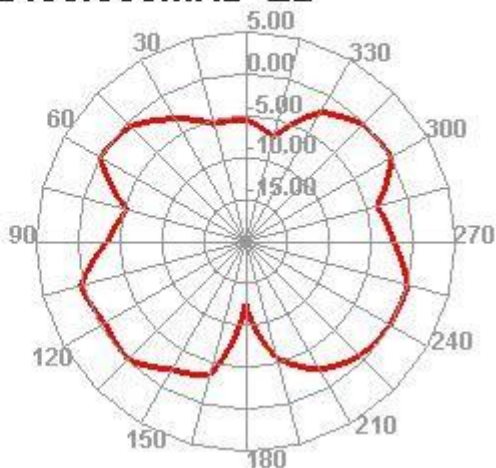

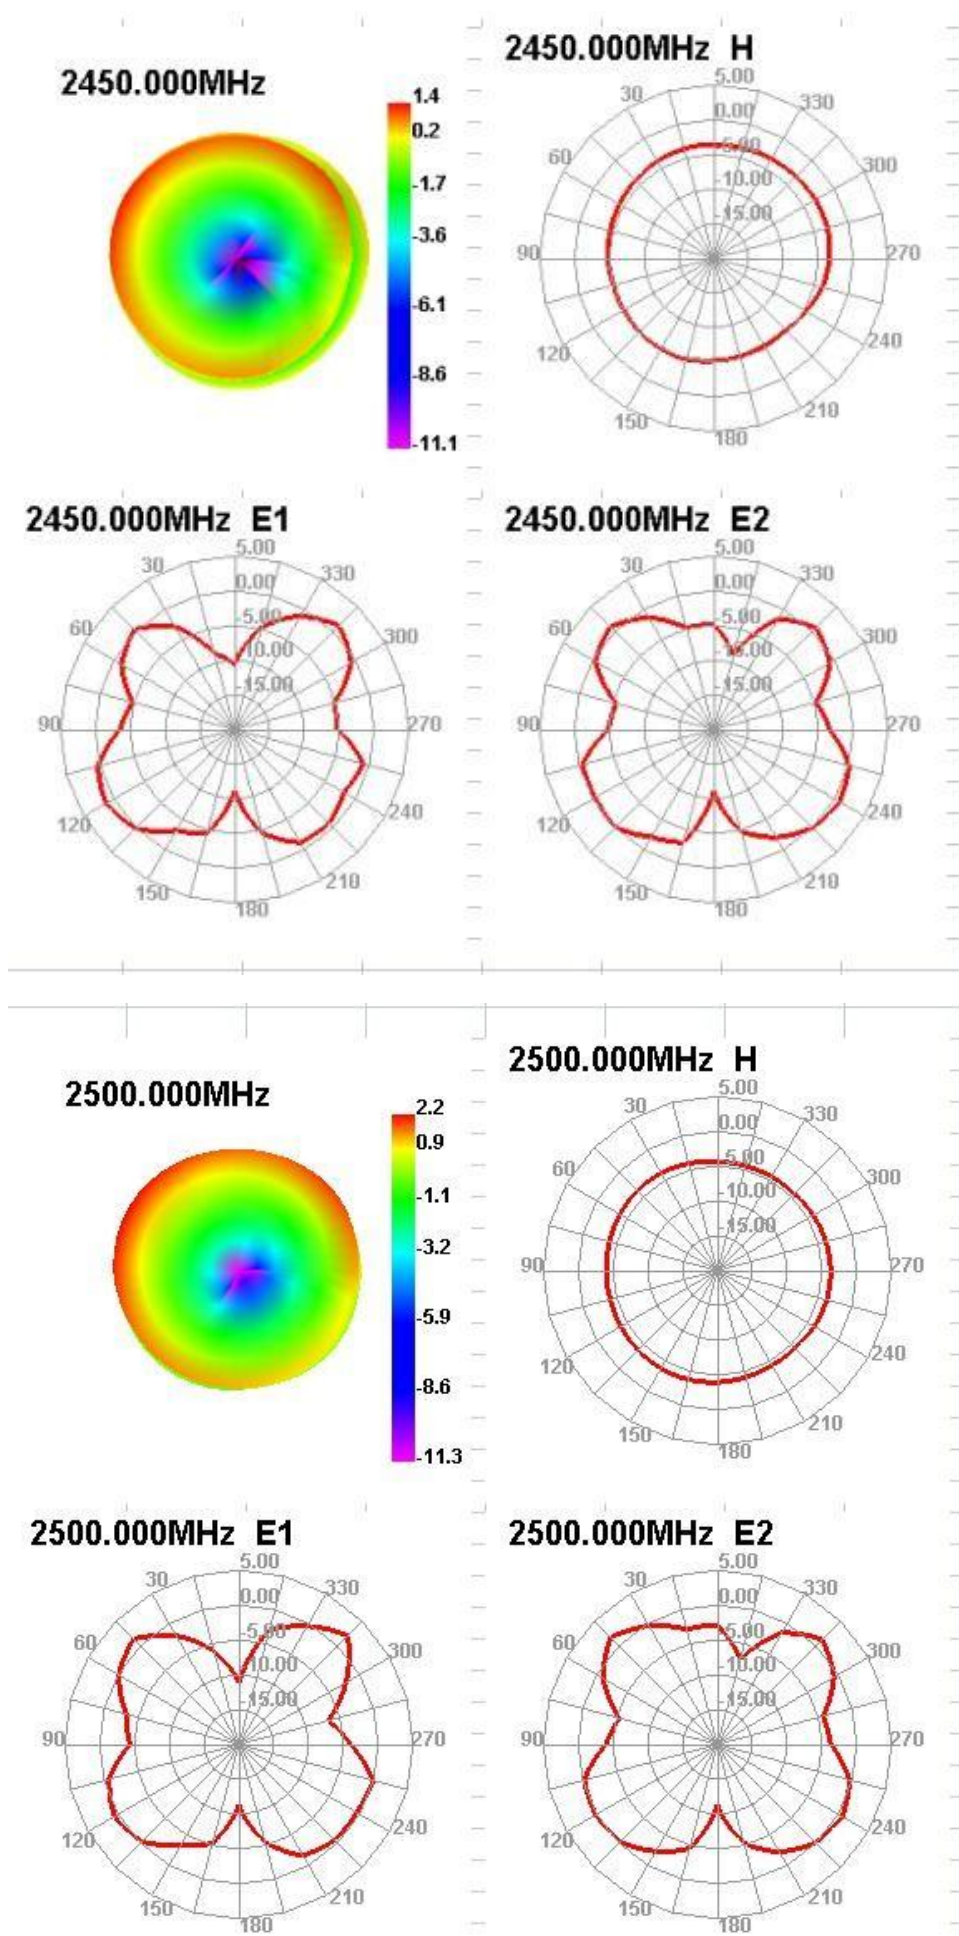


4. WiFi 天线暗室有源数据:

Test Result	Wifi 2G TRP		
	1	6	11
Frequency (MHz)	2412	2437	2462
Txp Ave(dBm)	13.28	13.15	13.49
NHPRP(dBm)	NULL	NULL	NULL
MAX(dBm)	15.53	15.62	15.99
EIRP peak	15.53	15.62	15.99
Min(dBm)	8.8	9.54	10.98
Attenuation Horizontal	14.38	14.18	15.19
Attenuation Vertical	14.28	14.09	14.82

Test Result	Wifi 2G TIS		
	11		
Frequency (MHz)	2462		
Sens Ave(dBm)	-84.3		
NHPIS(dBm)	NULL		
RSSIAve	13.95		
MaxPosRSSI	14.58		
MaxPosSens	-84.93		
MAX(dBm)	16.45		
EIS peak	16.45		
Min(dBm)	11.46		
Attenuation Horizontal	15.63		
Attenuation Vertical	15.32		

5.天线结构图:

Antenna structure diagram:

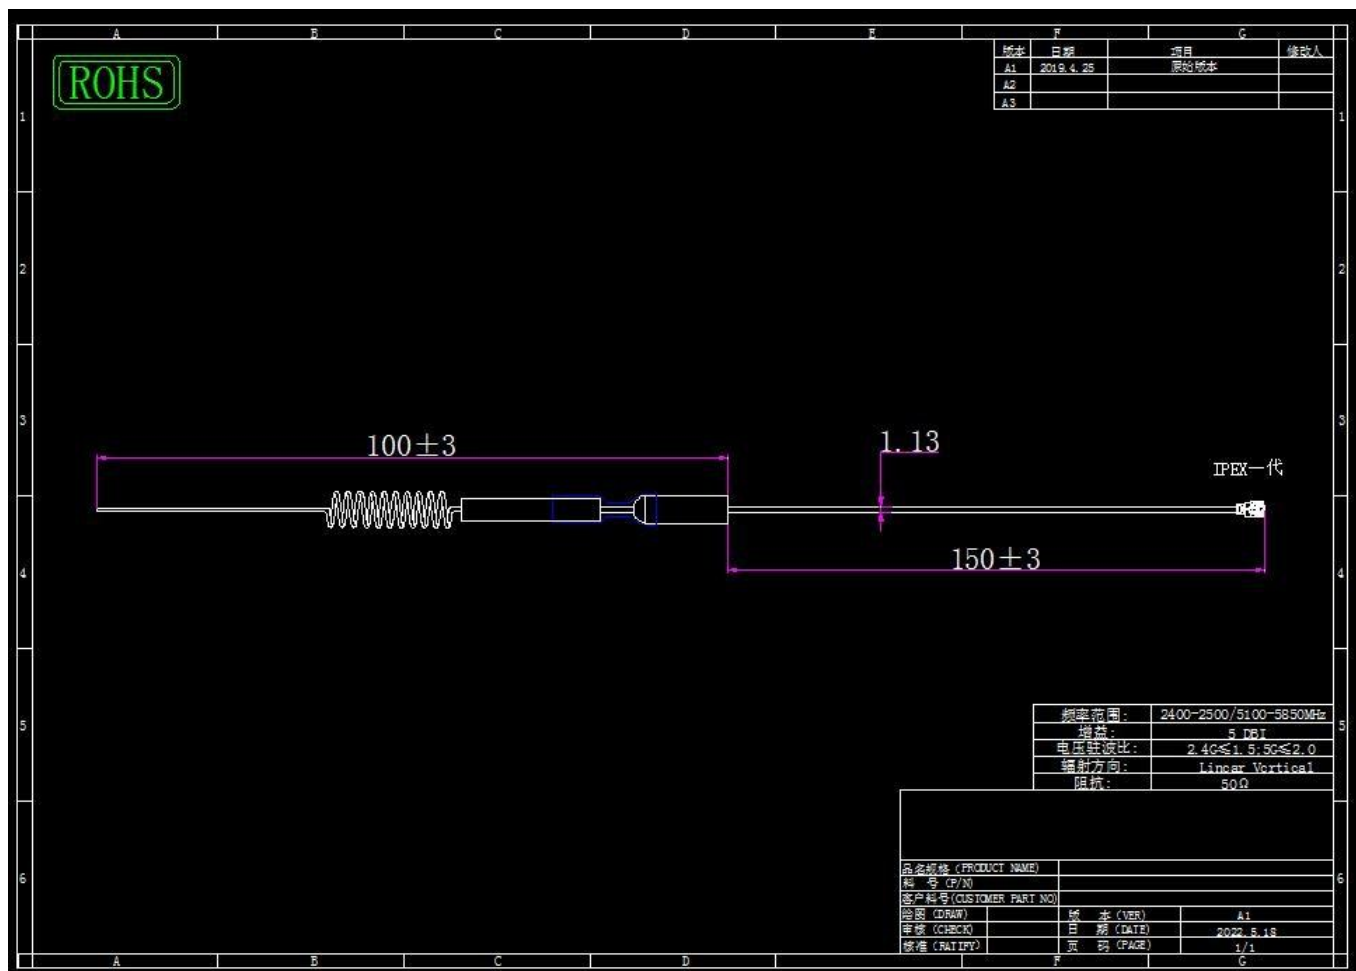

电器技术参数

Technical
parameters of
electrical
appliances

电 性 能 指 标		Electrical Specifications	
频率范围	2400~2500MHz	Frequency Range	2400~2500MHz
电压驻波比	≤ 2.0	VSWR	≤ 2.0
输入阻抗	50 Ω	Input Impedance	50 Ω
增益	3DB	Gain	3DB
辐射方向	全向	Radiation direction	omnidirectional
机 械 指 标		Mechanical Specifications	
线材颜色	黑色	Antenna Color	Black
接口形式	环切	Input connector	OPEO
天线线长	120mm	Cable length	120mm

工作温度	-40℃~+85℃	Working Temperature	-40℃~+85℃
工作湿度	20~80%	Working Humidity	20~80%

RF113 规格

1. 适用范围

本规格书制定了电线的结构和电气特性

同轴线
AWG 32

2. 结构/Construction

项目/Item		单位/Unit	详细资料/Details
Conductor 导体	材料/Material	-	绞合镀银铜丝 Silver-coated copper wire
	构成/Composition	(No./mm)	7/0.08
	外径/OD.	mm	0.24
	绞向/Orientation	-	S
Insulation 绝缘层	材料/Material	-	FEP(进口料)
	绝缘颜色/Insulation color	-	本色/Natural
	标称绝缘厚度/ Nom. Thickness	mm	0.22
	绝缘线径/OD.	mm	0.69
Braid Shield 编织	材料/Material	-	镀锡铜丝 Tinned copper wire
	构成/Composition	(No./mm)	16/4/0.05
	编织密度/Coverage	(%)	≥90
Jacket 外被	材料/Material	-	FEP
	标称绝缘厚度/ Nom. Thickness	mm	0.12
	外径/OD.	mm	1.13±0.10

3. Electrical Properties (at 20℃) /电气特性 (20℃时)

项目/Item	单位/Unit	详细资料/Details
导体电阻/Conductor Resistance	Ω/km	571 (Max.)
绝缘电阻/Insulation Resistance	MΩ • km	100 (Min.)
耐压强度(AC)/Dielectric Strength(AC)	V/ 1 Min	500
特性阻抗/Impedance	Ω	50±3
耐温等级/ Temperature	℃	200
额定电压/rated voltage	V	30

4. 电线截面图示如下:

