



Test Report No.:
FCCSZ2025-0027

RF Test Report

FCC ID : 2BOP508182020



NAME OF SAMPLE : Nova

APPLICANT : Open Launch LLC

CLASSIFICATION OF TEST : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant		Name: Open Launch LLC Address: 103 Forrest St Lafayette LA 70501	
Manufacturer		Name: Huizhou Boshijie Techenology Co.,Ltd Address: Boshijie Industrial Park, No. 1 Huifeng West Third Road, Zhongkai High-tech Zone, Huizhou City, Guangdong, China. 516006	
Equipment Under Test		Name: Nova Brand: NOVA Model/Type: Nova Additional Model: N/A Serial NO.: N/A Sample NO.: 2-1	
Date of Receipt.	Mar.13,2025	Date of Testing	Mar.13,2025~Apr.17,2025
Test Specification		Test Result	
FCC Part 15, Subpart C (15.255)		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied.	
		Seal of CVC Issue Date: Apr.18,2025	
Compiled by:  <u>Liang Jiatong</u> Name Signature	Reviewed by:  <u>Mo Xianbiao</u> Name Signature	Approved by:  <u>Dong Sanbi</u> Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed		Fail = failed	N/A= not applicable
EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 OTHER INFORMATION	8
2.3 TEST MODE	9
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
2.5 DESCRIPTION OF SUPPORT UNITS	10
2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz	11
2.7 RADIATED TEST SETUP	12
3 TEST TYPES AND RESULTS	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT	17
3.3 10 DB BANDWIDTH MEASUREMENT	31
3.4 EIRP POWER MEASUREMENT	33
3.5 FREQUENCY STABILITY	36
3.6 ANTENNA REQUIREMENT	37
4 PHOTOGRAPHS OF TEST SETUP	38
5 PHOTOGRAPHS OF THE EUT	39



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2025-0027	Original release	Apr.18,2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15.255			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	See section 3.1
15.255(d)	Transmitter Spurious Emissions	PASS	See section 3.2
15.215(c)(3)	10dB Bandwidth	PASS	See section 3.3
15.255(c)(3)	Output Power	PASS	See section 3.4
15.255(f)	Frequency stability	PASS	See section 3.5
15.255(h)	Group Installation	N/A	The test is not applicable since there are no external phase-locking inputs in this EUT
15.203	Antenna Requirement	PASS	See section 3.6



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Radiation Spurious(1GHz-40GHz)					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2025.4.27
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2026.1.22
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2026.3.28
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2026.3.21
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2025.4.28
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2025.4.28
Preamplifier(18GHz-40GHz)	Rohde&Schwarz	SCU40A	101209	1 year	2025.4.28
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.28
Radiation Spurious(Below 1GHz)					/
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2025/5/24
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	1510	1 year	2026/1/12
3m anechoic chamber	MORI	966	CS0200019	3 year	2026/5/18
LISN (single-phase)	Rohde&Schwarz	ESH3-Z6	102152/102156	1 year	2025/4/27
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100298	1 year	2025/4/28
Conducted Emission					/
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
limiter (10 dB)	Rohde&Schwarz	ESH3-Z2	102824	1 year	2025.5.15
Voltage probe	Rohde&Schwarz	CVP9222C	28	1 year	2025.4.27
Current probe	Rohde&Schwarz	EZ-17	101442	1 year	2025.4.28
ISN network	Rohde&Schwarz	ENV 81	100401	1 year	2025.4.28
ISN network	Rohde&Schwarz	ENV 81 Cat6	101896	1 year	2025.4.28
#1Shielding room	MORI	854	N/A	3 year	2026.5.16
LISN	SCHWARZBECK	NSLK 8129	5021	1 year	2025.4.27
Temperature and humidity meter	/	C193561430	C193561430	1 year	2025.4.27
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Radiation Spurious(Above 40GHz)					/
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.28
Signal&Spectrum Analyzer	keysight	N9040B	CS0300074	1 year	2025.9.24
SA Expansion Module(40-60GHz)	VDI	N9029AV19	CS0300075	3 year	2025.9.14
SA Expansion Module(60-90GHz)	VDI	N9029AV12	CS0300076	3 year	2025.9.14
SA Expansion Module(90-140GHz)	VDI	N9029AV08	CS0300077	3 year	2025.9.14
SA Expansion Module(140-220GHz)	VDI	N9029AV05	CS0300078	3 year	2025.9.14
SA Expansion Module(220-330GHz)	VDI	N9029AV03	CS0300079	3 year	2025.9.14
Horn antenna(40-60GHz)	CMI	HO19R	CS0300086	3 year	2025.9.14
Horn antenna(60-90GHz)	CMI	HO12R	CS0300088	3 year	2025.9.14
Horn antenna(90-140GHz)	CMI	HO08R	CS0300090	3 year	2025.9.14
Horn antenna(140-220GHz)	CMI	HO05R	CS0300092	3 year	2025.9.14
Horn antenna(220-330GHz)	CMI	HO03R	CS0300094	3 year	2025.9.14



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement Uncertainty		
No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	±1.86%
2	Radiated emission(9kHz-30MHz)	+/-5.6 dB
3	Radiated Emissions(30MHz-1GHz)	±5.0dB
4	Radiated Emissions(1GHz-18GHz)	±4.8dB
5	Radiated Emissions(18GHz-40GHz)	±5.1dB
6	Radiated Emissions(40GHz-60GHz)	±4.8dB
7	Radiated Emissions(60GHz-90GHz)	±4.8dB
8	Radiated Emissions(90GHz-140GHz)	±5.0dB
9	Radiated Emissions(140GHz-220GHz)	±5.1dB
10	Radiated Emissions(220GHz-300GHz)	±4.8dB
11	Temperature	±0.73°C
12	Supply voltages	±0.37 %
13	Humidity	±3.9 %

Remark: 95% Confidence Levels, k=2.

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Nova
BRAND	NOVA
TEST MODEL	Nova
ADDITIONAL MODEL	N/A
POWER SUPPLY	AC 100~230V
MODULATION TECHNOLOGY	Pulse Modulation
FREQUENCY RANGE	57 ~ 64GHz
PEAK OUTPUT POWER	9.22dBm for TM1 8.77dBm for TM2
ANTENNA TYPE (Note 4)	Antenna in Package
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Note:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to report.
4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

2.2 OTHER INFORMATION

The EUT only have one channel.

CHANNEL	FREQUENCY (MHz)
1	60650


2.3 TEST MODE

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis (if EUT with antenna diversity architecture) and packet type.

The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

MODE	ANTENNA	FREQUENCY (GHz)	TEST ITEM
TM1	Antenna Array(1TX/1RX)	60.65	ALL
TM2	Antenna Array(1TX/1RX)	60.65	Only EIRP Power*

*)The two radars have identical hardware and software, with an RF output power difference of less than 0.5 dB. Therefore, only the EIRP Power is tested.

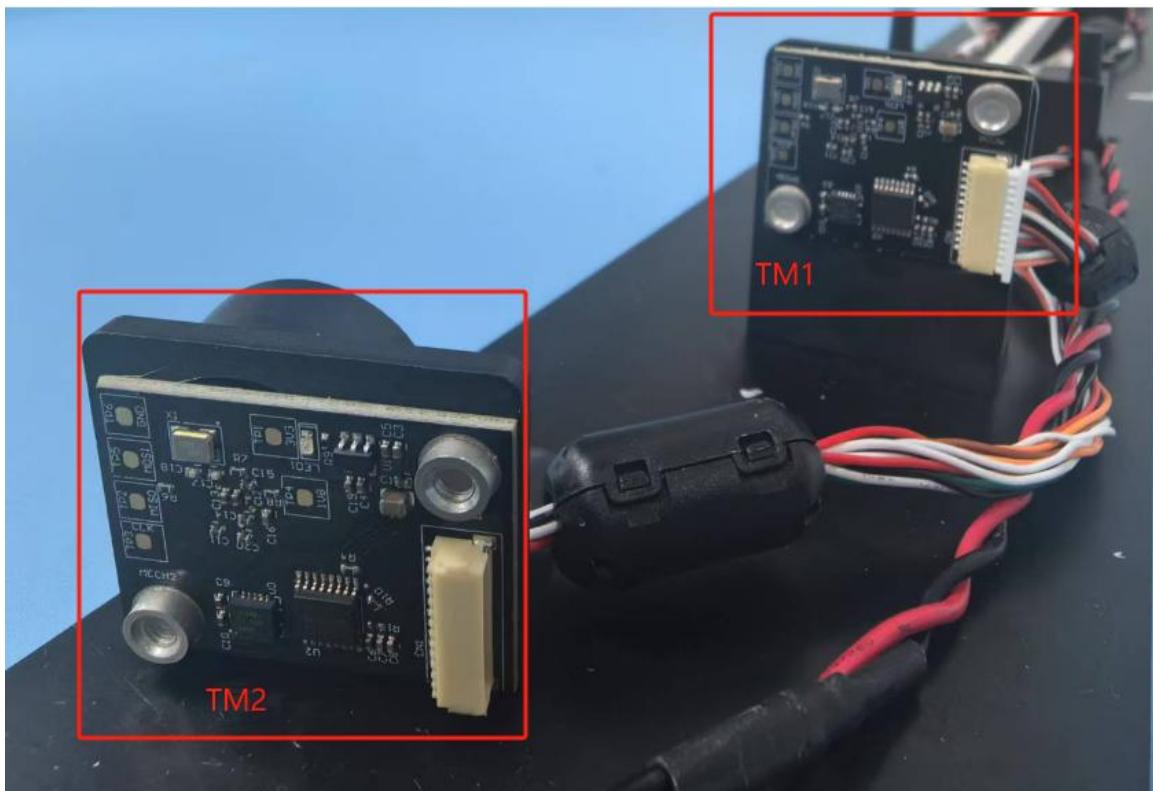



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, SUBPART C. SECTION 15.255
KDB 364244 D01 MEAS 15.255 RADARS v01r01
ANSI C63.10-2020

TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment
Keysight Application Note 5952-1039

All test items have been performed and recorded as per the above standards.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
1	Laptop	Lenovo	K4e-ARE120	MP20kshe	Lab
Support Cable					
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)




2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz

The equipment under test was transmitting while connected to its integral antenna and is placed on a turn table. The measurement antenna is in the far field of the EUT per formula $2D^2/\lambda$ where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.


Horn Antenna	Frequency (GHz)	Antenna Dimension A(m)	Wavelength (λ)(m)	Far field R(m)>=2D ² /λ	Measurement Distance(D)(m)
QMS-00880	18	0.08	0.0167	0.77	3
	40	0.08	0.0075	1.71	
HO19R	40	0.046	0.0075	0.56	1
	60	0.046	0.005	0.85	
HO12R	60	0.03	0.005	0.36	1
	90	0.03	0.0033	0.55	
HO8R	90	0.019	0.0033	0.22	1
	140	0.019	0.0021	0.34	
HO5R	140	0.012	0.0021	0.14	1
	220	0.012	0.0014	0.21	
HO3R	220	0.008	0.0014	0.09	1
	330	0.008	0.0009	0.14	

2.7 RADIATED TEST SETUP


Below 30MHz Test Setup:

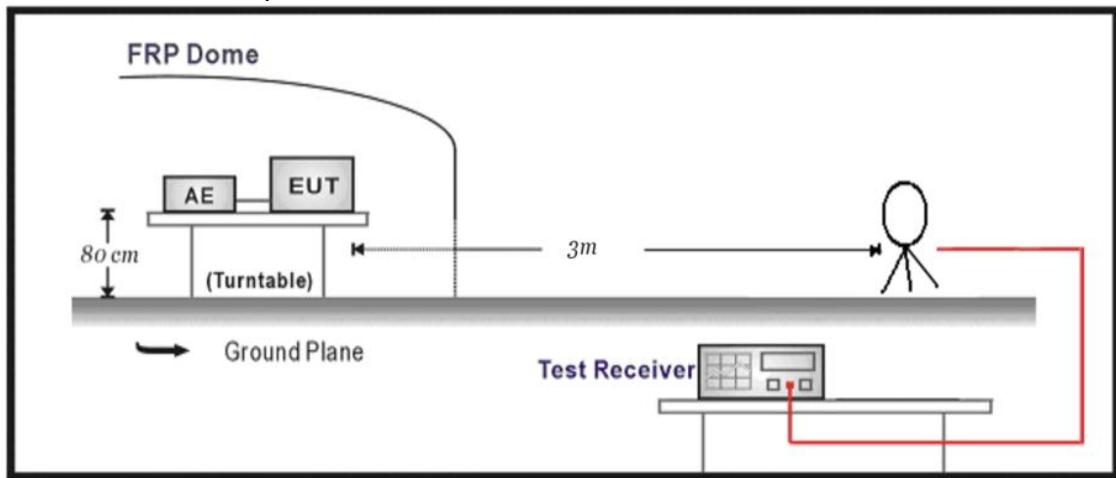


30MHz-1GHz Test Setup:

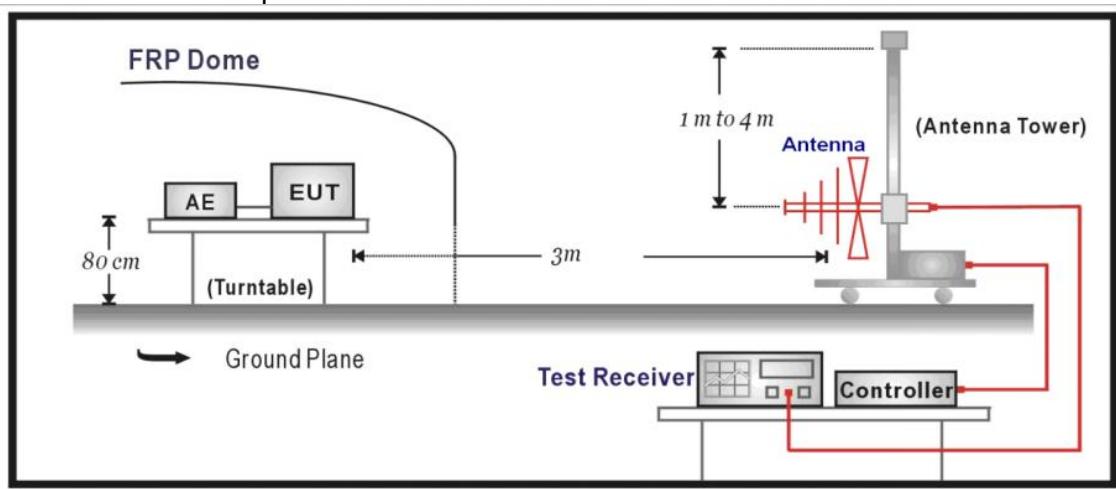

1GHz -40GHz Test Setup:

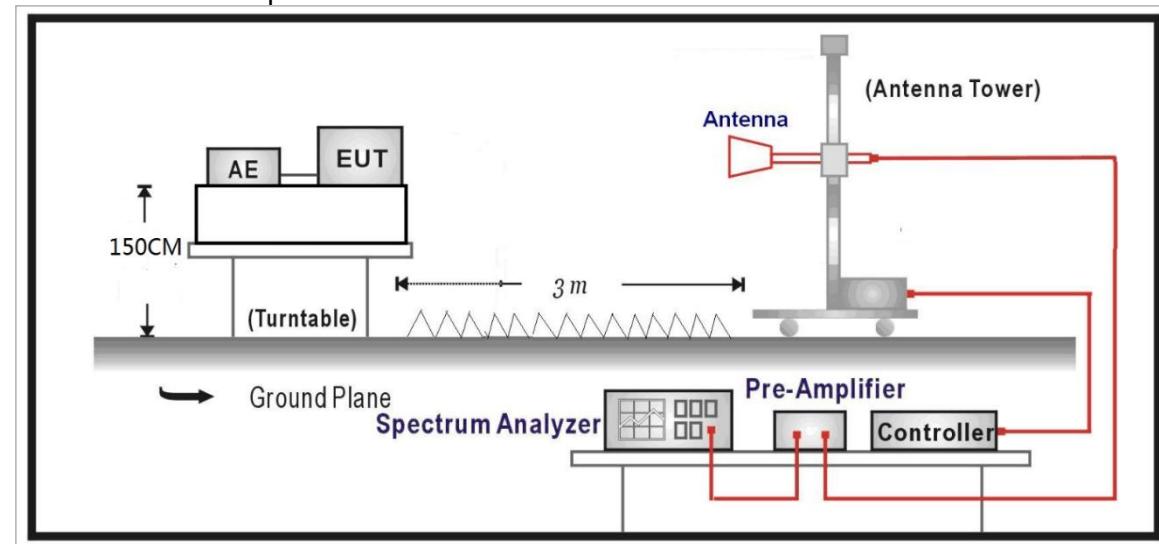

Above 40GHz Test Setup:

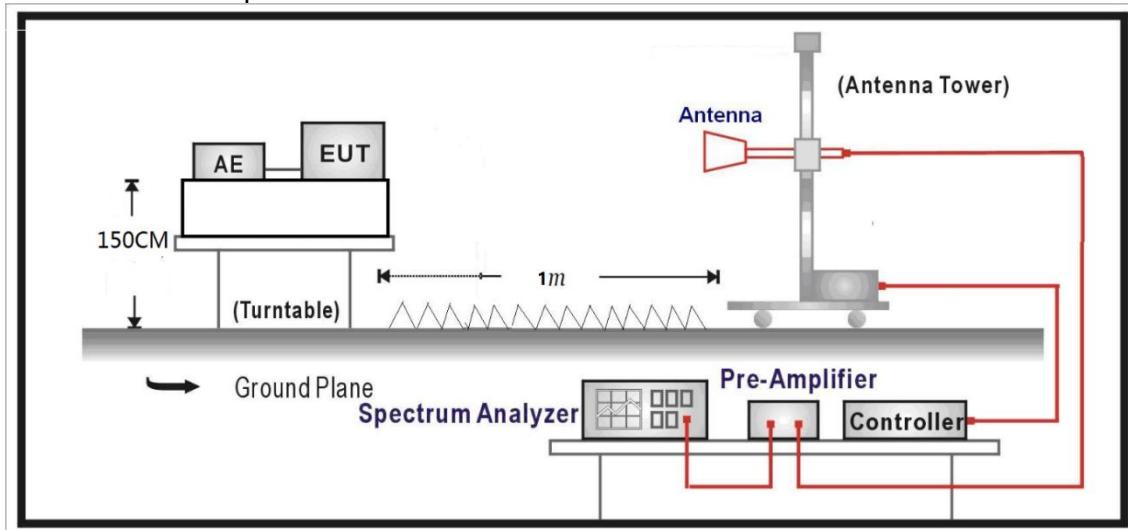

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit

Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.2 Measurement procedure

- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.1.3 Test setup

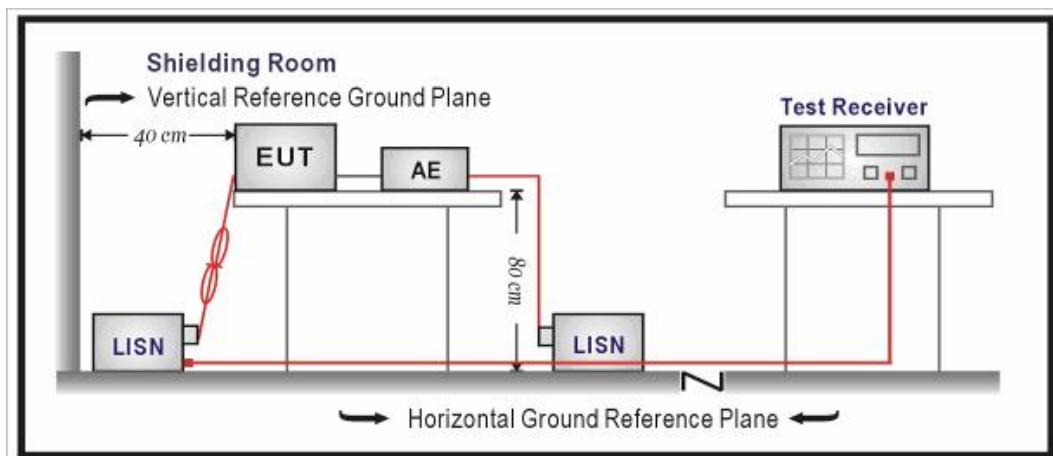


3.1.4 Test results

Test Mode	TM1	Frequency Range	150KHz ~ 30MHz
Test Voltage	AC 120V/60Hz	PHASE	Line (L)
Environmental Conditions	25.3deg. C, 55%RH	Tested By	Zhou Ye

NO	Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr.Factor (dB)
1	0.490	27.8	---	56.2	28.4	L1	20.2
2	0.533	29.8	---	56.0	26.2	L1	20.3
3	0.553	31.2	---	56.0	24.8	L1	20.3
4	4.652	---	12.6	46.0	33.4	L1	21.8
5	4.988	---	13.0	46.0	33.0	L1	22.0
6	27.137	---	16.5	50.0	33.5	L1	23.9

Remark: The emission levels of other frequencies were very low against the limit.

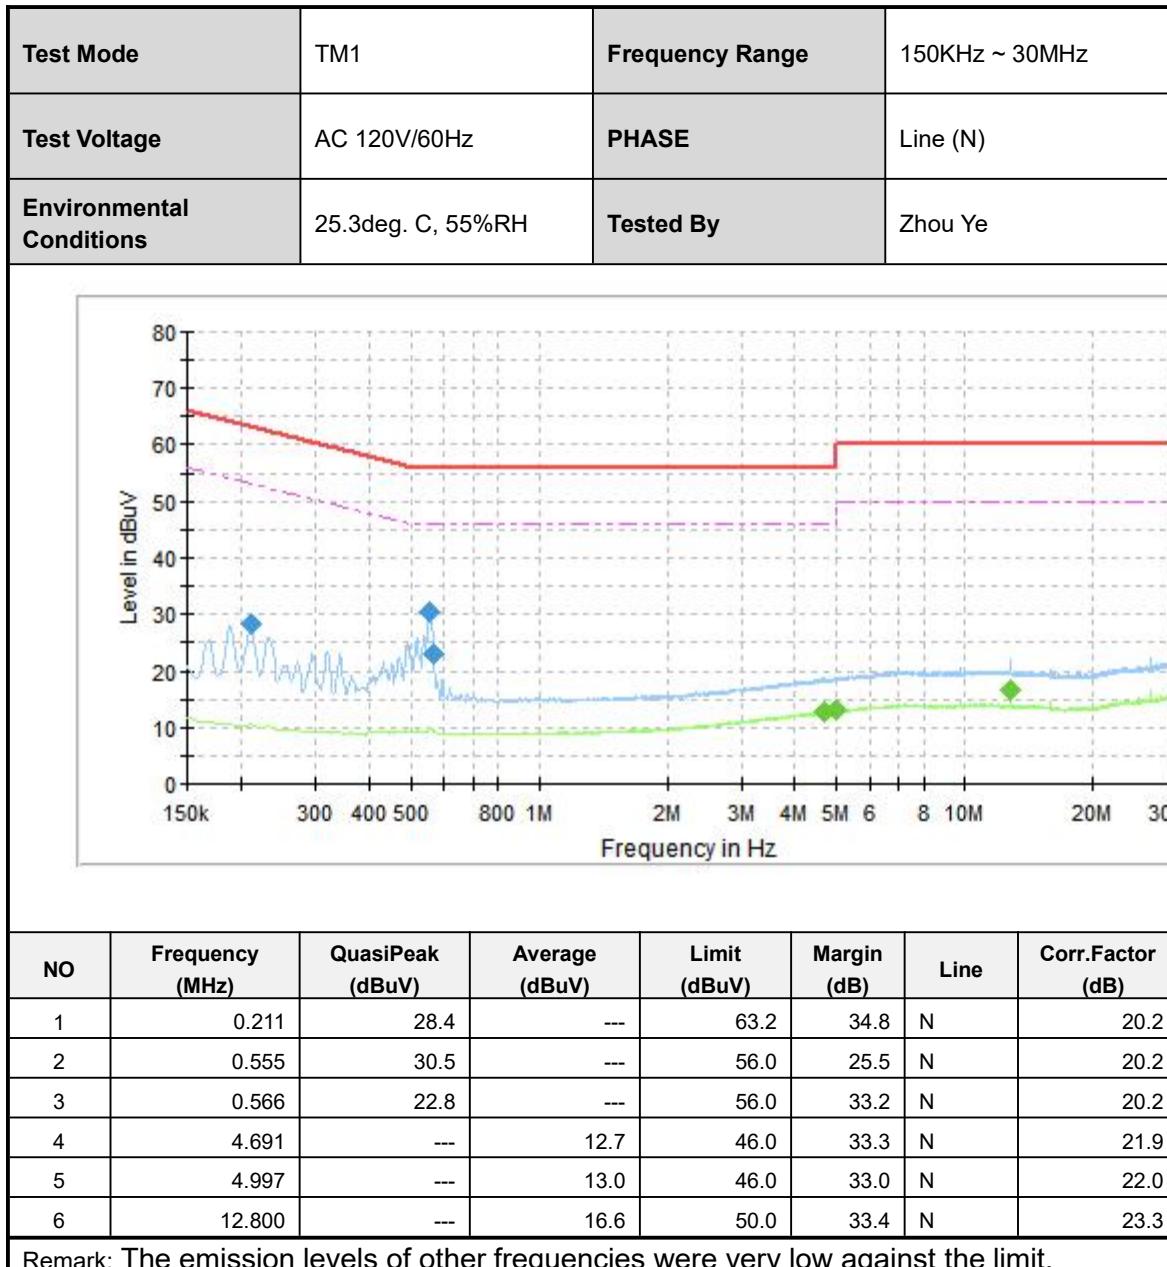



3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT

3.2.1 Limit

Below 40 GHz radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90pW/cm² at a distance of 3 meters.

FCC Frequency [GHz]	EIRP
40 - 200	-10dBm
Limit conversion according to ANSI C63.10-2020 9.2.3 (pW/cm ² to dBm):	EIRP[dBm] = 10 × log(4 × π × d ² × PD[W/m ²]) ----- According to this formula, an emission limit of PD = 90 pW/cm ² at a distance of d = 3 m corresponds to an equivalent isotropically radiated power of EIRP = -10 dBm.



3.2.2 Measurement procedure

Measurement of harmonic and spurious emissions below 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

h.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

Measurement of harmonic and spurious emissions above 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer.
- c. Set spectrum analyzer RBW = 1MHz, VBW = 3MHz, average detector.
- d. Maximize all observed emissions. Note the maximum power indicated on the spectrum analyzer. Adjust this reading, if necessary, by the conversion loss of the external mixer used at the frequency under investigation and the external mixer IF cable loss.
- e. Calculate the maximum field strength of the emission at the measurement distance
- f. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit
- g. Repeat the preceding sequence for every emission observed in the frequency band under investigation.



3.2.3 Test setup

See section 2.7 of this report.




3.2.4 Test results(9kHz-30MHz)

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

3.2.5 Test results(30MHz-1GHz)

Test Mode:	TM1	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

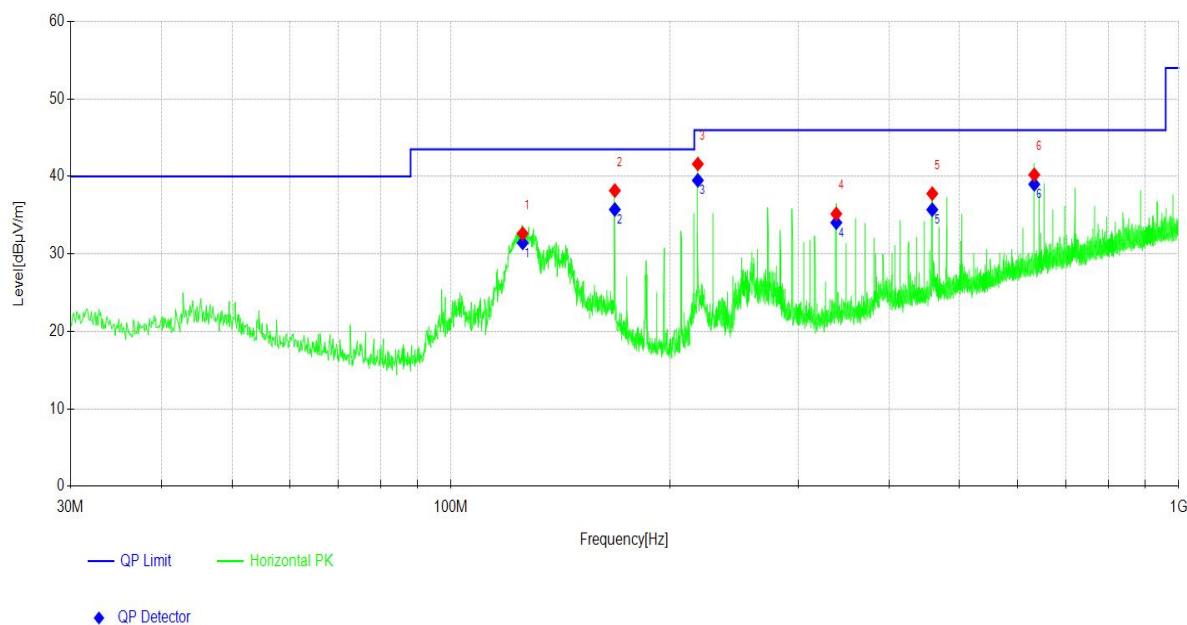

Frequency[MHz]	QP Reading [dB μ V/m]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
125.458	12.08	31.43	43.50	12.07	100	2	Horizontal
167.948	15.1	35.74	43.50	7.76	100	2	Horizontal
218.399	28.11	39.5	46.00	6.50	159	215	Horizontal
338.491	12.6	34.04	46.00	11.96	100	42	Horizontal
458.589	11.52	35.71	46.00	10.29	100	2	Horizontal
633.303	11.56	38.99	46.00	7.01	100	306	Horizontal


Remark: 1. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]



Test Mode:	TM1	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

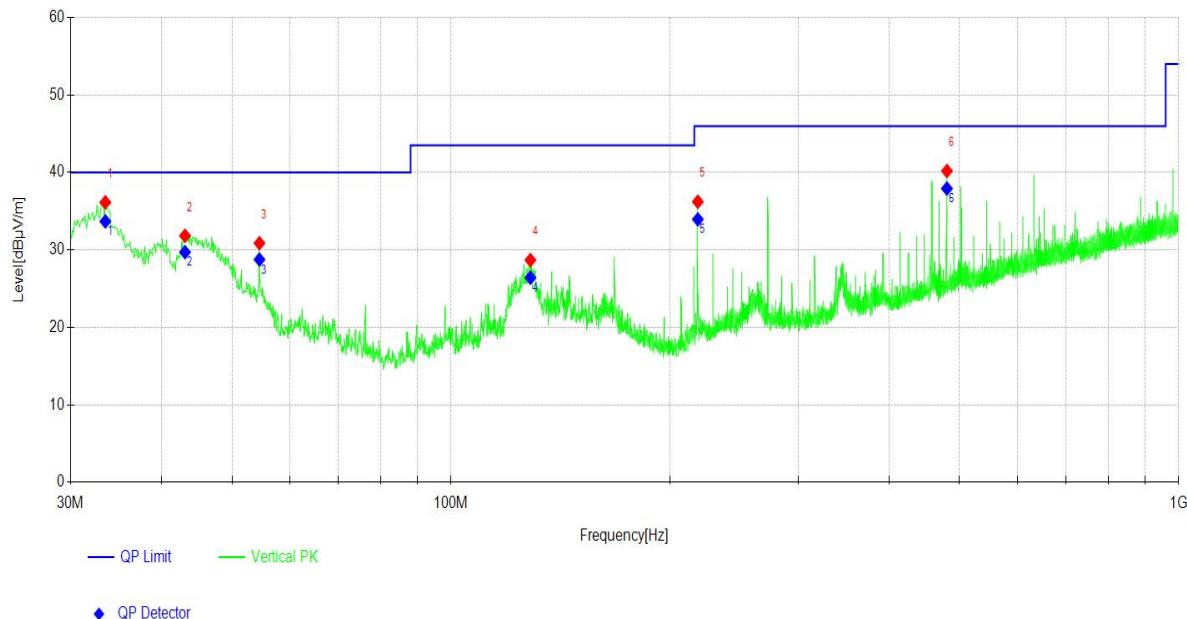

Frequency [MHz]	QP Reading [dB μ V/m]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
33.492	13.87	33.69	40.00	6.31	100	133	Vertical
43.096	9.28	29.72	40.00	10.28	100	108	Vertical
54.543	8.89	28.76	40.00	11.24	100	140	Vertical
128.562	7.02	26.42	43.50	17.08	100	9	Vertical
218.393	15.95	33.95	46.00	12.05	200	291	Vertical
480.416	13.5	37.93	46.00	8.07	200	2	Vertical

Remark: 1. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).


2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. Margin(dB) = Limit[dB μ V/m] - Level [dB μ V/m]



3.2.6 Test results(1GHz-18GHz)

Test Mode:	TM1	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

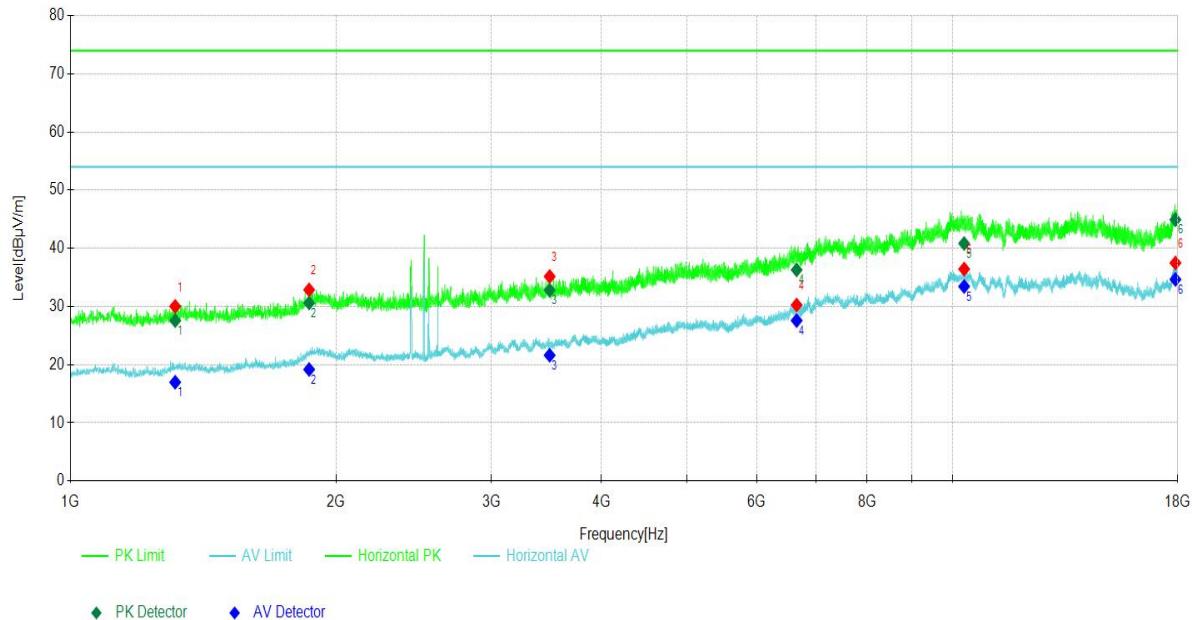


Frequency [MHz]	Factor [dB]	PK Value [dB μ V/m]	PK Limit [dB μ V/m]	PK Margin [dB]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1314.431	-23.41	27.59	74.00	46.41	16.99	54.00	37.01	100	211	Horizontal
1864.686	-20.64	30.62	74.00	43.38	19.18	54.00	34.82	100	347	Horizontal
3493.849	-16.99	32.81	74.00	41.19	21.62	54.00	32.38	100	224	Horizontal
6657.366	-7.12	36.30	74.00	37.70	27.59	54.00	26.41	100	97	Horizontal
10308.031	-0.64	40.84	74.00	33.16	33.45	54.00	20.55	100	265	Horizontal
17894.389	5.15	44.94	74.00	29.06	34.66	54.00	19.34	100	333	Horizontal

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)



Test Mode:	TM1	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

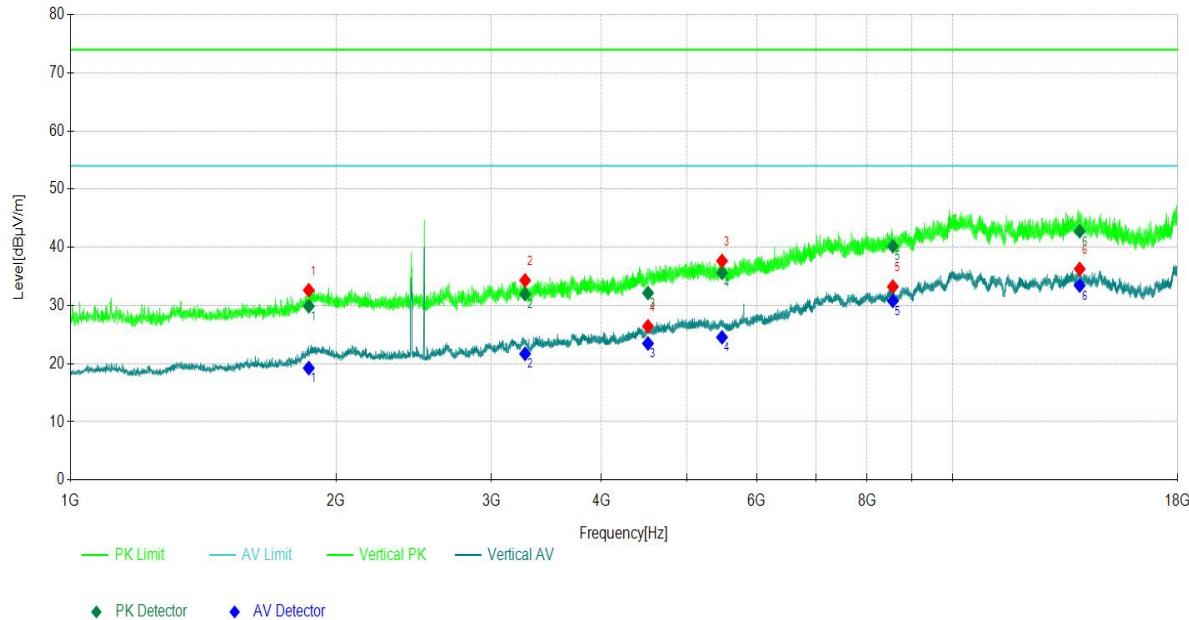

Frequency [MHz]	Factor [dB]	PK Value [dB μ V/m]	PK Limit [dB μ V/m]	PK Margin [dB]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1862.886	-20.68	29.88	74.00	44.12	19.25	54.00	34.75	100	359	Vertical
3276.628	-17.19	31.96	74.00	42.04	21.70	54.00	32.30	100	354	Vertical
4516.352	-13.59	32.16	74.00	41.84	23.48	54.00	30.52	100	162	Vertical
5478.848	-11.22	35.61	74.00	38.39	24.54	54.00	29.46	100	46	Vertical
8557.756	-4.31	40.20	74.00	33.80	30.80	54.00	23.20	100	358	Vertical
13938.394	1.34	42.78	74.00	31.22	33.44	54.00	20.56	100	195	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.


2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)

3.2.7 Test results(18GHz-40GHz)

Test Mode:	TM1	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

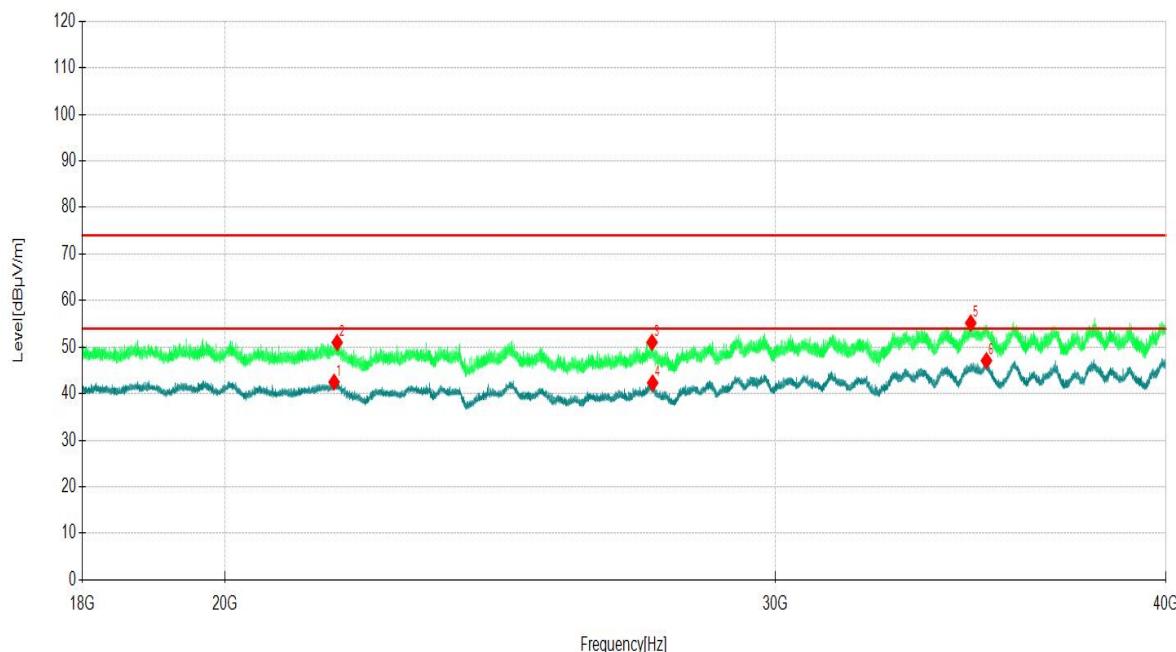


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21671.17	47.34	-4.84	42.50	54.00	11.50	AV	Horizontal
2	21720.17	55.64	-4.66	50.98	74.00	23.02	PK	Horizontal
3	27390.43	54.07	-3.04	51.03	74.00	22.97	PK	Horizontal
4	27403.43	45.45	-3.14	42.31	54.00	11.69	AV	Horizontal
5	34638.76	56.63	-1.45	55.18	74.00	18.82	PK	Horizontal
6	35044.77	48.05	-0.95	47.10	54.00	6.90	AV	Horizontal

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)



Test Mode:	TM1	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

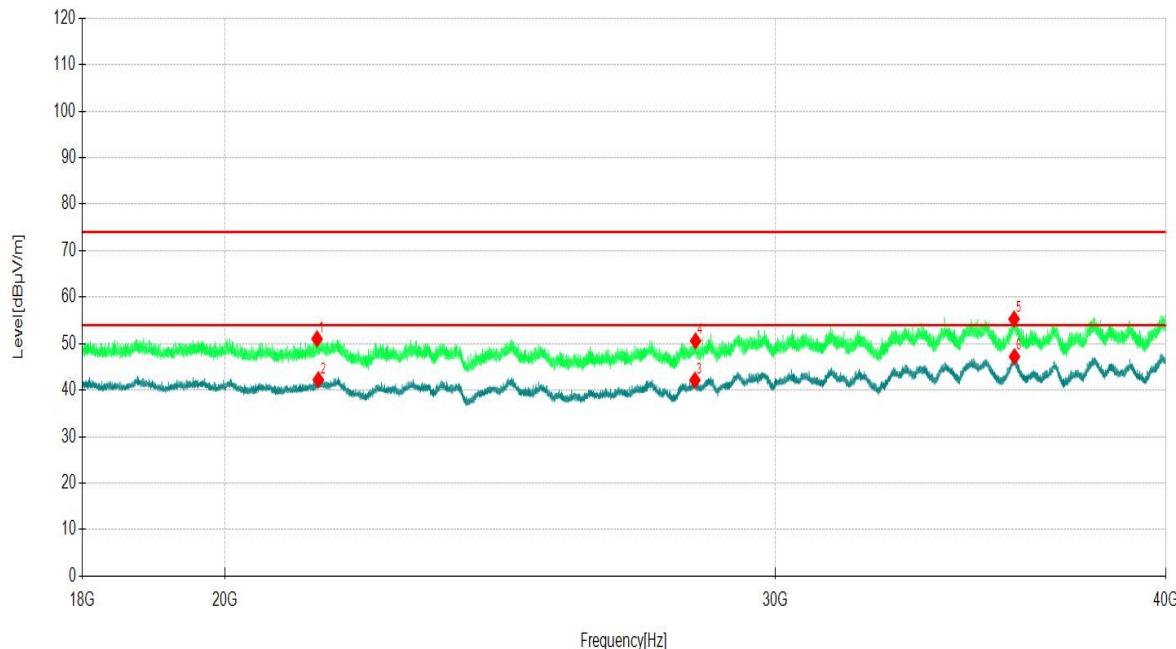

NO.	Freq. [MHz]	Reading [dB μ V]	Factor [dB/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Detector	Polarity
1	21401.15	56.40	-5.37	51.03	74.00	22.97	PK	Vertical
2	21421.16	47.62	-5.37	42.25	54.00	11.75	AV	Vertical
3	28270.47	45.23	-3.08	42.15	54.00	11.85	AV	Vertical
4	28284.47	53.62	-3.02	50.60	74.00	23.40	PK	Vertical
5	35763.81	56.62	-1.32	55.30	74.00	18.70	PK	Vertical
6	35774.81	48.61	-1.40	47.21	54.00	6.79	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB μ V/m) = Reading (dB μ V) + Factor (dB/m).


3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB μ V/m) - Level (dB μ V/m)

3.2.8 Test results(40GHz-200GHz)

Only showing the highest value, “worst case” (Vertical-TM1)

Test Mode:	TM1	Frequency Range	40GHz-60GHz
------------	------------	-----------------	-------------

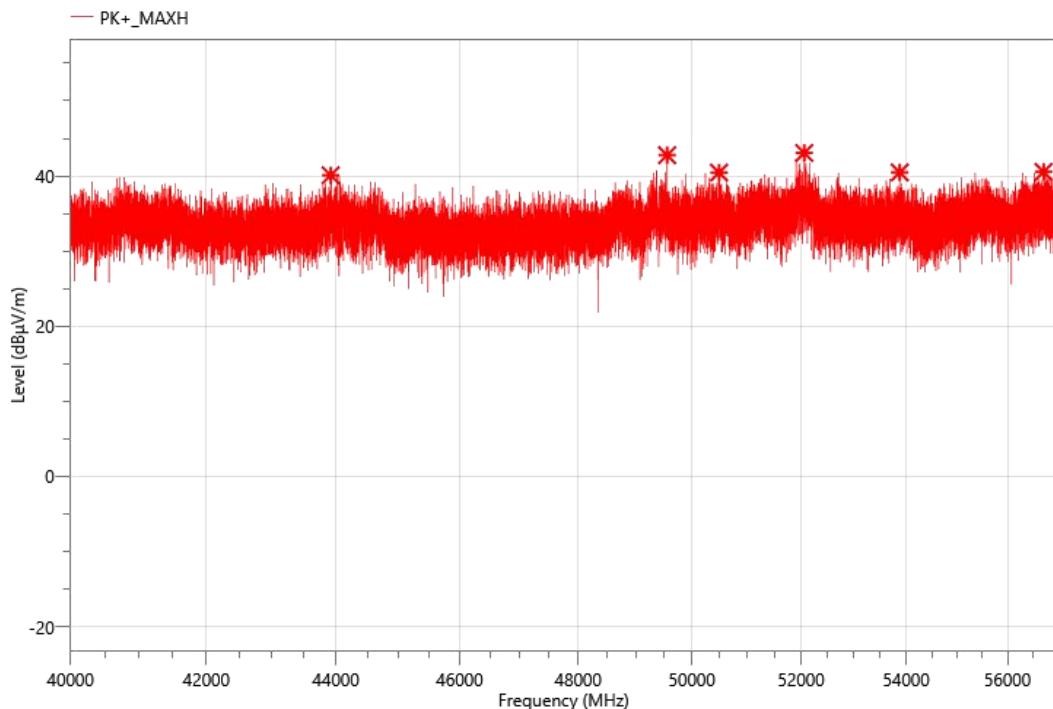


Freq. (MHz)	Reading @1m (dBµV)	Corr. (dB/m)	Meas. @1m (dBµV/m)	Meas. @3m (dBµV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
43916.8	22.06	18.04	40.1	30.56	0	90	V
49556.55	25.37	17.4	42.77	33.23	0.001	90	V
50489.42	22.47	17.98	40.45	30.91	0	90	V
52058.1	22.69	20.38	43.07	33.53	0.001	90	V
53873.7	22.34	18.14	40.48	30.94	0	90	V
56730.97	21.2	19.35	40.55	31.01	0	90	V

Note:

1. Meas. @1m(dBµV/m) = Reading @1m(dBµV) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Mea. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Test Mode:	TM1	Frequency Range	64GHz-90GHz
------------	------------	-----------------	-------------

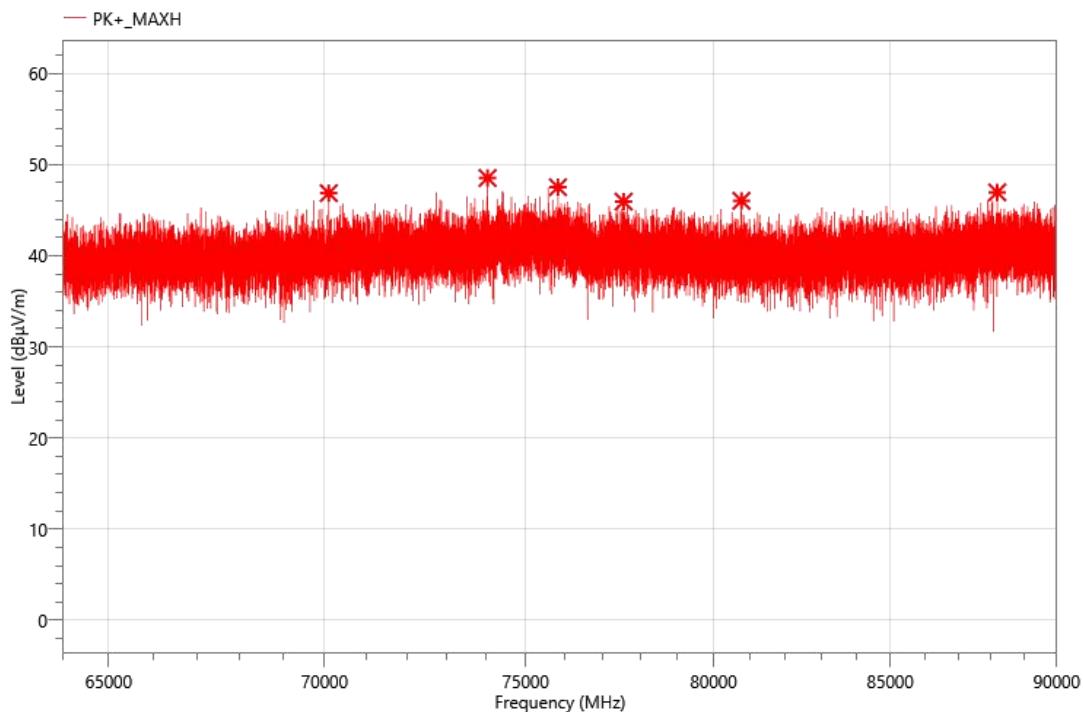


Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
70100.9	24.21	22.65	46.86	37.32	0.001	90	V
74028.2	24.41	24.11	48.52	38.98	0.002	90	V
75838.45	23.16	24.35	47.51	37.97	0.002	90	V
77566.15	22.18	23.75	45.93	36.39	0.001	90	V
80768.05	22.64	23.38	46.02	36.48	0.001	90	V
88179.35	22.23	24.72	46.95	37.41	0.001	90	V

Note:

1. Meas. @1m(dB μ V/m) = Reading @1m(dB μ V) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Mea. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Test Mode:	TM1	Frequency Range	90GHz-140GHz
------------	------------	-----------------	--------------

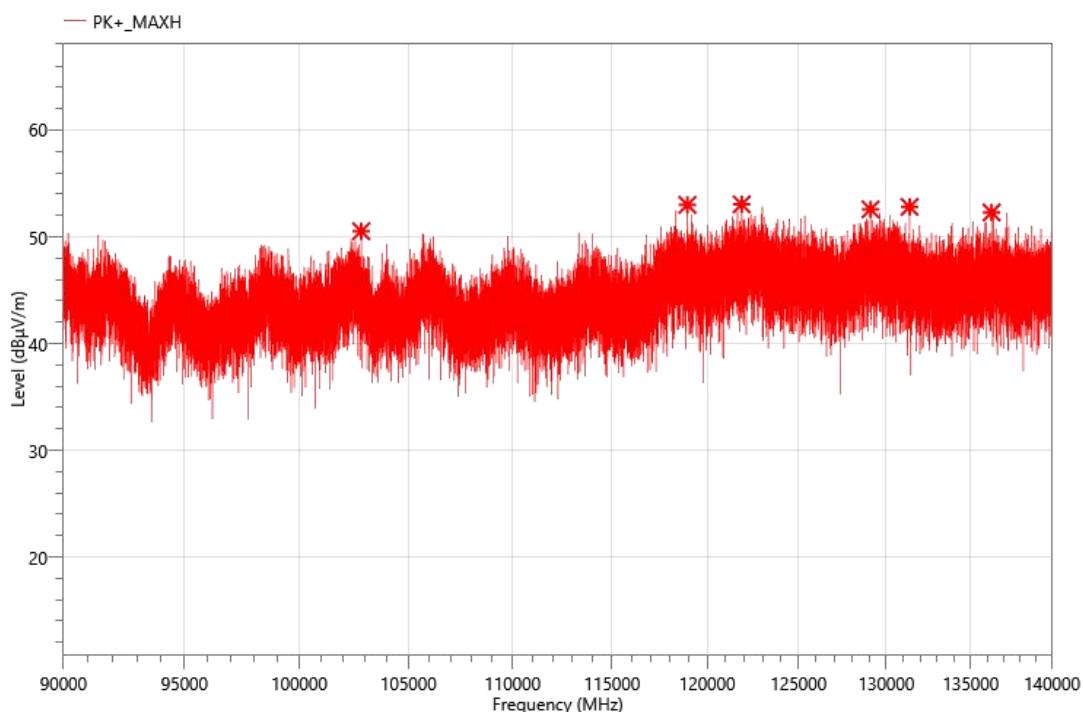


Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
102810	23.08	27.45	50.53	40.99	0.003	90	V
118946.2	24.47	28.53	53	43.46	0.006	90	V
121866.2	23.77	29.28	53.05	43.51	0.006	90	V
129091.2	23.13	29.45	52.58	43.04	0.005	90	V
131362.5	23.75	29.06	52.81	43.27	0.006	90	V
136267.5	22.63	29.66	52.29	42.75	0.005	90	V

Note:

1. Meas. @1m(dB μ V/m) = Reading @1m(dB μ V) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Mea. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$

Test Mode:	TM1	Frequency Range	140GHz-200GHz
------------	------------	-----------------	---------------

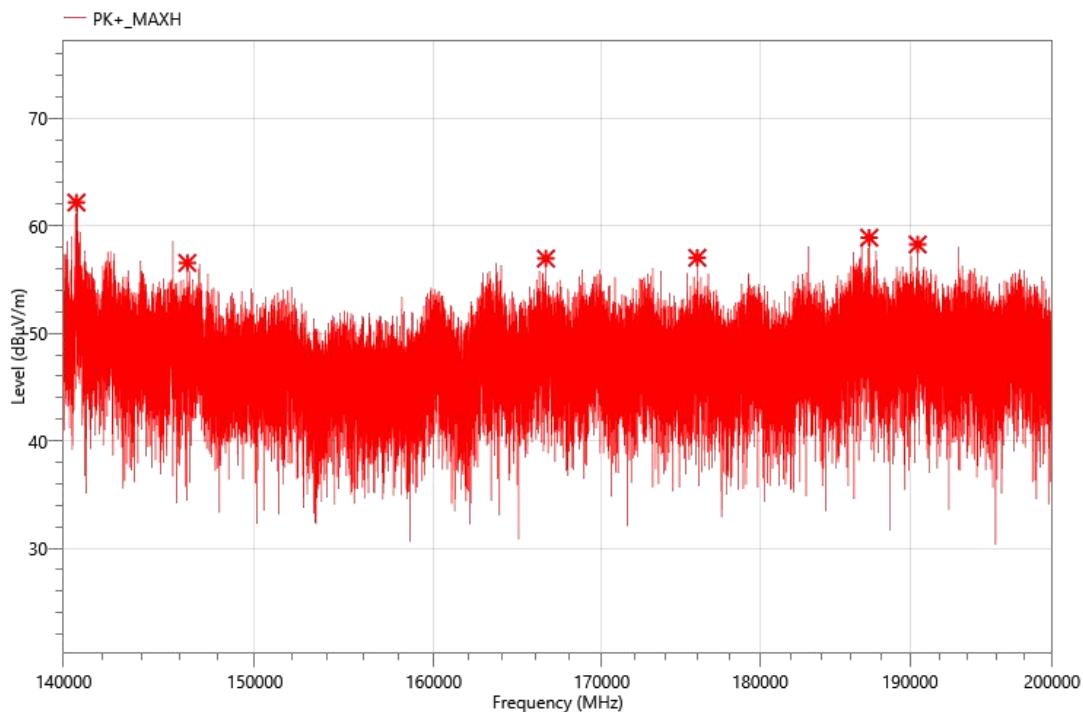

Freq. (MHz)	Reading @1m (dB μ V)	Corr. (dB/m)	Meas. @1m (dB μ V/m)	Meas. @3m (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Pol.
140655.5	31.26	30.91	62.17	52.63	0.049	90	V
146397.5	25.83	30.72	56.55	47.01	0.013	90	V
166619	25.08	31.88	56.96	47.42	0.015	90	V
175971.5	25.65	31.38	57.03	47.49	0.015	90	V
187235	25.64	33.26	58.9	49.36	0.023	90	V
190533.5	25.5	32.77	58.27	48.73	0.02	90	V

Note:

1. Meas. @1m(dB μ V/m) = Reading @1m(dB μ V) + Corr.(dB/m)
2. Corr.(dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) + Mixer Conversion Loss (dB)
3. Meas. @3m = Mea. @1m + 20 * log(1m / 3m)
4. Power Density = $(10^8 / 377) * \{10^{[(\text{Meas. @3m} - 120) / 20]}\}^2$



3.3 10 DB BANDWIDTH MEASUREMENT

3.3.1 Limits

According to § 15.255(c)(3)

The radar bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

3.3.2 Measurement procedure

99% OCCUPIED BANDWIDTH MEASUREMENT PARAMETER	
Detector:	Peak
Resolution bandwidth:	10 MHz (The analyzer limits maximum RBW at 10 MHz.)
Video bandwidth:	50 MHz
Trace-Mode:	Max Hold
Sweep	Auto couple.

Measurement procedures: Bandwidth: ANSI C63.10-2020 6.9 / 9.3

Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower)

3.3.3 Test setup

See section 2.7 of this report.



3.3.4 Test results

Test Mode:	10dB Occupied Bandwidth(MHz)	Verdict
TM1	700.6	Report only

10dB Occupied Bandwidth



3.4 EIRP POWER MEASUREMENT

3.4.1 Limits

According to § 15.255(c)(3)

- Pulse duration not to exceed 6 ns
- Duty factor $\leq 10\%$ within any 0.3 μ s time window
- Averaged EIRP ≤ 13 dBm
- Peak EIRP ≤ 33 dBm
- Averaged integrated EIRP ≤ 5 dBm in any 0.3 μ s time window within 61.5 and 64 GHz

3.4.2 Measurement procedure

Test Settings

1. Radiated power measurements are performed using the signal analyzer's swept mode measurement capability for signals with continuous operation.
2. RBW = 10MHz
3. VBW $\geq 3 \times$ RBW
4. Span as required, enough to observe the fundamental
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector and Trace mode = Suitable for peak and average measurements
7. The trace was allowed to stabilize

Method of measurement:

Refer as TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

Pulse desensitization factor:

Desensitization factor and sweep time considerations for measurements of FMCW signals in ANSI C63.10-2020 Annex C 2.2

3.4.3 Test setup

See section 2.7 of this report.



3.4.4 Test results

Peak EIRP


Test Mode:	Level (dBm)	Desensitization factor (dB)	Peak EIRP (dBm)	Peak EIRP Limit(dBm)	Verdict
TM1	-17.80	-32.11	14.31	33	PASS
TM2	-17.95	-32.11	14.16	33	PASS

Peak EIRP (dBm) = Level(dBm) - Desensitization factor (dB)

AV EIRP

Test Mode:	Level (dBm)	Desensitization factor (dB)	Peak EIRP (dBm)	Peak EIRP Limit(dBm)	Verdict
TM1	-22.89	-32.11	9.22	13	PASS
TM2	-23.34	-32.11	8.77	13	PASS

AV EIRP (dBm) = Level(dBm) - Desensitization factor (dB)

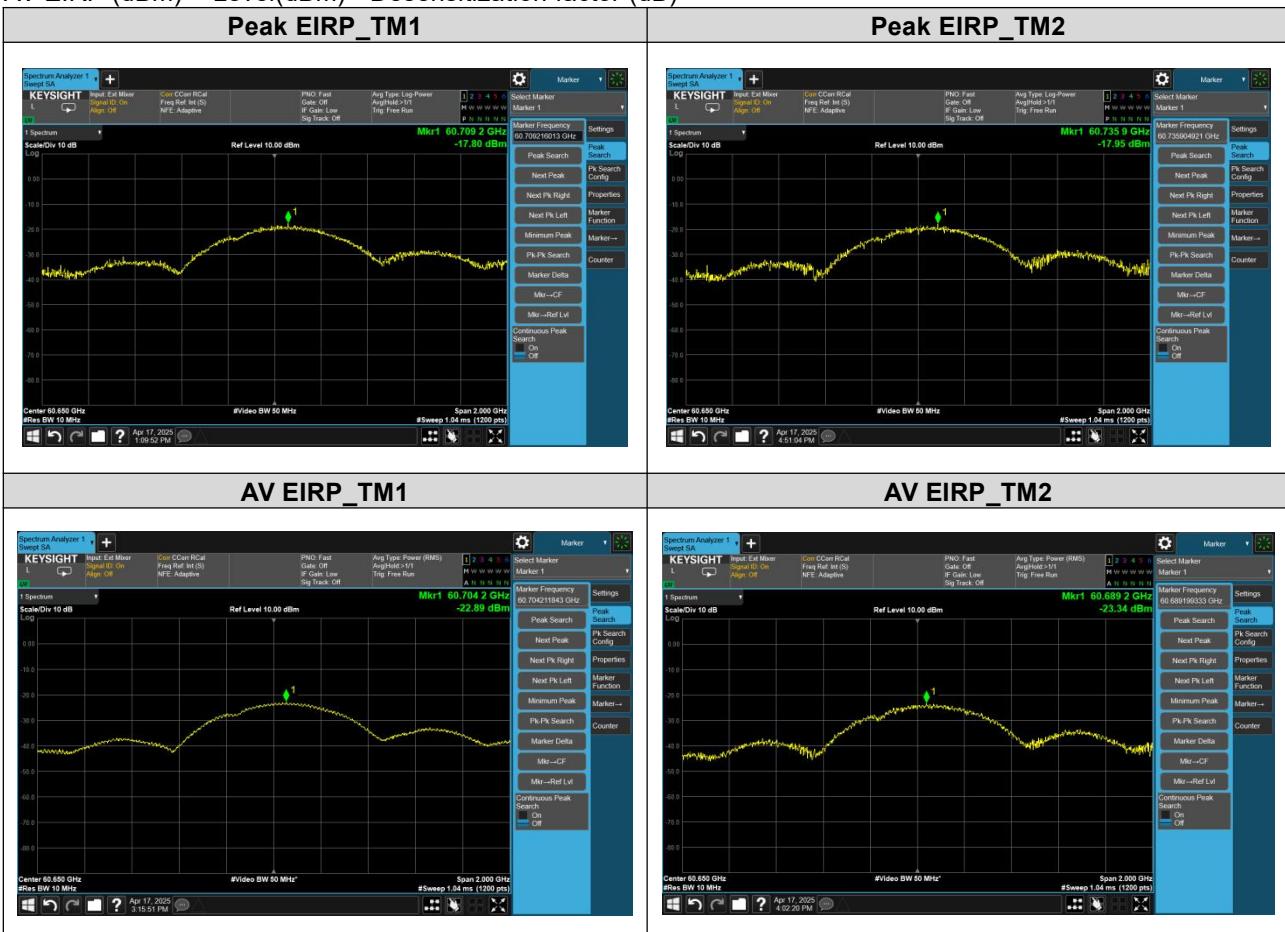

Pulse desensitization factor is:

$$\alpha_p(\text{dB}) = 20 \times \log (\tau \times B_{\text{imp}})$$

Start Frequency (GHz)	Stop Frequency (GHz)	Chirp Width(MHz)	Chirp_τ(ns)	RBW(MHz)	Desensitization factor (dB)
57	64	7000	2.48	10	-32.11

Pulse duration/ Duty/ E.I.R.P. within 61.5 – 64 GHz

Test Mode:	Test Item	Average EIRP Limit(dBm)	Limit	Verdict
TM1	Maximum Pulse duration	2.48ns*	6ns	PASS
	Duty factor within 0.3μs time window	4.1%*	10%	PASS
	Averaged integrated E.I.R.P. within 61.5 – 64 GHz within 0.3μs	-19.37dBm	5dBm	PASS

*) refer module test report No. 1-5794_23-01-03.pdf (Section 12.2, FCC ID: 2AQ6KA1201, Date of Grant: 09/05/2023)



3.5 FREQUENCY STABILITY

3.5.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency range, 57GHz – 64GHz.

3.5.2 Measurement Procedure

Method of measurement: Refer as ANSI C63.10-2020 clause 9.5

3.5.3 Test setup

See section 2.7 of this report.

3.5.4 Test results

FREQUENCY STABILITY					
Temperature (°C)	Voltage (Volt)	FL	FH	Limit (GHz)	Result
		(GHz)	(GHz)		
50	Normal Voltage	60.3439	61.0445	57-64GHz	PASS
40		60.3446	61.0439		
30		60.3438	61.0435		
20		60.3427	61.0457		
10		60.3456	61.0452		
0		60.3447	61.0431		
-10		60.3430	61.0452		
-20		60.3447	61.0436		
-30		60.3456	61.0460		
20	115%	60.3445	61.0446		
20	85%	60.3430	61.0439		



3.6 ANTENNA REQUIREMENT

3.6.1 LIMITS

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.6.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is Antenna in Package and that no antenna other than that furnished by the responsible party shall be used with the device



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>