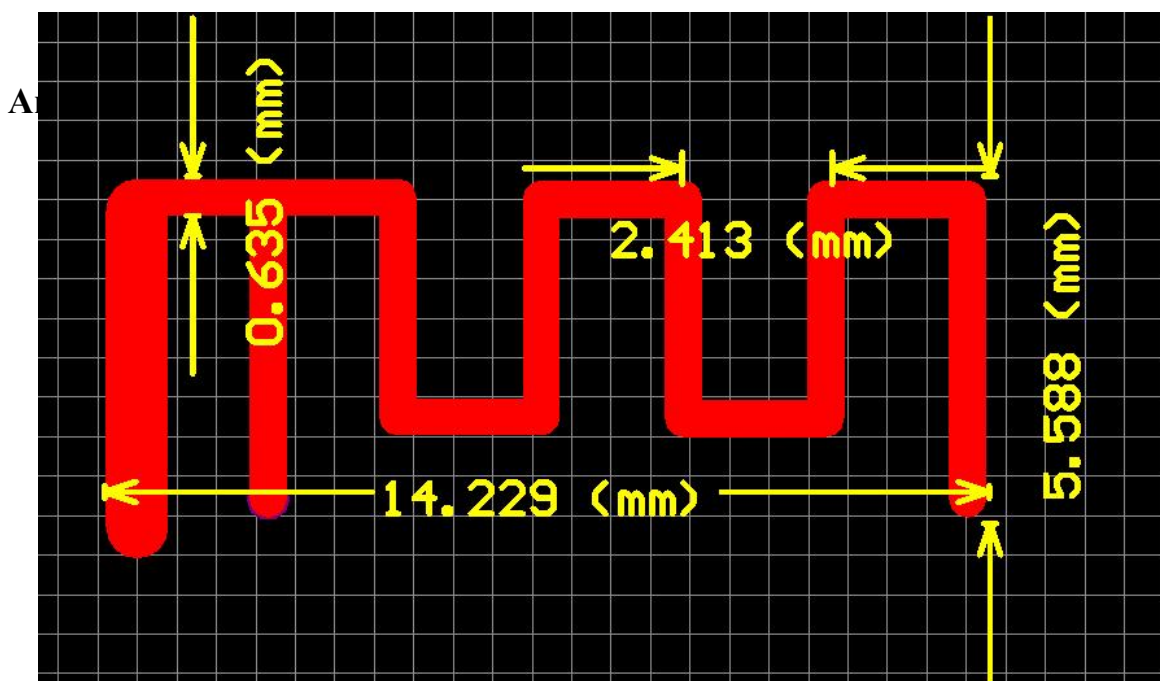


Product specification**Quick Reference Date**


	Antenna module on the system board	
Frequenc Range	2405~ 2480GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. Zigbee class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.08	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	1.08(Avg Gain XY-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S .W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice



**Antenna Gain****Gain Table**

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.08	-0.5	1.08	-3.6	1.0	-3.0	60.2 %


Return Loss

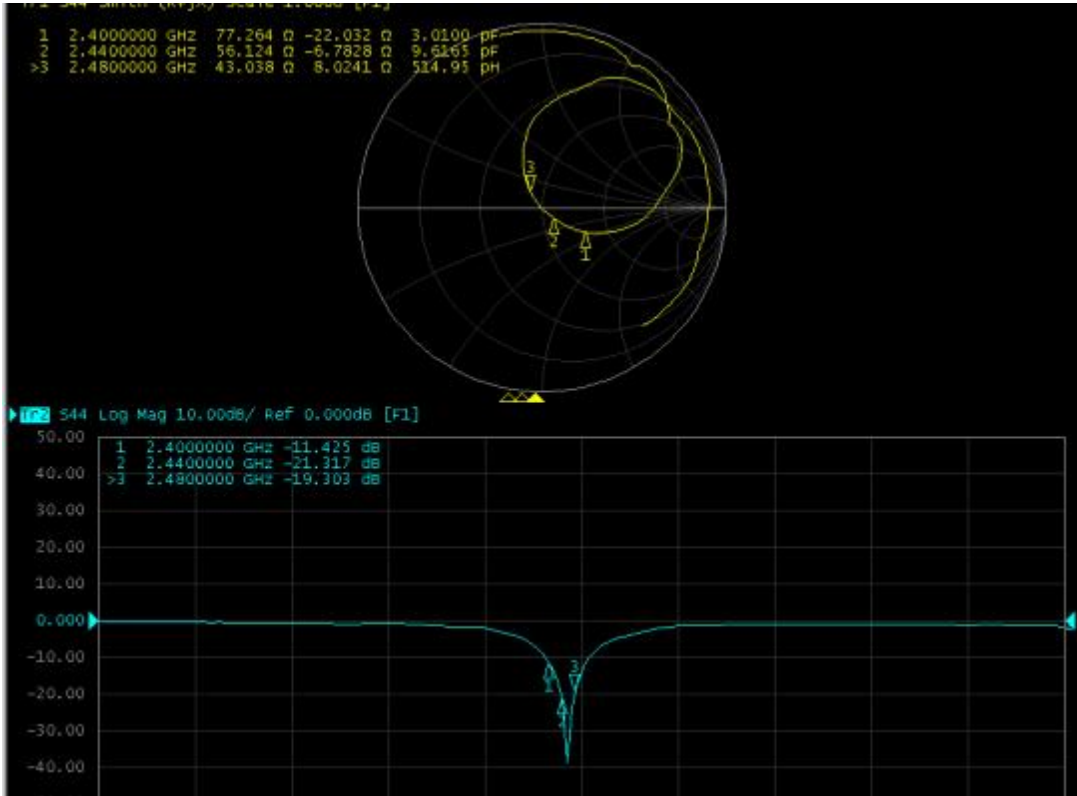

The Environment of Antenna Radiation Pattern

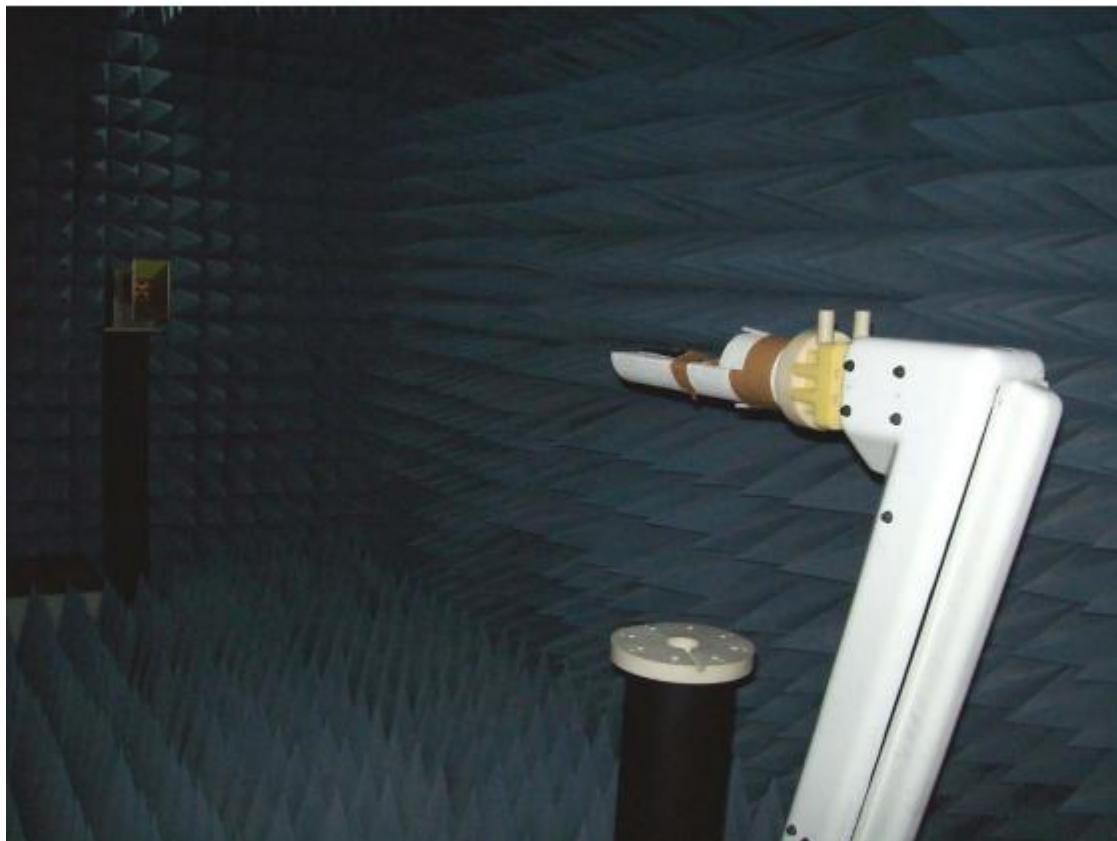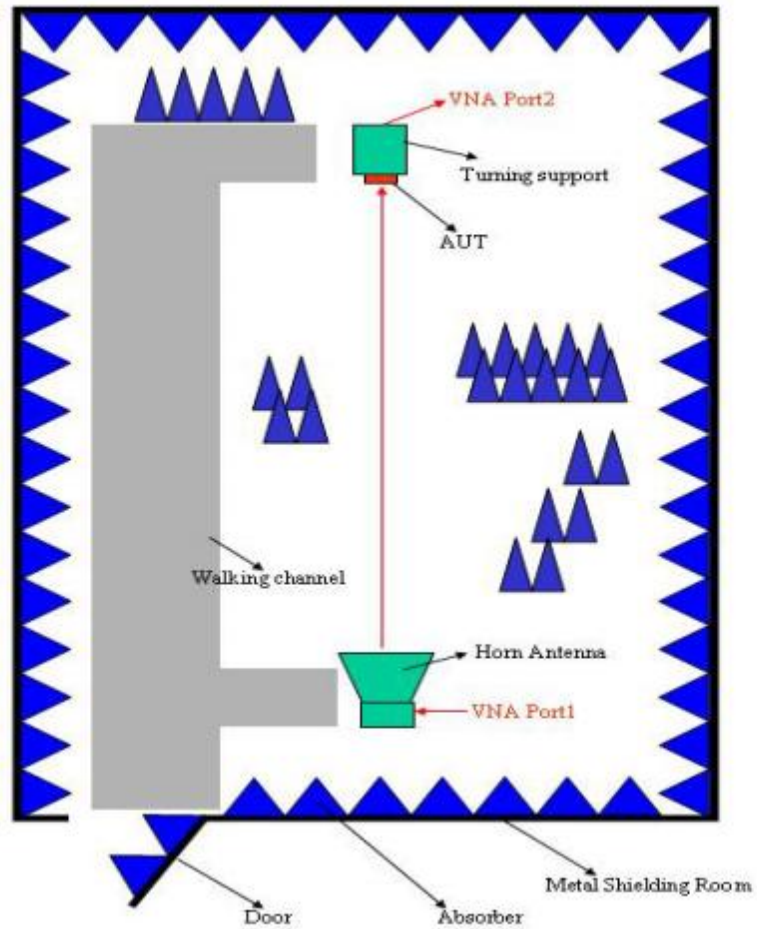


3D radiation pattern diagram

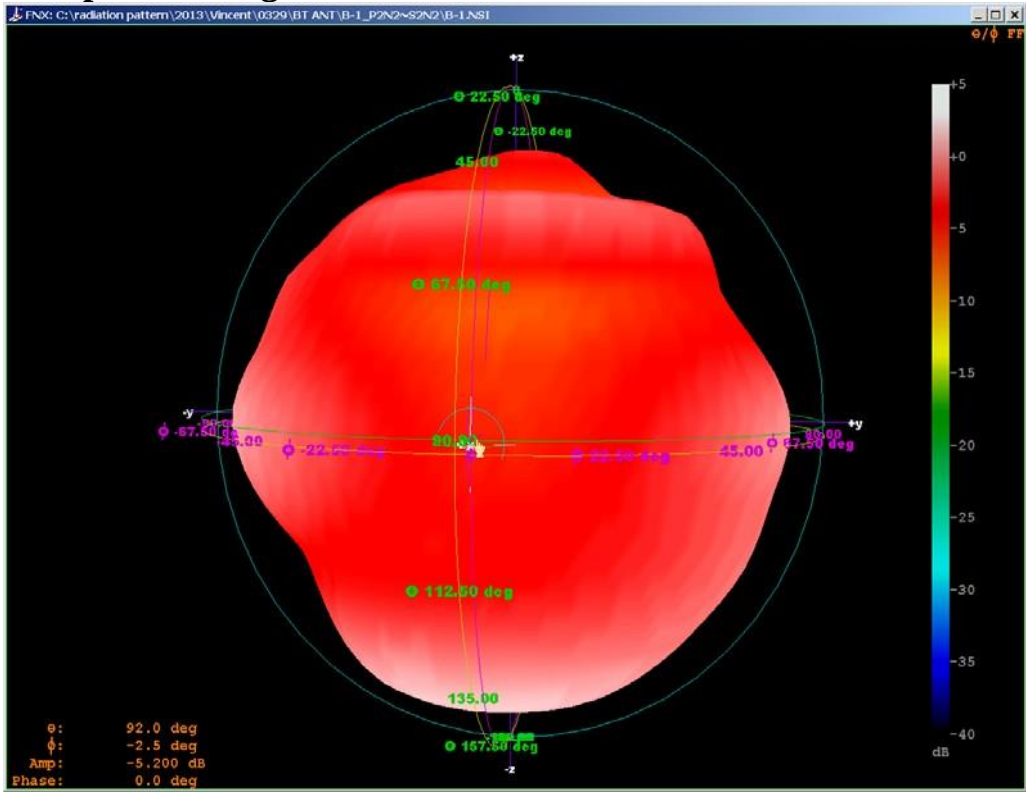


XY-plane

Far-field Power Distribution(H+V) on X-Y Plane

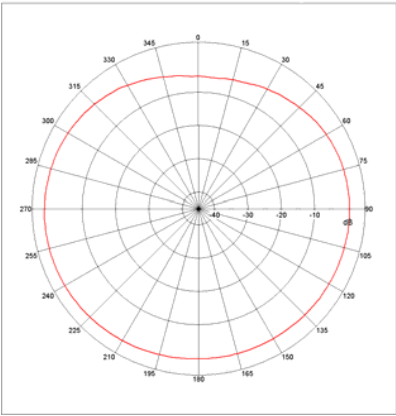

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane

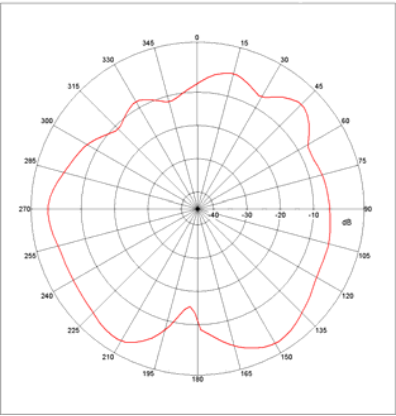

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane

