

TEST REPORT

Reference No...... : WTD25X05135985W001
FCC ID..... : 2BP6U-M2L-10K
Applicant..... : Shenzhen Gewu Zhixin Technology Co., Ltd.
Address..... : 1005, Block A, Huizhi R&D Center, Longteng Community, Xixiang Street,
Bao'an District, Shenzhen, China
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Wireless Power Bank
Model No...... : M2L-10K
Standards..... : FCC Part 15.207&15.209
Date of Receipt sample..... : 2025-05-27
Date of Test..... : 2025-05-27 to 2025-06-17
Date of Issue..... : 2025-06-17
Test Report Form No...... : WTX_Part 15_207_209W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

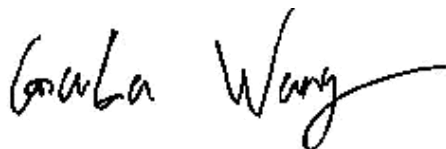

Gala Wang/Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 TEST RESULT	13
4. CONDUCTED EMISSIONS	14
4.1 TEST PROCEDURE	14
4.2 BASIC TEST SETUP BLOCK DIAGRAM	14
4.3 ENVIRONMENTAL CONDITIONS	14
4.4 SUMMARY OF TEST RESULTS/PLOTS	14
5. RADIATED EMISSION	17
5.1 STANDARD APPLICABLE	17
5.2 TEST PROCEDURE	17
5.3 TEST RECEIVER SETUP	19
5.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
5.5 ENVIRONMENTAL CONDITIONS	19
5.6 SUMMARY OF TEST RESULTS/PLOTS	19
6. OCCUPIED BANDWIDTH	23
6.1 STANDARD APPLICABLE	23
6.2 TEST PROCEDURE	23
6.3 ENVIRONMENTAL CONDITIONS	23
6.4 SUMMARY OF TEST RESULTS/PLOTS	23
APPENDIX PHOTOGRAPHS	25

Report version

Version No.	Date of issue	Description
Rev.00	2025-06-17	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Wireless Power Bank
Trade Name:	/
Model No.:	M2L-10K
Adding Model(s):	S2-T, 2C-S5, Dual2-10, HM-Q2
Rated Voltage:	Battery Capacity: 10000mAh Wireless Charging out: 15W Max Total output:5V Lightning input: 5V USB-C Input: 5V/9V USB-C port output: 5V/9V/12V USB-C wire output:5V USB-A output: 5V Wireless Charger: 15W Total Output: 15W Max
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model M2L-10K, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110-148kHz
Antenna Type:	Coil Antenna
Modulation Type:	FSK
Rated Current:	Total output:3A Lightning input: 2A USB-C Input : 3A/2A USB-C port output : 2A/2.2A/1.67A USB-C wire output:2A USB-A output: 2A
Rated Power:	Wireless Output : 15W Max

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.207: Conducted limits.

FCC Rules Part 15.209: Radiated emission limits; general requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, the equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Output 15W	Input: DC5V/9V

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	0.6	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
wireless charging tester	YBZ	YBZ wireless charging tester	/
Adapter	Xiaomi	MDY-08-ES	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz, 3.74dB
		0.15-30MHz, 3.34dB
Radiated Emissions	Radiated	30-200MHz, 4.52dB
		0.2-1GHz, 5.56dB
		1-6GHz, 3.84dB
		6-18GHz, 3.92dB

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2025-02-23	2026-02-22
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2025-02-23	2026-02-22
WTXE1103A 1003	Attenuator	Pasternack	PE4007-4	/	2025-02-23	2026-02-22
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2025-02-23	2026-02-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2025-02-23	2026-02-22
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2025-02-23	2026-02-22
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2025-02-23	2026-02-22
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2025-02-23	2026-02-22
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2025-02-23	2026-02-22
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22

1001						
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2025-02-23	2026-02-22
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2025-02-23	2026-02-22
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2025-02-23	2026-02-22
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2025-02-23	2026-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2025-02-23	2026-02-22
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2026-02-25
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2025-02-23	2026-02-22
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2025-02-23	2026-02-22
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09

WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2025-02-23	2026-02-22
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2026-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2025-02-23	2026-02-22
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2025-02-23	2026-02-22
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2024-12-08	2025-12-07
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2025-02-23	2026-02-22
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2025-02-23	2026-02-22
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2025-02-23	2026-02-22
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2025-02-23	2026-02-22
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2025-02-23	2026-02-22
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2025-02-23	2026-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission A)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission B)	Farad	EZ-EMC	RA-03A1 (1.1.4.2)
EMI Test Software (Radiated Emission C)	Farad	EZ-EMC	RA-03A1-2 (1.1.4.2)
EMI Test Software (Conducted Emission Room 1#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3
EMI Test Software (Conducted Emission Room 2#)	Farad	EZ-EMC	3A1*CE-RE 1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.203Antenna Requirement	Compliant
§15.207 (a) Conducted Emission	Compliant
§15.209 Radiated Emission	Compliant

N/A: not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a Coil Antenna, fulfill the requirement of this section.


4. Conducted Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

4.2 Basic Test Setup Block Diagram

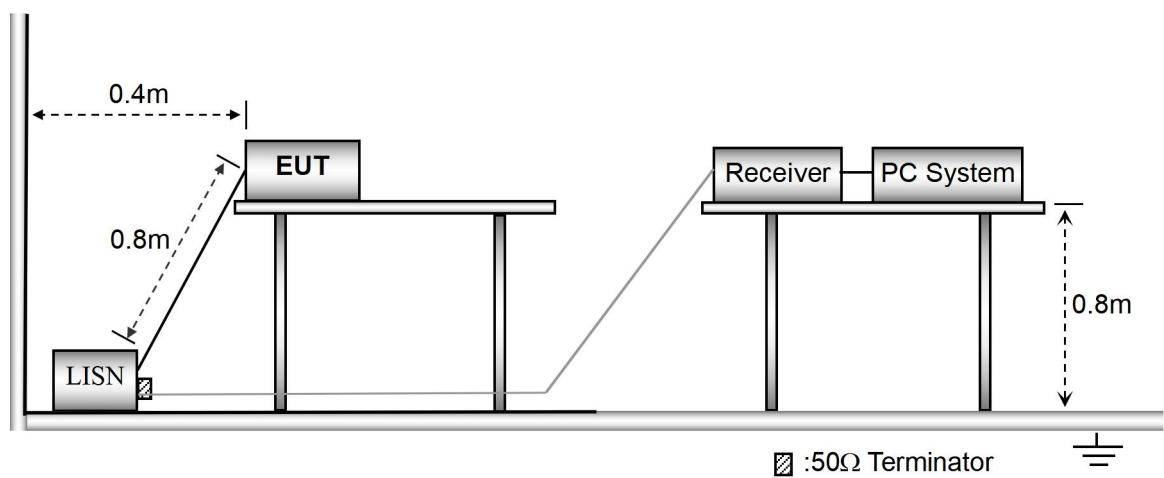


4.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


4.4 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

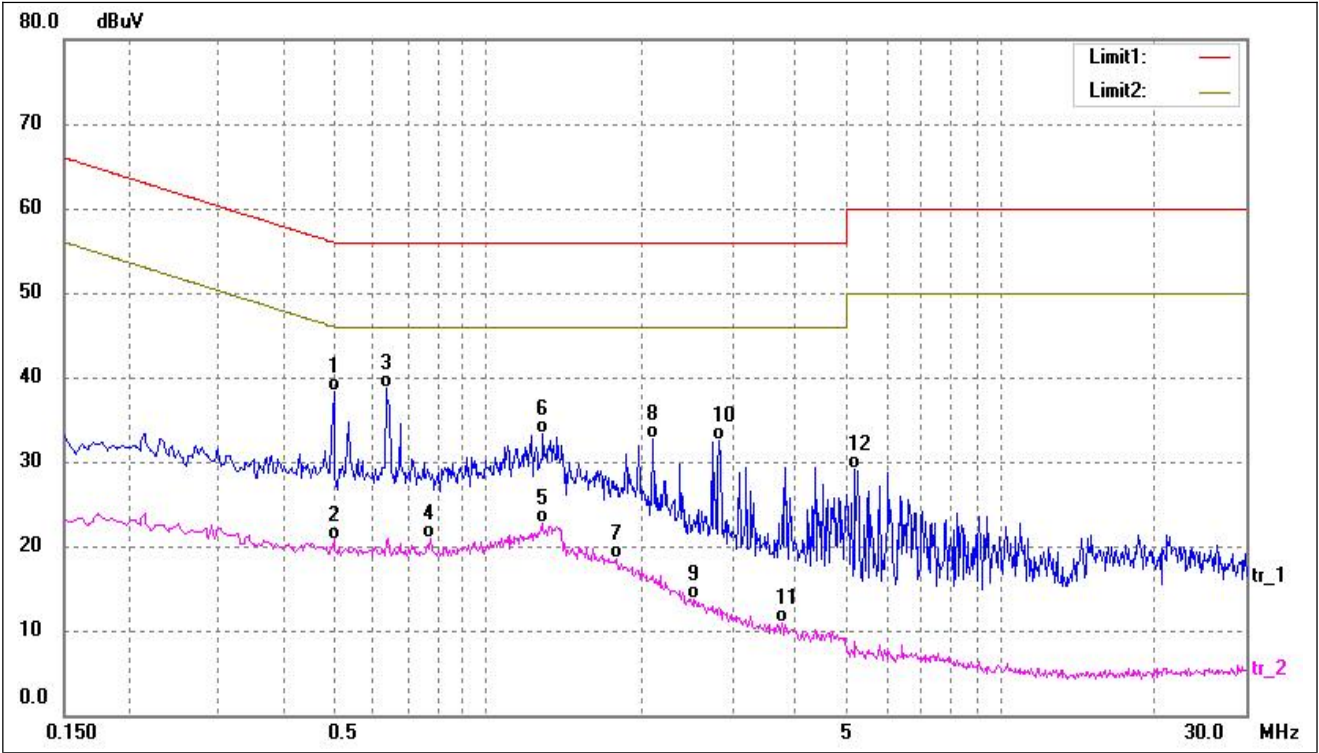

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5020	28.92	9.45	38.37	56.00	-17.63	QP
2	0.5020	11.18	9.45	20.63	46.00	-25.37	AVG
3*	0.6340	29.17	9.51	38.68	56.00	-17.32	QP
4	0.7780	11.42	9.52	20.94	46.00	-25.06	AVG
5	1.2780	13.13	9.60	22.73	46.00	-23.27	AVG
6	1.2860	23.67	9.60	33.27	56.00	-22.73	QP
7	1.7860	8.71	9.85	18.56	46.00	-27.44	AVG
8	2.1100	22.77	9.94	32.71	56.00	-23.29	QP
9	2.5260	3.86	9.84	13.70	46.00	-32.30	AVG
10	2.8340	22.67	9.78	32.45	56.00	-23.55	QP
11	3.7420	1.26	9.61	10.87	46.00	-35.13	AVG
12	5.1980	19.46	9.61	29.07	60.00	-30.93	QP

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

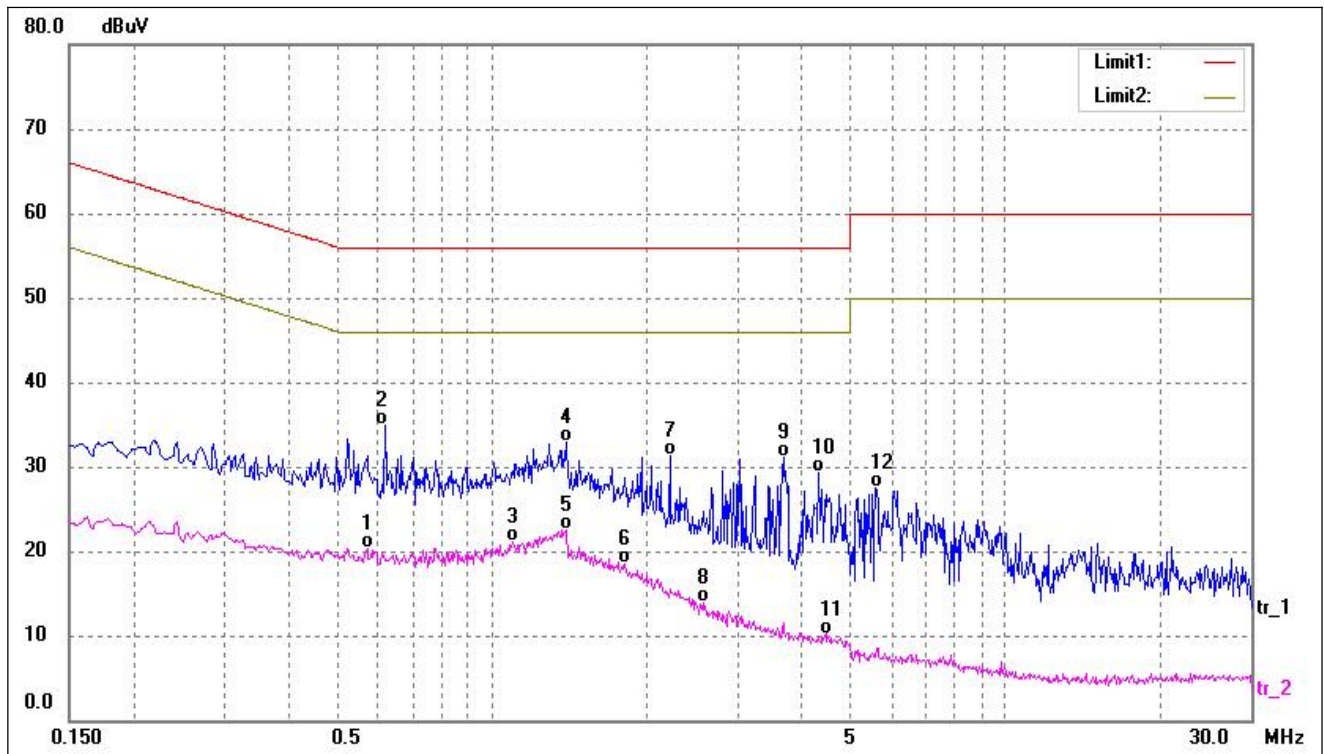

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5700	10.86	9.49	20.35	46.00	-25.65	AVG
2*	0.6180	25.36	9.50	34.86	56.00	-21.14	QP
3	1.0940	11.67	9.51	21.18	46.00	-24.82	AVG
4	1.3900	23.16	9.66	32.82	56.00	-23.18	QP
5	1.3900	12.90	9.66	22.56	46.00	-23.44	AVG
6	1.8140	8.62	9.87	18.49	46.00	-27.51	AVG
7	2.2180	21.40	9.92	31.32	56.00	-24.68	QP
8	2.5740	4.05	9.84	13.89	46.00	-32.11	AVG
9	3.6900	21.55	9.62	31.17	56.00	-24.83	QP
10	4.3220	19.71	9.57	29.28	56.00	-26.72	QP
11	4.4660	0.62	9.58	10.20	46.00	-35.80	AVG
12	5.5700	17.81	9.63	27.44	60.00	-32.56	QP

5. RADIATED EMISSION

5.1 Standard Applicable

According to 15.209(a), radiated emission limits; general requirements.


Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

5.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

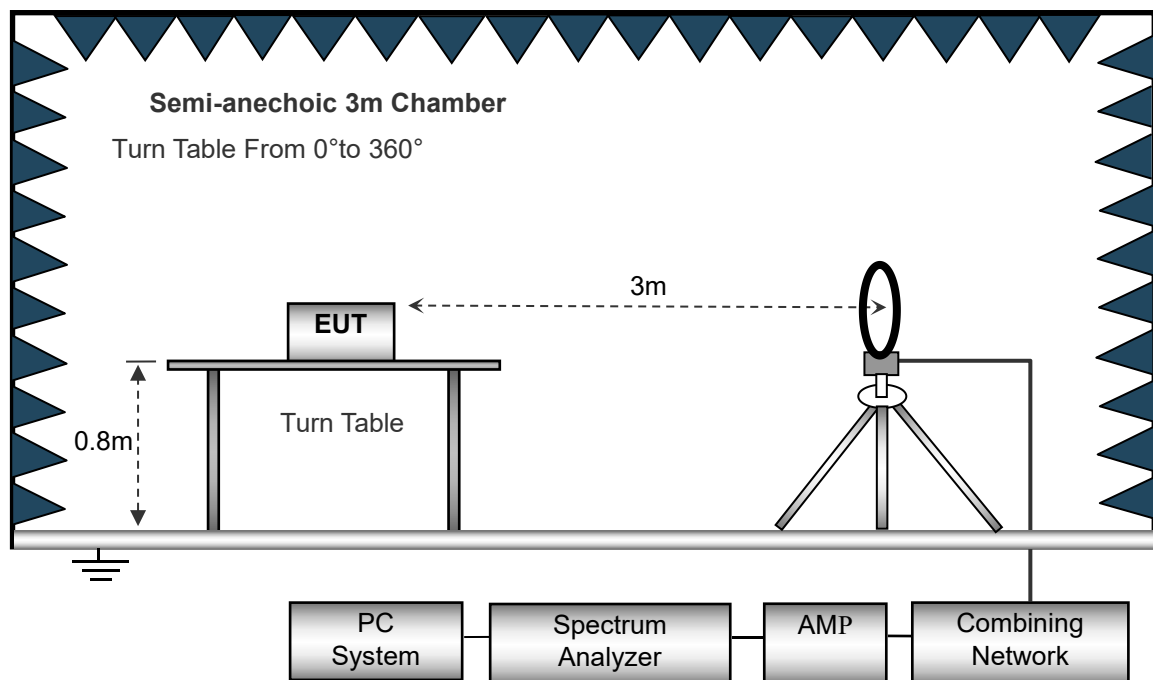

The test setup for emission measurement from 30MHz to 1GHz.

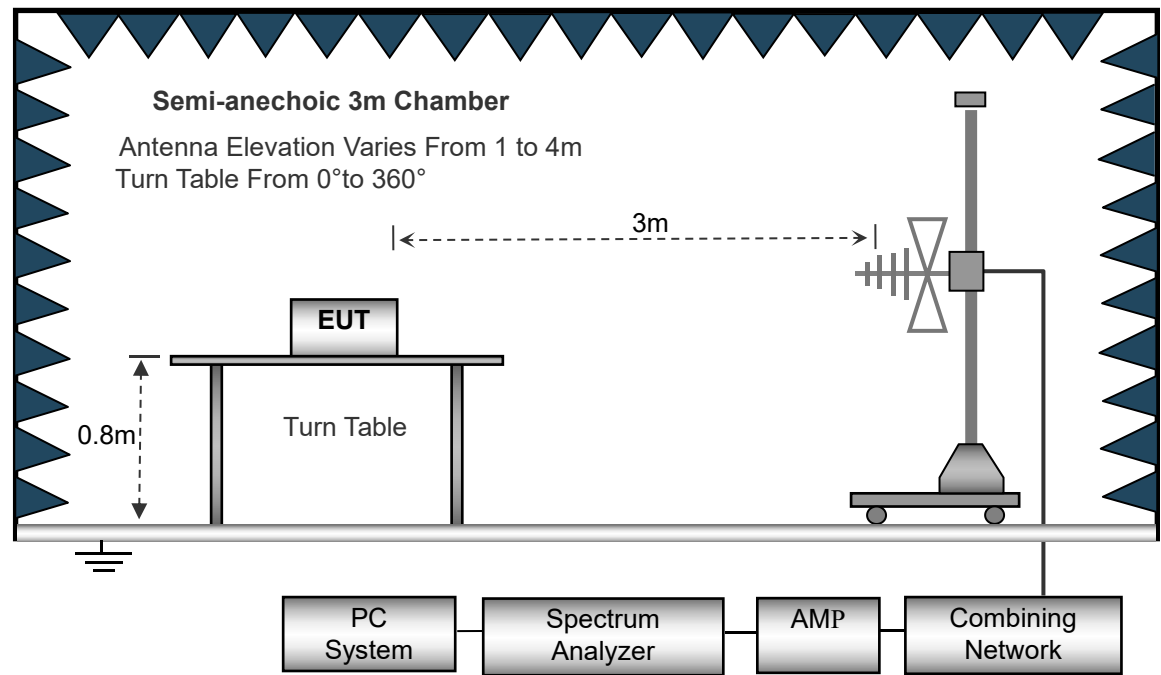

The test setup for emission measurement above 1GHz.

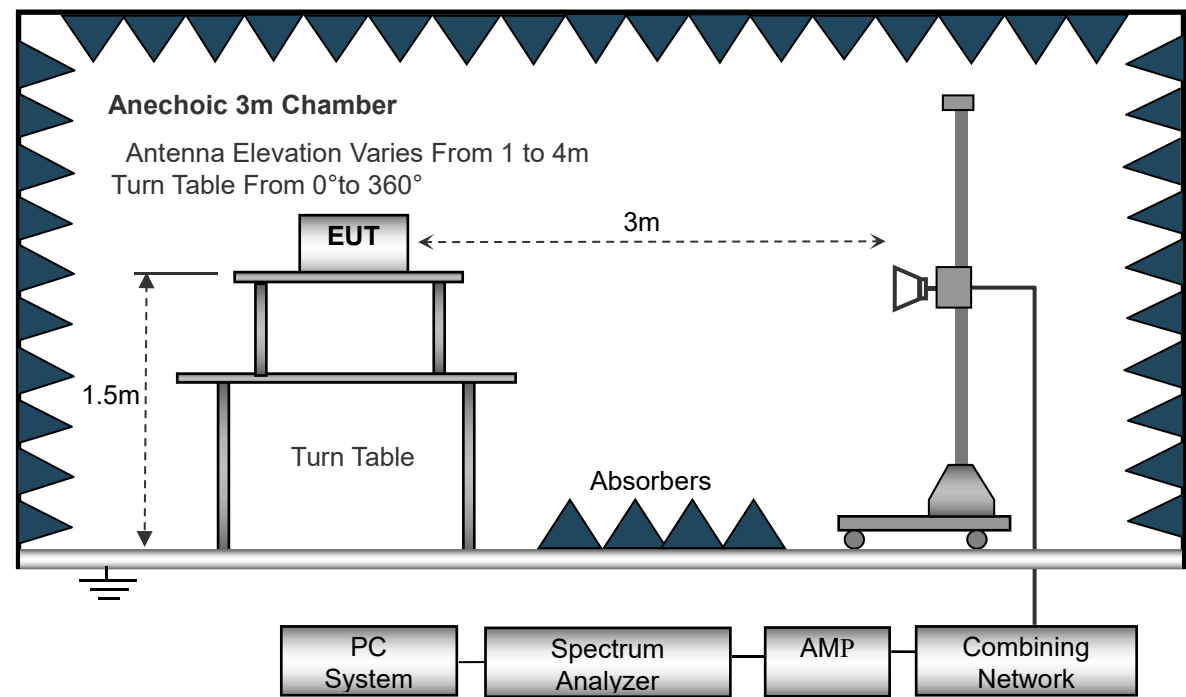

5.3 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10kHz,

VBW =30kHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120kHz,

VBW=300kHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.209(a) Limit}$$

5.5 Environmental Conditions


Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

5.6 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Below 30MHz


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

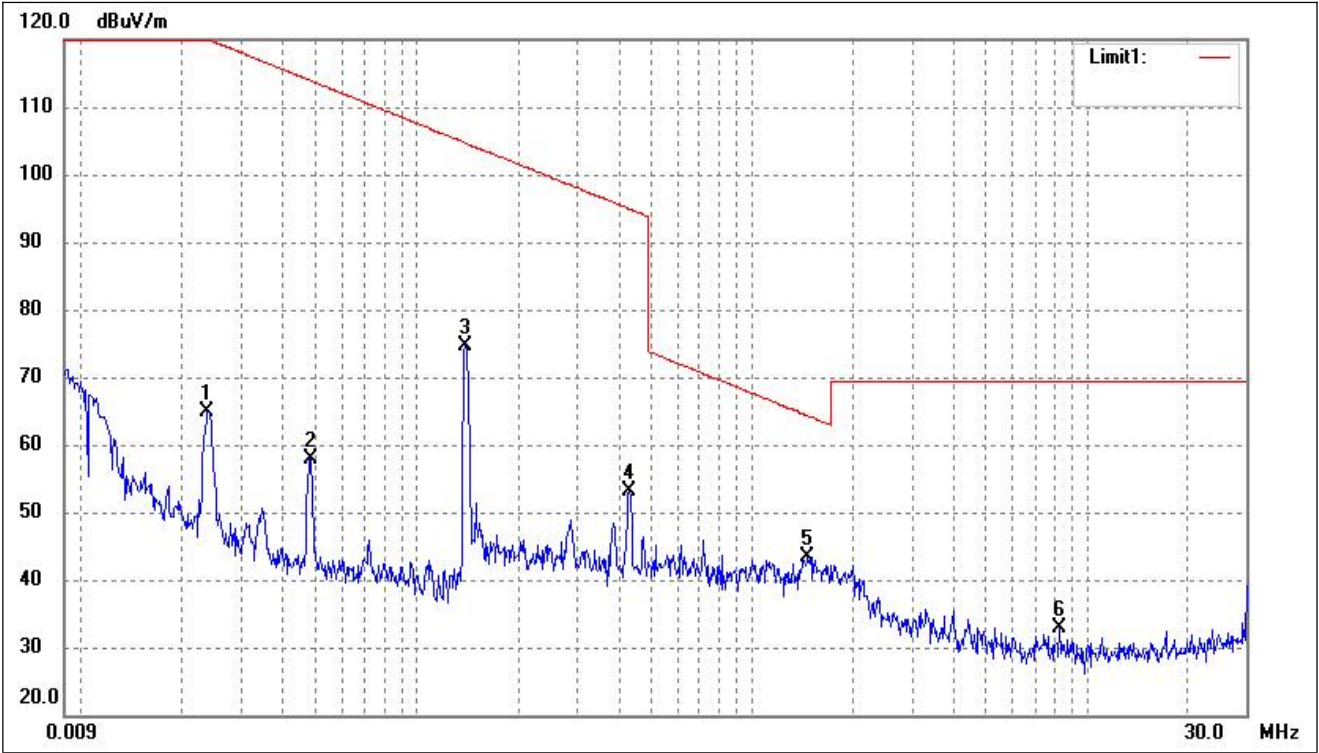

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0238	72.37	-7.41	64.96	120.06	-55.10	-	-	peak
2	0.0481	65.62	-7.70	57.92	113.95	-56.03	-	-	peak
3	0.1389	82.50	-7.93	74.57	104.74	-30.17	-	-	peak
4	0.4305	61.37	-8.28	53.09	94.92	-41.83	-	-	peak
5	1.4640	51.26	-7.79	43.47	64.32	-20.85	-	-	peak
6	8.2789	40.50	-7.74	32.76	69.50	-36.74	-	-	peak


➤ 30MHz-1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

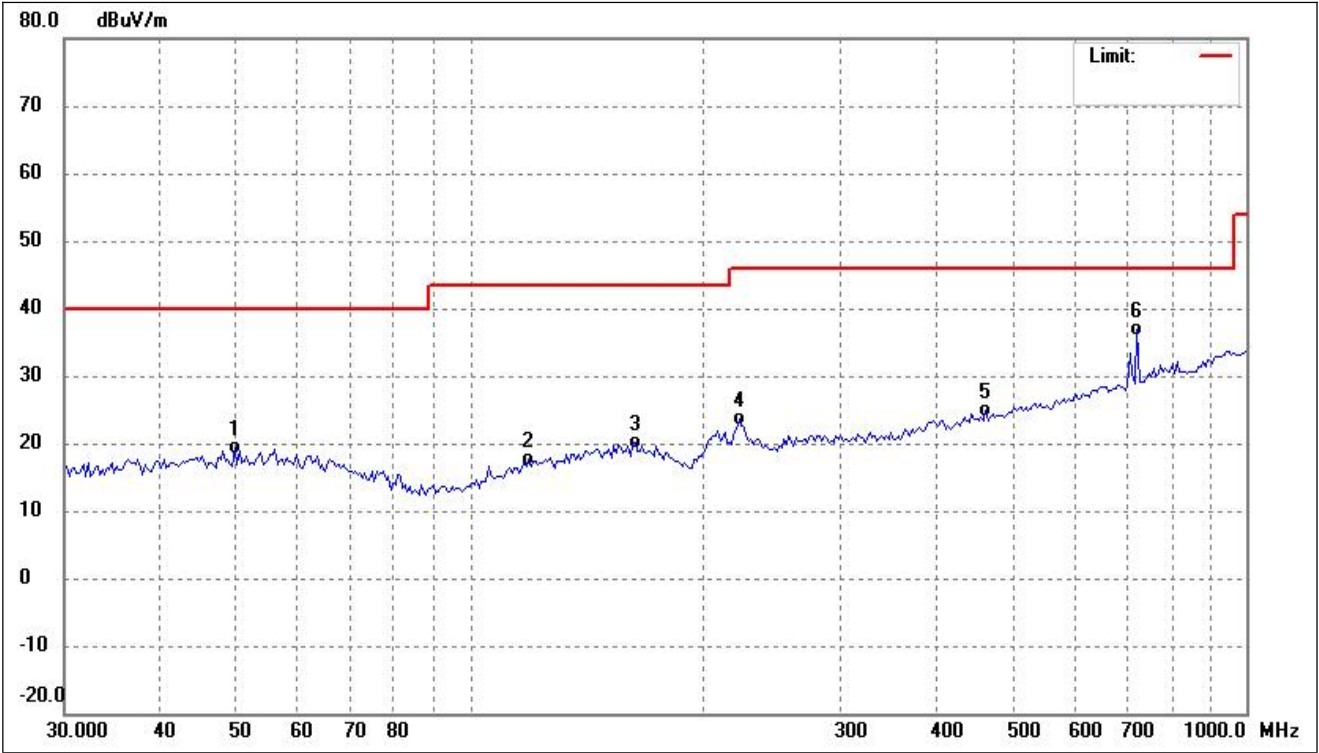

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.7571	28.31	-8.98	19.33	40.00	-20.67	-	-	QP
2	118.9285	28.55	-11.00	17.55	43.50	-25.95	-	-	QP
3	163.1623	28.75	-8.58	20.17	43.50	-23.33	-	-	QP
4	222.2807	35.24	-11.50	23.74	46.00	-22.26	-	-	QP
5	461.6313	29.85	-4.92	24.93	46.00	-21.07	-	-	QP
6	723.7930	37.41	-0.43	36.98	46.00	-9.02	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

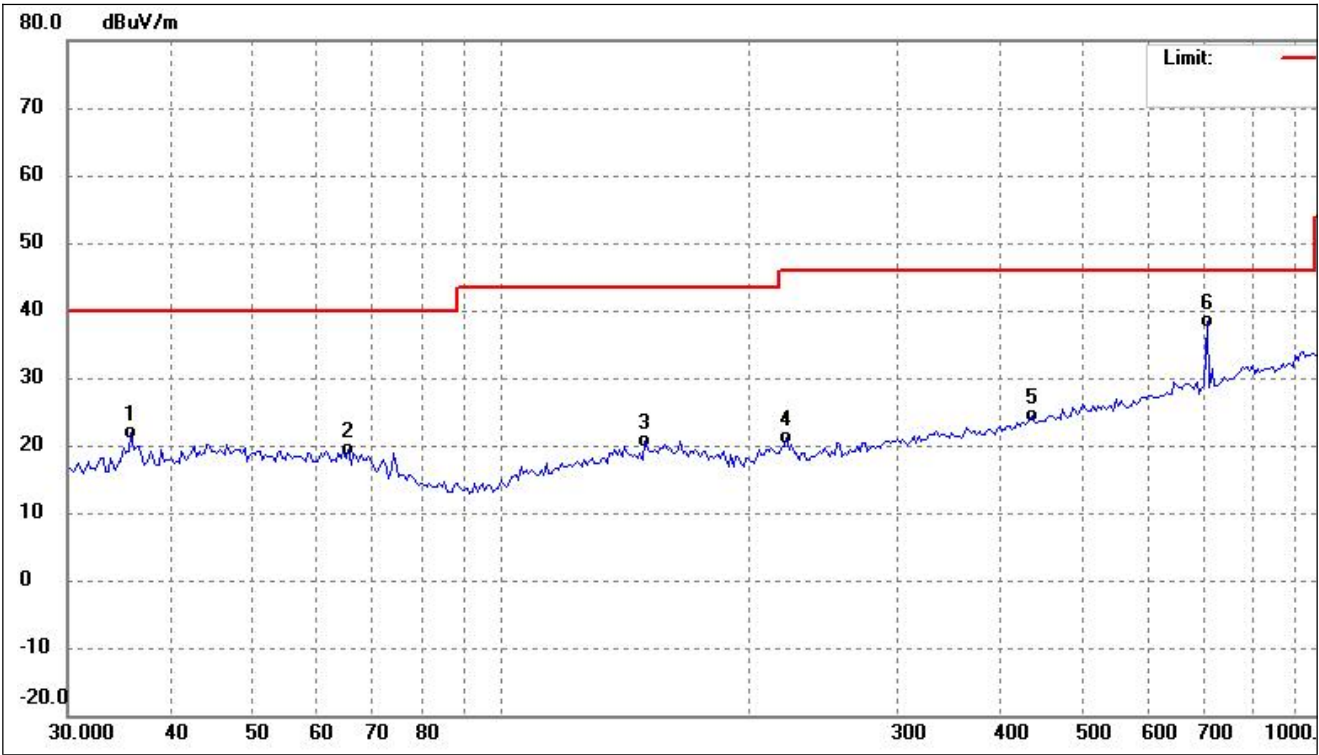

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.7617	31.89	-10.13	21.76	40.00	-18.24	-	-	QP
2	65.4452	29.65	-10.26	19.39	40.00	-20.61	-	-	QP
3	148.9175	29.66	-8.91	20.75	43.50	-22.75	-	-	QP
4	220.7241	32.63	-11.55	21.08	46.00	-24.92	-	-	QP
5	436.3956	29.87	-5.41	24.46	46.00	-21.54	-	-	QP
6	708.6941	39.26	-0.77	38.49	46.00	-7.51	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

6. Occupied Bandwidth

6.1 Standard Applicable

According to 15.215,20dB emission bandwidth.

6.2 Test Procedure

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

Test mode	Test Channel(kHz)	20dB Bandwidth(Hz)
TM1	123	970

Please refer to the attached plots.



Note: The RBW of the analyzer measuring Bandwidth cannot be adjusted to 1%-5% OBW, the RBW of the test setting is the closest value.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****