






11G-Ant1-2437-30~1000-PASS

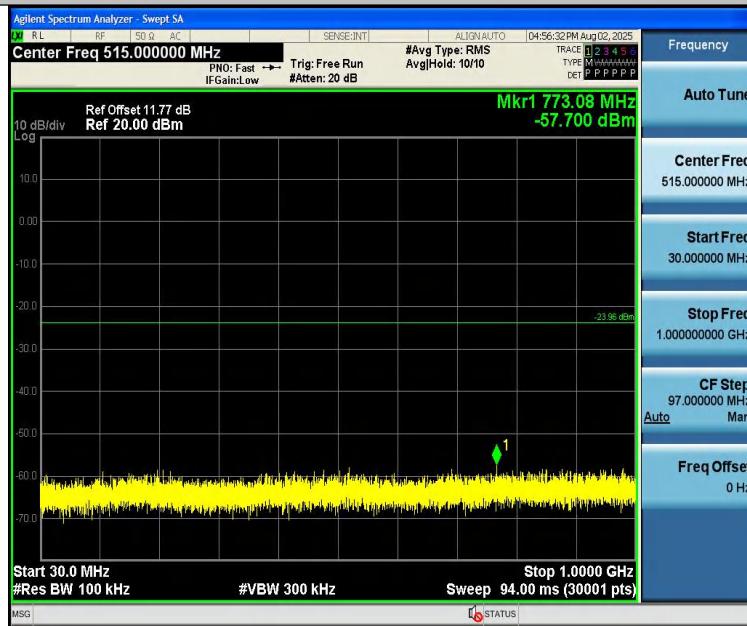

11G-Ant1-2437-1000~26500-PASS

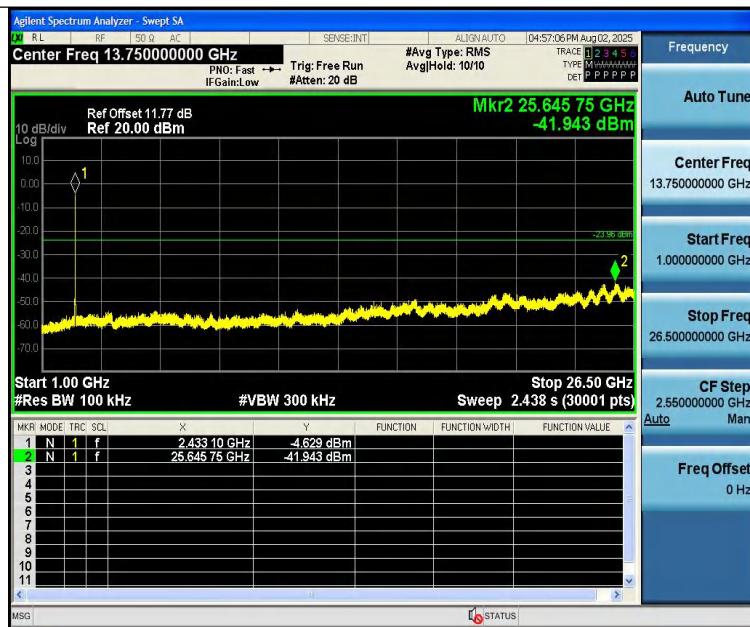


11G-Ant1-2462-0~Reference-PASS

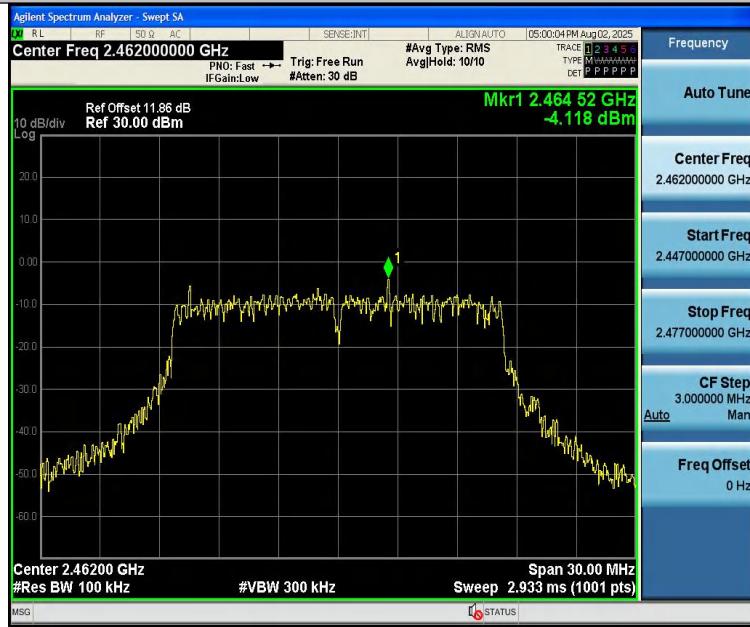

11G-Ant1-2462-30~1000-PASS




11G-Ant1-2462-1000~26500-PASS

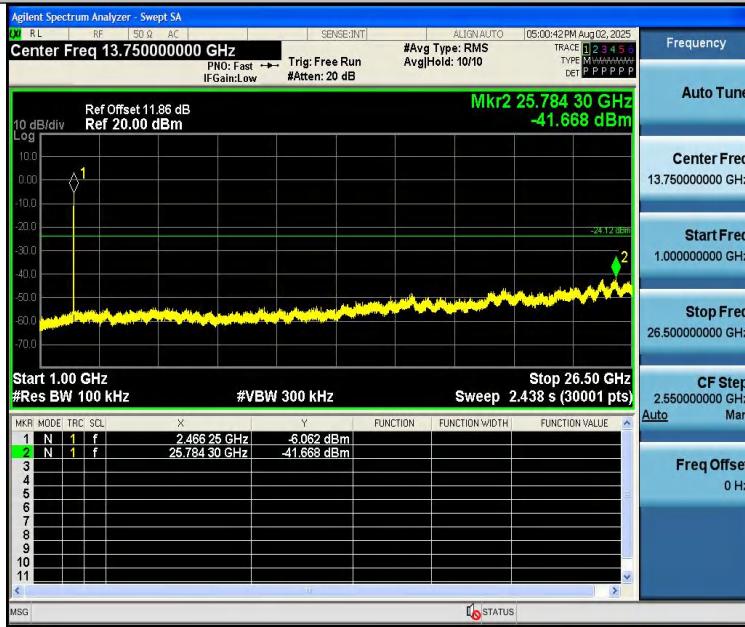


11N20SISO-Ant1-2412-0~Reference-PASS



11N20SISO-Ant1-2412-30~1000-PASS

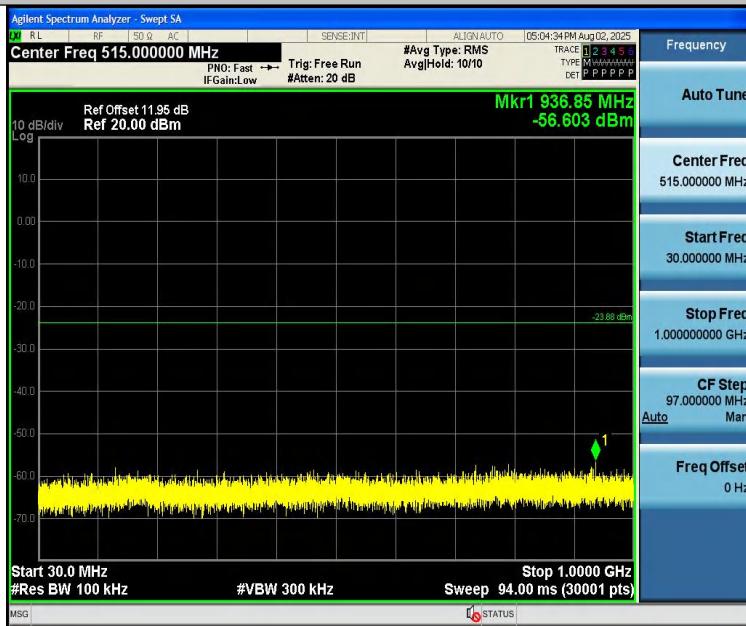


11N20SISO-Ant1-2412-1000~26500-PASS

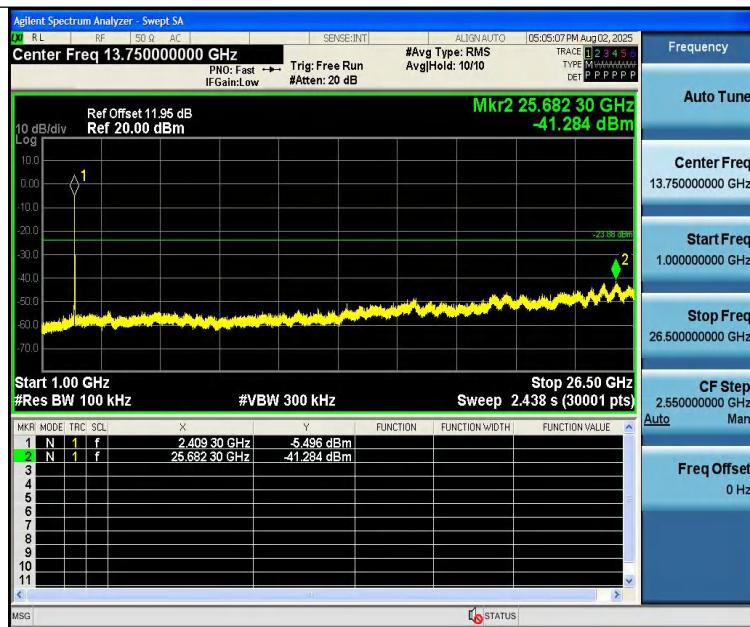


11N20SISO-Ant1-2437-0~Reference-PASS



11N20SISO-Ant1-2437-30~1000-PASS

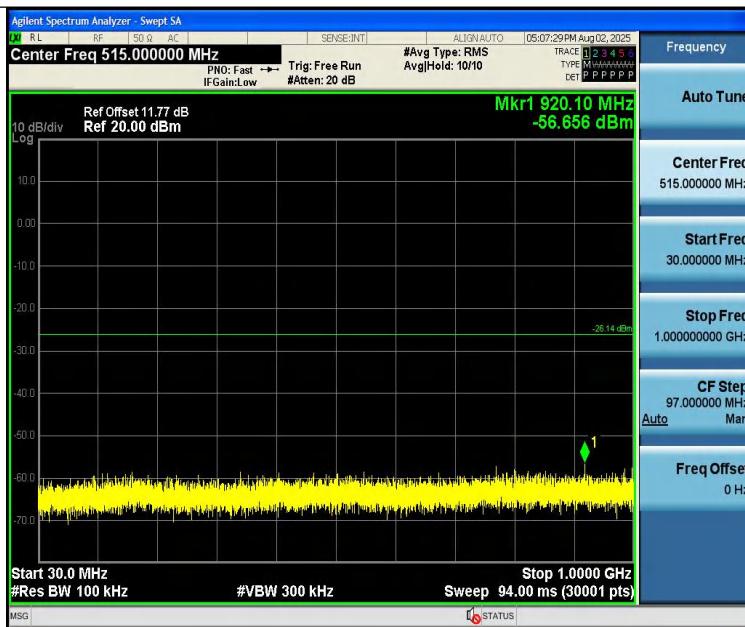


11N20SISO-Ant1-2437-1000~26500-PASS

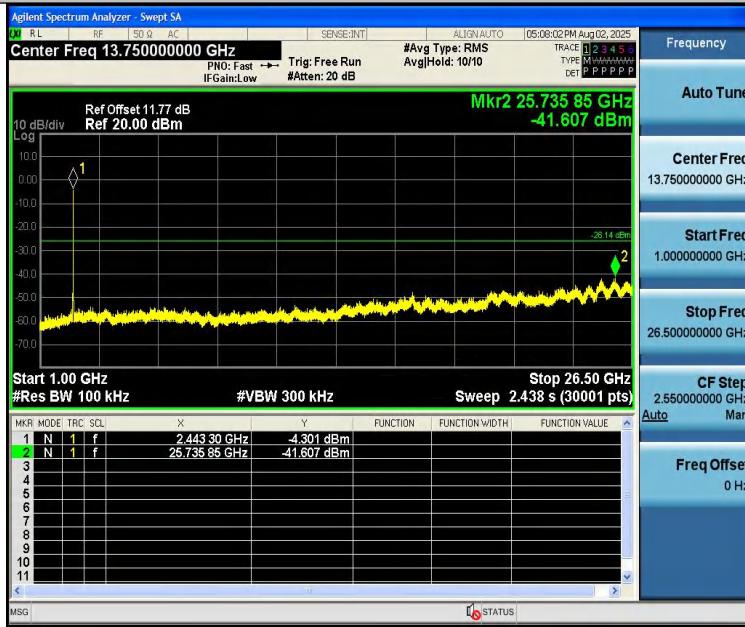


11N20SISO-Ant1-2462-0~Reference-PASS



11N20SISO-Ant1-2462-30~1000-PASS

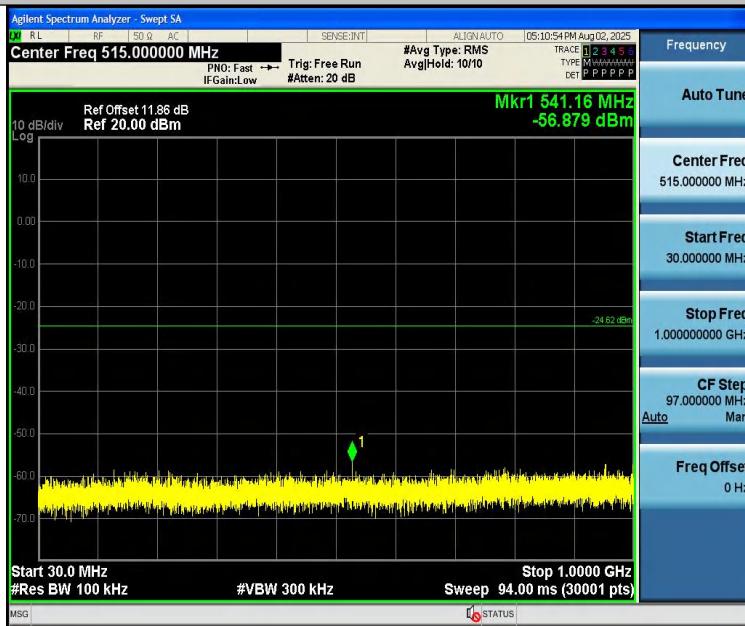


11N20SISO-Ant1-2462-1000~26500-PASS

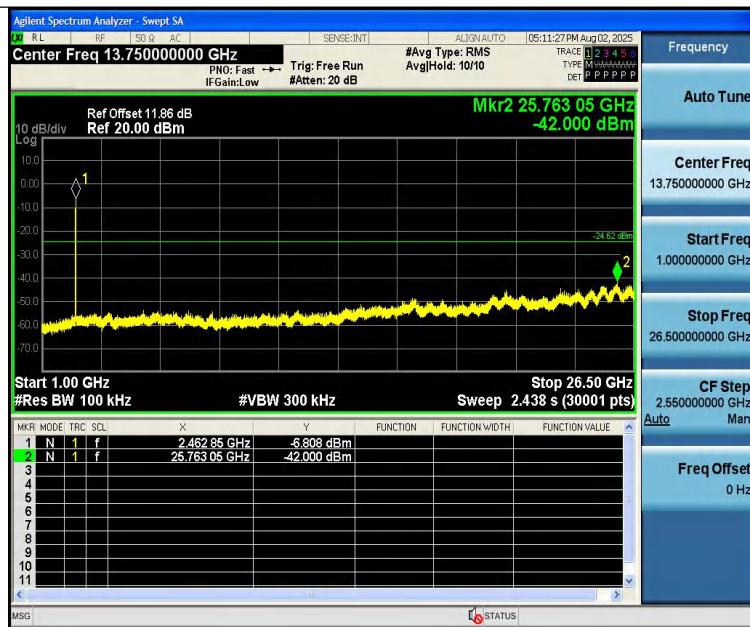


11N40SISO-Ant1-2422-0~Reference-PASS



11N40SISO-Ant1-2422-30~1000-PASS

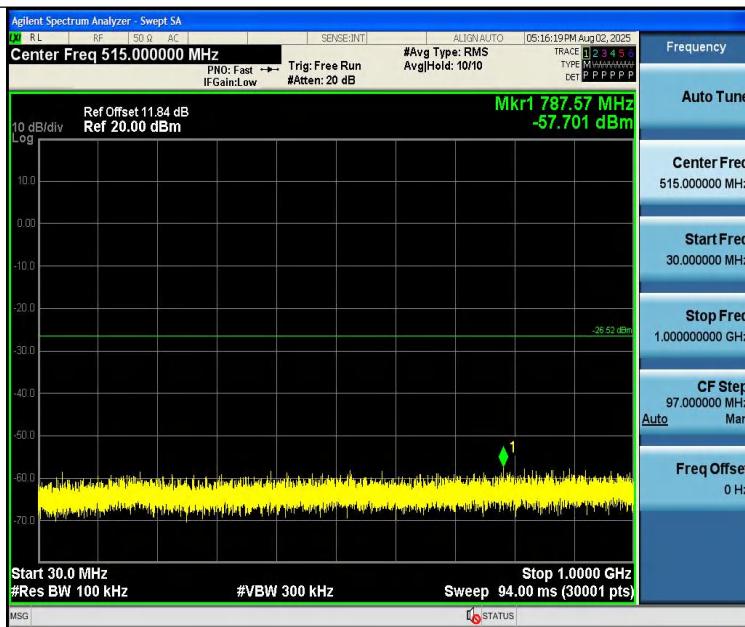


11N40SISO-Ant1-2422-1000~26500-PASS

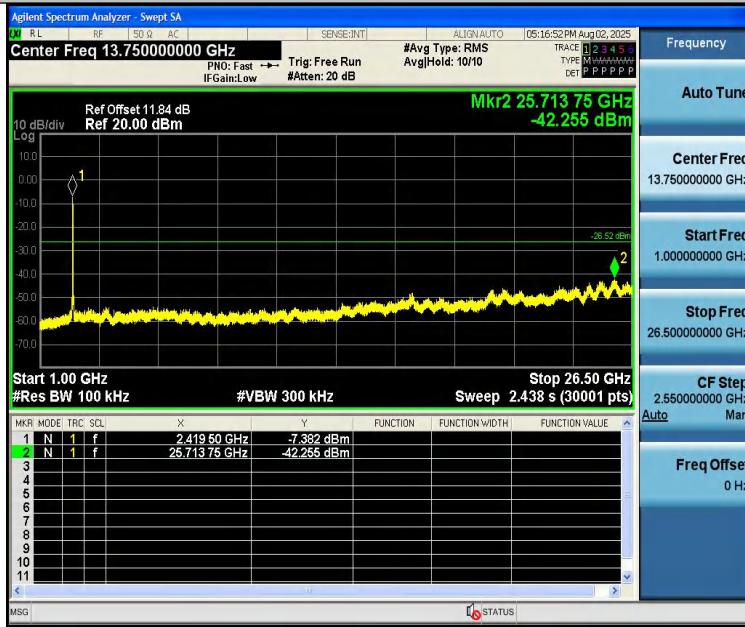


11N40SISO-Ant1-2437-0~Reference-PASS



11N40SISO-Ant1-2437-30~1000-PASS

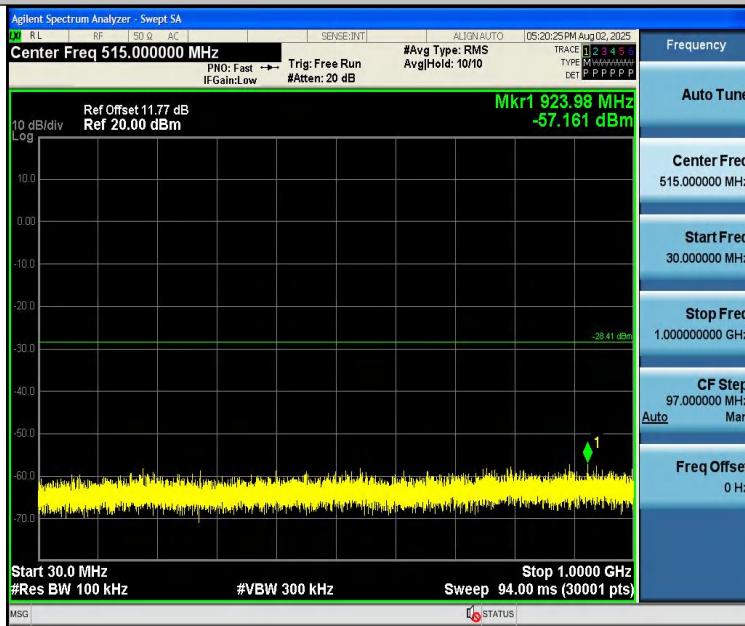


11N40SISO-Ant1-2437-1000~26500-PASS

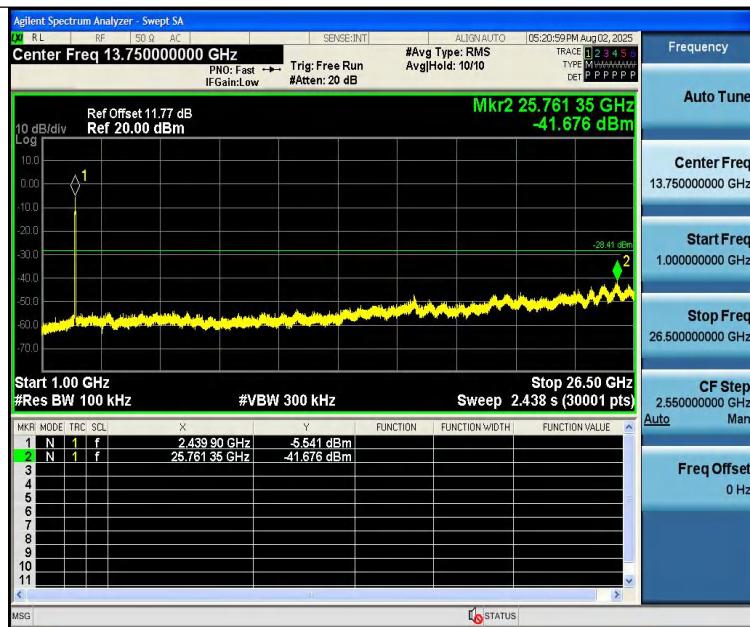


11N40SISO-Ant1-2452-0~Reference-PASS



11N40SISO-Ant1-2452-30~1000-PASS

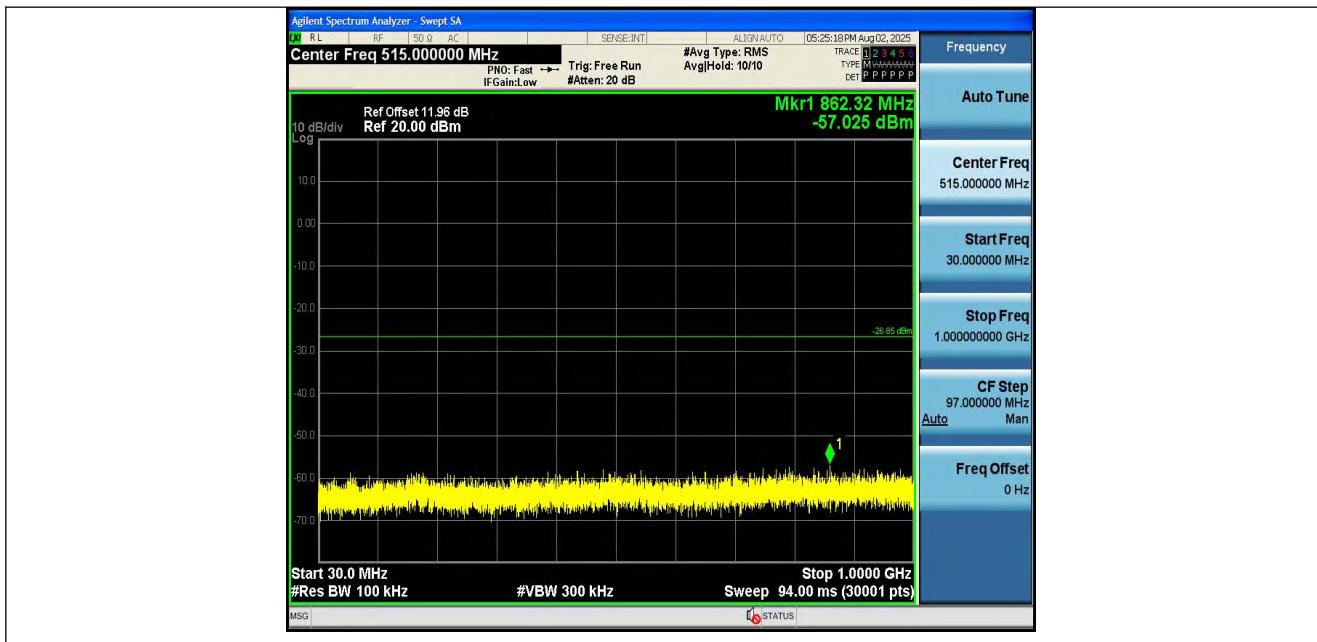

11N40SISO-Ant1-2452-1000~26500-PASS

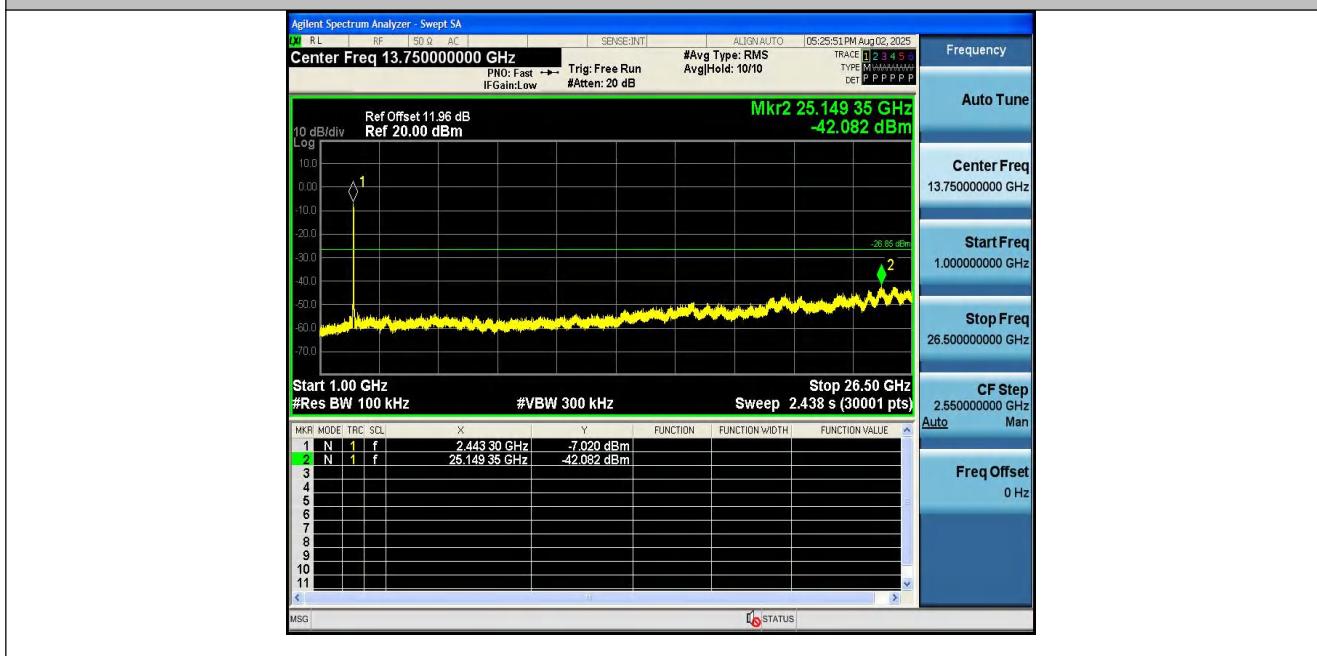


8 Band Edge Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Setup




8.3 Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	2.26	-36.03	≤-17.74	PASS
11B	Ant1	High	2462	3.31	-46.05	≤-16.69	PASS
11G	Ant1	Low	2412	-2.87	-41.52	≤-22.87	PASS
11G	Ant1	High	2462	-2.92	-46.2	≤-22.92	PASS
11N20SISO	Ant1	Low	2412	-2.50	-39.55	≤-22.5	PASS
11N20SISO	Ant1	High	2462	-3.64	-45.98	≤-23.64	PASS
11N40SISO	Ant1	Low	2422	-5.64	-42.51	≤-25.64	PASS
11N40SISO	Ant1	High	2452	-5.54	-45.86	≤-25.54	PASS


Test Graphs:





11G-Ant1-2462-PASS

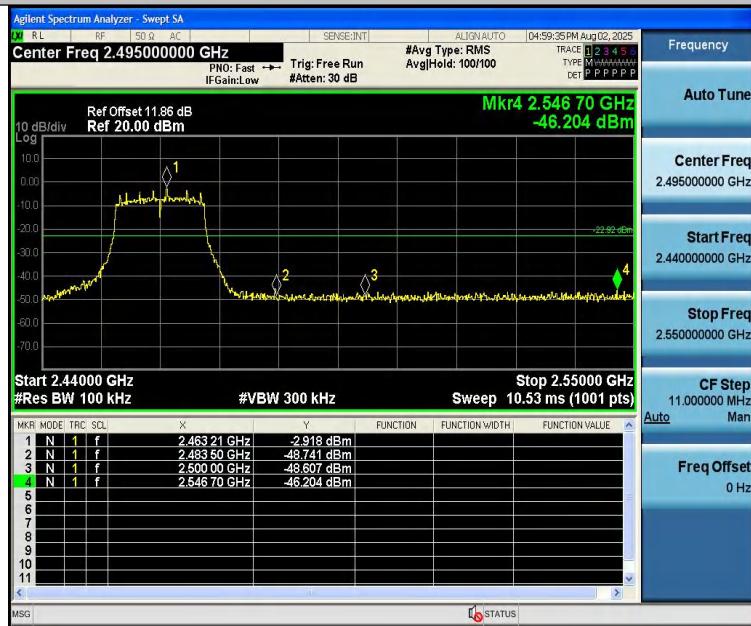


11N20ISO-Ant1-2412-PASS

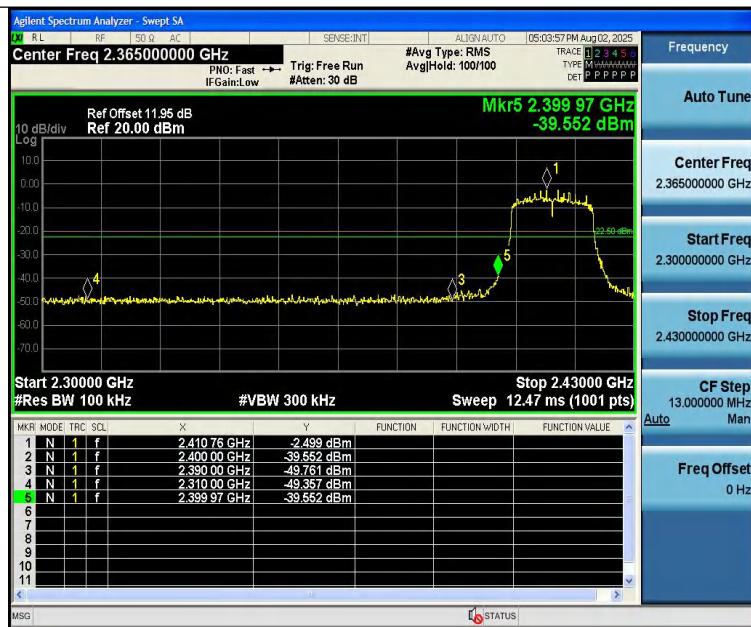


11N20SISO-Ant1-2462-PASS

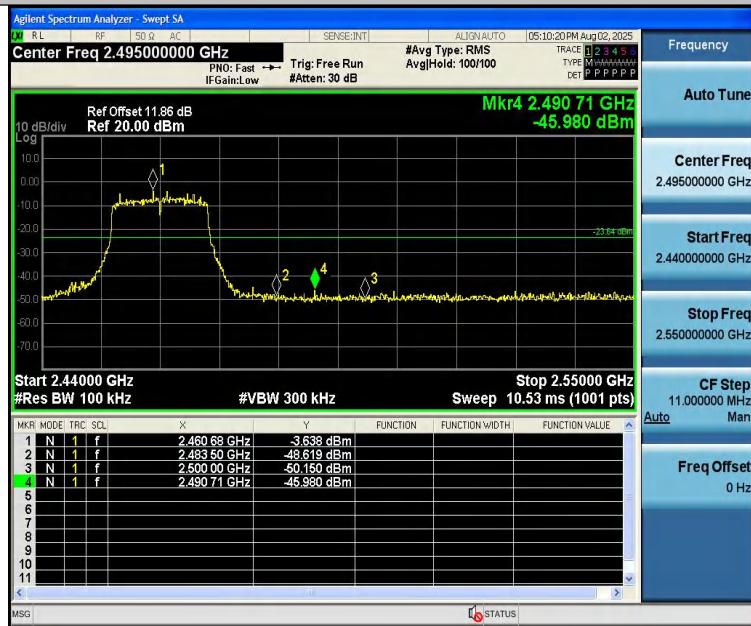

11N40SISO-Ant1-2422-PASS

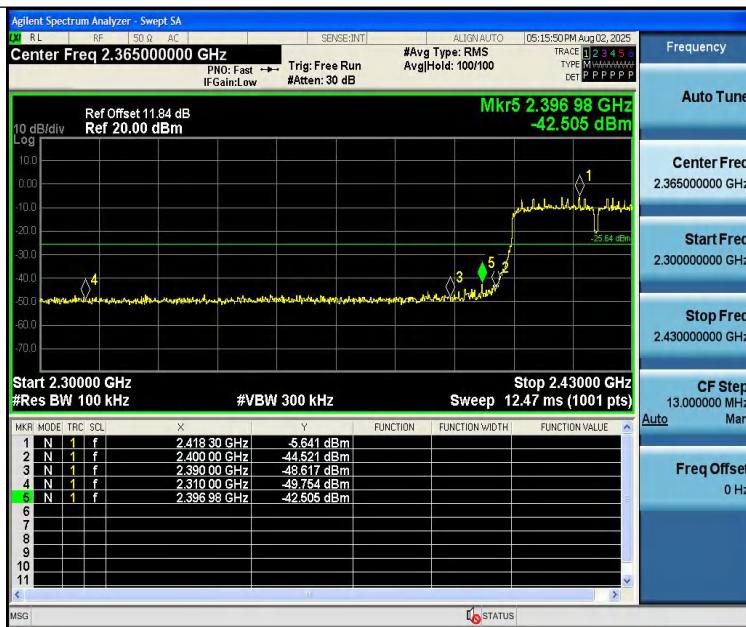

11N40SISO-Ant1-2452-PASS

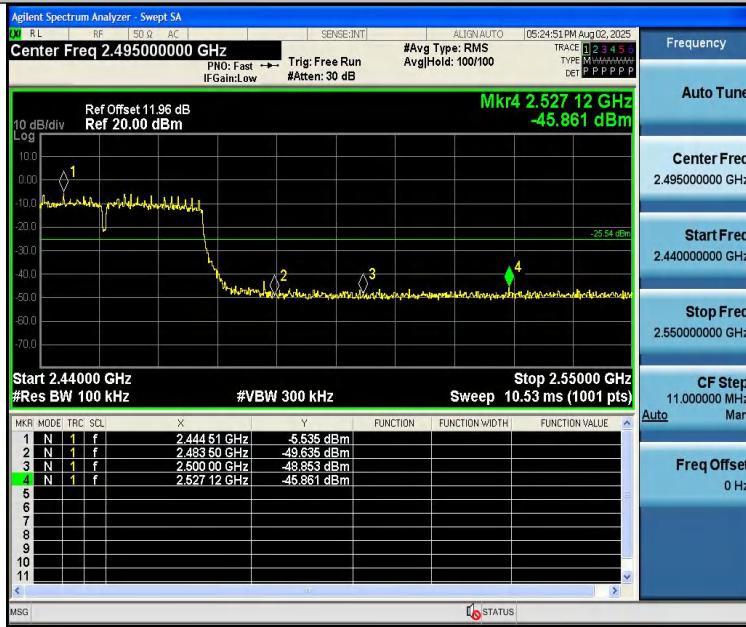



9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit
Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Setup



9.3 Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.080	2406.960	2417.040	0.5	PASS
11B	Ant1	2437	9.880	2431.920	2441.800	0.5	PASS
11B	Ant1	2462	10.080	2456.960	2467.040	0.5	PASS
11G	Ant1	2412	16.280	2403.840	2420.120	0.5	PASS
11G	Ant1	2437	16.280	2428.840	2445.120	0.5	PASS
11G	Ant1	2462	16.280	2453.840	2470.120	0.5	PASS
11N20SISO	Ant1	2412	16.080	2403.480	2419.560	0.5	PASS
11N20SISO	Ant1	2437	16.760	2428.600	2445.360	0.5	PASS
11N20SISO	Ant1	2462	16.760	2453.600	2470.360	0.5	PASS
11N40SISO	Ant1	2422	35.120	2404.400	2439.520	0.5	PASS
11N40SISO	Ant1	2437	34.960	2419.560	2454.520	0.5	PASS
11N40SISO	Ant1	2452	35.440	2434.080	2469.520	0.5	PASS

Test Graphs:




11G-Ant1-2412-PASS



11G-Ant1-2437-PASS



11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS



11N20SISO-Ant1-2437-PASS




11N20SISO-Ant1-2462-PASS




11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2437-PASS

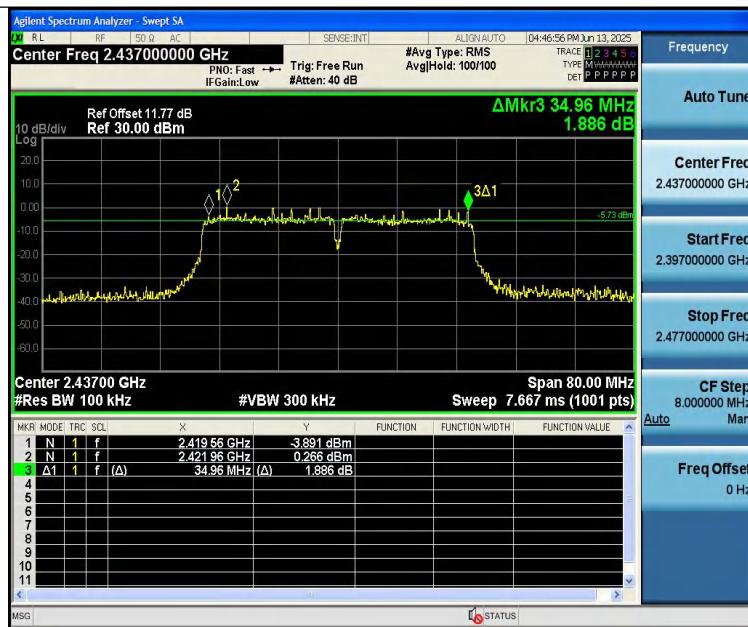

11N40SISO-Ant1-2452-PASS

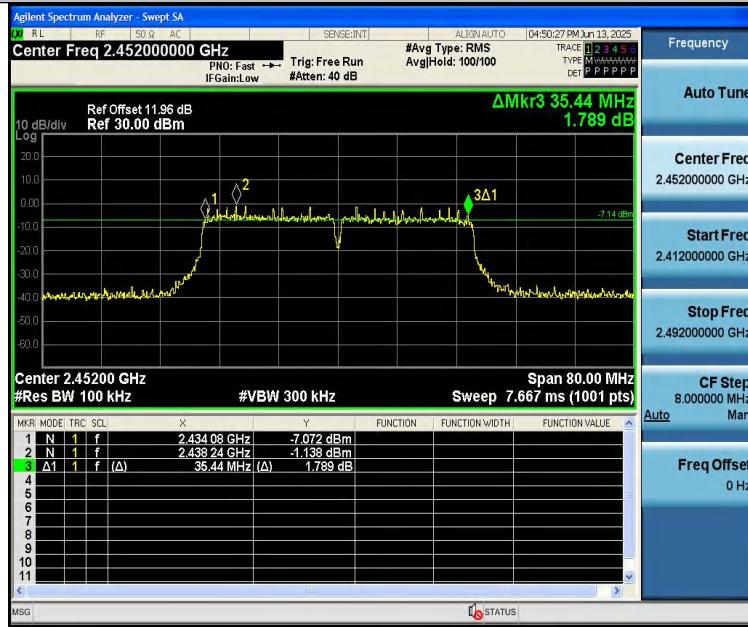


10 Maximum conducted output power

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Procedure

1. According to ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

10.2 Test Setup



10.3 Test Result

TestMode	Antenna	Frequency[MHz]	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	---	13.96	≤30.00	PASS
11B	Ant1	2437	---	13.19	≤30.00	PASS
11B	Ant1	2462	---	11.33	≤30.00	PASS
11G	Ant1	2412	---	14.39	≤30.00	PASS
11G	Ant1	2437	---	12.88	≤30.00	PASS
11G	Ant1	2462	---	13.80	≤30.00	PASS
11N20SISO	Ant1	2412	---	13.38	≤30.00	PASS
11N20SISO	Ant1	2437	---	12.88	≤30.00	PASS
11N20SISO	Ant1	2462	---	12.56	≤30.00	PASS
11N40SISO	Ant1	2422	---	13.40	≤30.00	PASS
11N40SISO	Ant1	2437	---	14.47	≤30.00	PASS
11N40SISO	Ant1	2452	---	12.87	≤30.00	PASS


11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(e) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Procedure


1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
 - Center frequency=DTS channel center frequency
 - Span = 1.5 times the DTS bandwidth
 - RBW = 3KHz, VBW = 10KHz
 - Sweep time = auto couple
 - Detector = peak
 - Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

11.2 Test Setup




11.3 Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-5.76	≤8.00	PASS
11B	Ant1	2437	-7.2	≤8.00	PASS
11B	Ant1	2462	-6.88	≤8.00	PASS
11G	Ant1	2412	-12.45	≤8.00	PASS
11G	Ant1	2437	-12.91	≤8.00	PASS
11G	Ant1	2462	-13.13	≤8.00	PASS
11N20SISO	Ant1	2412	-8.98	≤8.00	PASS
11N20SISO	Ant1	2437	-12.66	≤8.00	PASS
11N20SISO	Ant1	2462	-13.23	≤8.00	PASS
11N40SISO	Ant1	2422	-13.84	≤8.00	PASS
11N40SISO	Ant1	2437	-14.43	≤8.00	PASS
11N40SISO	Ant1	2452	-15.18	≤8.00	PASS

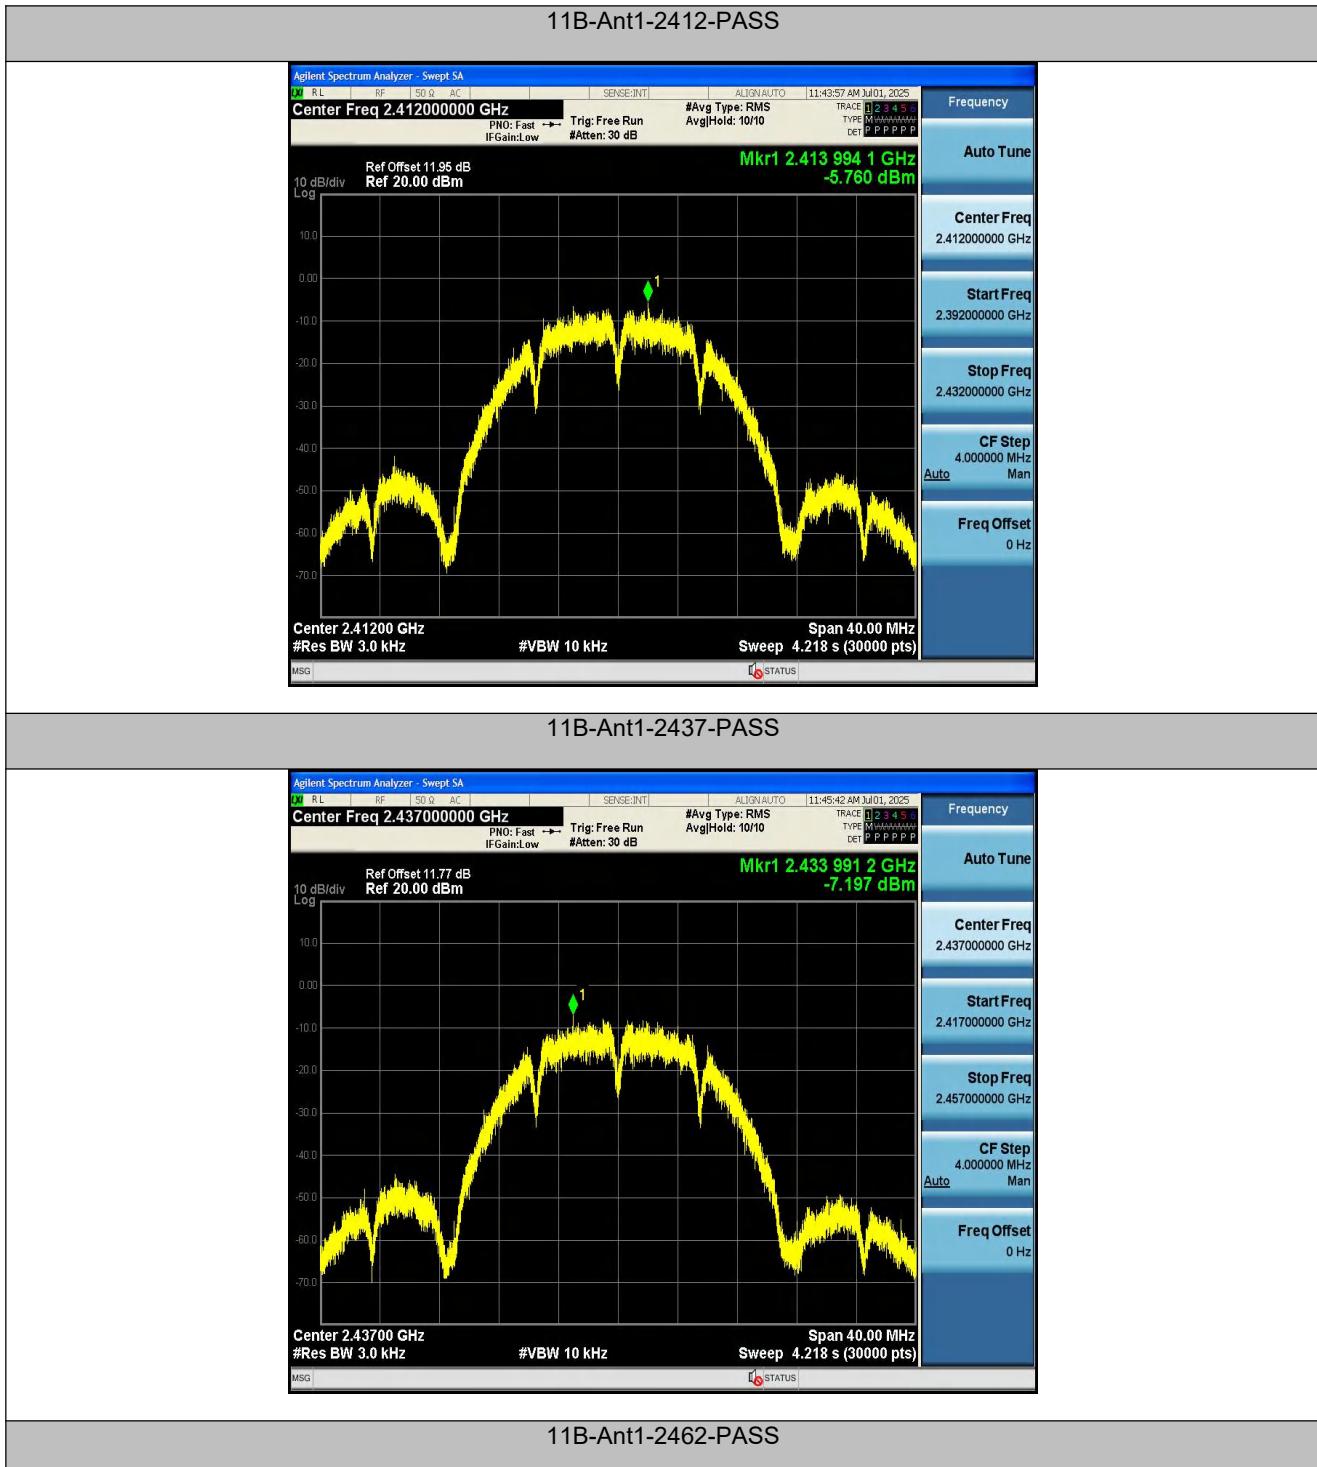
Test Graphs:




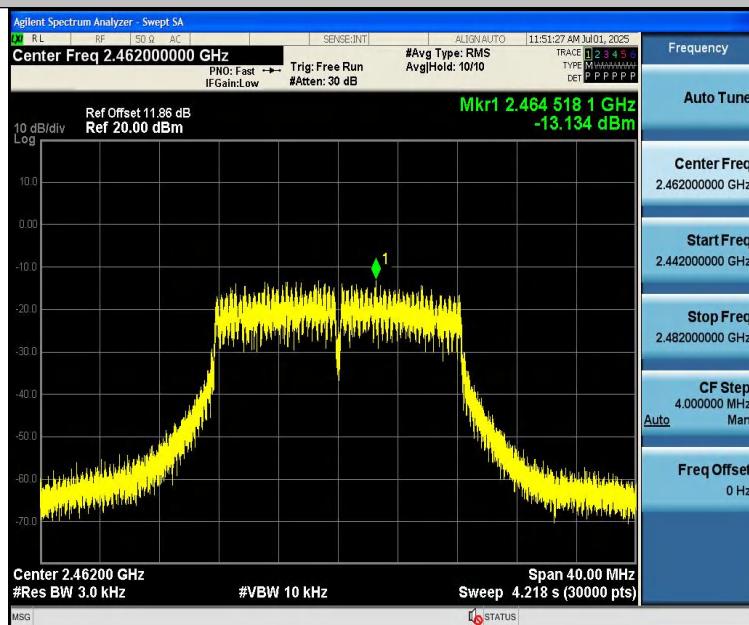
11G-Ant1-2412-PASS

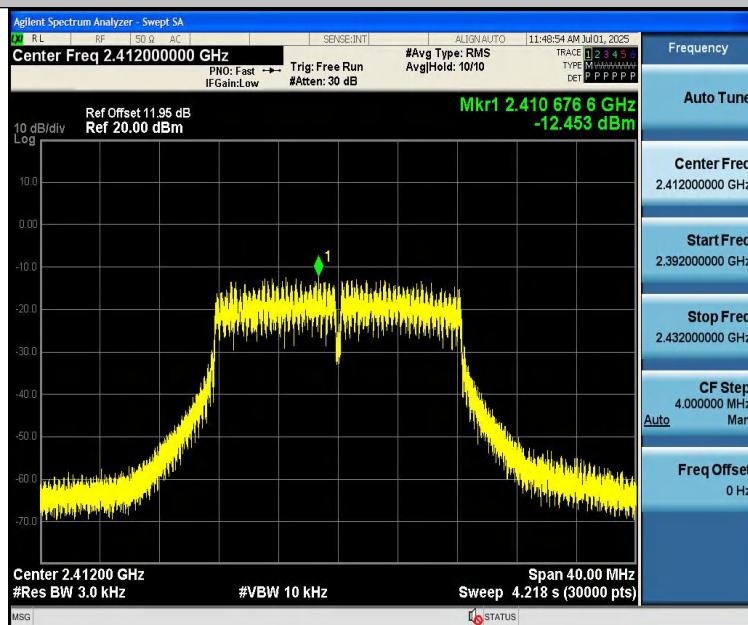


11G-Ant1-2437-PASS

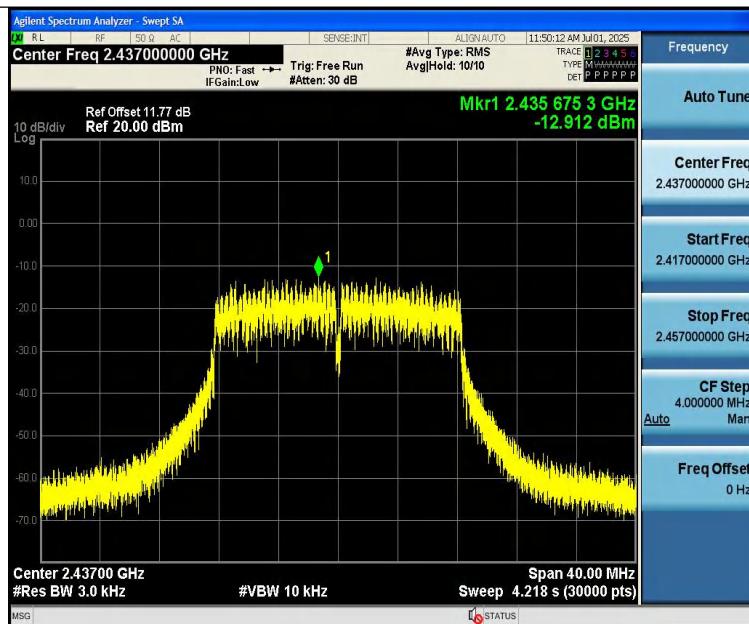


11G-Ant1-2462-PASS




11N20SISO-Ant1-2412-PASS

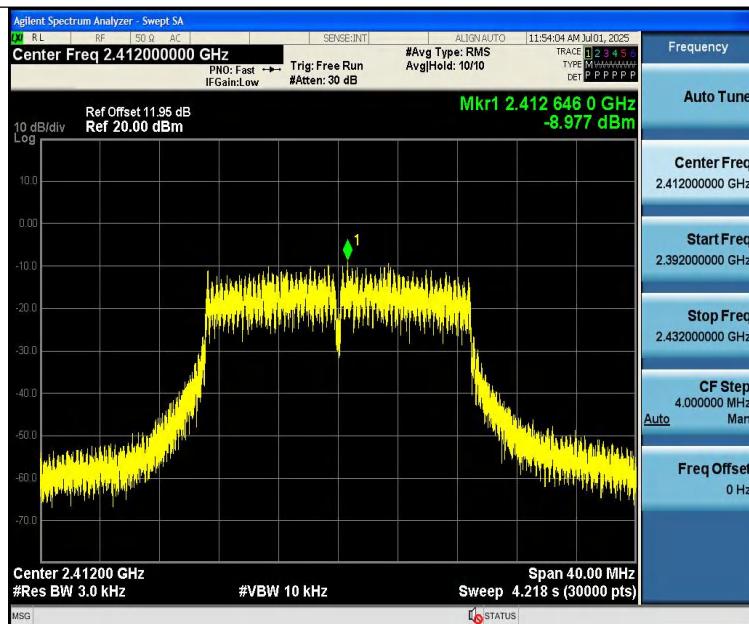


11N20SISO-Ant1-2437-PASS

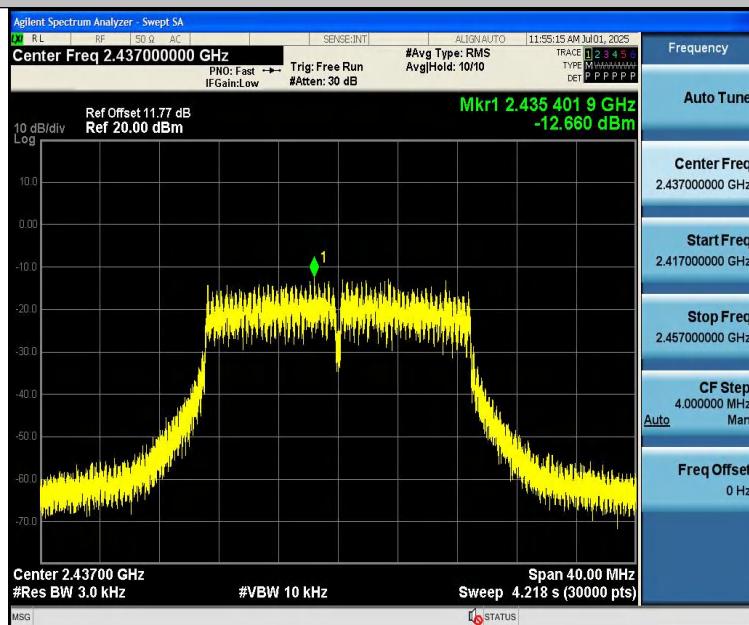


11N20SISO-Ant1-2462-PASS

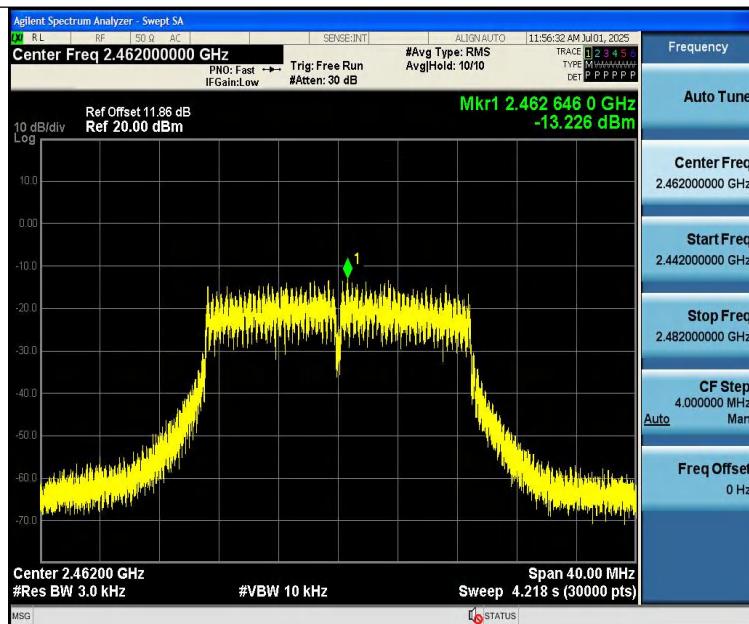

11N40SISO-Ant1-2422-PASS

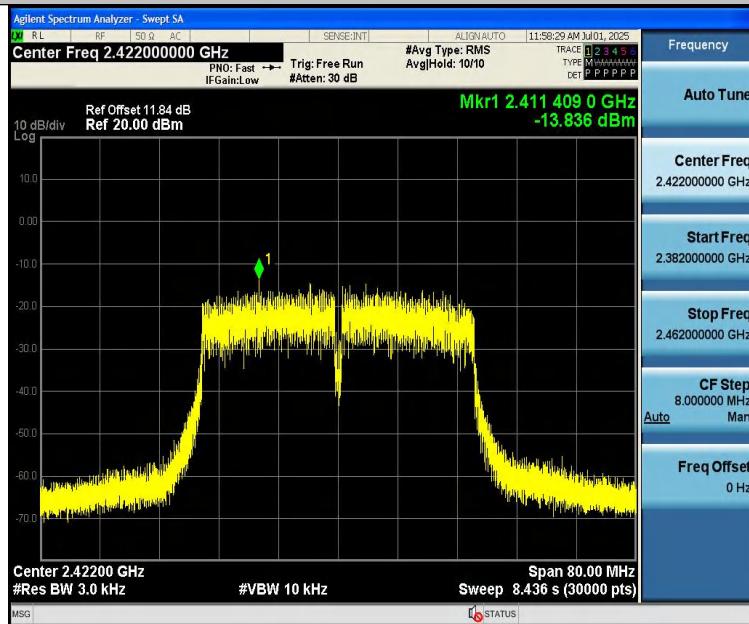

11N40SISO-Ant1-2437-PASS

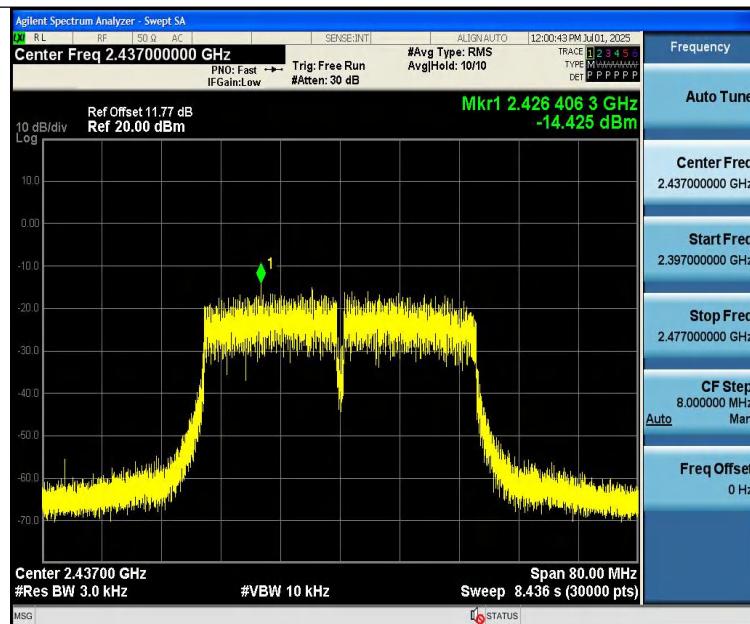

11N40SISO-Ant1-2452-PASS

