



FCC Part 15C Test Report

FCC ID:2BPRE-U40

Applicant: **Shenzhen Hongxuan Health Intelligence Co., Ltd.**

Address: Room 501, Building AB, No. 9, Dongcai Industrial Zone, Gushu Community, Xixiang Street, Bao'an District, Shenzhen City, China.

Manufacturer: **Shenzhen Hongxuan Health Intelligence Co., Ltd.**

Address: Room 501, Building AB, No. 9, Dongcai Industrial Zone, Gushu Community, Xixiang Street, Bao'an District, Shenzhen City, China.

EUT: Magnetic selfie screen

Trade Mark: N/A

Model Number: U40-BLACK, U40-WHITE, U40-BLUE, U40-PINK, U40-BLACK, U50-WHITE, U50-BLUE, U50-PINK, U50-BLACK

Date of Receipt: May 12, 2025

Test Date: May 12, 2025 to May 21, 2025

Date of Report: May 21, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.

Applicable Standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
ANSI C63.10:2013
KDB 789033 D02 v02r01

Test Result: Pass

Report Number: DLE-250526008R

Prepared (Test Engineer):

Dimon Tan

Reviewer (Supervisor):

Jack Bu

Approved (Manager):

Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. VERSION.....	4
2.SUMMARY OF TEST RESULTS.....	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY.....	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4.EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS.....	13
4.1.2 TEST PROCEDURE.....	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 APPLICABLE STANDARD	19
4.2.2 CONFORMANCE LIMIT	19
4.2.3 MEASURING INSTRUMENTS	19
4.2.4 TEST CONFIGURATION.....	20
4.2.5 TEST PROCEDURE.....	21
4.2.6 TEST RESULT	22
5.POWER SPECTRAL DENSITY TEST	38
5.1 APPLIED PROCEDURES / LIMIT	38
5.2 TEST PROCEDURE.....	39
5.3 DEVIATION FROM STANDARD	39
5.4 TEST SETUP	39
5.5 EUT OPERATION CONDITIONS	39
5.6 TEST RESULTS	40
6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH	48
6.1 APPLIED PROCEDURES / LIMIT	48
6.2 TEST PROCEDURE.....	48
6.3 EUT OPERATION CONDITIONS	48
6.4 TEST RESULTS	49
7.MAXIMUM CONDUCTED OUTPUT POWER	57
7.1 PPLIED PROCEDURES / LIMIT	57
7.2 TEST PROCEDURE.....	57
7.3 DEVIATION FROM STANDARD	58
7.4 TEST SETUP	58
7.5 EUT OPERATION CONDITIONS	58
7.6 TEST RESULTS	59
8.OUT OF BAND EMISSIONS	61
8.1 APPLICABLE STANDARD	61
8.2 TEST PROCEDURE.....	61
8.3 DEVIATION FROM STANDARD	61



Table of Contents	Page
8.4 TEST SETUP	61
8.5 EUT OPERATION CONDITIONS	61
8.6 TEST RESULTS	62
9.SPURIOUS RF CONDUCTED EMISSIONS.....	66
9.1 CONFORMANCE LIMIT	66
9.2 MEASURING INSTRUMENTS	66
9.3 TEST SETUP	66
9.4 TEST PROCEDURE.....	66
9.5 TEST RESULTS	66
10.FREQUENCY STABILITY MEASUREMENT	73
10.1 LIMIT	73
10.2 TEST PROCEDURES	73
10.3 TEST SETUP LAYOUT	73
10.4 EUT OPERATION DURING TEST.....	73
10.5 TEST RESULTS	73
11. DUTY CYCLE	84
11.1 APPLIED PROCEDURES / LIMIT	84
11.2 DEVIATION FROM STANDARD.....	84
11.3 TEST SETUP.....	84
12.ANTENNA REQUIREMENT	93
13. TEST SETUP PHOTO	94
14. EUT CONSTRUCTIONAL DETAILS	94



1. VERSION

Report No.	Version	Description	Approved
DLE-250526008R	Rev.01	Initial issue of report	May 21, 2025

**2.SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emission	PASS	
789033 D02 General U-NII	Duty Cycle	PASS	
15.209(a) 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
15.407 (a) 15.1049 15.407(e)	26dB Emission Bandwidth & 6dB Occupied Bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Magnetic selfie screen	
Model No.:	U40-BLACK	
Serial Model:	U40-WHITE, U40-BLUE, U40-PINK, U40-BLACK, U50-WHITE, U50-BLUE, U50-PINK, U50-BLACK	
Model Different.:	All the model are the same circuit and RF module, only the model name is different.	
Sample(s) Status:	Engineer sample	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11ac/n (40MHz channel bandwidth) ☒ 802.11ac (80MHz channel bandwidth)
	Data Rate	802.11a 802.11n(HT20/HT40):MCS0-MCS7; 802.11ac(VHT20/VHT40/VHT80):MCS0-MCS9
	Modulation	OFDM with BPSK / QPSK / 16-QAM / 64-QAM for 802.11a/n; OFDM with BPSK / QPSK / 16-QAM / 64-QAM / 256-QAM for 802.11ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n20/ac20; ☒ 5190-5230MHz for 802.11ac40/n40; ☒ 5210MHz for 802.11 ac80. ☒ 5745-5825 MHz for 802.11a/n20/ac20; ☒ 5755-5795 MHz for 802.11ac40/n40; ☒ 5775MHz for 802.11 ac80.
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; ☒ 2 channels for 802.11 ac40/n40 in the 5190-5230 MHz band ; ☒ 1 channels for 802.11 ac80 in the 5210MHz band. ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; ☒ 2 channels for 802.11 ac40/n40 in the 5755-5795 MHz band ; ☒ 1 channels for 802.11 ac80 in the 5775MHz band
Channel List	Please refer to the Note 2.	
Antenna Type:	FPC antenna	
Antenna gain:	5.2G: 3.61dBi 5.8G: 2.47dBi	
Power supply:	Type-C input: 5V $\overline{=}$ 1A Type-C output: 5V $\overline{=}$ 1A Battery: 3.7V, 1000mAh, 3.7Wh	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



802.11a/n/ac(20MHz) Frequency Channel for 5.2G							
Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)
36	5180	44	5200	40	5220	48	5240

802.11n/ac(40MHz) Frequency Channel for 5.2G							
Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)
38	5190	46	5230	-	-	-	-

802.11ac (80MHz) Frequency Channel for 5.2G	
Channel	Frequency (MHz)
42	5210

802.11a/n/ac(20 MHz) Frequency Channel for 5.8G							
Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)	Channel	Frequenc y (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac(40MHz) Frequency Channel for 5.8G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac (80MHz) Frequency Channel for 5.8G	
Channel	Frequency (MHz)
155	5775



3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	CMD
Power level setup	Default

Pretest Mode	Description
Mode 1	802.11a/n20/ac20 CH 36/ CH 40/ CH 48 for 5.2G 802.11a/n20/ac20 CH149/ CH157/ CH 165 for 5.8G
Mode 2	802.11n 40/ac 40 CH38/ CH 46 for 5.2G 802.11n 40/ac 40 CH 151 / CH 159 for 5.8G
Mode 3	802.11 ac80 CH 42 for 5.2G 802.11 ac80 CH 155 for 5.8G

For Conducted Emission	
Final Test Mode	Description
Mode 1	802.11a/n20/ac20 CH 36/ CH 40/ CH 48 for 5.2G 802.11a/n20/ac20 CH149/ CH157/ CH 165 for 5.8G
Mode 2	802.11n 40/ac 40 CH38/ CH 46 for 5.2G 802.11n 40/ac 40 CH 151 / CH 159 for 5.8G
Mode 3	802.11 ac80 CH 42 for 5.2G 802.11 ac80 CH 155 for 5.8G

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a/n20/ac20 CH 36/ CH 40/ CH 48 for 5.2G 802.11a/n20/ac20 CH149/ CH157/ CH 165 for 5.8G
Mode 2	802.11n 40/ac 40 CH38/ CH 46 for 5.2G 802.11n 40/ac 40 CH 151 / CH 159 for 5.8G
Mode 3	802.11 ac80 CH 42 for 5.2G 802.11 ac80 CH 155 for 5.8G


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Magnetic selfie screen	N/A	U40-BLACK	N/A	EUT
A1	AC/DC Adapter	GVE	GM53-240200-F	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESC13	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\

RF Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025



2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektron ik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405 D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

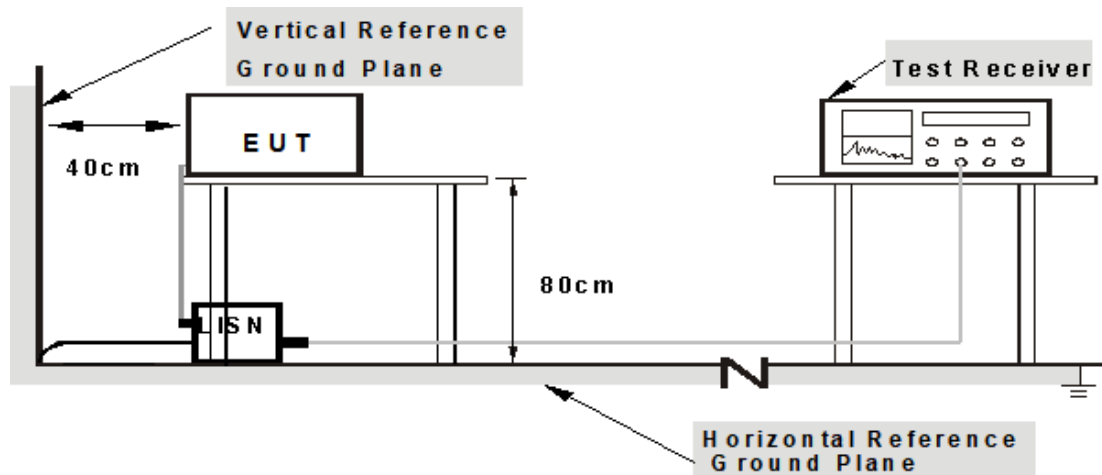

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

5.2G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5180MHz

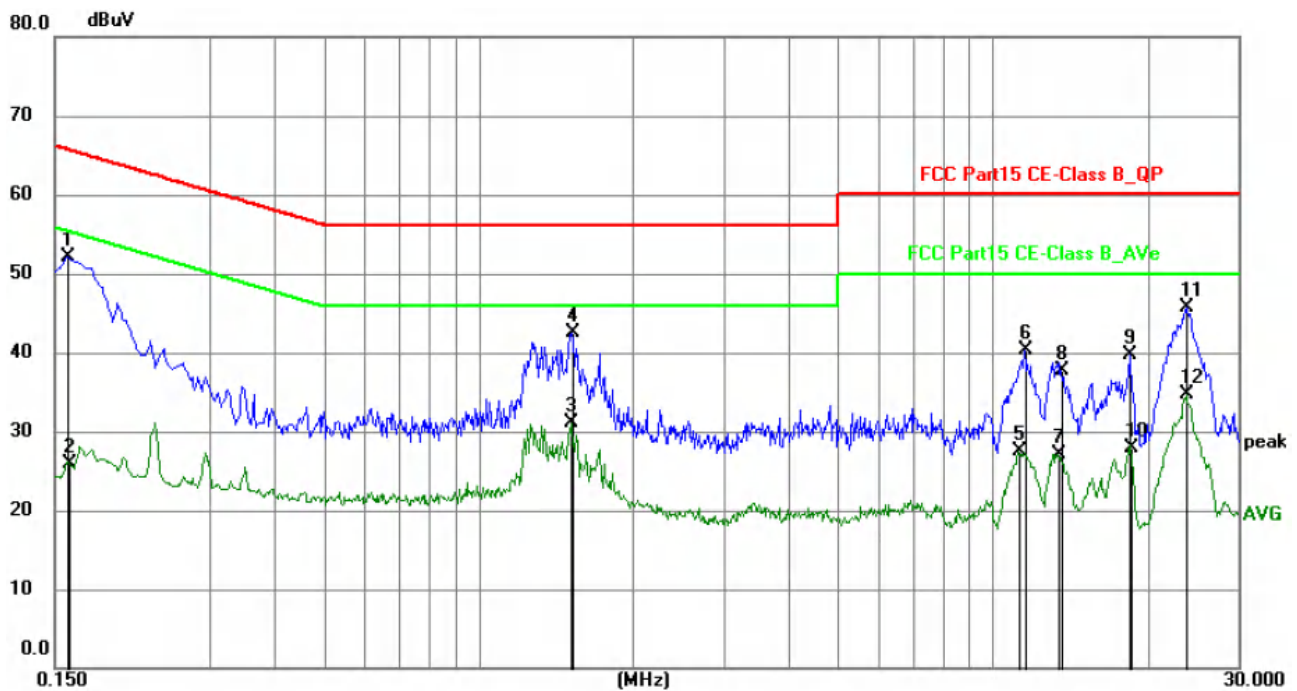

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	31.90	20.22	52.12	65.52	-13.40	QP	P
2	0.1597	5.73	20.22	25.95	55.48	-29.53	AVG	P
3	1.5179	10.85	20.30	31.15	46.00	-14.85	AVG	P
4	1.5267	22.11	20.30	42.41	56.00	-13.59	QP	P
5	11.2469	6.98	20.46	27.44	50.00	-22.56	AVG	P
6	11.5304	19.88	20.47	40.35	60.00	-19.65	QP	P
7	13.3933	6.63	20.47	27.10	50.00	-22.90	AVG	P
8	13.5510	17.18	20.47	37.65	60.00	-22.35	QP	P
9	18.4649	19.15	20.50	39.65	60.00	-20.35	QP	P
10	18.5685	7.45	20.50	27.95	50.00	-22.05	AVG	P
11	23.8515	25.03	20.60	45.63	60.00	-14.37	QP	P
12	23.8515	14.02	20.60	34.62	50.00	-15.38	AVG	P



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5180MHz

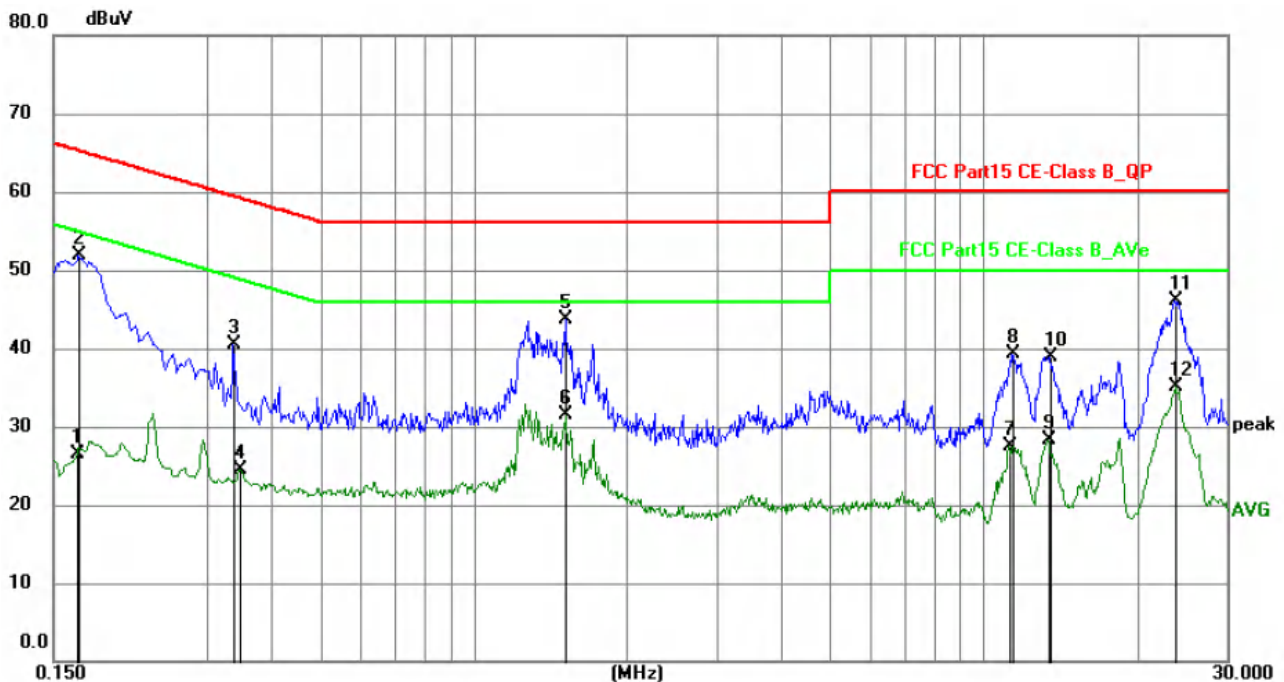

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1665	6.22	20.23	26.45	55.13	-28.68	AVG	P
2	0.1680	31.66	20.24	51.90	65.06	-13.16	QP	P
3	0.3390	20.09	20.34	40.43	59.23	-18.80	QP	P
4	0.3478	4.18	20.34	24.52	49.01	-24.49	AVG	P
5	1.5179	23.33	20.30	43.63	56.00	-12.37	QP	P
6	1.5179	11.30	20.30	31.60	46.00	-14.40	AVG	P
7	11.2514	6.98	20.47	27.45	50.00	-22.55	AVG	P
8	11.4135	18.80	20.48	39.28	60.00	-20.72	QP	P
9	13.3665	7.74	20.49	28.23	50.00	-21.77	AVG	P
10	13.5419	18.45	20.49	38.94	60.00	-21.06	QP	P
11	23.6848	25.49	20.63	46.12	60.00	-13.88	QP	P
12	23.8515	14.45	20.63	35.08	50.00	-14.92	AVG	P


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11n20 - 5180MHz.



5.8G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5745MHz

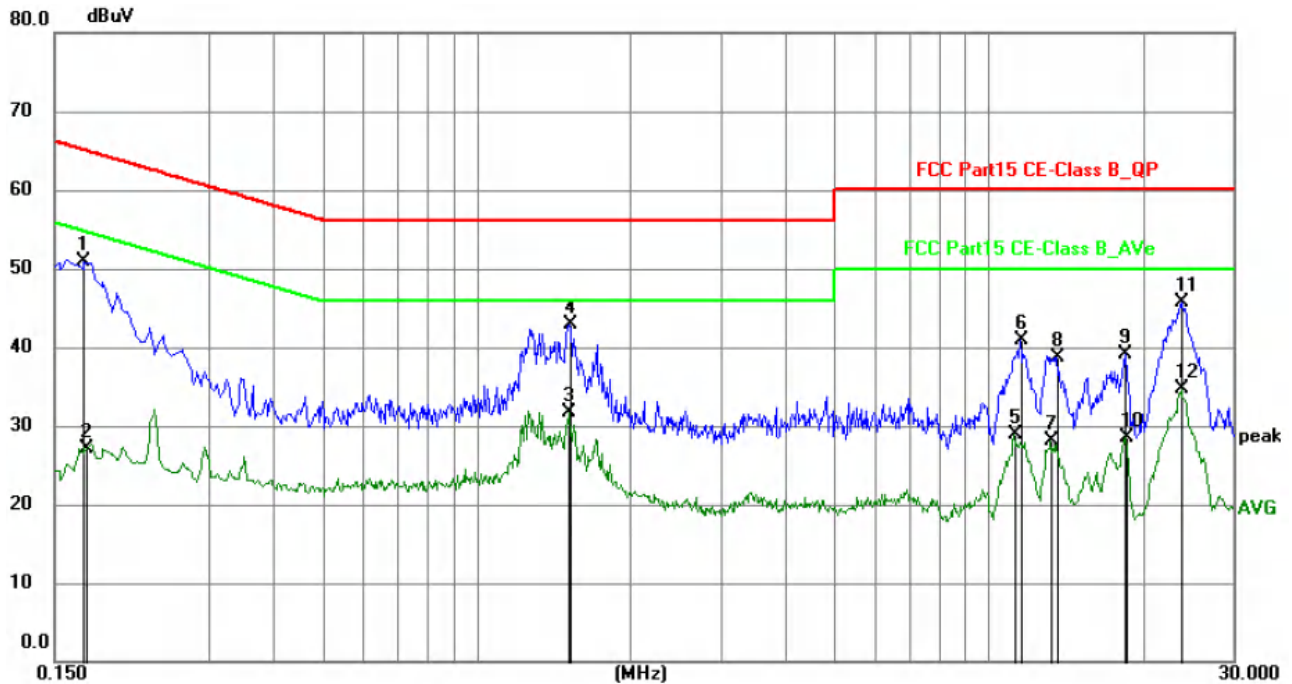

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1711	30.61	20.26	50.87	64.91	-14.04	QP	P
2	0.1728	6.78	20.27	27.05	54.82	-27.77	AVG	P
3	1.5179	11.35	20.30	31.65	46.00	-14.35	AVG	P
4	1.5265	22.61	20.30	42.91	56.00	-13.09	QP	P
5	11.2469	8.48	20.46	28.94	50.00	-21.06	AVG	P
6	11.5304	20.38	20.47	40.85	60.00	-19.15	QP	P
7	13.2270	7.56	20.47	28.03	50.00	-21.97	AVG	P
8	13.5510	18.18	20.47	38.65	60.00	-21.35	QP	P
9	18.4649	18.65	20.50	39.15	60.00	-20.85	QP	P
10	18.5685	7.95	20.50	28.45	50.00	-21.55	AVG	P
11	23.8515	25.03	20.60	45.63	60.00	-14.37	QP	P
12	23.8515	14.02	20.60	34.62	50.00	-15.38	AVG	P



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5745MHz

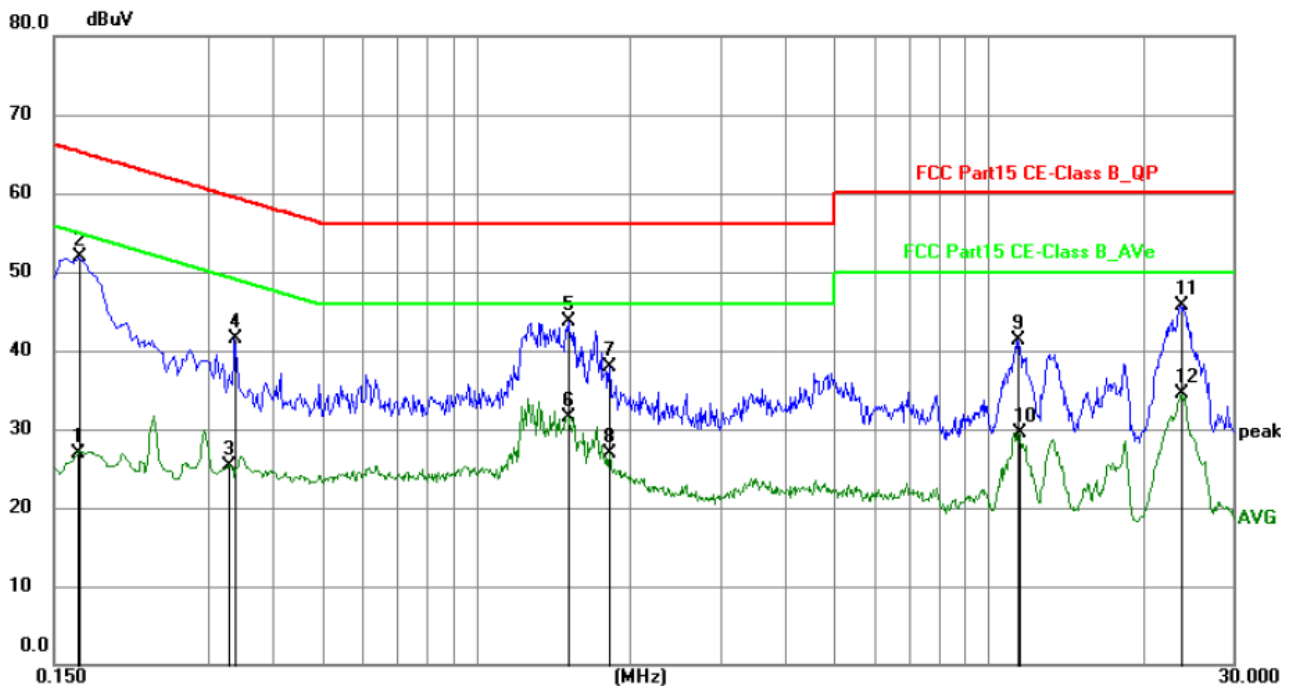

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1665	6.72	20.23	26.95	55.13	-28.18	AVG	P
2	0.1680	31.66	20.24	51.90	65.06	-13.16	QP	P
3	0.3300	5.06	20.34	25.40	49.45	-24.05	AVG	P
4	0.3390	21.09	20.34	41.43	59.23	-17.80	QP	P
5	1.5179	23.33	20.30	43.63	56.00	-12.37	QP	P
6	1.5179	11.30	20.30	31.60	46.00	-14.40	AVG	P
7	1.8191	17.55	20.31	37.86	56.00	-18.14	QP	P
8	1.8191	6.56	20.31	26.87	46.00	-19.13	AVG	P
9	11.4135	20.80	20.48	41.28	60.00	-18.72	QP	P
10	11.4584	8.95	20.48	29.43	50.00	-20.57	AVG	P
11	23.6847	24.99	20.63	45.62	60.00	-14.38	QP	P
12	23.8515	13.95	20.63	34.58	50.00	-15.42	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11n20 - 5745MHz.



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark : 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

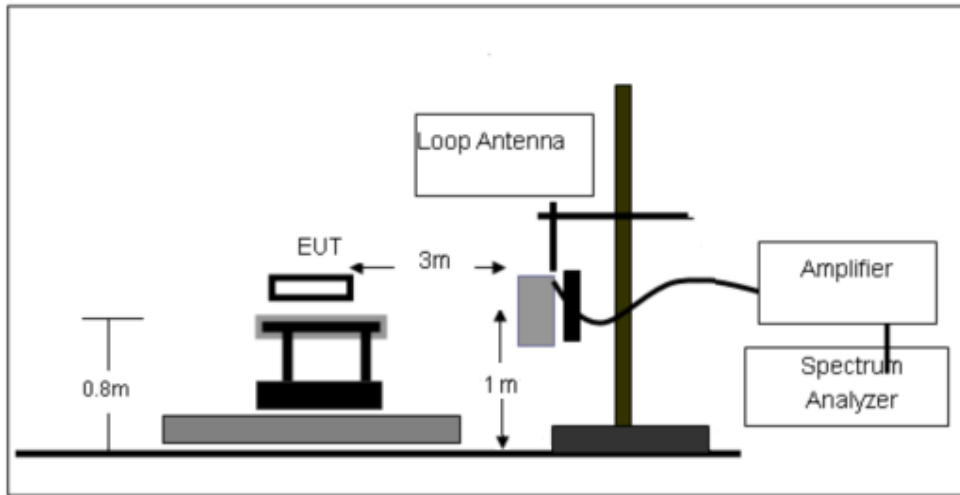

2. For radiated emissions from 30MHz to 1000MHz

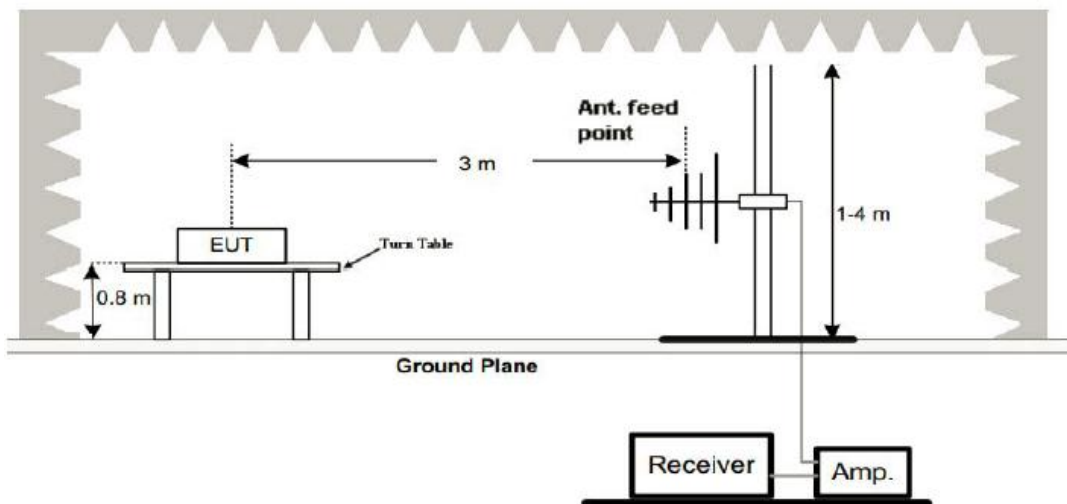

3. Radiated Emission Test-Up Frequency Above 1GHz

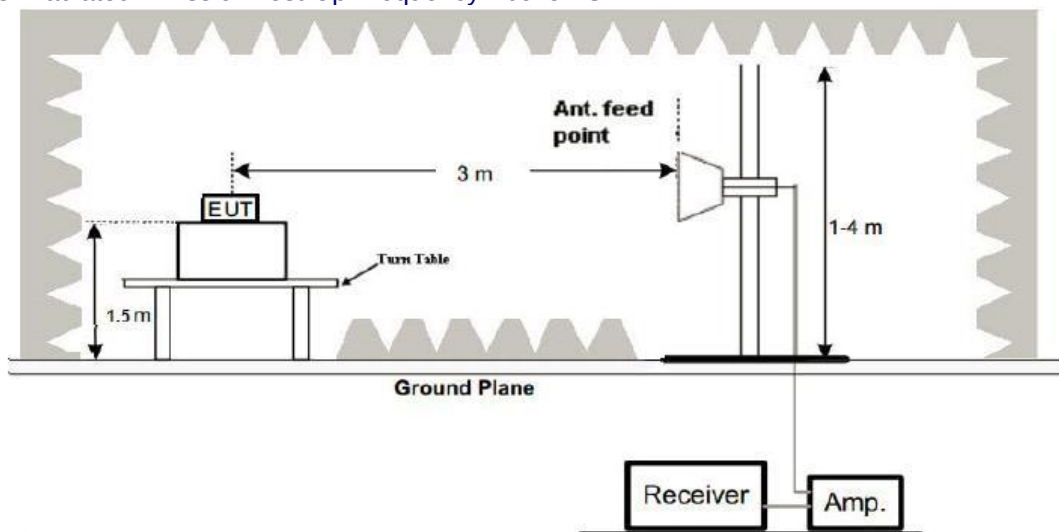



4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



4.2.6 TEST RESULT


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

5.2G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11n20 - 5180MHz

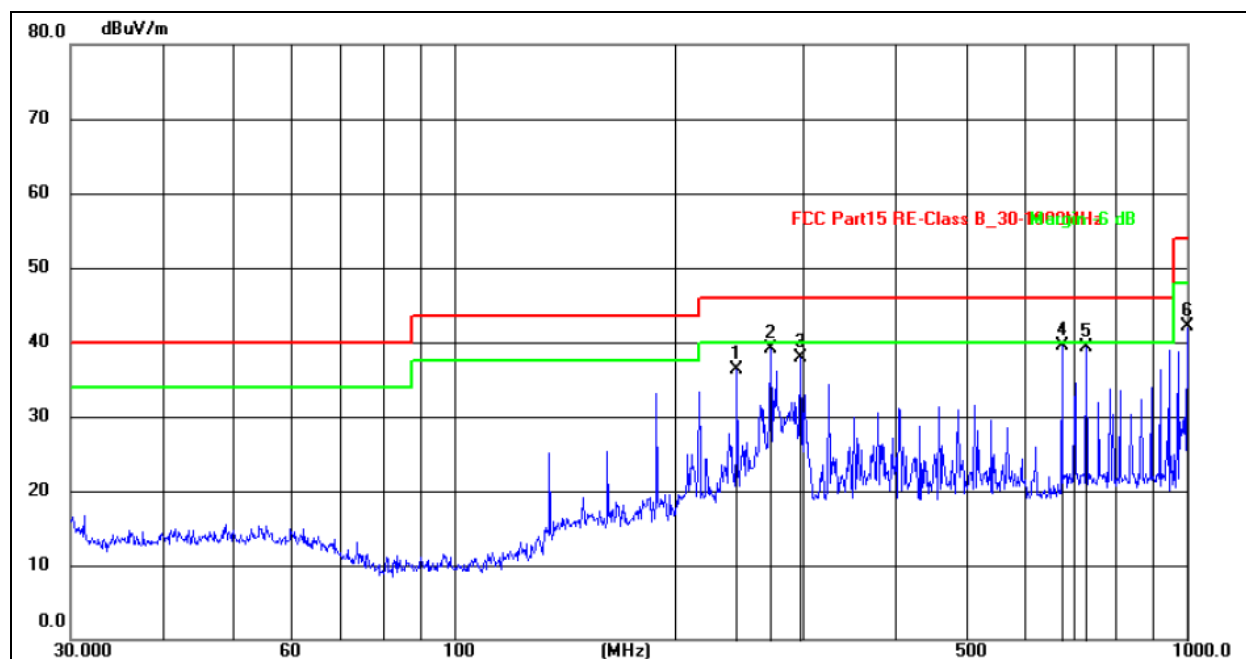

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	243.3771	52.17	-15.80	36.37	46.00	-9.63	QP
2	270.3747	53.60	-14.53	39.07	46.00	-6.93	QP
3	297.2238	54.03	-16.18	37.85	46.00	-8.15	QP
4	675.2078	46.41	-6.92	39.49	46.00	-6.51	QP
5	729.3582	45.77	-6.50	39.27	46.00	-6.73	QP
6	1000.0000	46.72	-4.56	42.16	54.00	-11.84	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11n20 - 5180MHz

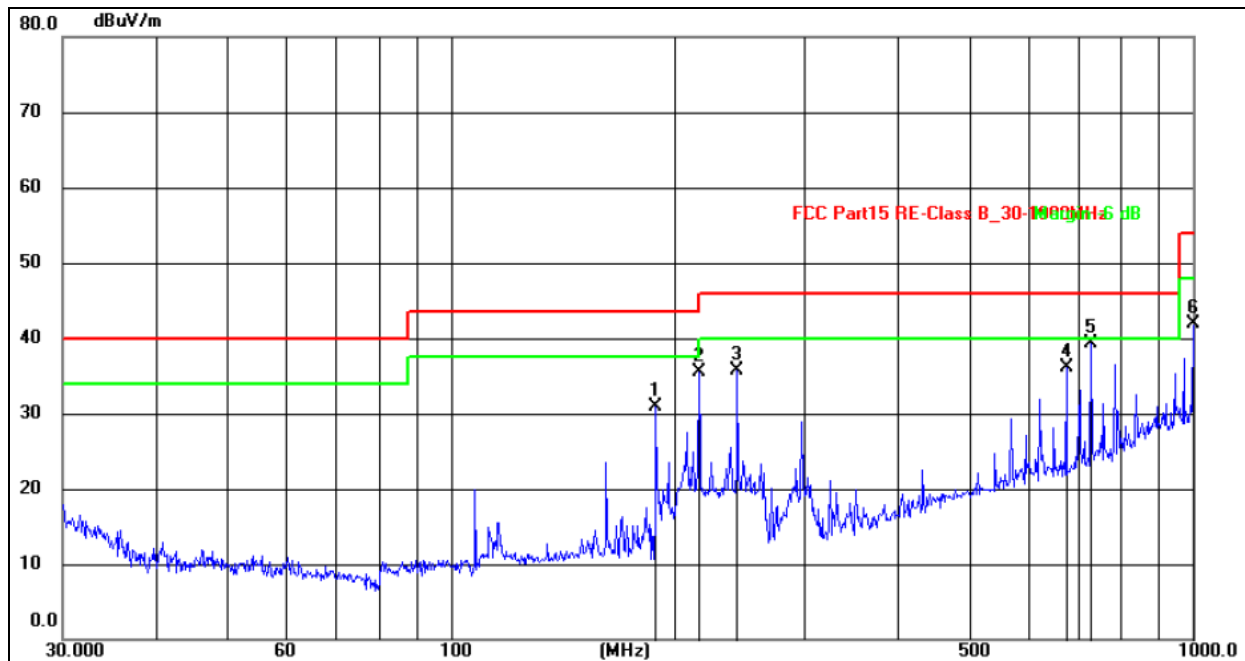

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	189.0742	50.83	-19.94	30.89	43.50	-12.61	QP
2	216.0238	55.60	-20.12	35.48	46.00	-10.52	QP
3	243.3771	55.60	-19.82	35.78	46.00	-10.22	QP
4	675.2078	43.53	-7.36	36.17	46.00	-9.83	QP
5	729.3582	45.56	-6.17	39.39	46.00	-6.61	QP
6	1000.0000	41.73	0.09	41.82	54.00	-12.18	QP


Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All modes were tested, and only the worst test data was recorded is 802.11n20 - 5180MHz.



5.8G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11n20 - 5745MHz

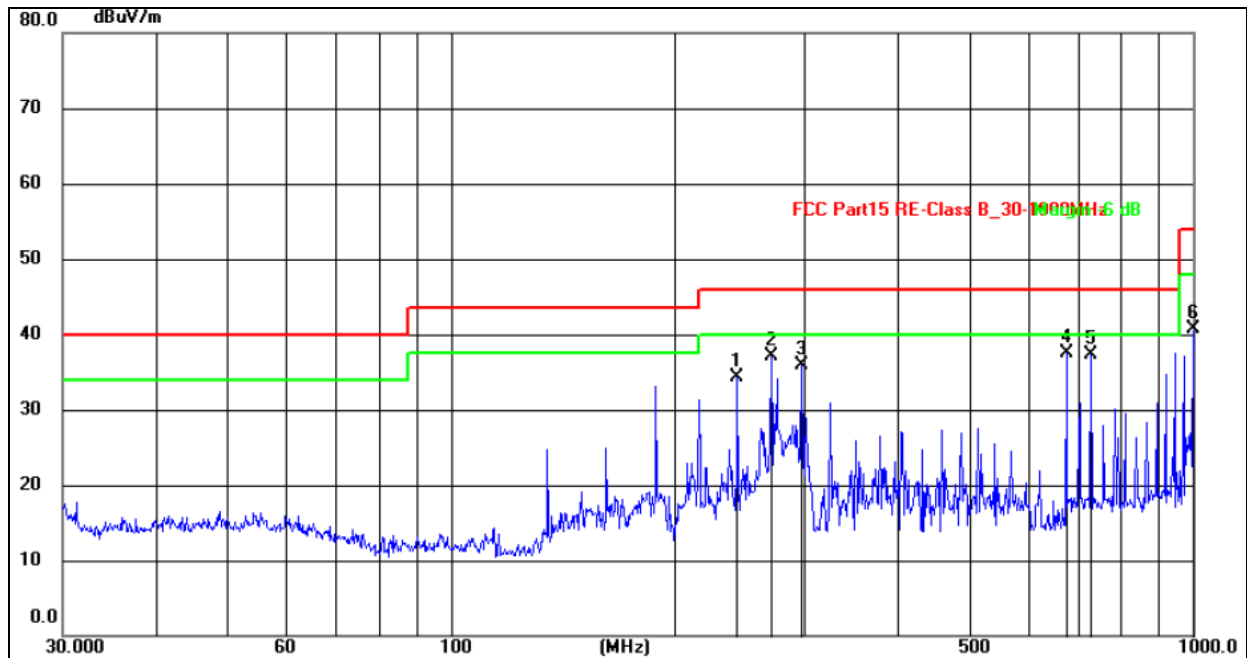

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	243.3771	50.17	-15.80	34.37	46.00	-11.63	QP
2	270.3747	51.60	-14.53	37.07	46.00	-8.93	QP
3	297.2238	52.03	-16.18	35.85	46.00	-10.15	QP
4	675.2078	44.41	-6.92	37.49	46.00	-8.51	QP
5	729.3582	43.77	-6.50	37.27	46.00	-8.73	QP
6	1000.0000	45.22	-4.56	40.66	54.00	-13.34	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11n20 - 5745MHz

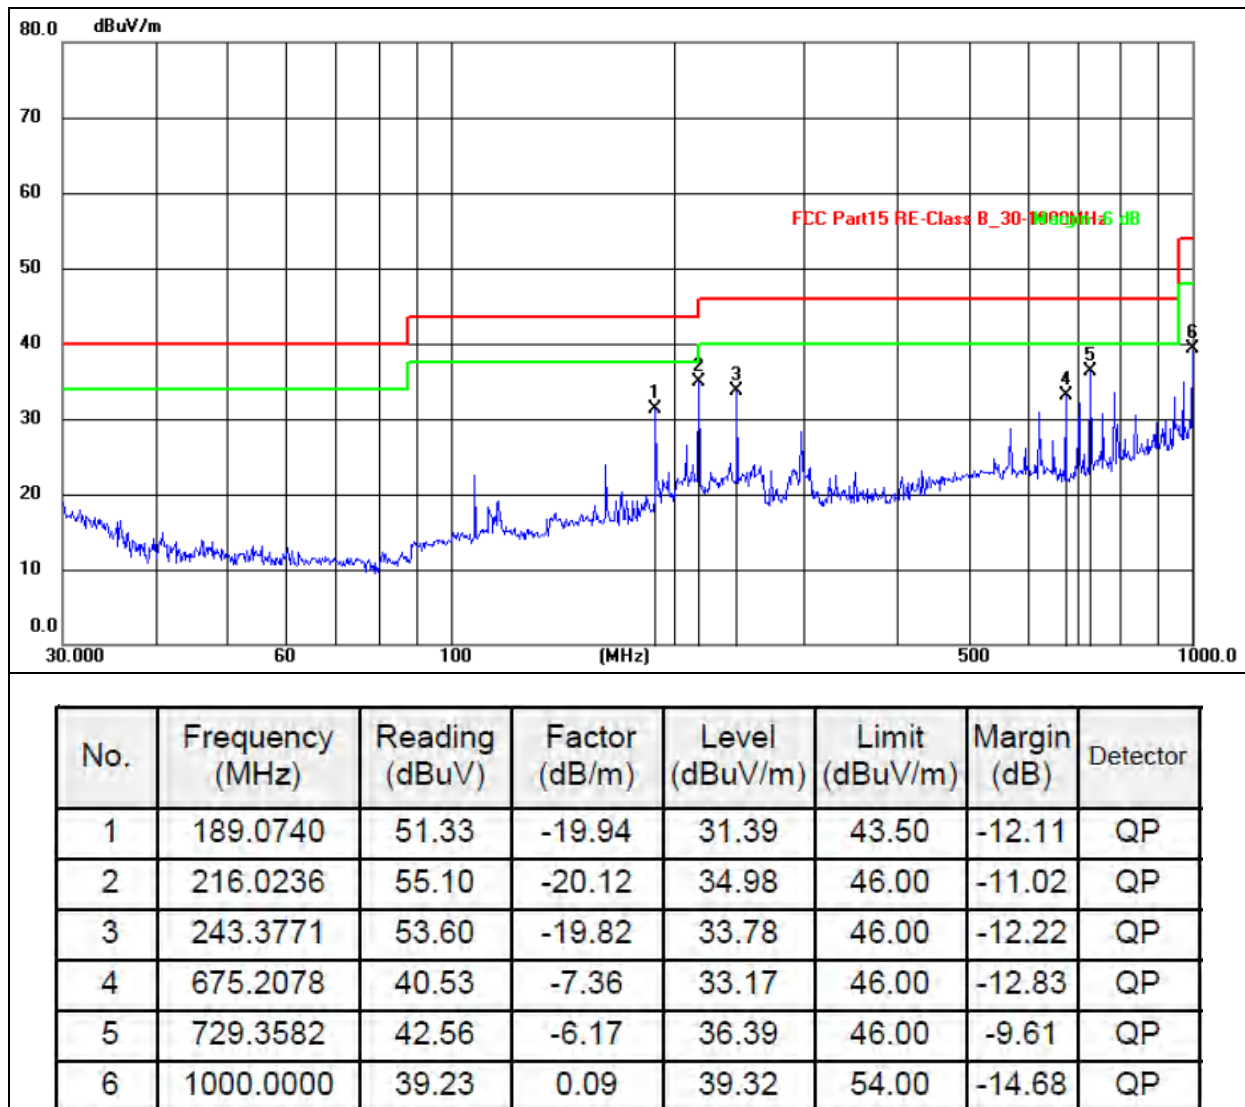**Remarks:**

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All modes were tested, and only the worst test data was recorded is 802.11n20 - 5745MHz.



Between 1GHz – 40GHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	5.2G TX - 802.11a/ n20/ ac20/ n40/ ac40/ac80		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	5150.00	41.66	30.45	8.77	38.66	58.64	74.00	-15.36	PK
V	5150.00	31.54	30.45	8.77	38.66	48.52	54.00	-5.48	AV
V	10360.00	52.14	30.55	5.77	24.66	52.02	74.00	-21.98	PK
V	10360.00	42.99	30.55	5.77	24.66	42.87	54.00	-11.13	AV
V	15540.00	53.77	30.33	6.32	24.55	54.31	74.00	-19.69	PK
V	15540.00	42.88	30.33	6.32	24.55	43.42	54.00	-10.58	AV
V	20720.00	49.66	30.85	7.45	24.69	50.95	74.00	-23.05	PK
V	20720.00	42.91	30.85	7.45	24.69	44.20	54.00	-9.80	AV
V	25900.00	51.55	31.02	8.99	25.57	55.09	74.00	-18.91	PK
V	25900.00	42.75	31.02	8.99	25.57	46.29	54.00	-7.71	AV
H	5150.00	41.58	30.45	8.77	38.66	58.56	74.00	-15.44	PK
H	5150.00	31.69	30.45	8.77	38.66	48.67	54.00	-5.33	AV
H	10360.00	50.15	30.55	5.77	24.66	50.03	74.00	-23.97	PK
H	10360.00	42.44	30.55	5.77	24.66	42.32	54.00	-11.68	AV
H	15540.00	53.15	30.33	6.32	24.55	53.69	74.00	-20.31	PK
H	15540.00	42.99	30.33	6.32	24.55	43.53	54.00	-10.47	AV
H	20720.00	51.14	30.85	7.45	24.69	52.43	74.00	-21.57	PK
H	20720.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
H	25900.00	50.15	31.02	8.99	25.57	53.69	74.00	-20.31	PK
H	25900.00	42.83	31.02	8.99	25.57	46.37	54.00	-7.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	5150.00	40.33	30.45	8.77	38.66	57.31	74.00	-16.69	PK
V	5150.00	29.89	30.45	8.77	38.66	46.87	54.00	-7.13	AV
V	10400.00	50.33	30.55	5.77	24.66	50.21	74.00	-23.79	PK
V	10400.00	41.17	30.55	5.77	24.66	41.05	54.00	-12.95	AV
V	15600.00	51.91	30.33	6.32	24.55	52.45	74.00	-21.55	PK
V	15600.00	40.62	30.33	6.32	24.55	41.16	54.00	-12.84	AV
V	20800.00	47.73	30.85	7.45	24.69	49.02	74.00	-24.98	PK
V	20800.00	40.84	30.85	7.45	24.69	42.13	54.00	-11.87	AV
V	26000.00	49.76	31.02	8.99	25.57	53.30	74.00	-20.70	PK
V	26000.00	40.73	31.02	8.99	25.57	44.27	54.00	-9.73	AV
H	5150.00	39.85	30.45	8.77	38.66	56.83	74.00	-17.17	PK
H	5150.00	29.90	30.45	8.77	38.66	46.88	54.00	-7.12	AV
H	10400.00	47.94	30.55	5.77	24.66	47.82	74.00	-26.18	PK
H	10400.00	40.73	30.55	5.77	24.66	40.61	54.00	-13.39	AV
H	15600.00	50.80	30.33	6.32	24.55	51.34	74.00	-22.66	PK



H	15600.00	40.89	30.33	6.32	24.55	41.43	54.00	-12.57	AV
H	20800.00	49.06	30.85	7.45	24.69	50.35	74.00	-23.65	PK
H	20800.00	41.34	30.85	7.45	24.69	42.63	54.00	-11.37	AV
H	26000.00	48.43	31.02	8.99	25.57	51.97	74.00	-22.03	PK
H	26000.00	41.24	31.02	8.99	25.57	44.78	54.00	-9.22	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	5350.00	40.63	30.45	8.77	38.66	57.61	74.00	-16.39	PK
V	5350.00	30.98	30.45	8.77	38.66	47.96	54.00	-6.04	AV
V	10480.00	50.89	30.55	5.77	24.66	50.77	74.00	-23.23	PK
V	10480.00	41.60	30.55	5.77	24.66	41.48	54.00	-12.52	AV
V	15720.00	52.78	30.33	6.32	24.55	53.32	74.00	-20.68	PK
V	15720.00	42.09	30.33	6.32	24.55	42.63	54.00	-11.37	AV
V	20960.00	48.61	30.85	7.45	24.69	49.90	74.00	-24.10	PK
V	20960.00	41.56	30.85	7.45	24.69	42.85	54.00	-11.15	AV
V	26200.00	50.86	31.02	8.99	25.57	54.40	74.00	-19.60	PK
V	26200.00	41.55	31.02	8.99	25.57	45.09	54.00	-8.91	AV
H	5350.00	40.65	30.45	8.77	38.66	57.63	74.00	-16.37	PK
H	5350.00	31.09	30.45	8.77	38.66	48.07	54.00	-5.93	AV
H	10480.00	48.90	30.55	5.77	24.66	48.78	74.00	-25.22	PK
H	10480.00	42.02	30.55	5.77	24.66	41.90	54.00	-12.10	AV
H	15720.00	51.57	30.33	6.32	24.55	52.11	74.00	-21.89	PK
H	15720.00	41.46	30.33	6.32	24.55	42.00	54.00	-12.00	AV
H	20960.00	49.92	30.85	7.45	24.69	51.21	74.00	-22.79	PK
H	20960.00	42.11	30.85	7.45	24.69	43.40	54.00	-10.60	AV
H	26200.00	49.10	31.02	8.99	25.57	52.64	74.00	-21.36	PK
H	26200.00	42.17	31.02	8.99	25.57	45.71	54.00	-8.29	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11n20**

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	5150.00	42.01	30.45	8.77	38.66	58.99	74.00	-15.01	PK
V	5150.00	31.89	30.45	8.77	38.66	48.87	54.00	-5.13	AV
V	10360.00	52.49	30.55	5.77	24.66	52.37	74.00	-21.63	PK
V	10360.00	43.34	30.55	5.77	24.66	43.22	54.00	-10.78	AV
V	15540.00	54.12	30.33	6.32	24.55	54.66	74.00	-19.34	PK
V	15540.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	20720.00	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
V	20720.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
V	25900.00	51.90	31.02	8.99	25.57	55.44	74.00	-18.56	PK
V	25900.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV
H	5150.00	41.93	30.45	8.77	38.66	58.91	74.00	-15.09	PK
H	5150.00	32.04	30.45	8.77	38.66	49.02	54.00	-4.98	AV
H	10360.00	50.50	30.55	5.77	24.66	50.38	74.00	-23.62	PK
H	10360.00	42.79	30.55	5.77	24.66	42.67	54.00	-11.33	AV
H	15540.00	53.50	30.33	6.32	24.55	54.04	74.00	-19.96	PK
H	15540.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
H	20720.00	51.49	30.85	7.45	24.69	52.78	74.00	-21.22	PK
H	20720.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
H	25900.00	50.50	31.02	8.99	25.57	54.04	74.00	-19.96	PK
H	25900.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	5150.00	41.59	30.45	8.77	38.66	58.57	74.00	-15.43	PK
V	5150.00	31.15	30.45	8.77	38.66	48.13	54.00	-5.87	AV
V	10400.00	51.59	30.55	5.77	24.66	51.47	74.00	-22.53	PK
V	10400.00	42.43	30.55	5.77	24.66	42.31	54.00	-11.69	AV
V	15600.00	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
V	15600.00	41.88	30.33	6.32	24.55	42.42	54.00	-11.58	AV
V	20800.00	48.99	30.85	7.45	24.69	50.28	74.00	-23.72	PK
V	20800.00	42.10	30.85	7.45	24.69	43.39	54.00	-10.61	AV
V	26000.00	51.02	31.02	8.99	25.57	54.56	74.00	-19.44	PK
V	26000.00	41.99	31.02	8.99	25.57	45.53	54.00	-8.47	AV
H	5150.00	41.11	30.45	8.77	38.66	58.09	74.00	-15.91	PK
H	5150.00	31.16	30.45	8.77	38.66	48.14	54.00	-5.86	AV
H	10400.00	49.20	30.55	5.77	24.66	49.08	74.00	-24.92	PK
H	10400.00	41.99	30.55	5.77	24.66	41.87	54.00	-12.13	AV
H	15600.00	52.06	30.33	6.32	24.55	52.60	74.00	-21.40	PK
H	15600.00	42.15	30.33	6.32	24.55	42.69	54.00	-11.31	AV
H	20800.00	50.32	30.85	7.45	24.69	51.61	74.00	-22.39	PK
H	20800.00	42.60	30.85	7.45	24.69	43.89	54.00	-10.11	AV
H	26000.00	49.69	31.02	8.99	25.57	53.23	74.00	-20.77	PK
H	26000.00	42.50	31.02	8.99	25.57	46.04	54.00	-7.96	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	5350.00	40.83	30.45	8.77	38.66	57.81	74.00	-16.19	PK
V	5350.00	31.18	30.45	8.77	38.66	48.16	54.00	-5.84	AV
V	10480.00	51.09	30.55	5.77	24.66	50.97	74.00	-23.03	PK
V	10480.00	41.80	30.55	5.77	24.66	41.68	54.00	-12.32	AV
V	15720.00	52.98	30.33	6.32	24.55	53.52	74.00	-20.48	PK
V	15720.00	42.29	30.33	6.32	24.55	42.83	54.00	-11.17	AV
V	20960.00	48.81	30.85	7.45	24.69	50.10	74.00	-23.90	PK
V	20960.00	41.76	30.85	7.45	24.69	43.05	54.00	-10.95	AV
V	26200.00	51.06	31.02	8.99	25.57	54.60	74.00	-19.40	PK
V	26200.00	41.75	31.02	8.99	25.57	45.29	54.00	-8.71	AV
H	5350.00	40.85	30.45	8.77	38.66	57.83	74.00	-16.17	PK
H	5350.00	31.29	30.45	8.77	38.66	48.27	54.00	-5.73	AV
H	10480.00	49.10	30.55	5.77	24.66	48.98	74.00	-25.02	PK
H	10480.00	42.22	30.55	5.77	24.66	42.10	54.00	-11.90	AV
H	15720.00	51.77	30.33	6.32	24.55	52.31	74.00	-21.69	PK
H	15720.00	41.66	30.33	6.32	24.55	42.20	54.00	-11.80	AV
H	20960.00	50.12	30.85	7.45	24.69	51.41	74.00	-22.59	PK
H	20960.00	42.31	30.85	7.45	24.69	43.60	54.00	-10.40	AV
H	26200.00	49.30	31.02	8.99	25.57	52.84	74.00	-21.16	PK
H	26200.00	42.37	31.02	8.99	25.57	45.91	54.00	-8.09	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11ac20**

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	5150.00	41.83	30.45	8.77	38.66	58.81	74.00	-15.19	PK
V	5150.00	31.71	30.45	8.77	38.66	48.69	54.00	-5.31	AV
V	10360.00	52.31	30.55	5.77	24.66	52.19	74.00	-21.81	PK
V	10360.00	43.16	30.55	5.77	24.66	43.04	54.00	-10.96	AV
V	15540.00	53.94	30.33	6.32	24.55	54.48	74.00	-19.52	PK
V	15540.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	20720.00	49.83	30.85	7.45	24.69	51.12	74.00	-22.88	PK
V	20720.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
V	25900.00	51.72	31.02	8.99	25.57	55.26	74.00	-18.74	PK
V	25900.00	42.92	31.02	8.99	25.57	46.46	54.00	-7.54	AV
H	5150.00	41.75	30.45	8.77	38.66	58.73	74.00	-15.27	PK
H	5150.00	31.86	30.45	8.77	38.66	48.84	54.00	-5.16	AV
H	10360.00	50.32	30.55	5.77	24.66	50.20	74.00	-23.80	PK
H	10360.00	42.61	30.55	5.77	24.66	42.49	54.00	-11.51	AV
H	15540.00	53.32	30.33	6.32	24.55	53.86	74.00	-20.14	PK
H	15540.00	43.16	30.33	6.32	24.55	43.70	54.00	-10.30	AV
H	20720.00	51.31	30.85	7.45	24.69	52.60	74.00	-21.40	PK
H	20720.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
H	25900.00	50.32	31.02	8.99	25.57	53.86	74.00	-20.14	PK
H	25900.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	5150.00	40.72	30.45	8.77	38.66	57.70	74.00	-16.30	PK
V	5150.00	30.28	30.45	8.77	38.66	47.26	54.00	-6.74	AV
V	10400.00	50.72	30.55	5.77	24.66	50.60	74.00	-23.40	PK
V	10400.00	41.56	30.55	5.77	24.66	41.44	54.00	-12.56	AV
V	15600.00	52.30	30.33	6.32	24.55	52.84	74.00	-21.16	PK
V	15600.00	41.01	30.33	6.32	24.55	41.55	54.00	-12.45	AV
V	20800.00	48.12	30.85	7.45	24.69	49.41	74.00	-24.59	PK
V	20800.00	41.23	30.85	7.45	24.69	42.52	54.00	-11.48	AV
V	26000.00	50.15	31.02	8.99	25.57	53.69	74.00	-20.31	PK
V	26000.00	41.12	31.02	8.99	25.57	44.66	54.00	-9.34	AV
H	5150.00	40.24	30.45	8.77	38.66	57.22	74.00	-16.78	PK
H	5150.00	30.29	30.45	8.77	38.66	47.27	54.00	-6.73	AV
H	10400.00	48.33	30.55	5.77	24.66	48.21	74.00	-25.79	PK
H	10400.00	41.12	30.55	5.77	24.66	41.00	54.00	-13.00	AV
H	15600.00	51.19	30.33	6.32	24.55	51.73	74.00	-22.27	PK
H	15600.00	41.28	30.33	6.32	24.55	41.82	54.00	-12.18	AV
H	20800.00	49.45	30.85	7.45	24.69	50.74	74.00	-23.26	PK
H	20800.00	41.73	30.85	7.45	24.69	43.02	54.00	-10.98	AV
H	26000.00	48.82	31.02	8.99	25.57	52.36	74.00	-21.64	PK
H	26000.00	41.63	31.02	8.99	25.57	45.17	54.00	-8.83	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	5350.00	40.70	30.45	8.77	38.66	57.68	74.00	-16.32	PK
V	5350.00	31.05	30.45	8.77	38.66	48.03	54.00	-5.97	AV
V	10480.00	50.96	30.55	5.77	24.66	50.84	74.00	-23.16	PK
V	10480.00	41.67	30.55	5.77	24.66	41.55	54.00	-12.45	AV
V	15720.00	52.85	30.33	6.32	24.55	53.39	74.00	-20.61	PK
V	15720.00	42.16	30.33	6.32	24.55	42.70	54.00	-11.30	AV
V	20960.00	48.68	30.85	7.45	24.69	49.97	74.00	-24.03	PK
V	20960.00	41.63	30.85	7.45	24.69	42.92	54.00	-11.08	AV
V	26200.00	50.93	31.02	8.99	25.57	54.47	74.00	-19.53	PK
V	26200.00	41.62	31.02	8.99	25.57	45.16	54.00	-8.84	AV
H	5350.00	40.72	30.45	8.77	38.66	57.70	74.00	-16.30	PK
H	5350.00	31.16	30.45	8.77	38.66	48.14	54.00	-5.86	AV
H	10480.00	48.97	30.55	5.77	24.66	48.85	74.00	-25.15	PK
H	10480.00	42.09	30.55	5.77	24.66	41.97	54.00	-12.03	AV
H	15720.00	51.64	30.33	6.32	24.55	52.18	74.00	-21.82	PK
H	15720.00	41.53	30.33	6.32	24.55	42.07	54.00	-11.93	AV
H	20960.00	49.99	30.85	7.45	24.69	51.28	74.00	-22.72	PK
H	20960.00	42.18	30.85	7.45	24.69	43.47	54.00	-10.53	AV
H	26200.00	49.17	31.02	8.99	25.57	52.71	74.00	-21.29	PK
H	26200.00	42.24	31.02	8.99	25.57	45.78	54.00	-8.22	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	5.8G TX - 802.11a/ n20/ ac20/ n40/ ac40/ac80		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.21	30.55	5.77	24.66	50.09	74.00	-23.91	PK
V	11490.00	42.49	30.55	5.77	24.66	42.37	54.00	-11.63	AV
V	17235.00	51.48	30.33	6.32	24.55	52.02	68.20	-16.18	PK
V	17235.00	42.01	30.33	6.32	24.55	42.55	54.00	-11.45	AV
V	22980.00	49.09	30.85	7.45	24.69	50.38	74.00	-23.62	PK
V	22980.00	41.94	30.85	7.45	24.69	43.23	54.00	-10.77	AV
V	28725.00	52.34	31.02	8.99	25.57	55.88	68.20	-12.32	PK
V	28725.00	42.16	31.02	8.99	25.57	45.70	54.00	-8.30	AV
H	11490.00	50.96	30.55	5.77	24.66	50.84	74.00	-23.16	PK
H	11490.00	42.46	30.55	5.77	24.66	42.34	54.00	-11.66	AV
H	17235.00	52.97	30.33	6.32	24.55	53.51	68.20	-14.69	PK
H	17235.00	42.17	30.33	6.32	24.55	42.71	54.00	-11.29	AV
H	22980.00	50.93	30.85	7.45	24.69	52.22	74.00	-21.78	PK
H	22980.00	42.40	30.85	7.45	24.69	43.69	54.00	-10.31	AV
H	28725.00	51.52	31.02	8.99	25.57	55.06	68.20	-13.14	PK
H	28725.00	42.63	31.02	8.99	25.57	46.17	54.00	-7.83	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.36	30.55	5.77	24.66	50.24	74.00	-23.76	PK
V	11570.00	42.75	30.55	5.77	24.66	42.63	54.00	-11.37	AV
V	17355.00	49.50	30.33	6.32	24.55	50.04	68.20	-18.16	PK
V	17355.00	42.55	30.33	6.32	24.55	43.09	54.00	-10.91	AV
V	23140.00	51.58	30.85	7.45	24.69	52.87	68.20	-15.33	PK
V	23140.00	42.36	30.85	7.45	24.69	43.65	54.00	-10.35	AV
V	28925.00	49.53	31.02	8.99	25.57	53.07	68.20	-15.13	PK
V	28925.00	42.58	31.02	8.99	25.57	46.12	54.00	-7.88	AV
H	11570.00	49.71	30.55	5.77	24.66	49.59	74.00	-24.41	PK
H	11570.00	42.83	30.55	5.77	24.66	42.71	54.00	-11.29	AV
H	17355.00	53.94	30.33	6.32	24.55	54.48	68.20	-13.72	PK
H	17355.00	42.36	30.33	6.32	24.55	42.90	54.00	-11.10	AV
H	23140.00	51.45	30.85	7.45	24.69	52.74	68.20	-15.46	PK
H	23140.00	42.77	30.85	7.45	24.69	44.06	54.00	-9.94	AV
H	28925.00	49.35	31.02	8.99	25.57	52.89	68.20	-15.31	PK
H	28925.00	42.95	31.02	8.99	25.57	46.49	54.00	-7.51	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.84	30.55	5.77	24.66	50.72	74.00	-23.28	PK
V	11650.00	42.65	30.55	5.77	24.66	42.53	54.00	-11.47	AV
V	17475.00	49.53	30.33	6.32	24.55	50.07	68.20	-18.13	PK
V	17475.00	42.40	30.33	6.32	24.55	42.94	54.00	-11.06	AV
V	23300.00	50.60	30.85	7.45	24.69	51.89	68.20	-16.31	PK
V	23300.00	42.49	30.85	7.45	24.69	43.78	54.00	-10.22	AV
V	29125.00	53.18	31.02	8.99	25.57	56.72	68.20	-11.48	PK
V	29125.00	42.43	31.02	8.99	25.57	45.97	54.00	-8.03	AV
H	11650.00	51.83	30.55	5.77	24.66	51.71	74.00	-22.29	PK
H	11650.00	42.19	30.55	5.77	24.66	42.07	54.00	-11.93	AV
H	17475.00	52.42	30.33	6.32	24.55	52.96	68.20	-15.24	PK
H	17475.00	42.63	30.33	6.32	24.55	43.17	54.00	-10.83	AV
H	23300.00	53.26	30.85	7.45	24.69	54.55	68.20	-13.65	PK
H	23300.00	42.43	30.85	7.45	24.69	43.72	54.00	-10.28	AV
H	29125.00	49.25	31.02	8.99	25.57	52.79	68.20	-15.41	PK
H	29125.00	42.81	31.02	8.99	25.57	46.35	54.00	-7.65	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11n20**

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.58	30.55	5.77	24.66	50.46	74.00	-23.54	PK
V	11490.00	42.86	30.55	5.77	24.66	42.74	54.00	-11.26	AV
V	17235.00	51.85	30.33	6.32	24.55	52.39	68.20	-15.81	PK
V	17235.00	42.38	30.33	6.32	24.55	42.92	54.00	-11.08	AV
V	22980.00	49.46	30.85	7.45	24.69	50.75	74.00	-23.25	PK
V	22980.00	42.31	30.85	7.45	24.69	43.60	54.00	-10.40	AV
V	28725.00	52.71	31.02	8.99	25.57	56.25	68.20	-11.95	PK
V	28725.00	42.53	31.02	8.99	25.57	46.07	54.00	-7.93	AV
H	11490.00	51.33	30.55	5.77	24.66	51.21	74.00	-22.79	PK
H	11490.00	42.83	30.55	5.77	24.66	42.71	54.00	-11.29	AV
H	17235.00	53.34	30.33	6.32	24.55	53.88	68.20	-14.32	PK
H	17235.00	42.54	30.33	6.32	24.55	43.08	54.00	-10.92	AV
H	22980.00	51.30	30.85	7.45	24.69	52.59	74.00	-21.41	PK
H	22980.00	42.77	30.85	7.45	24.69	44.06	54.00	-9.94	AV
H	28725.00	51.89	31.02	8.99	25.57	55.43	68.20	-12.77	PK
H	28725.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	PK
V	11570.00	42.98	30.55	5.77	24.66	42.86	54.00	-11.14	AV
V	17355.00	49.73	30.33	6.32	24.55	50.27	68.20	-17.93	PK
V	17355.00	42.78	30.33	6.32	24.55	43.32	54.00	-10.68	AV
V	23140.00	51.81	30.85	7.45	24.69	53.10	68.20	-15.10	PK
V	23140.00	42.59	30.85	7.45	24.69	43.88	54.00	-10.12	AV
V	28925.00	49.76	31.02	8.99	25.57	53.30	68.20	-14.90	PK
V	28925.00	42.81	31.02	8.99	25.57	46.35	54.00	-7.65	AV
H	11570.00	49.94	30.55	5.77	24.66	49.82	74.00	-24.18	PK
H	11570.00	43.06	30.55	5.77	24.66	42.94	54.00	-11.06	AV
H	17355.00	54.17	30.33	6.32	24.55	54.71	68.20	-13.49	PK
H	17355.00	42.59	30.33	6.32	24.55	43.13	54.00	-10.87	AV
H	23140.00	51.68	30.85	7.45	24.69	52.97	68.20	-15.23	PK
H	23140.00	43.00	30.85	7.45	24.69	44.29	54.00	-9.71	AV
H	28925.00	49.58	31.02	8.99	25.57	53.12	68.20	-15.08	PK
H	28925.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.09	30.55	5.77	24.66	50.97	74.00	-23.03	PK
V	11650.00	42.90	30.55	5.77	24.66	42.78	54.00	-11.22	AV
V	17475.00	49.78	30.33	6.32	24.55	50.32	68.20	-17.88	PK
V	17475.00	42.65	30.33	6.32	24.55	43.19	54.00	-10.81	AV
V	23300.00	50.85	30.85	7.45	24.69	52.14	68.20	-16.06	PK
V	23300.00	42.74	30.85	7.45	24.69	44.03	54.00	-9.97	AV
V	29125.00	53.43	31.02	8.99	25.57	56.97	68.20	-11.23	PK
V	29125.00	42.68	31.02	8.99	25.57	46.22	54.00	-7.78	AV
H	11650.00	52.08	30.55	5.77	24.66	51.96	74.00	-22.04	PK
H	11650.00	42.44	30.55	5.77	24.66	42.32	54.00	-11.68	AV
H	17475.00	52.67	30.33	6.32	24.55	53.21	68.20	-14.99	PK
H	17475.00	42.88	30.33	6.32	24.55	43.42	54.00	-10.58	AV
H	23300.00	53.51	30.85	7.45	24.69	54.80	68.20	-13.40	PK
H	23300.00	42.68	30.85	7.45	24.69	43.97	54.00	-10.03	AV
H	29125.00	49.50	31.02	8.99	25.57	53.04	68.20	-15.16	PK
H	29125.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11ac20**

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.66	30.55	5.77	24.66	50.54	74.00	-23.46	PK
V	11490.00	42.94	30.55	5.77	24.66	42.82	54.00	-11.18	AV
V	17235.00	51.93	30.33	6.32	24.55	52.47	68.20	-15.73	PK
V	17235.00	42.46	30.33	6.32	24.55	43.00	54.00	-11.00	AV
V	22980.00	49.54	30.85	7.45	24.69	50.83	74.00	-23.17	PK
V	22980.00	42.39	30.85	7.45	24.69	43.68	54.00	-10.32	AV
V	28725.00	52.79	31.02	8.99	25.57	56.33	68.20	-11.87	PK
V	28725.00	42.61	31.02	8.99	25.57	46.15	54.00	-7.85	AV
H	11490.00	51.41	30.55	5.77	24.66	51.29	74.00	-22.71	PK
H	11490.00	42.91	30.55	5.77	24.66	42.79	54.00	-11.21	AV
H	17235.00	53.42	30.33	6.32	24.55	53.96	68.20	-14.24	PK
H	17235.00	42.62	30.33	6.32	24.55	43.16	54.00	-10.84	AV
H	22980.00	51.38	30.85	7.45	24.69	52.67	74.00	-21.33	PK
H	22980.00	42.85	30.85	7.45	24.69	44.14	54.00	-9.86	AV
H	28725.00	51.97	31.02	8.99	25.57	55.51	68.20	-12.69	PK
H	28725.00	43.08	31.02	8.99	25.57	46.62	54.00	-7.38	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.71	30.55	5.77	24.66	50.59	74.00	-23.41	PK
V	11570.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	17355.00	49.85	30.33	6.32	24.55	50.39	68.20	-17.81	PK
V	17355.00	42.90	30.33	6.32	24.55	43.44	54.00	-10.56	AV
V	23140.00	51.93	30.85	7.45	24.69	53.22	68.20	-14.98	PK
V	23140.00	42.71	30.85	7.45	24.69	44.00	54.00	-10.00	AV
V	28925.00	49.88	31.02	8.99	25.57	53.42	68.20	-14.78	PK
V	28925.00	42.93	31.02	8.99	25.57	46.47	54.00	-7.53	AV
H	11570.00	50.06	30.55	5.77	24.66	49.94	74.00	-24.06	PK
H	11570.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	17355.00	54.29	30.33	6.32	24.55	54.83	68.20	-13.37	PK
H	17355.00	42.71	30.33	6.32	24.55	43.25	54.00	-10.75	AV
H	23140.00	51.80	30.85	7.45	24.69	53.09	68.20	-15.11	PK
H	23140.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
H	28925.00	49.70	31.02	8.99	25.57	53.24	68.20	-14.96	PK
H	28925.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.01	30.55	5.77	24.66	50.89	74.00	-23.11	PK
V	11650.00	42.82	30.55	5.77	24.66	42.70	54.00	-11.30	AV
V	17475.00	49.70	30.33	6.32	24.55	50.24	68.20	-17.96	PK
V	17475.00	42.57	30.33	6.32	24.55	43.11	54.00	-10.89	AV
V	23300.00	50.77	30.85	7.45	24.69	52.06	68.20	-16.14	PK
V	23300.00	42.66	30.85	7.45	24.69	43.95	54.00	-10.05	AV
V	29125.00	53.35	31.02	8.99	25.57	56.89	68.20	-11.31	PK
V	29125.00	42.60	31.02	8.99	25.57	46.14	54.00	-7.86	AV
H	11650.00	52.00	30.55	5.77	24.66	51.88	74.00	-22.12	PK
H	11650.00	42.36	30.55	5.77	24.66	42.24	54.00	-11.76	AV
H	17475.00	52.59	30.33	6.32	24.55	53.13	68.20	-15.07	PK
H	17475.00	42.80	30.33	6.32	24.55	43.34	54.00	-10.66	AV
H	23300.00	53.43	30.85	7.45	24.69	54.72	68.20	-13.48	PK
H	23300.00	42.60	30.85	7.45	24.69	43.89	54.00	-10.11	AV
H	29125.00	49.42	31.02	8.99	25.57	52.96	68.20	-15.24	PK
H	29125.00	42.98	31.02	8.99	25.57	46.52	54.00	-7.48	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

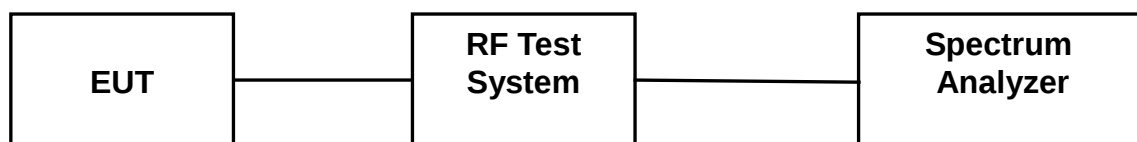

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5.4 Unless otherwise a special operating condition is specified in the follows during the testing.




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Band :	5.2G		

5.2G						
Test mode	Test Channel (MHz)	PSD (dBm)	duty cycle Factor (dB)	Total PSD (dBm)	Limit (dBm/MHz)	Result
802.11a	5180	-1.343	0.08	-1.263	11	Pass
	5200	-1.549	0.08	-1.469	11	Pass
	5240	-0.992	0.08	-0.912	11	Pass
802.11n20	5180	-2.404	0.04	-2.364	11	Pass
	5200	-2.461	0.04	-2.421	11	Pass
	5240	-1.903	0.04	-1.863	11	Pass
802.11n40	5190	-5.856	0.05	-5.806	11	Pass
	5230	-5.452	0.05	-5.402	11	Pass
802.11ac20	5180	-3.857	0.05	-3.807	11	Pass
	5200	-3.771	0.05	-3.721	11	Pass
	5240	-3.309	0.05	-3.259	11	Pass
802.11ac40	5190	-7.046	0.05	-6.996	11	Pass
	5230	-6.828	0.05	-6.778	11	Pass
802.11ac80	5210	-9.617	0.05	-9.567	11	Pass


Note: duty cycle Factor see page 85.



(802.11a) PSD plot on channel 36

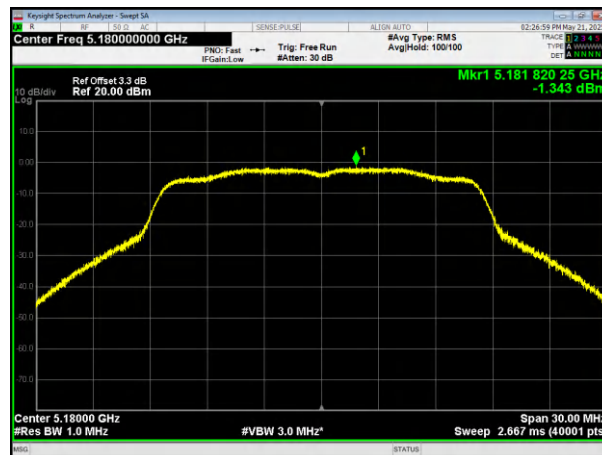

(802.11a) PSD plot on channel 40

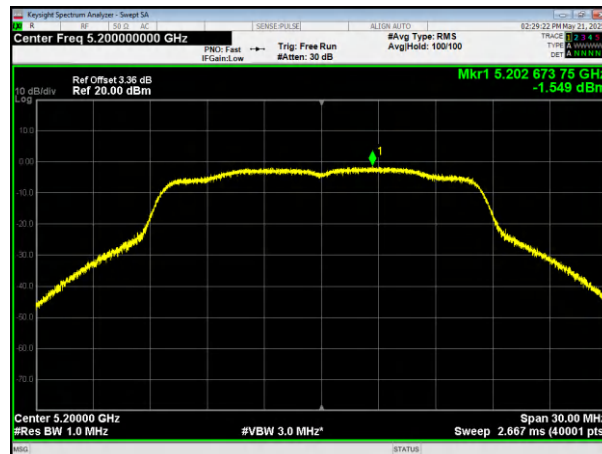


(802.11a) PSD plot on channel 48







(802.11n20) PSD plot on channel 36

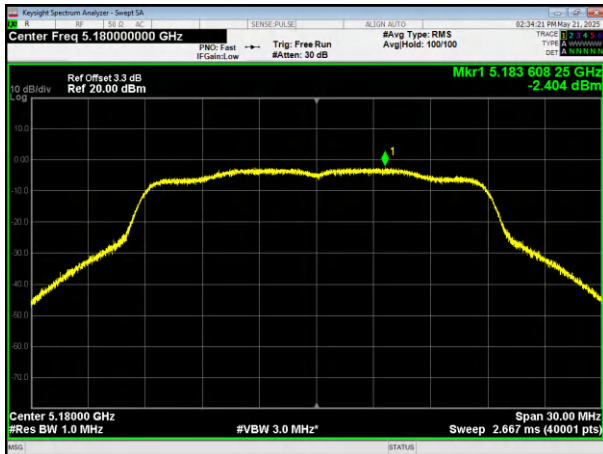


(802.11n40) PSD plot on channel 38

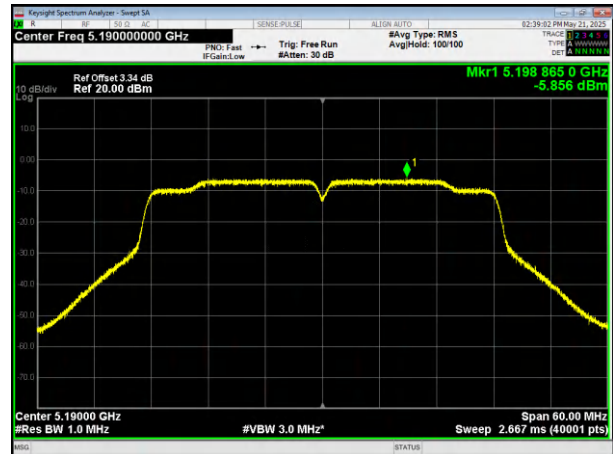


(802.11n20) PSD plot on channel 40

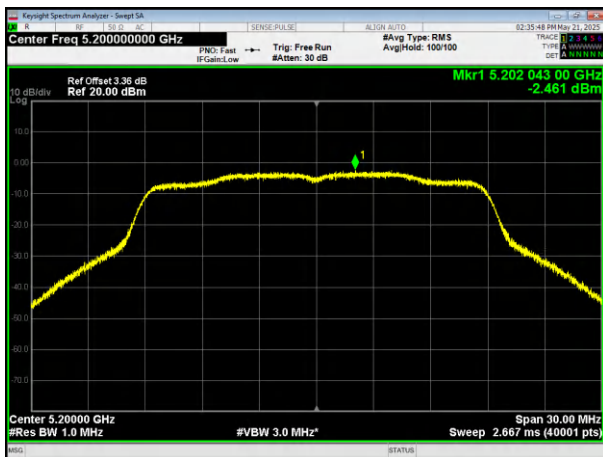

(802.11n40) PSD plot on channel 46

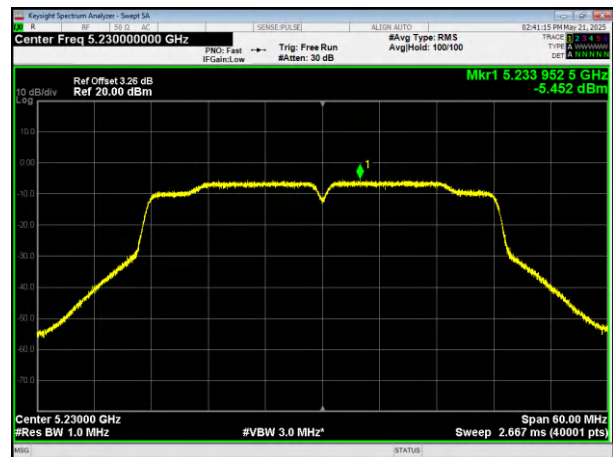


(802.11n20) PSD plot on channel 48

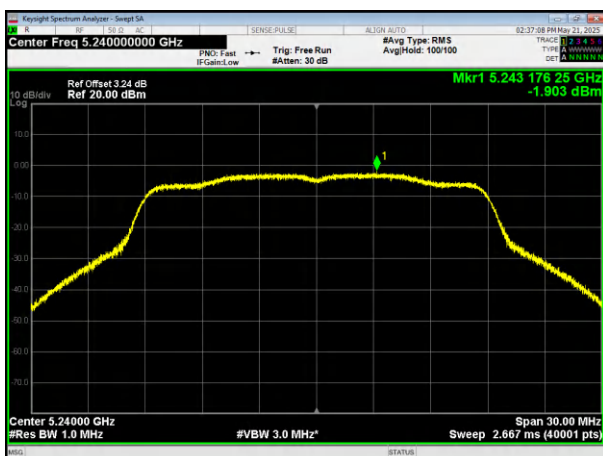





(802.11ac20) PSD plot on channel 36

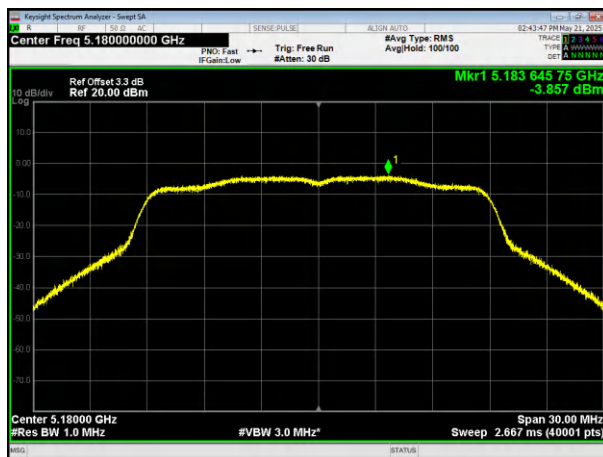


(802.11ac40) PSD plot on channel 38

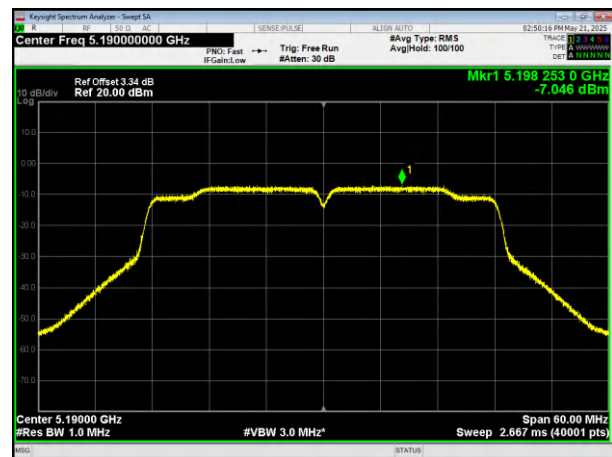


(802.11ac20) PSD plot on channel 40

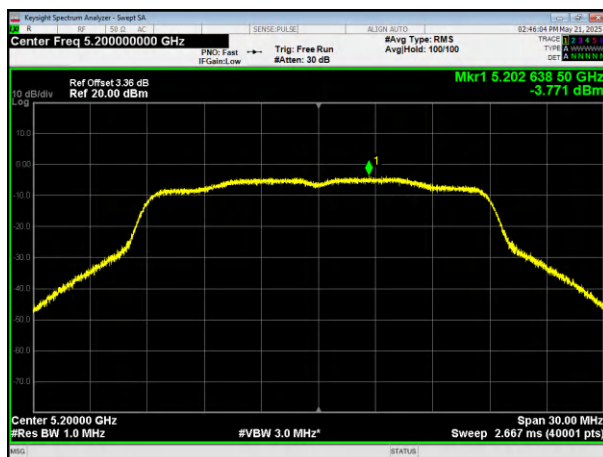


(802.11ac40) PSD plot on channel 46

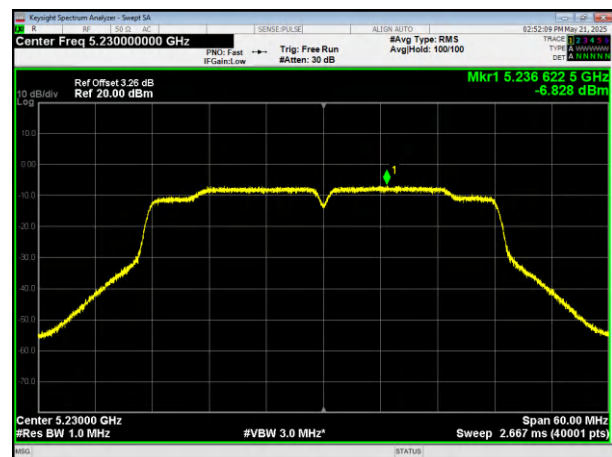

(802.11ac20) PSD plot on channel 48

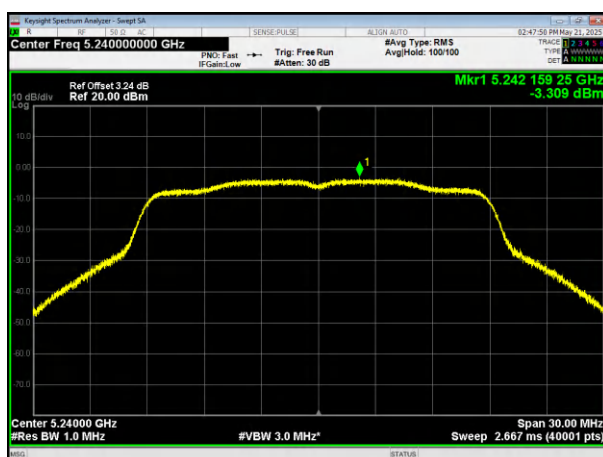

(802.11ac80) PSD plot on channel 42

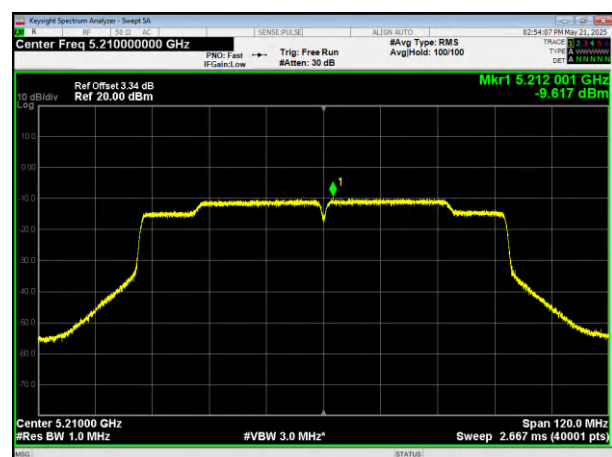




5.8G						
Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	duty cycle Factor (dB)	Total PSD (dBm)	Limit (dBm/500kHz)	Result
802.11a	5745	-6.293	0.10	-6.193	30	Pass
	5785	-5.532	0.10	-5.432	30	Pass
	5825	-4.867	0.10	-4.767	30	Pass
802.11n20	5745	-7.274	0.04	-7.234	30	Pass
	5785	-6.542	0.04	-6.502	30	Pass
	5825	-5.632	0.04	-5.592	30	Pass
802.11n40	5755	-9.356	0.04	-9.316	30	Pass
	5795	-9.153	0.04	-9.113	30	Pass
802.11ac20	5745	-7.603	0.04	-7.563	30	Pass
	5785	-6.730	0.04	-6.690	30	Pass
	5825	-5.877	0.04	-5.837	30	Pass
802.11ac40	5755	-10.996	0.05	-10.946	30	Pass
	5795	-10.495	0.05	-10.445	30	Pass
802.11ac80	5775	-12.862	0.04	-12.822	30	Pass


Note: duty cycle Factor see page 89.




(802.11a) PSD plot on channel 149

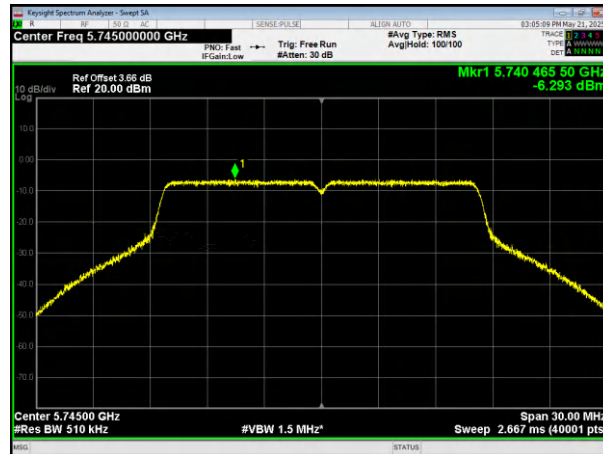

(802.11a) PSD plot on channel 157

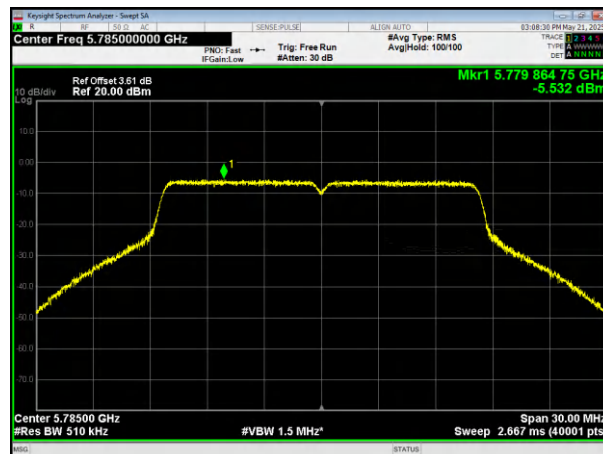


(802.11a) PSD plot on channel 165

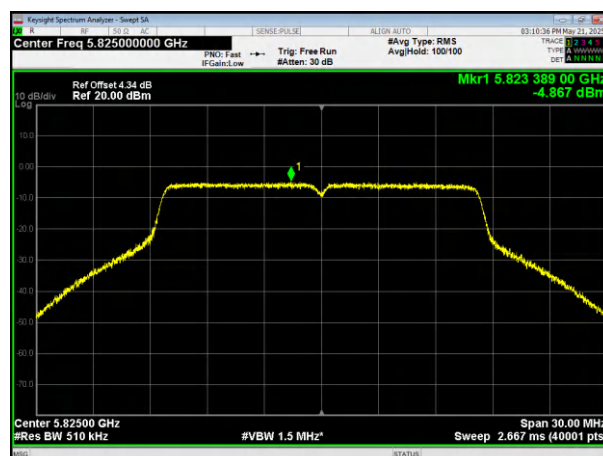





(802.11n20) PSD plot on channel 149

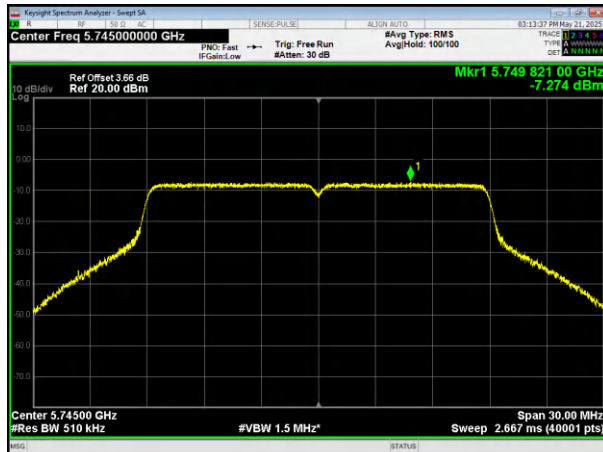


(802.11n40) PSD plot on channel 151

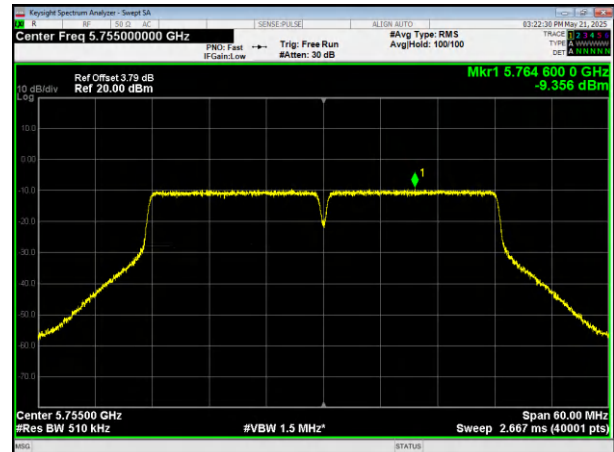

(802.11n20) PSD plot on channel 157

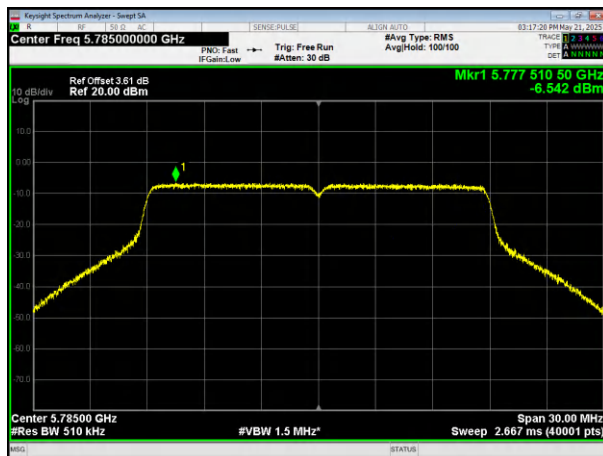

(802.11n40) PSD plot on channel 159

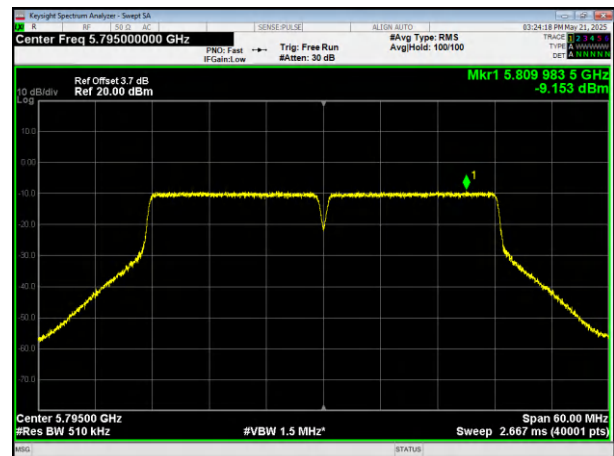


(802.11n20) PSD plot on channel 165






(802.11ac20) PSD plot on channel 149

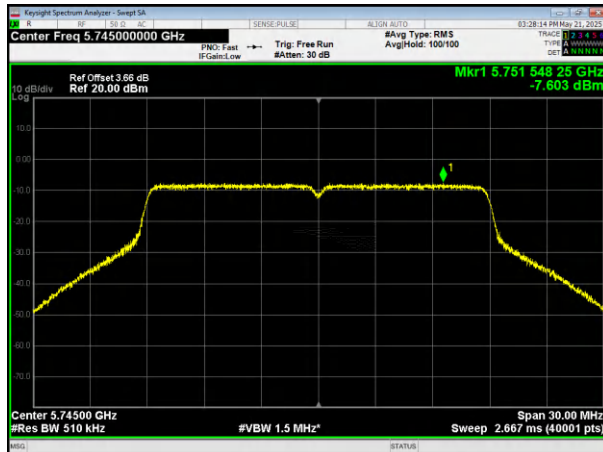


(802.11ac40) PSD plot on channel 151

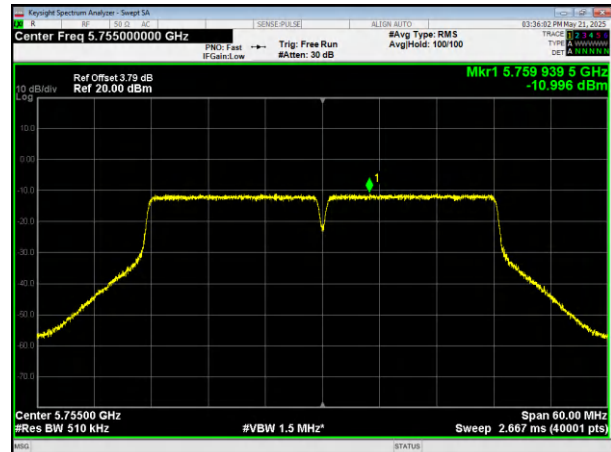


(802.11ac20) PSD plot on channel 157




(802.11ac40) PSD plot on channel 159

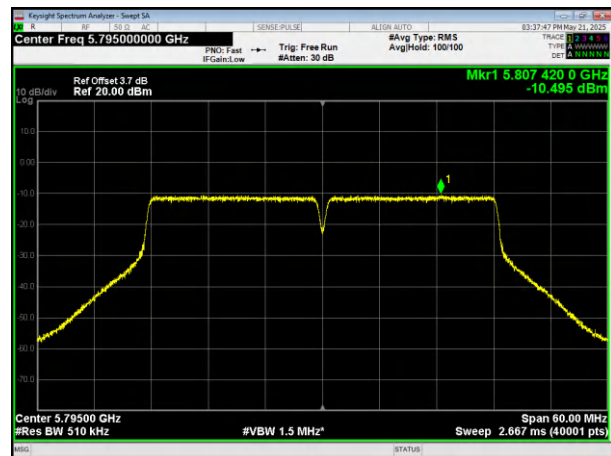

(802.11ac20) PSD plot on channel 165

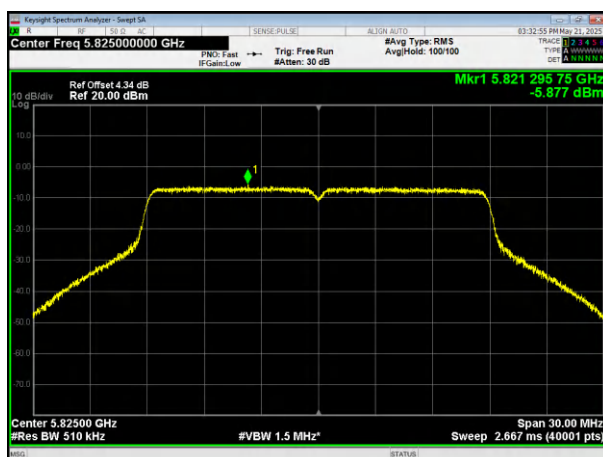

(802.11ac80) PSD plot on channel 155

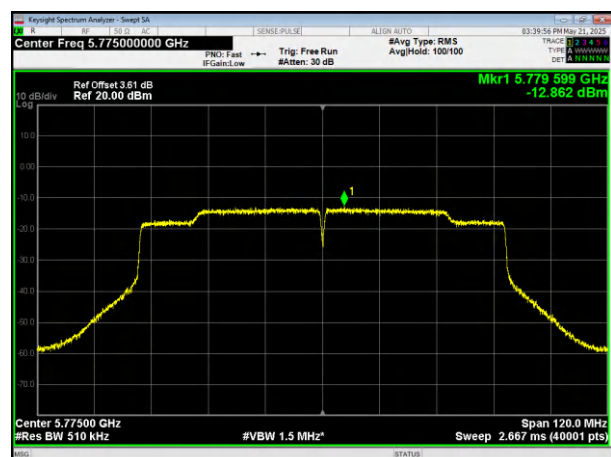



6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB Occupied Bandwidth:


The procedure for this method is as follows:

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB Emission bandwidth:

The procedure for this method is as follows:

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

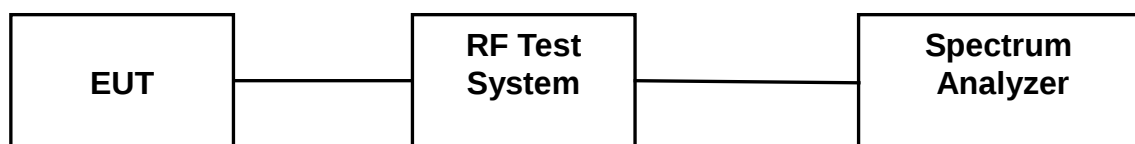

6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.2 Unless otherwise a special operating condition is specified in the follows during the testing.



6.4 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Band :	5.2G		

5.2G				
Test Mode	Test Channel (MHz)	26dB Emission Bandwidth (MHz)	Limit(KHz)	Result
802.11a	5180	22.23	N/A	Pass
	5200	22.59		
	5240	22.16		
802.11n20	5180	22.76	N/A	Pass
	5200	22.86		
	5240	22.26		
802.11n40	5190	42.60	N/A	Pass
	5230	42.12		
802.11ac20	5180	22.62	N/A	Pass
	5200	23.16		
	5240	22.38		
802.11ac40	5190	42.54	N/A	Pass
	5230	42.35		
802.11ac80	5210	83.99	N/A	Pass




5.2G Test plot


(802.11 a) 26dB Bandwidth plot on channel 36

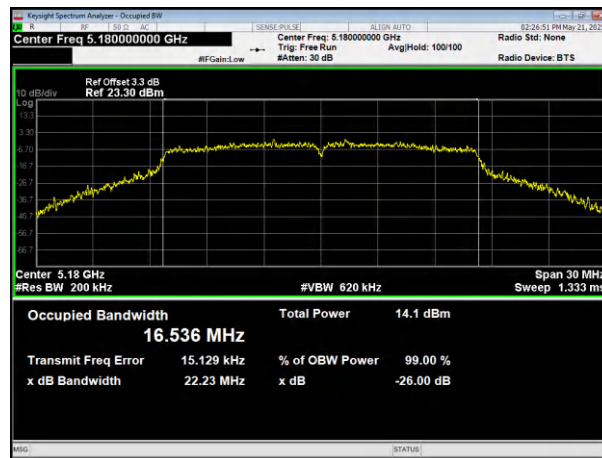

(802.11 a) 26dB Bandwidth plot on channel 48

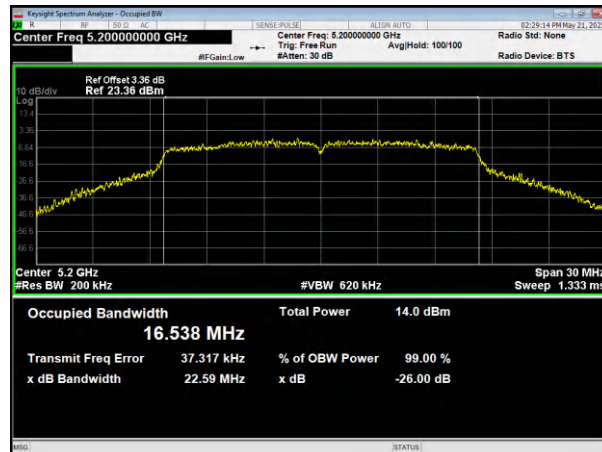


(802.11 a) 26dB Bandwidth plot on channel 48

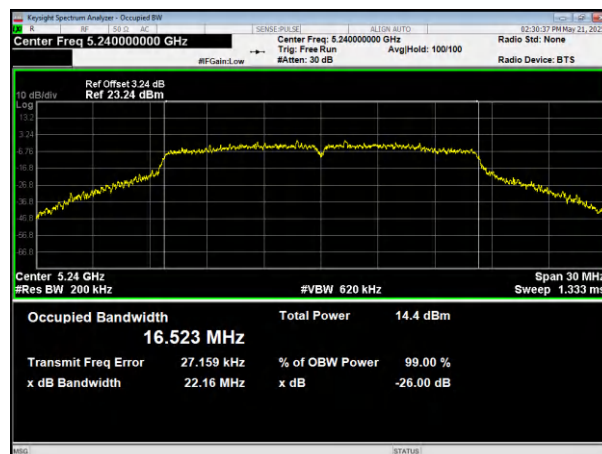




5.2G Test plot


(802.11 n20) 26dB Bandwidth plot on channel 36

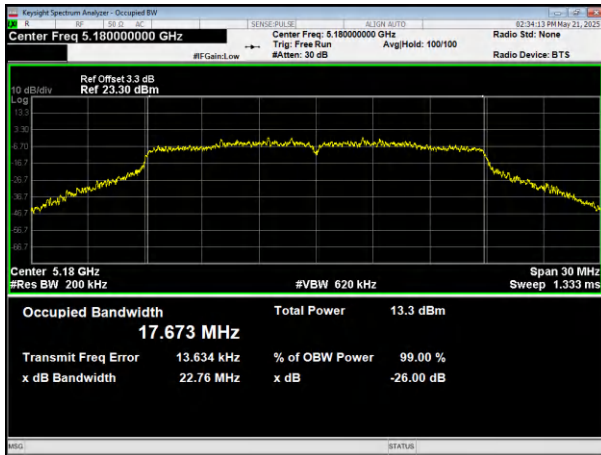


(802.11 n40) 26dB Bandwidth plot on channel 38

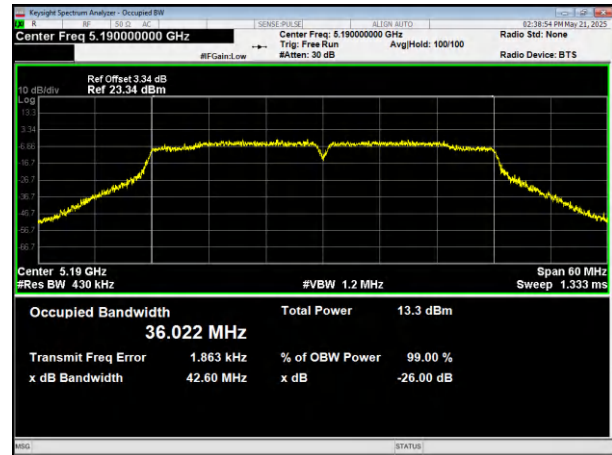


(802.11 n20) 26dB Bandwidth plot on channel 40

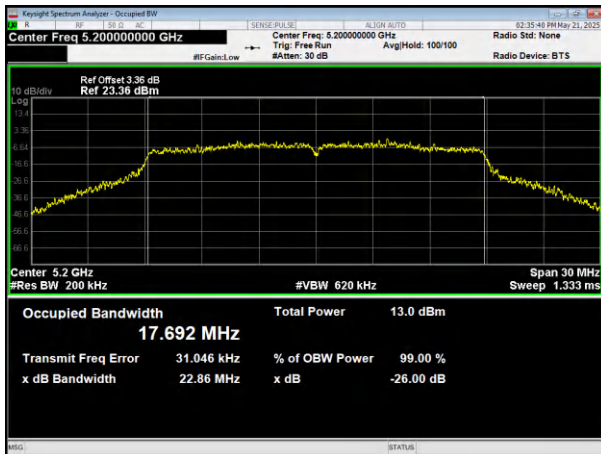

(802.11 n40) 26dB Bandwidth plot on channel 46

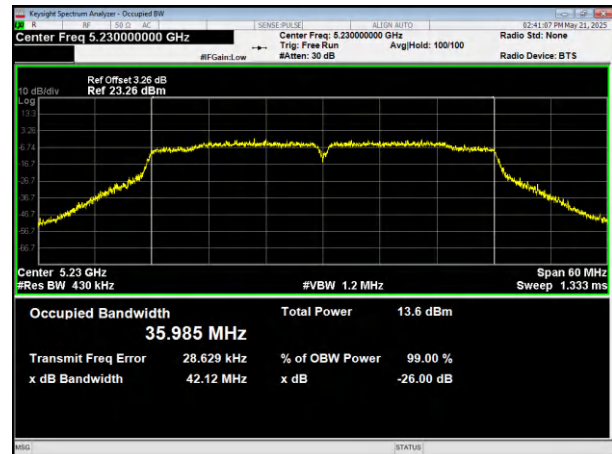


(802.11 n20) 26dB Bandwidth plot on channel 48

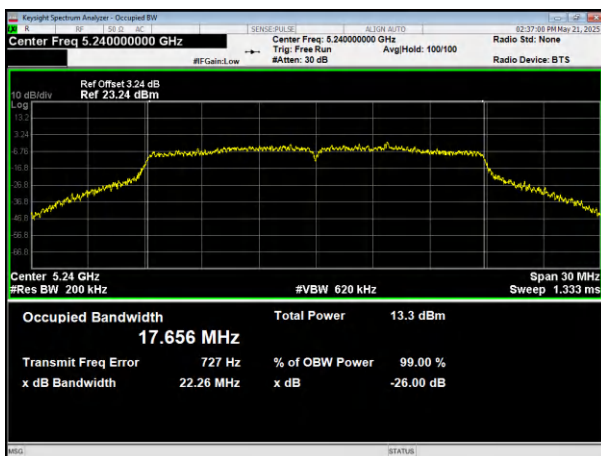




5.2G Test plot


(802.11 ac20) 26dB Bandwidth plot on channel 36

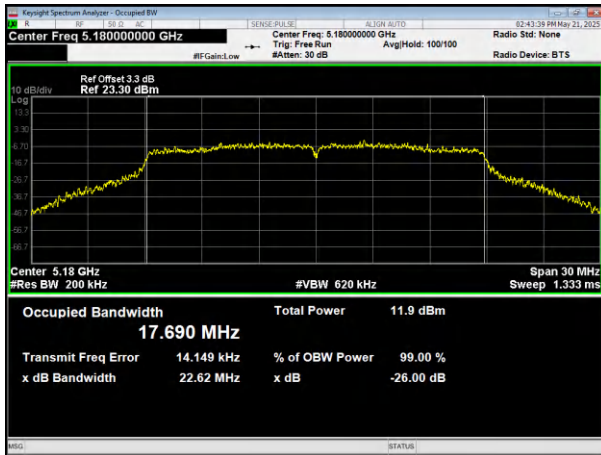


(802.11 ac40) 26dB Bandwidth plot on channel 38

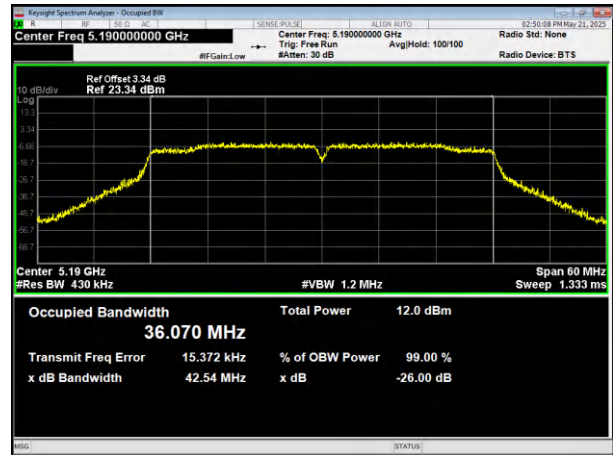


(802.11 ac20) 26dB Bandwidth plot on channel 40

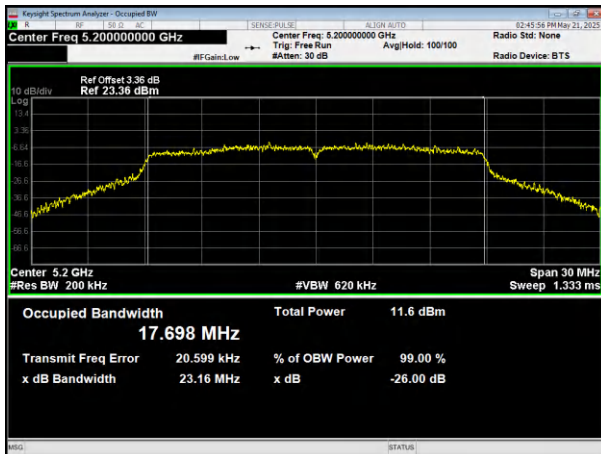


(802.11 ac40) 26dB Bandwidth plot on channel 46

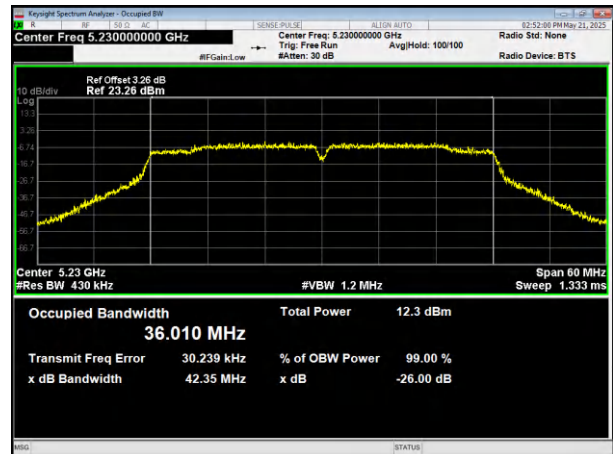

(802.11 ac20) 26dB Bandwidth plot on channel 48

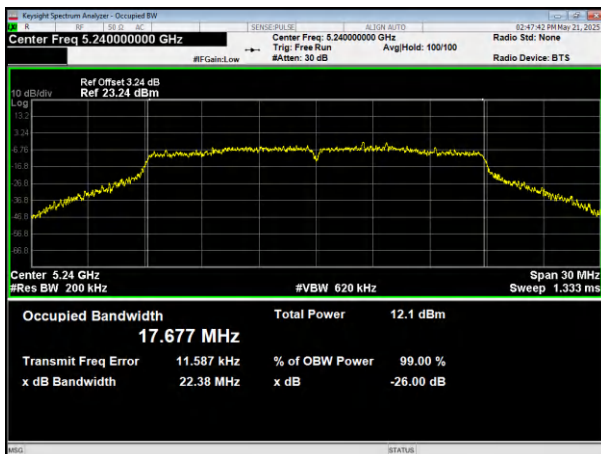

(802.11 ac80) 26dB Bandwidth plot on channel 42

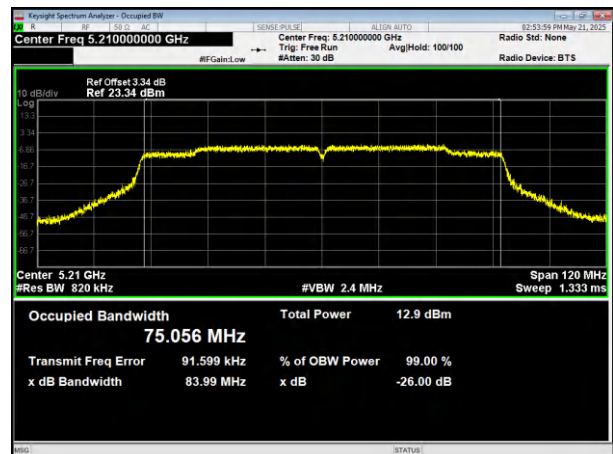




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Band :	5.8G		

5.8G				
Test Mode	Test Channel (MHz)	6dB Occupied Bandwidth (MHz)	Limit(KHz)	Result
802.11a	5745	16.353	>500	Pass
	5785	16.333		
	5825	16.311		
802.11n20	5745	17.584	>500	Pass
	5785	17.566		
	5825	17.563		
802.11n40	5755	36.363	>500	Pass
	5795	36.324		
802.11ac20	5745	17.556	>500	Pass
	5785	17.588		
	5825	17.586		
802.11ac40	5755	36.357	>500	Pass
	5795	36.376		
802.11ac80	5775	71.265	>500	Pass




5.8G Test plot


(802.11a) 6dB Bandwidth plot on channel 149

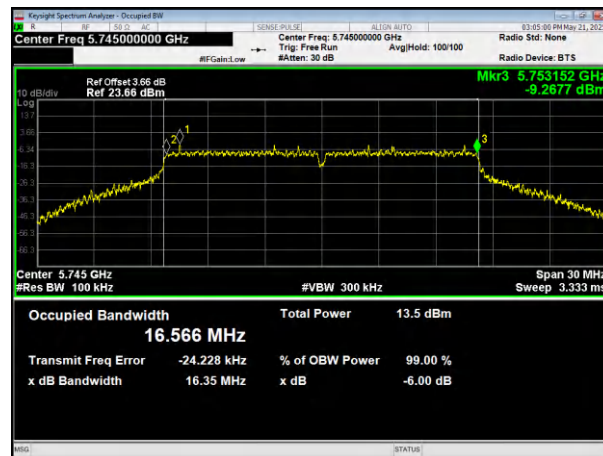

(802.11a) 6dB Bandwidth plot on channel 157

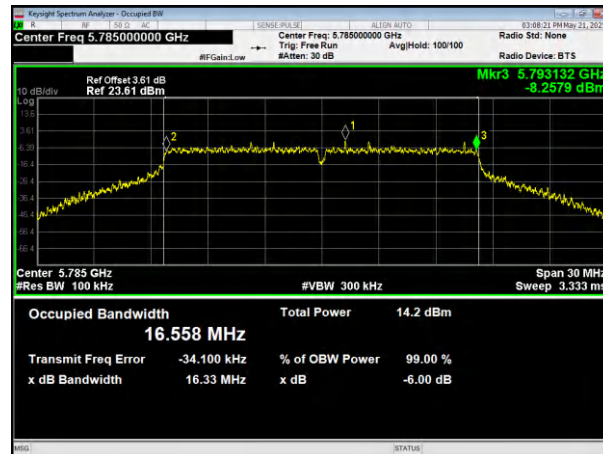


(802.11a) 6dB Bandwidth plot on channel 165

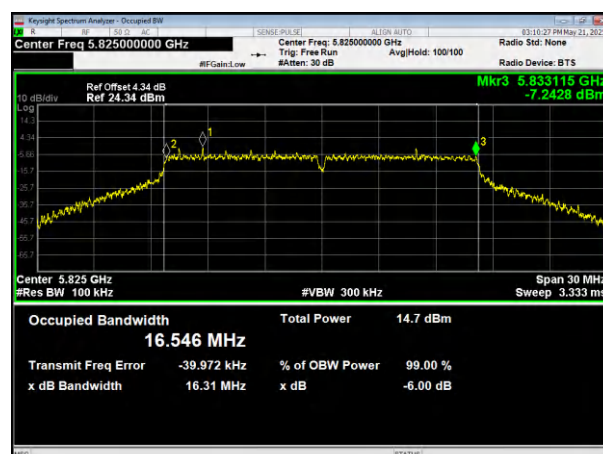




5.8G Test plot


(802.11n20) 6dB Bandwidth plot on channel 149

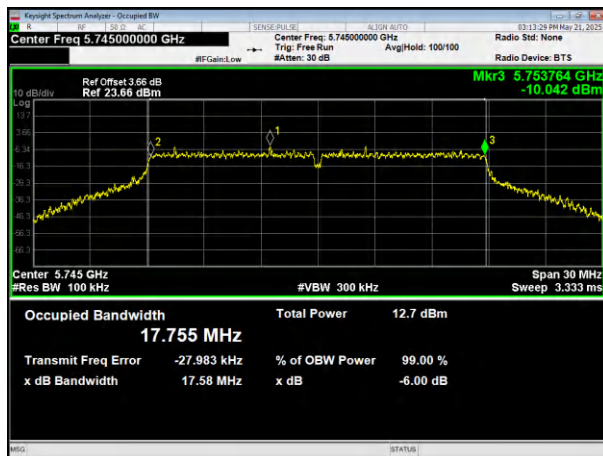


(802.11n40) 6dB Bandwidth plot on channel 151

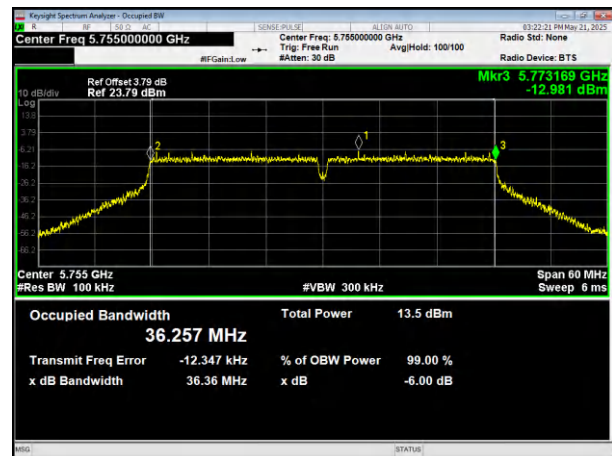


(802.11n20) 6dB Bandwidth plot on channel 157

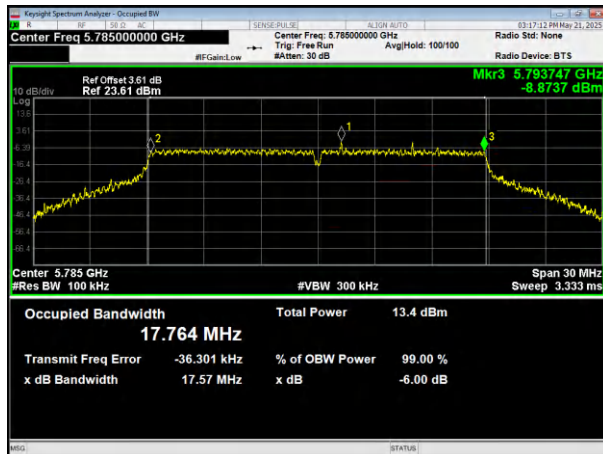

(802.11n40) 6dB Bandwidth plot on channel 159

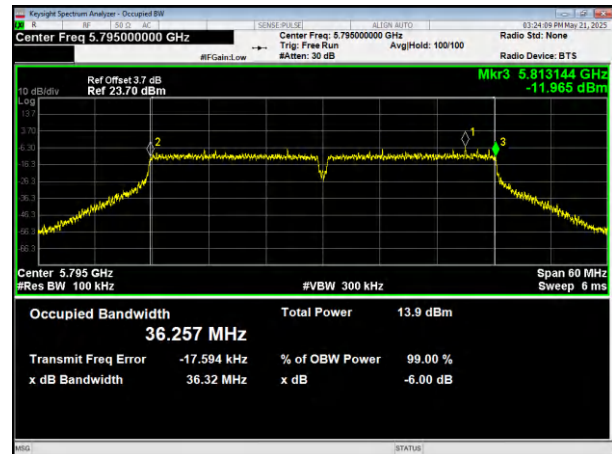


(802.11n20) 6dB Bandwidth plot on channel 165

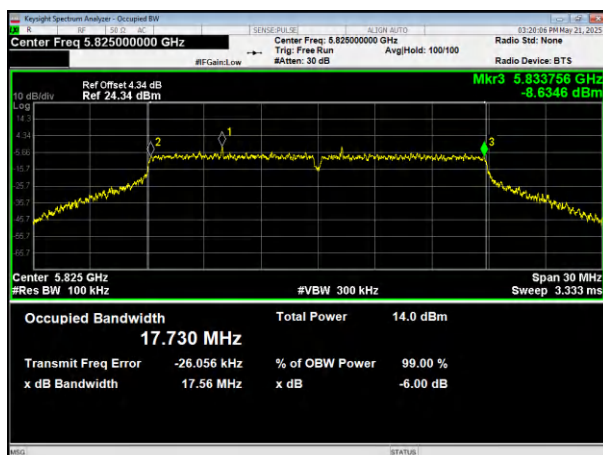




5.8G Test plot


(802.11ac20) 6dB Bandwidth plot on channel 149

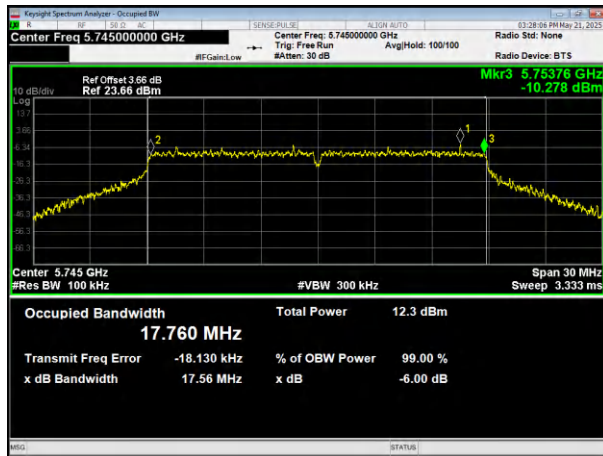


(802.11ac40) PSD plot on channel 151

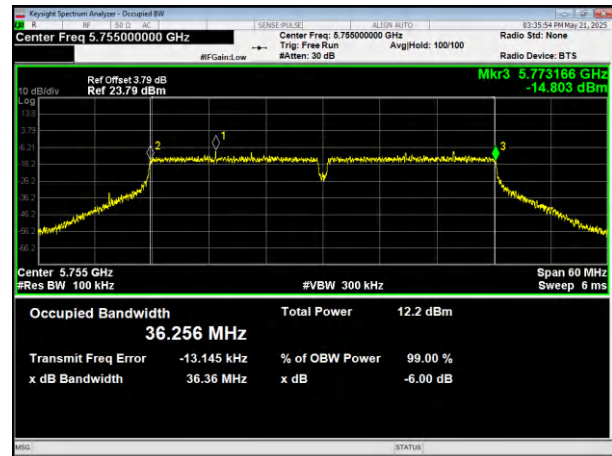


(802.11ac20) 6dB Bandwidth plot on channel 157

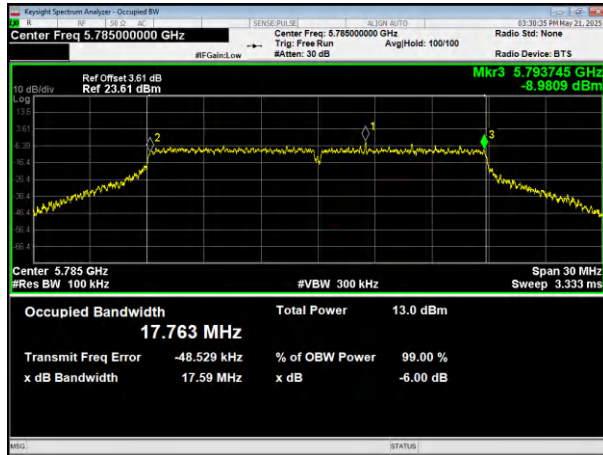


(802.11ac40) PSD plot on channel 159

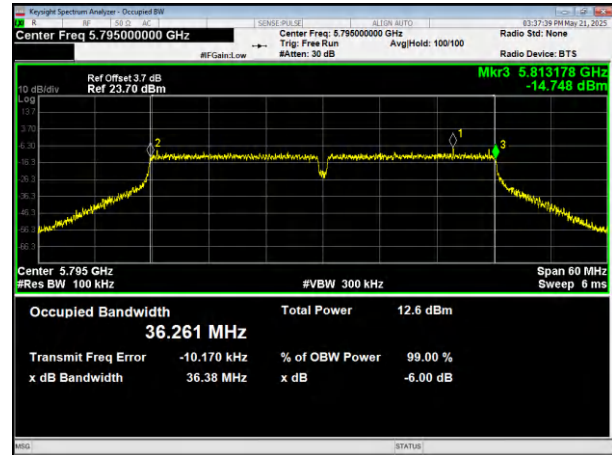

(802.11ac20) 6dB Bandwidth plot on channel 165

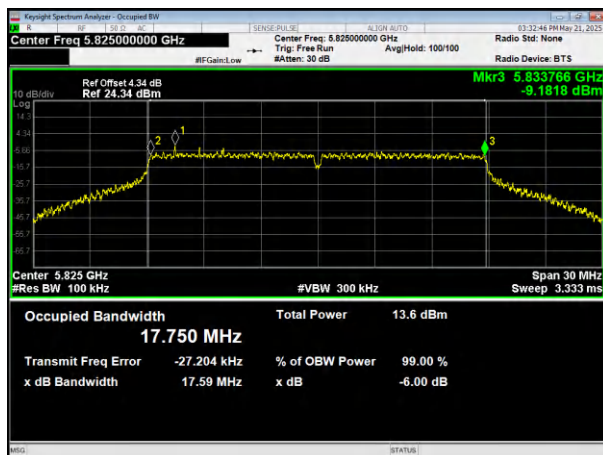

(802.11ac80) PSD plot on channel 155

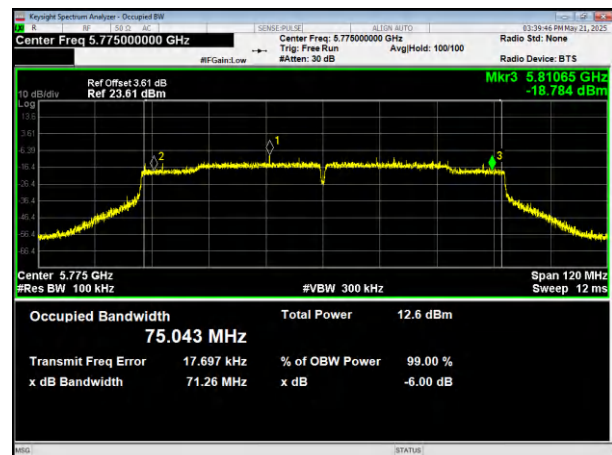



7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.



(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Band :	5.2G		

802.11 a Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH36	5180	7.423	0.08	7.503	23.98	Pass
CH40	5200	7.219	0.08	7.299	23.98	Pass
CH48	5240	7.673	0.08	7.753	23.98	Pass
802.11 n20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH36	5180	6.541	0.04	6.581	23.98	Pass
CH40	5200	6.254	0.04	6.294	23.98	Pass
CH48	5240	6.739	0.04	6.779	23.98	Pass
802.11 n40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH38	5190	6.560	0.05	6.610	23.98	Pass
CH46	5230	6.818	0.05	6.868	23.98	Pass
802.11 ac20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH36	5180	6.238	0.05	6.288	23.98	Pass
CH40	5200	5.915	0.05	5.965	23.98	Pass
CH48	5240	6.466	0.05	6.516	23.98	Pass
802.11 ac40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH38	5190	6.283	0.05	6.333	23.98	Pass
CH46	5230	6.560	0.05	6.610	23.98	Pass
802.11 ac80 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH42	5210	6.468	0.05	6.518	23.98	Pass

Note: duty cycle Factor see page 85.



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Band :	5.8G		

802.11 a Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	6.493	0.10	6.593	30	Pass
CH157	5785	6.191	0.10	6.291	30	Pass
CH165	5825	6.783	0.10	6.883	30	Pass
802.11 n20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	5.822	0.04	5.862	30	Pass
CH157	5785	5.513	0.04	5.553	30	Pass
CH165	5825	5.049	0.04	5.089	30	Pass
802.11 n40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH151	5755	4.493	0.04	4.533	30	Pass
CH159	5795	3.870	0.04	3.910	30	Pass
802.11 ac20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	4.515	0.04	4.555	30	Pass
CH157	5785	4.191	0.04	4.231	30	Pass
CH165	5825	4.734	0.04	4.774	30	Pass
802.11 ac40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH151	5755	3.261	0.05	3.311	30	Pass
CH159	5795	2.692	0.05	2.742	30	Pass
802.11 ac80 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH155	5775	4.409	0.04	4.449	30	Pass

Note: duty cycle Factor see page 89.



8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2)

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

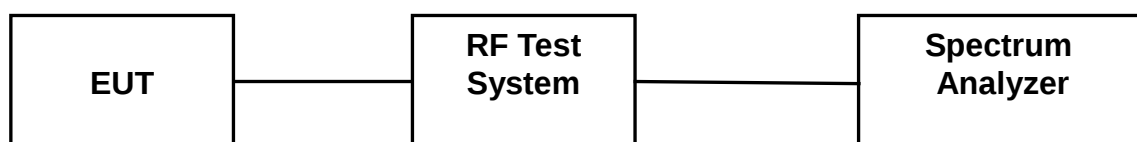

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test band :	5.2G	Antenna gain :	3.61dBi

5.180~5.240 GHz


(802.11a) Band Edge, Left Side

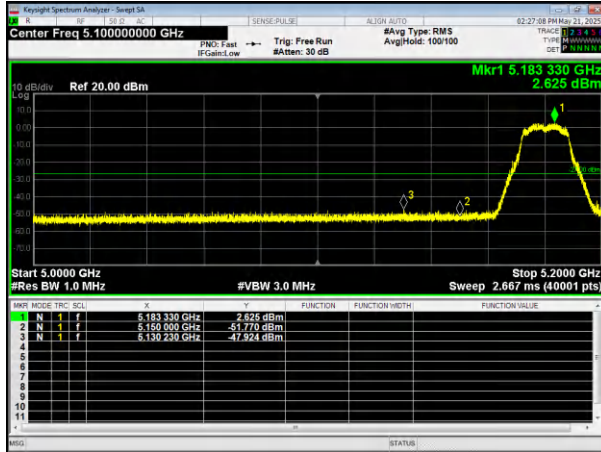


(802.11a) Band Edge, Right Side

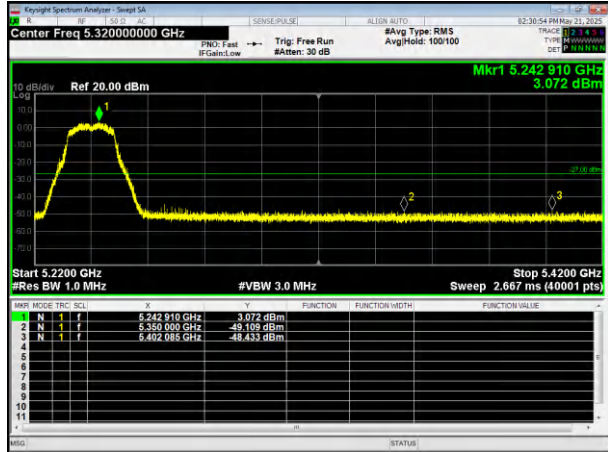


(802.11n20) Band Edge, Left Side

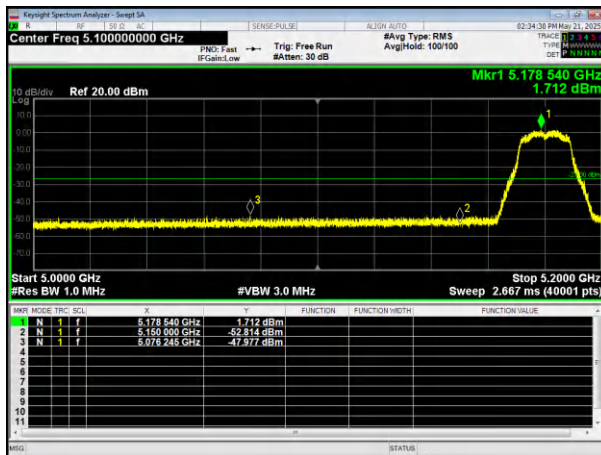


(802.11n20) Band Edge, Right Side

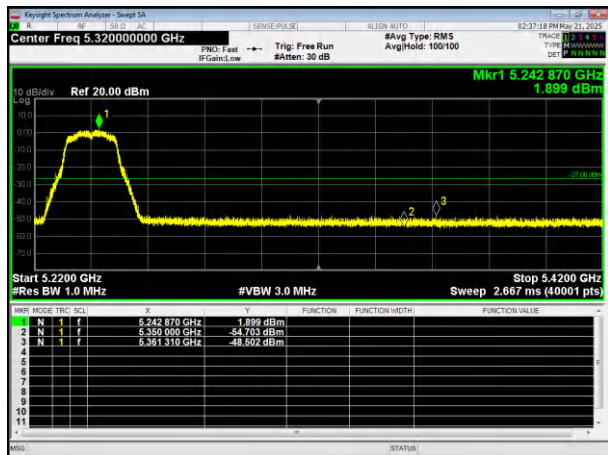

(802.11n40) Band Edge, Left Side

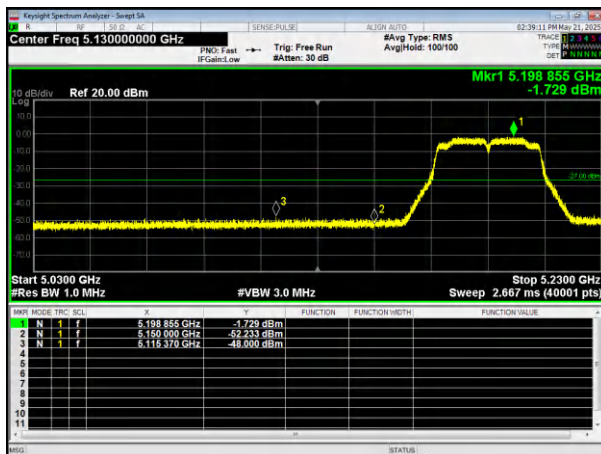


(802.11n40) Band Edge, Right Side

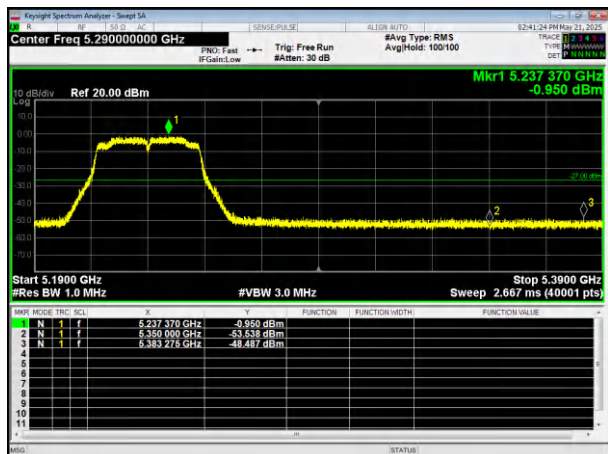





(802.11ac20) Band Edge, Left Side

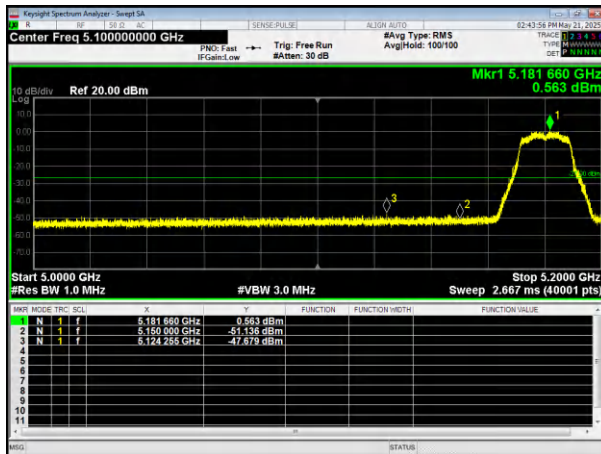


(802.11ac20) Band Edge, Right Side

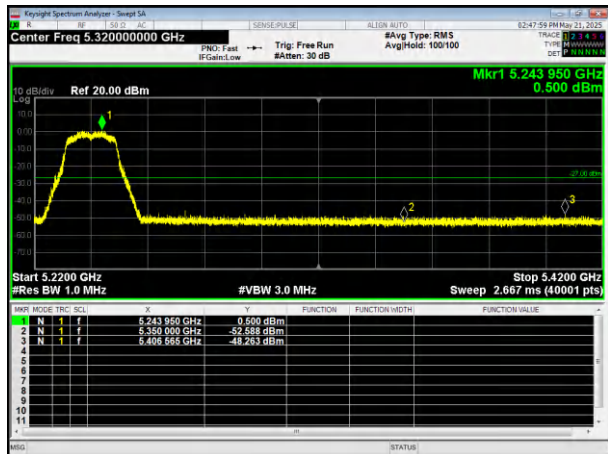


(802.11ac40) Band Edge, Left Side

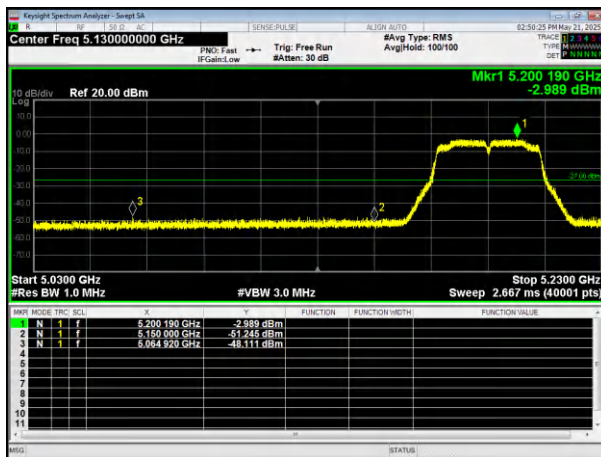

(802.11ac40) Band Edge, Right Side

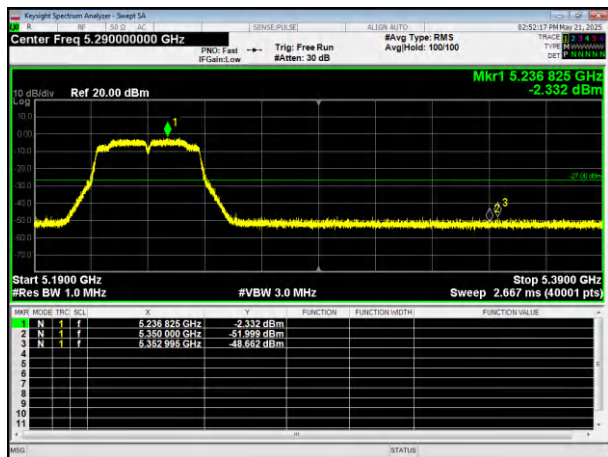

(802.11ac80) Band Edge

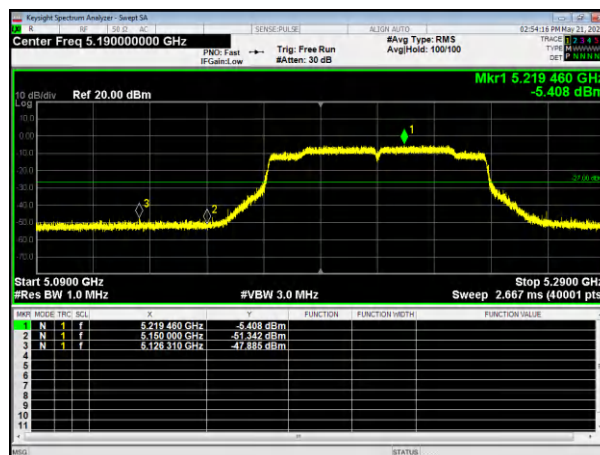





Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test band :	5.8G	Antenna gain :	2.47dBi

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

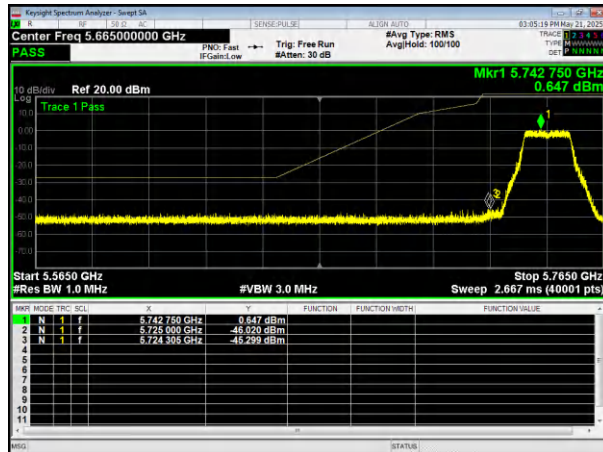


(802.11a) Band Edge, Right Side

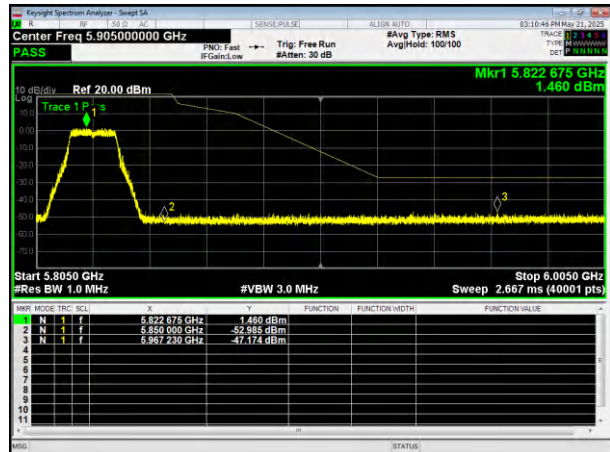


(802.11n20) Band Edge, Left Side

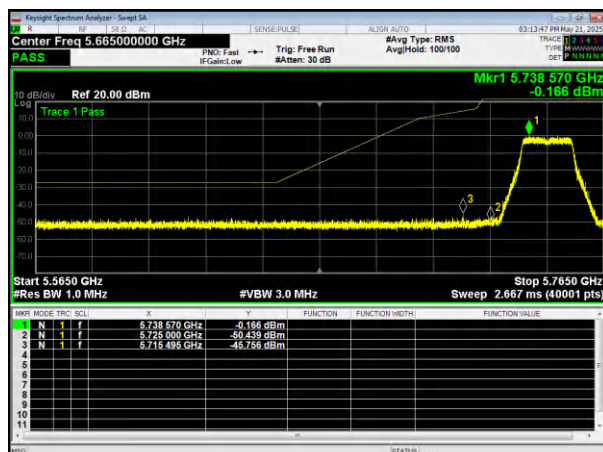


(802.11n20) Band Edge, Right Side

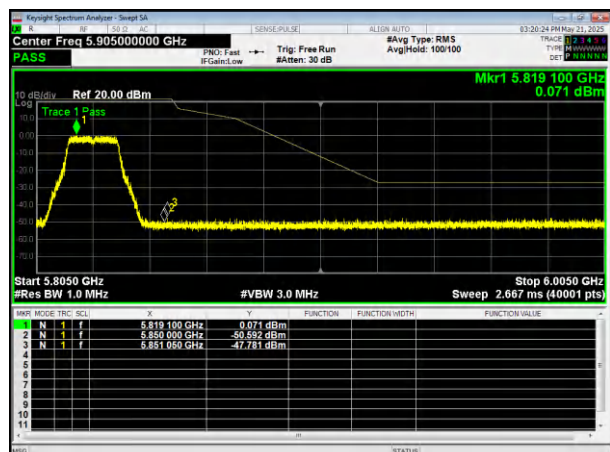

(802.11n40) Band Edge, Left Side

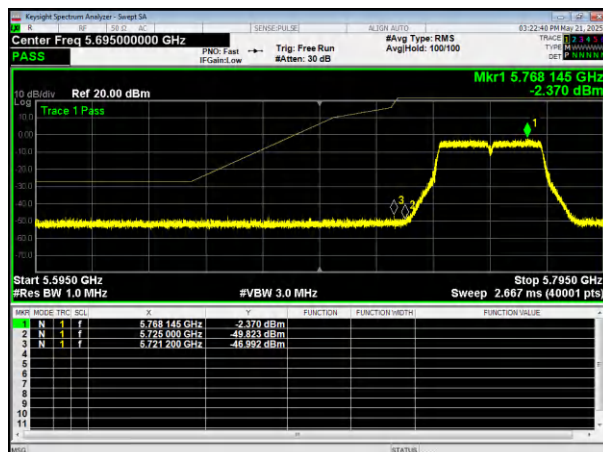


(802.11n40) Band Edge, Right Side

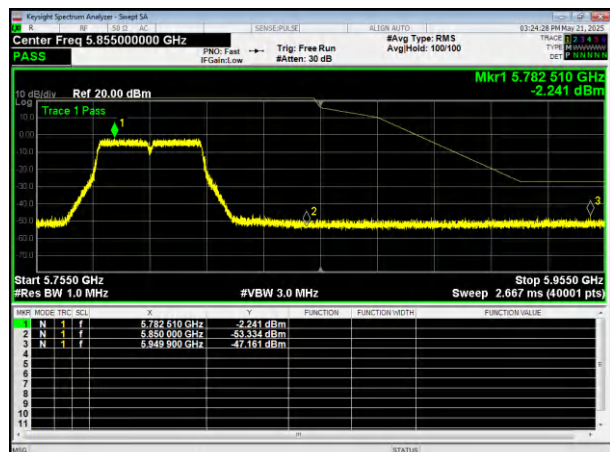





(802.11ac20) Band Edge, Left Side

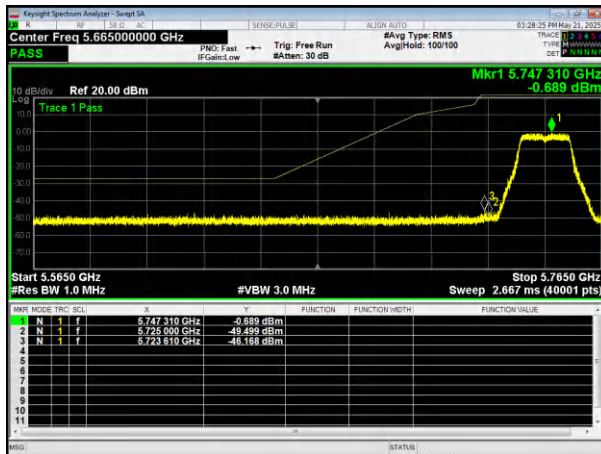


(802.11ac20) Band Edge, Right Side

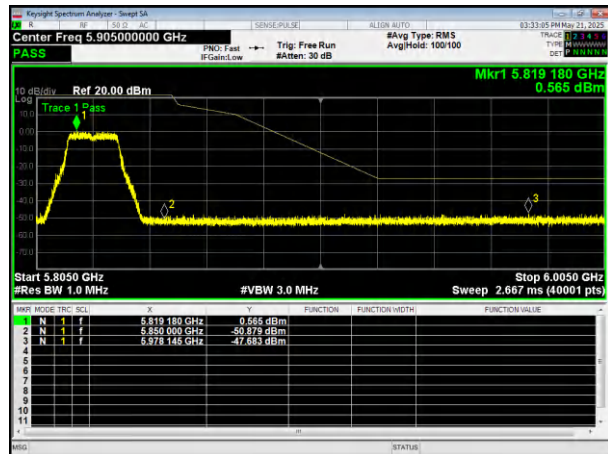


(802.11ac40) Band Edge, Left Side

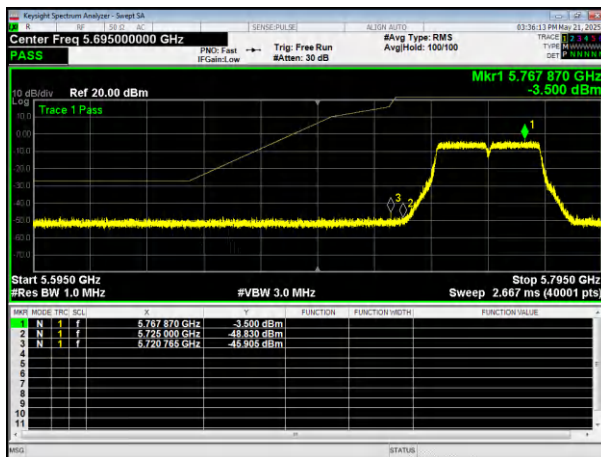

(802.11ac40) Band Edge, Right Side

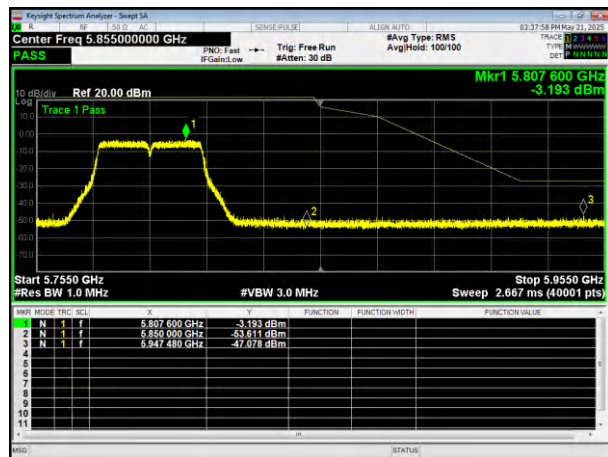

(802.11ac80) Band Edge

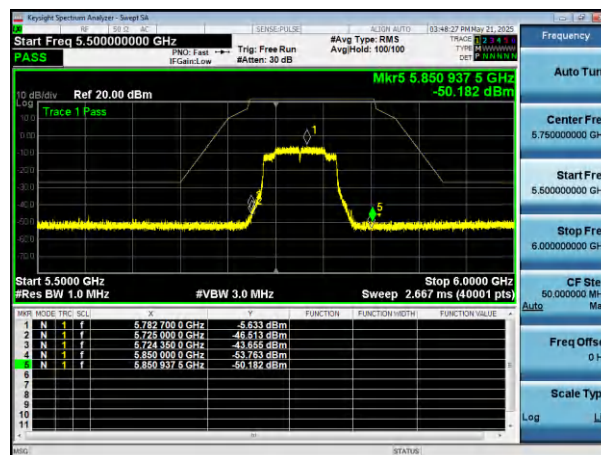



9.SPURIOUS RF CONDUCTED EMISSIONS


9.1 CONFORMANCE LIMIT

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 9.3 of this test report.

9.3 TEST SETUP

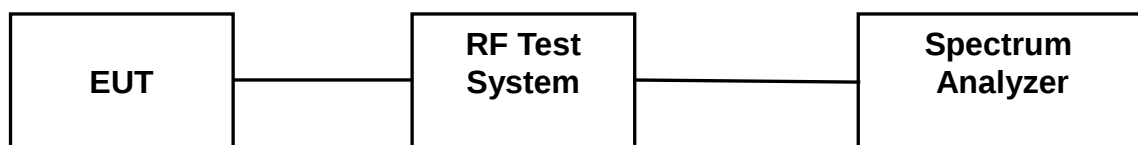

9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBW= 3MHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


9.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test band :	5.2G & 5.8G		
Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. And above 26.5GHz of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.			




5.2G Test Plot


802.11a on channel 36

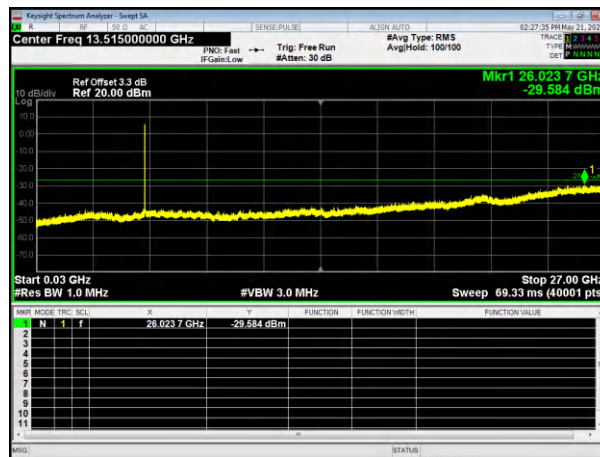

802.11a on channel 40

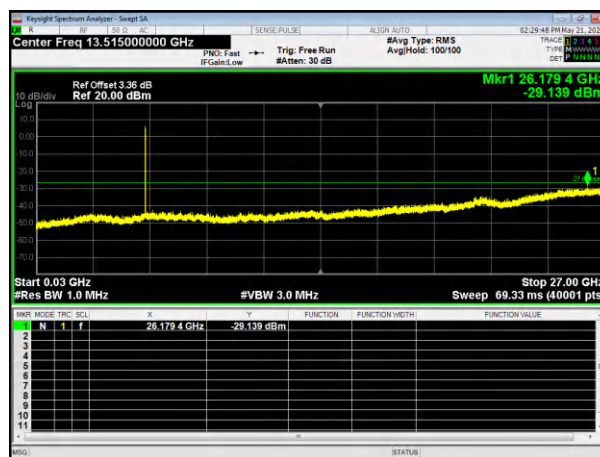


802.11a on channel 48

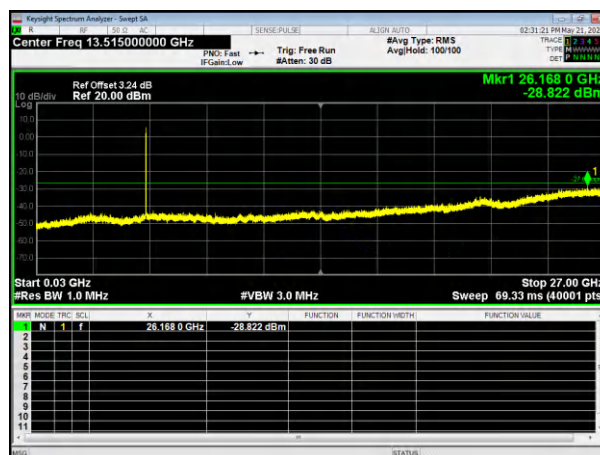




5.2G Test Plot


802.11n20 on channel 36

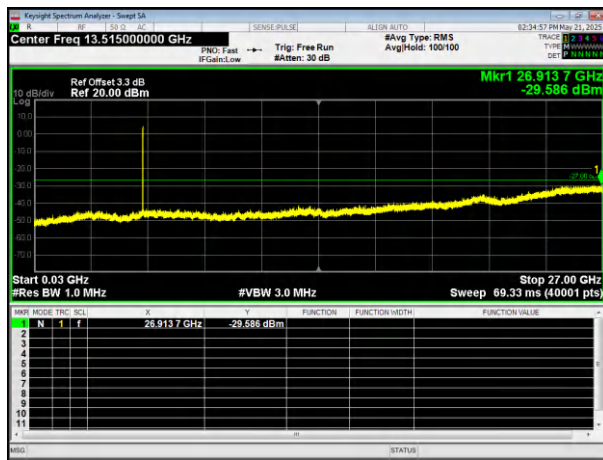


802.11n40 on channel 38

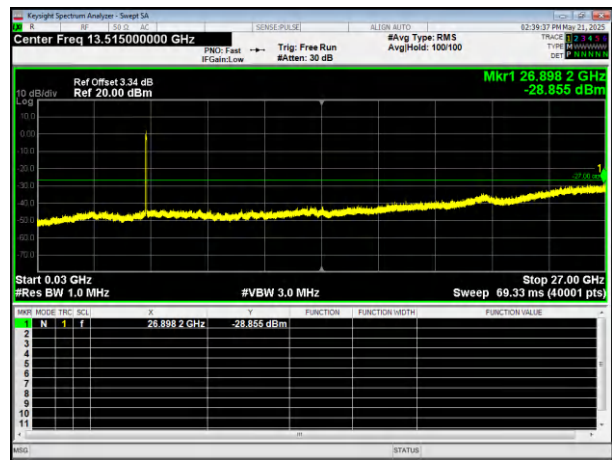


802.11n20 on channel 40

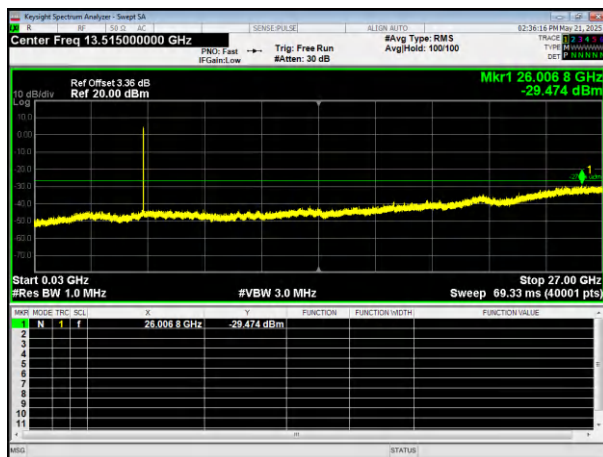

802.11n40 on channel 46

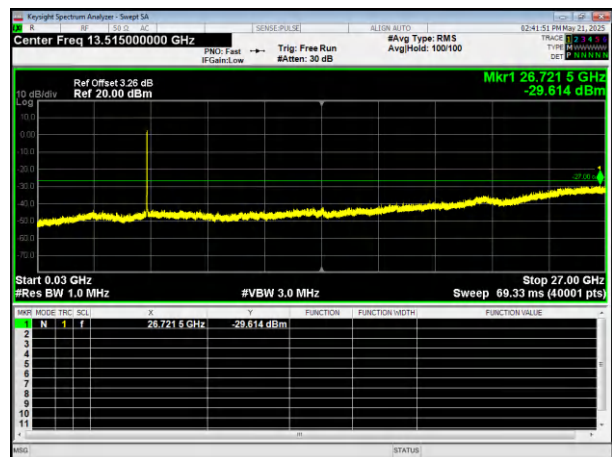


802.11n20 on channel 48

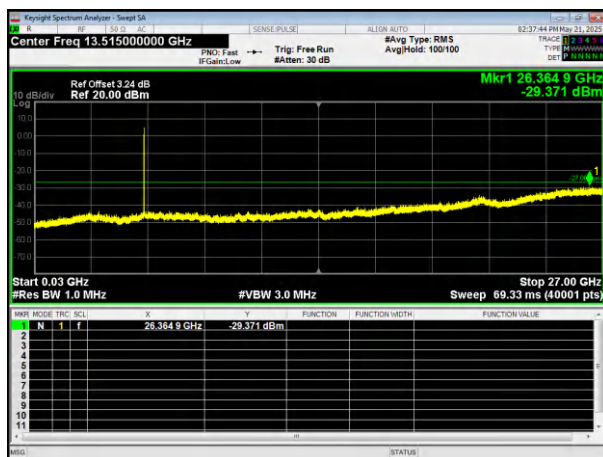




5.2G Test Plot


802.11ac20 on channel 36

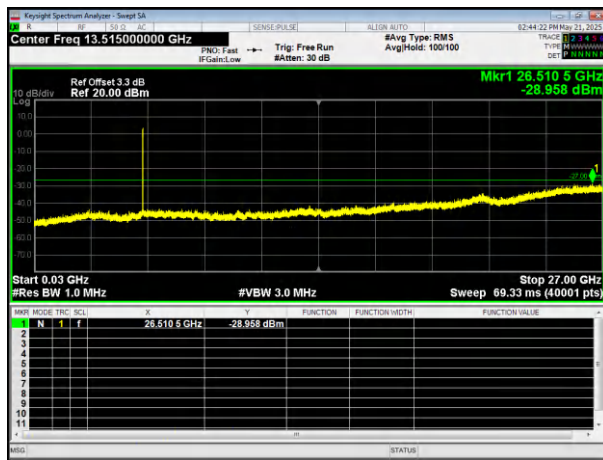


802.11ac40 on channel 46

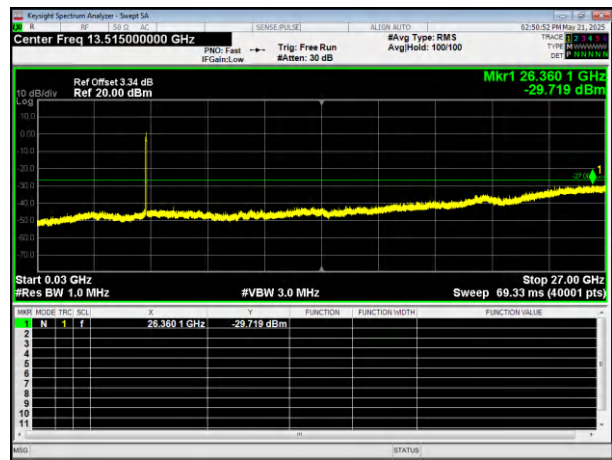


802.11ac20 on channel 40

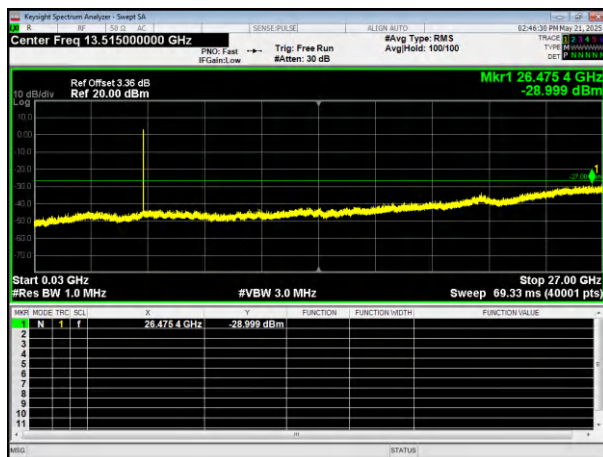


802.11ac40 on channel 46

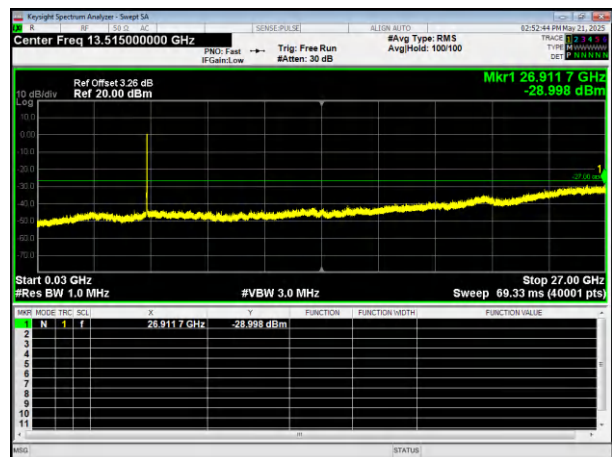

802.11ac20 on channel 48

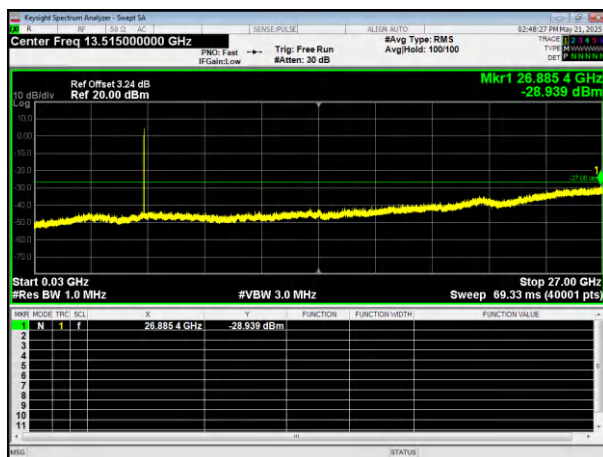


802.11ac80 on channel 42

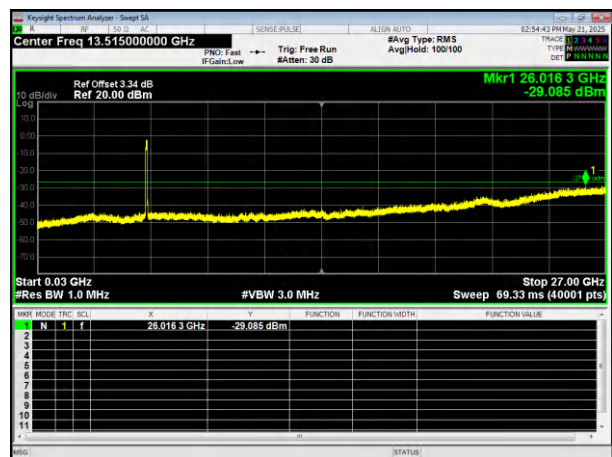




5.8G Test Plot


802.11a on channel 149

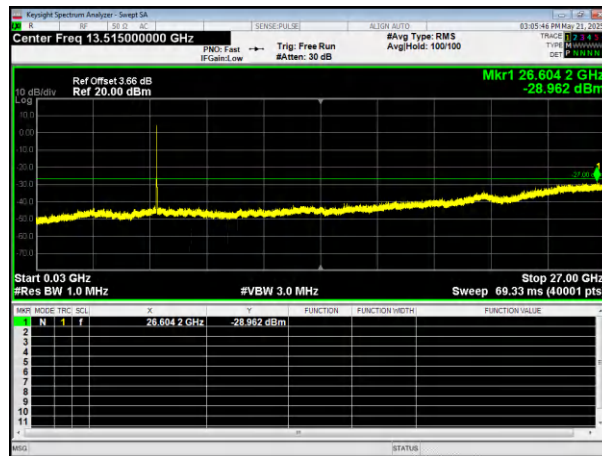

802.11a on channel 157

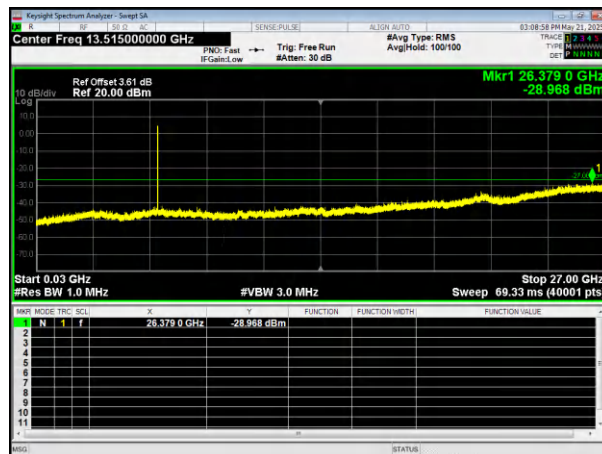


802.11a on channel 165

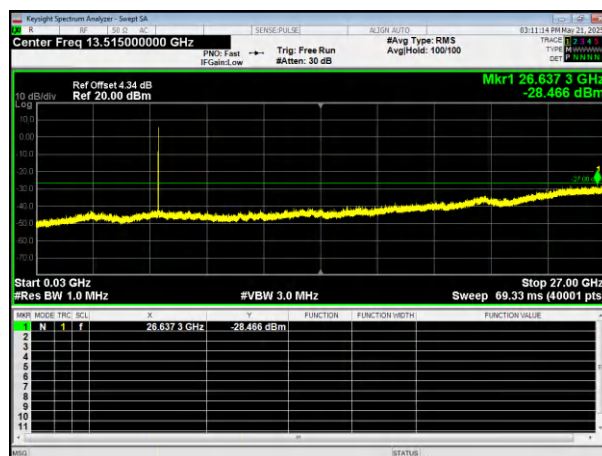




5.8G Test Plot


802.11n20 on channel 149

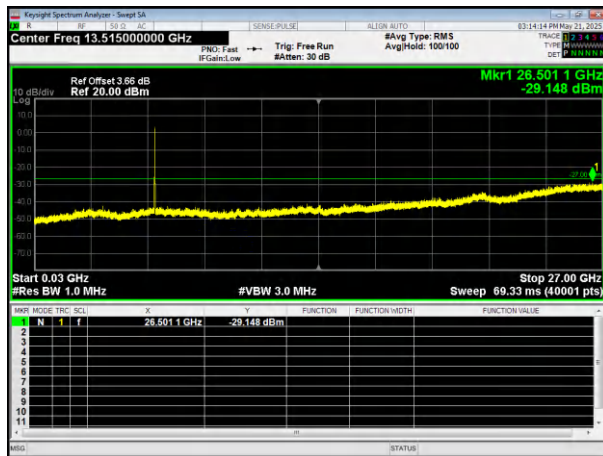


802.11n40 on channel 151

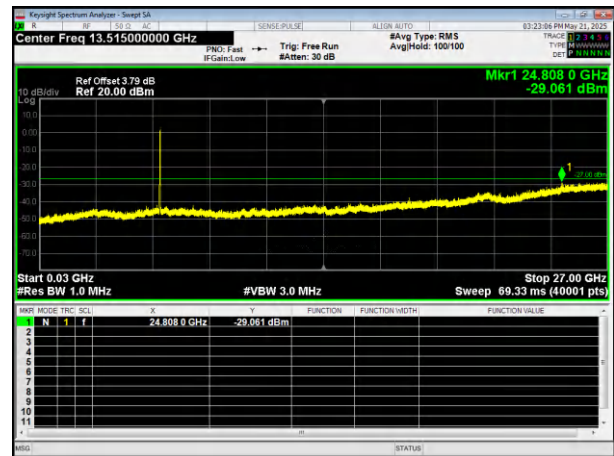


802.11n20 on channel 157

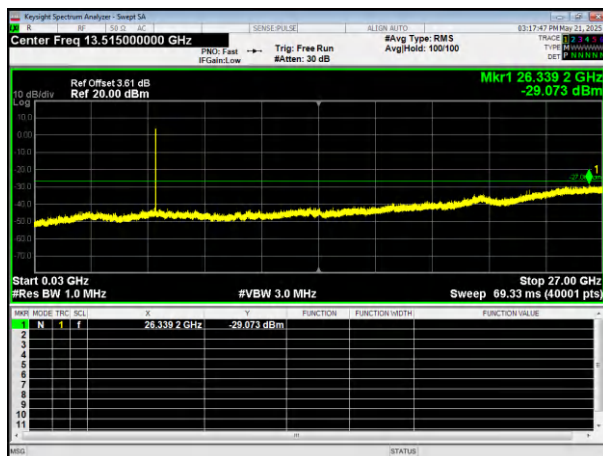

802.11n40 on channel 159

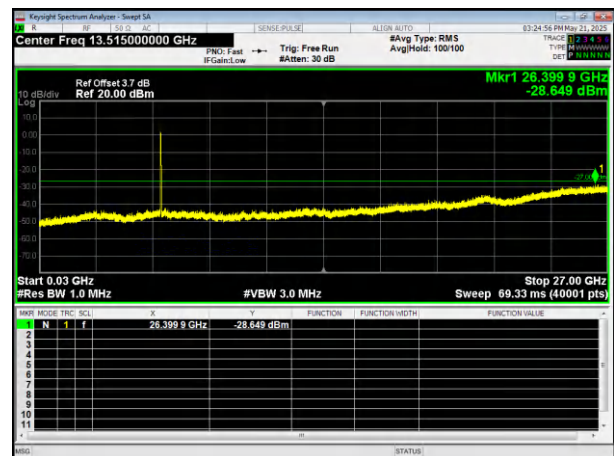


802.11n20 on channel 165

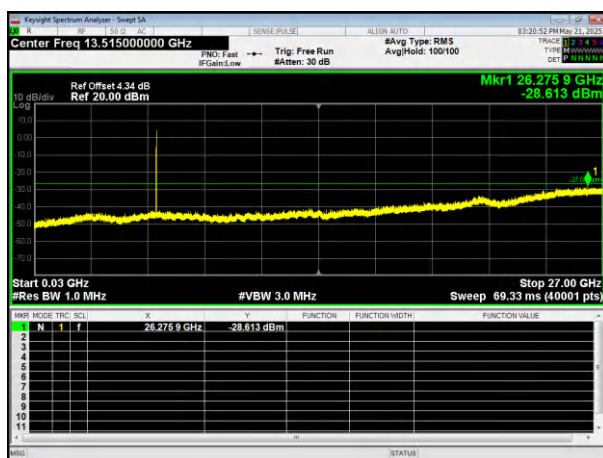




5.8G Test Plot


802.11ac20 on channel 149

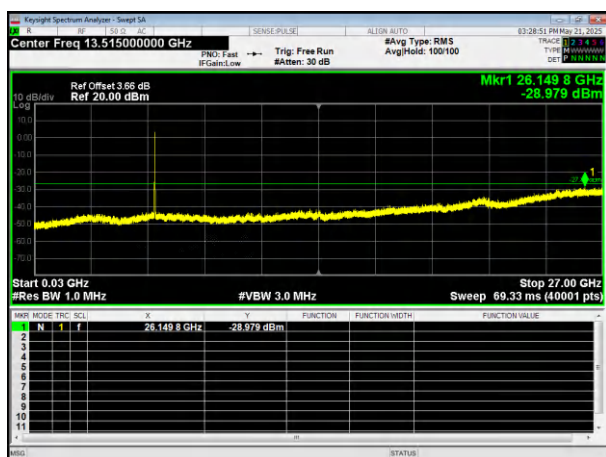


802.11ac40 on channel 151

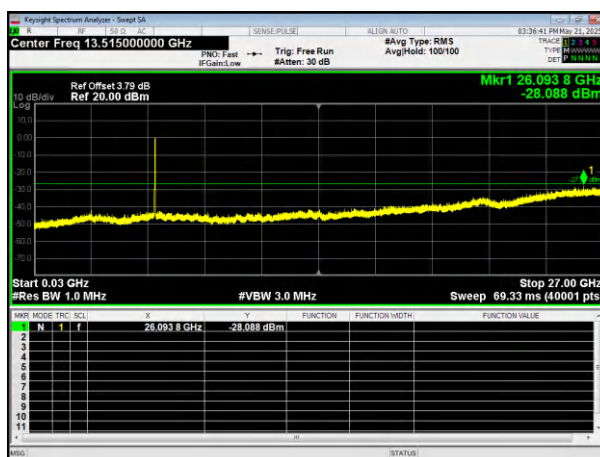


802.11ac20 on channel 157

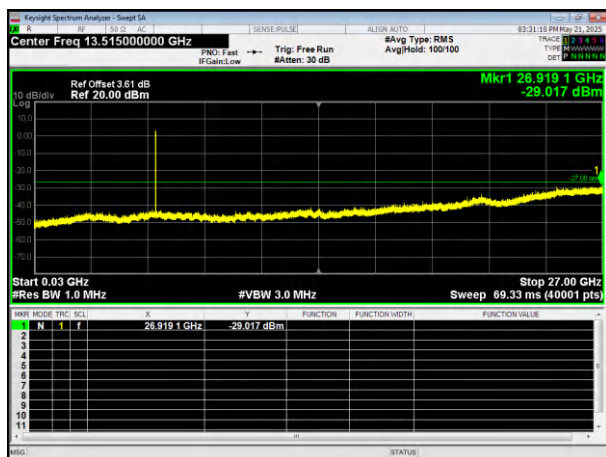


802.11ac40 on channel 159

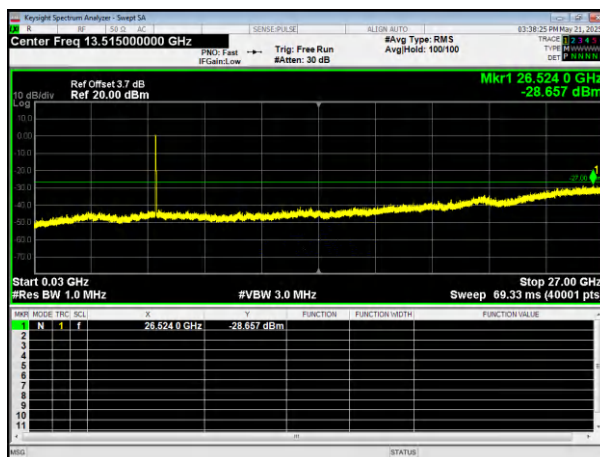

802.11ac20 on channel 165

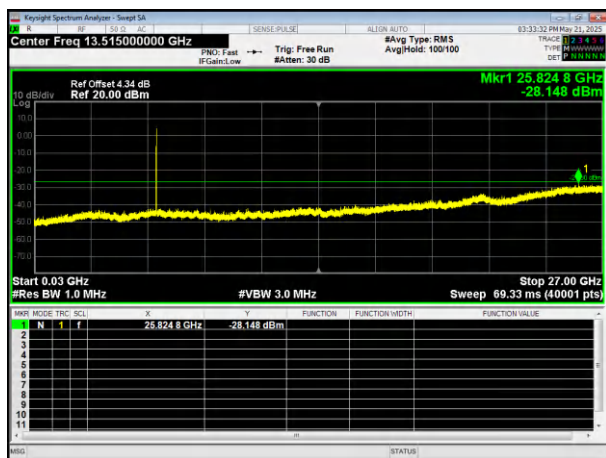

802.11ac80 on channel 155

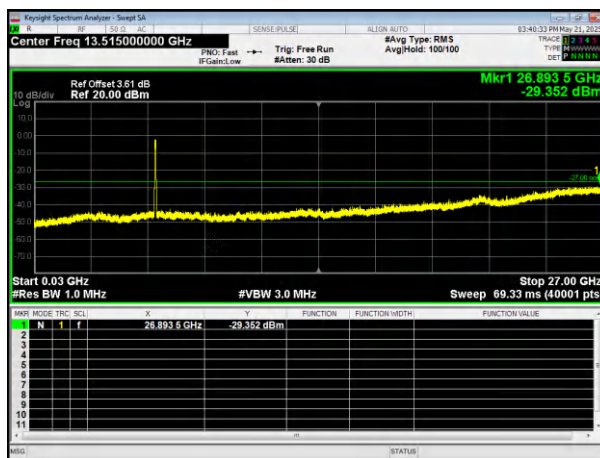



10. Frequency Stability Measurement

10.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT

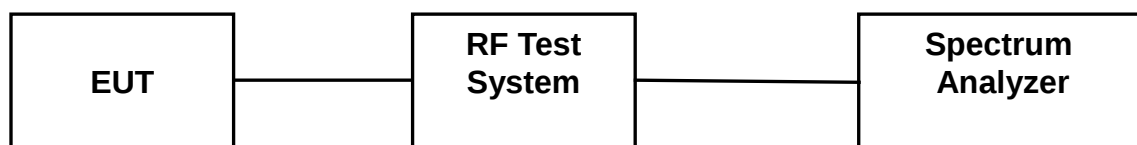

10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Band :	5.2G & 5.8G		
Note: All channels have been tested, and only the worst test data is recorded in this report.			



5.2G:

802.11a

Reference Frequency(Middle Channel): 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	56	0.01002
-10	3.7	45	0.00766
10	3.7	33	0.00616
20	3.7	28	0.00459
30	3.7	24	0.00427
40	3.7	15	0.00279
50	3.7	14	0.00271
60	3.7	24	0.00408
70	3.7	37	0.00630

802.11 n20

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	62	0.01121
-10	3.7	52	0.00918
10	3.7	42	0.00782
20	3.7	32	0.00587
30	3.7	23	0.00432
40	3.7	26	0.00483
50	3.7	22	0.00414
60	3.7	36	0.00656
70	3.7	40	0.00787



802.11n40

Reference Frequency(Middle Channel): 5190MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	61	0.01087
-10	3.7	52	0.00902
10	3.7	43	0.00779
20	3.7	44	0.00793
30	3.7	34	0.00621
40	3.7	22	0.00414
50	3.7	36	0.00656
60	3.7	43	0.00777
70	3.7	51	0.00914

802.11ac20

Reference Frequency(Middle Channel): 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	57	0.00919
-10	3.7	43	0.00694
10	3.7	31	0.00523
20	3.7	25	0.00382
30	3.7	24	0.00348
40	3.7	13	0.00171
50	3.7	14	0.00193
60	3.7	20	0.00328
70	3.7	33	0.00527



802.11 ac40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	65	0.01058
-10	3.7	52	0.00851
10	3.7	44	0.00707
20	3.7	33	0.00521
30	3.7	25	0.00362
40	3.7	27	0.00413
50	3.7	23	0.00348
60	3.7	38	0.00591
70	3.7	45	0.00713

802.11ac80

Reference Frequency(Middle Channel): 5210MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	63	0.01057
-10	3.7	52	0.00866
10	3.7	43	0.00711
20	3.7	41	0.00676
30	3.7	36	0.00589
40	3.7	32	0.0052
50	3.7	34	0.00555
60	3.7	43	0.00711
70	3.7	52	0.00851



So, Frequency Stability Versus Input Voltage is:

802.11a

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	56	0.01002
40	3.7	45	0.00766
70	3.7	33	0.00616

802.11n20

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	62	0.01121
40	3.7	52	0.00918
70	3.7	42	0.00782

802.11n40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	61	0.01087
40	3.7	52	0.00902
70	3.7	51	0.00914

802.11ac20

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	57	0.00919
40	3.7	43	0.00694
70	3.7	33	0.00527



802.11ac40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	65	0.01058
40	3.7	52	0.00851
70	3.7	45	0.00713

802.11ac80

Reference Frequency(Middle Channel): 5210 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	63	0.01057
40	3.7	52	0.00866
70	3.7	52	0.00851



5.8G:

802.11a

Reference Frequency(Middle Channel): 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	46	0.00815
-10	3.7	27	0.00757
10	3.7	36	0.00462
20	3.7	23	0.00419
30	3.7	14	0.00306
40	3.7	16	0.00324
50	3.7	13	0.00342
60	3.7	27	0.00443
70	3.7	38	0.00632

802.11n20

Reference Frequency(Middle Channel): 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	42	0.00658
-10	3.7	24	0.00534
10	3.7	32	0.00385
20	3.7	24	0.00347
30	3.7	13	0.00157
40	3.7	12	0.00139
50	3.7	13	0.00157
60	3.7	21	0.00295
70	3.7	32	0.00543



802.11n40

Reference Frequency(Middle Channel): 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	62	0.00953
-10	3.7	54	0.00801
10	3.7	42	0.00725
20	3.7	44	0.00759
30	3.7	34	0.00587
40	3.7	32	0.00552
50	3.7	34	0.00587
60	3.7	42	0.00725
70	3.7	51	0.00884

802.11ac20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	43	0.00709
-10	3.7	51	0.00648
10	3.7	23	0.00375
20	3.7	26	0.00515
30	3.7	23	0.00374
40	3.7	26	0.00415
50	3.7	22	0.00346
60	3.7	36	0.00588
70	3.7	26	0.00462



802.11ac40

Reference Frequency(Middle Channel): 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	60	0.00675
-10	3.7	55	0.00614
10	3.7	47	0.00341
20	3.7	45	0.00481
30	3.7	32	0.0034
40	3.7	26	0.00381
50	3.7	38	0.00312
60	3.7	43	0.00554
70	3.7	54	0.00428

802.11ac80

Reference Frequency(Middle Channel): 5775MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
-20	3.7	52	0.00866
-10	3.7	41	0.00705
10	3.7	43	0.00711
20	3.7	41	0.00676
30	3.7	36	0.00589
40	3.7	32	0.0052
50	3.7	34	0.00555
60	3.7	32	0.0052
70	3.7	52	0.00866



So, Frequency Stability Versus Input Voltage is:

802.11a

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	46	0.00815
40	3.7	27	0.00757
70	3.7	38	0.00632

802.11n20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	42	0.00658
40	3.7	24	0.00534
70	3.7	32	0.00543

802.11n40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	62	0.00953
40	3.7	54	0.00801
70	3.7	51	0.00884

802.11ac20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	43	0.00709
40	3.7	51	0.00648
70	3.7	36	0.00588



802.11ac40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	60	0.00675
40	3.7	55	0.00614
70	3.7	43	0.00554

802.11ac80

Reference Frequency(Middle Channel): 5775 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
-20	3.7	52	0.00866
40	3.7	41	0.00705
70	3.7	52	0.00866



11. DUTY CYCLE

11.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

11.2 DEVIATION FROM STANDARD

No deviation.

11.3 TEST SETUP

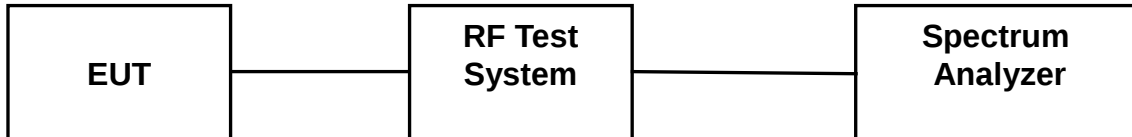




11.4 TEST RESULTS


5.2G				
Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
802.11a	5180	98.12	0.08	Pass
802.11n20	5180	99.00	0.04	Pass
802.11n40	5190	98.76	0.05	Pass
802.11ac20	5180	98.75	0.05	Pass
802.11ac40	5190	98.75	0.05	Pass
802.11ac80	5210	98.76	0.05	Pass



802.11a

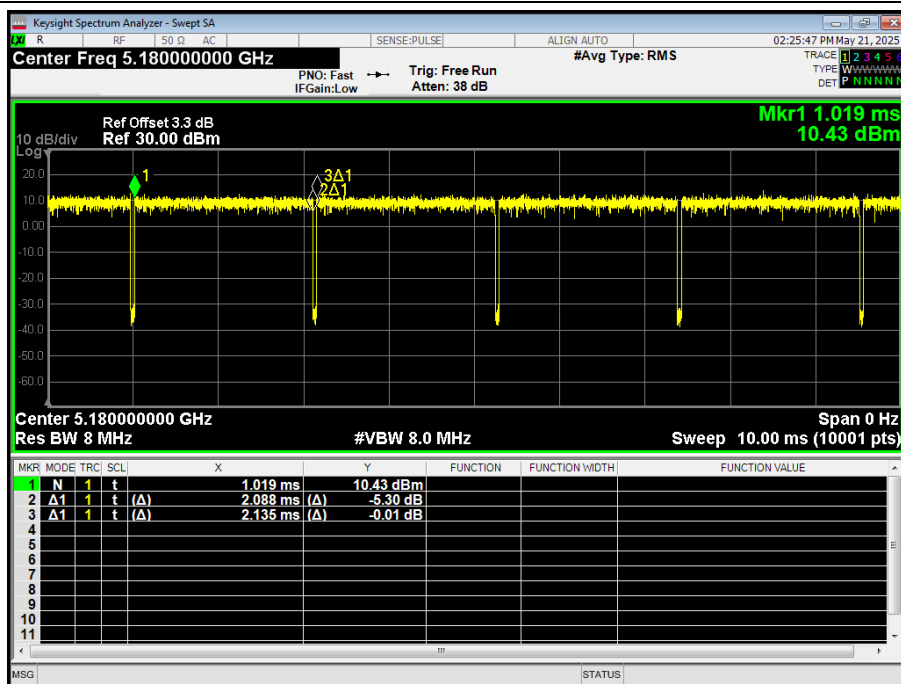


802.11n20

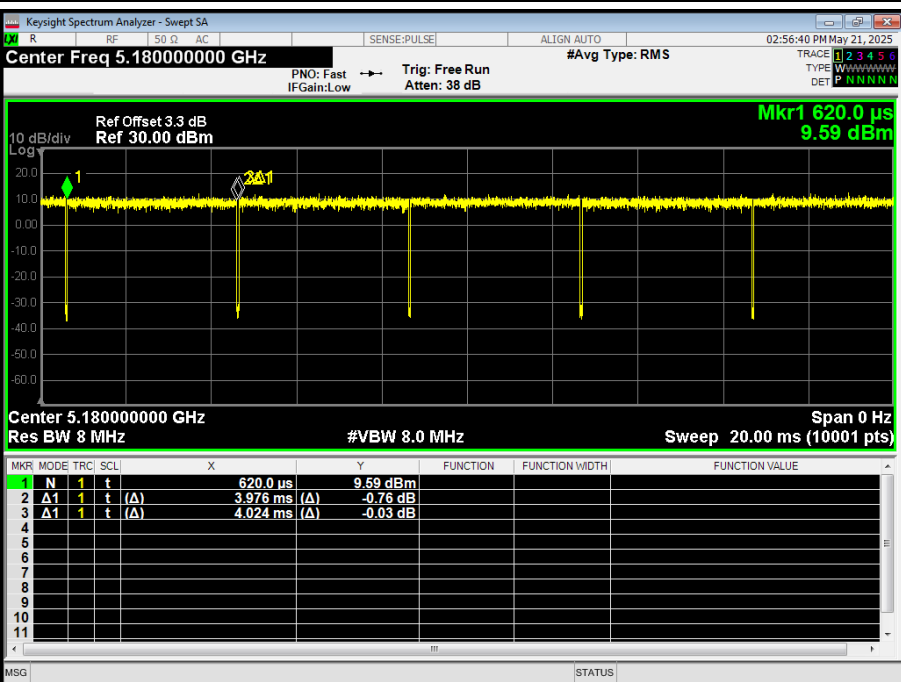




802.11n40

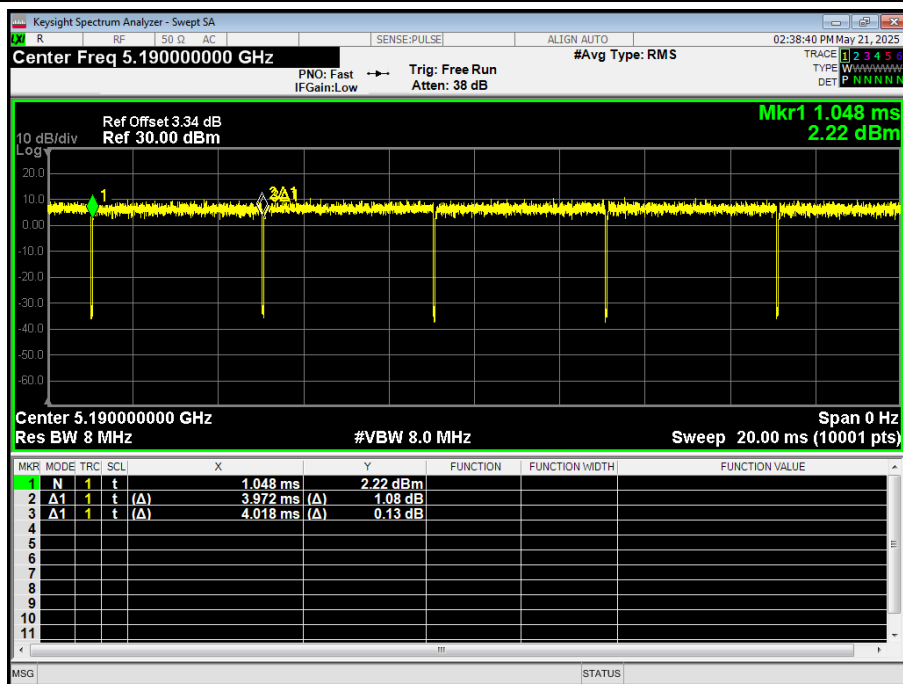


802.11ac20

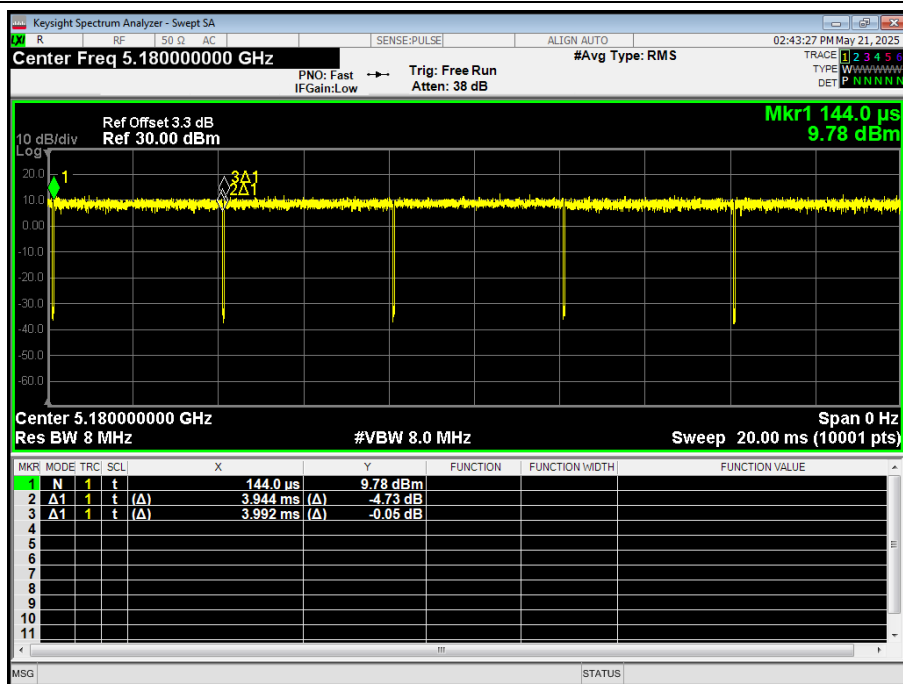




802.11ac40

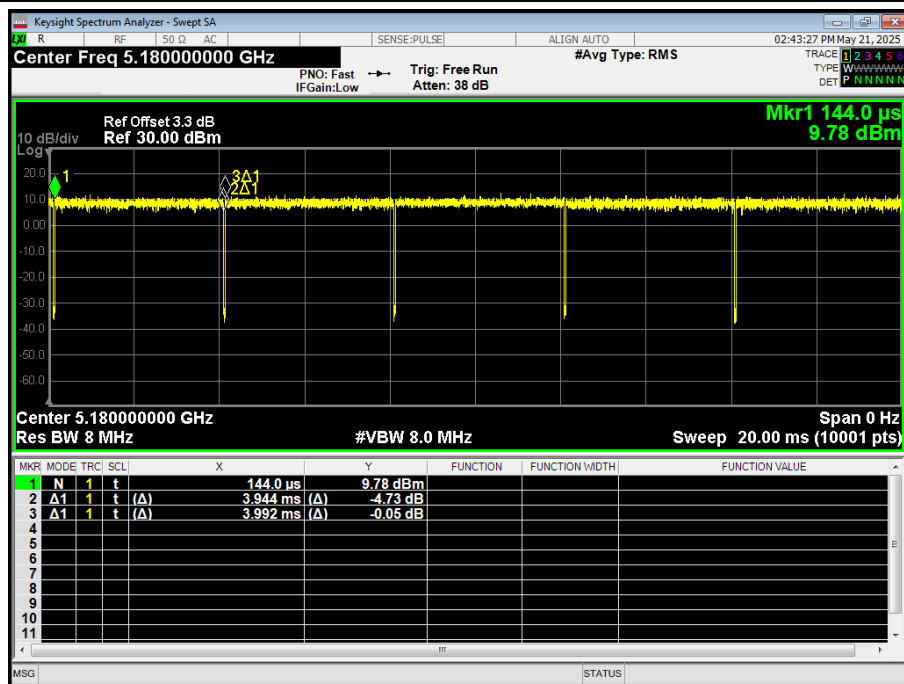

802.11ac80

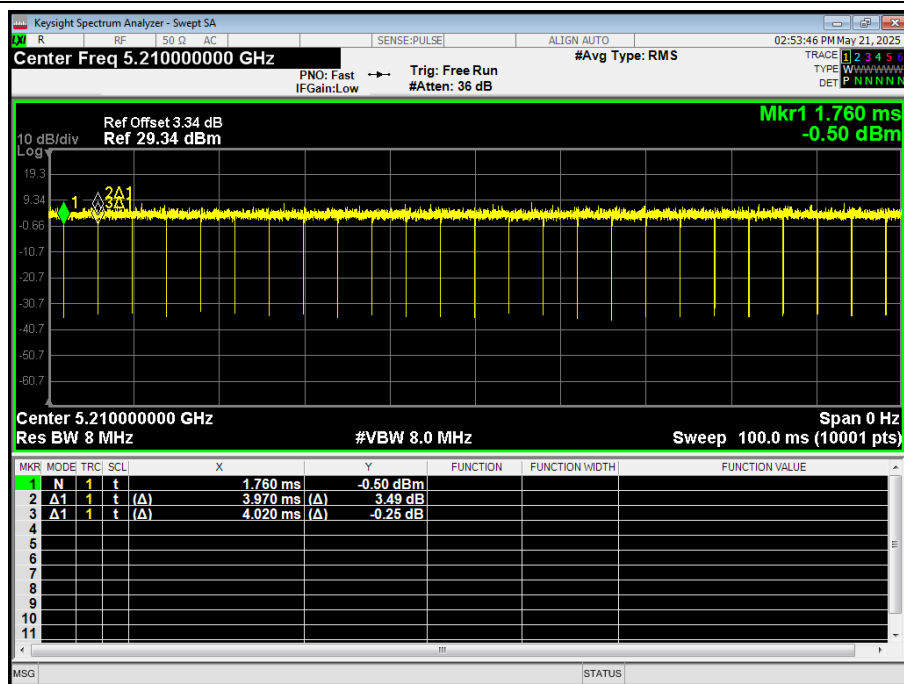

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle= Ton /Total*100%

Duty Cycle Correction Factor = 10log (1/Duty Cycle)



5.8G				
Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
802.11a	5745	97.66	0.10	Pass
802.11n20	5745	99.00	0.04	Pass
802.11n40	5755	99.00	0.04	Pass
802.11ac20	5745	99.00	0.04	Pass
802.11ac40	5755	98.75	0.05	Pass
802.11ac80	5775	99.00	0.04	Pass



Keysight Spectrum Analyzer - Swept SA

03:04:40 PM May 21, 2025

Center Freq 5.74500000 GHz

#Avg Type: RMS

Trace 1 2 3 4 5 6

TYPE W W W W W W

DET P N N N N N

PNO: Fast IF Gain: Low

Trig: Free Run

Atten: 38 dB

Ref Offset 3.66 dB

Ref 30.00 dBm

Mkr1 458.0 μ s

10.01 dBm

Center 5.74500000 GHz

Res BW 8 MHz

#VBW 8.0 MHz

Sweep 20.00 ms (10001 pts)

Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	t	458.0 μ s	10.01 dBm			
2	Δ 1	1	t (Δ)	2.088 ms (Δ)	-0.43 dB			
3	Δ 1	1	t (Δ)	2.136 ms (Δ)	0.26 dB			
4								
5								
6								
7								
8								
9								
10								
11								

MSG


STATUS

The image shows a Keysight Spectrum Analyzer interface. The main display is a frequency spectrum plot with a center frequency of 5.745 GHz and a resolution bandwidth of 8 MHz. A signal is visible as a series of vertical spikes. A yellow marker labeled '1' is placed on the signal, indicating a measurement of 458.0 μs and 10.01 dBm. The plot also shows a reference level at 30.00 dBm and a reference offset of 3.66 dB. The interface includes various control panels for frequency, span, and measurement settings, as well as a table for measurement results.


[illegible]



802.11n40

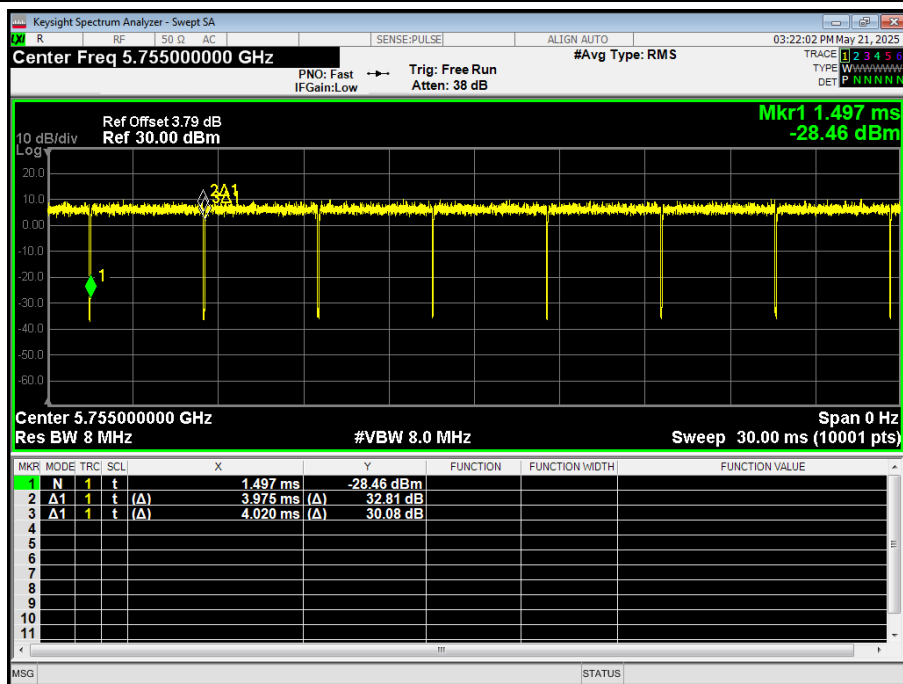


802.11ac20

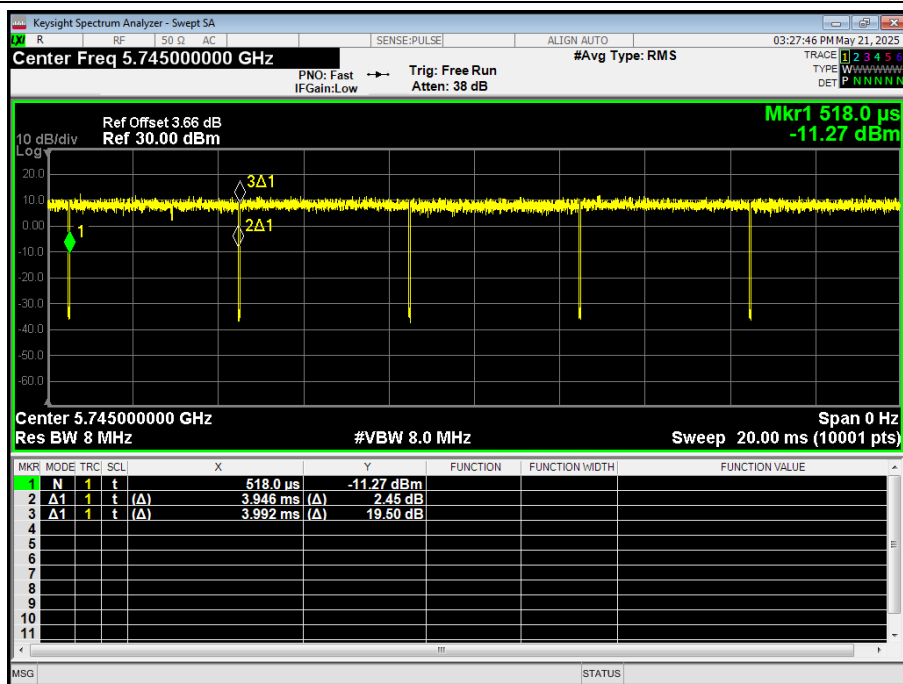




802.11ac40

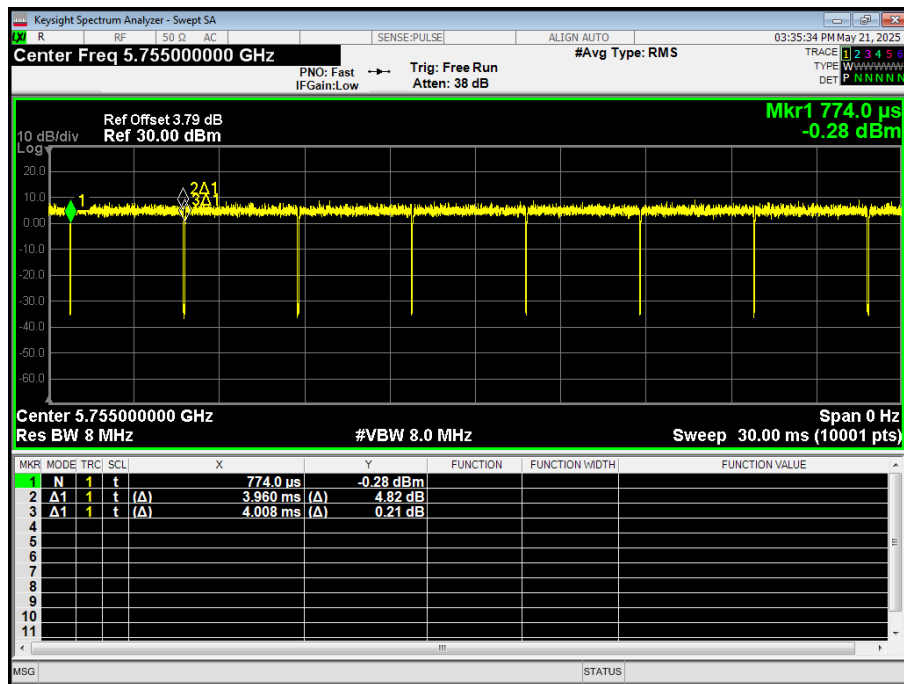

802.11ac80

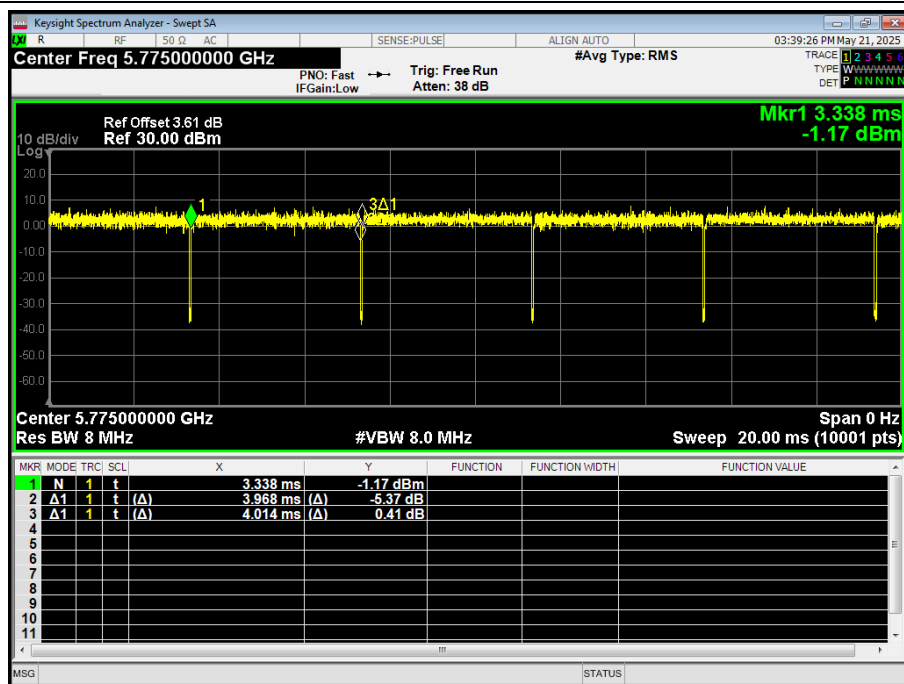

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle= Ton /Total*100%

Duty Cycle Correction Factor = 10log (1/Duty Cycle)

**12.ANTENNA REQUIREMENT**

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is FPC antenna, the best case gain of the antenna is 3.61dBi (Max), reference to the appendix II for details	



13. TEST SETUP PHOTO

Reference to the appendix I for details.

14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******