



HUAK TESTING

HUAK TESTING



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

FCC Test Report

Test report

On Behalf of

SHENZHENSIXIQINGYANGYANGKEJIYOUXIANGONGSI

For

All In One Computer

Model No.: L22W, L22B, S22T, L01, L02, L03, L04, L05, L06

FCC ID: 2BPY5-L22W

Prepared For : **SHENZHENSIXIQINGYANGYANGKEJIYOUXIANGONGSI**

**huaqiangbeijiedaolicunshequhuaqiangbeilu3012hao,
saigekejiyuan4dongxi5cengA-Dzhouyu1-4zhou5a23fang, shenzhen, guangdong,
518000 China**

Prepared By : **Shenzhen HUAK Testing Technology Co., Ltd.**
**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China**

Date of Test: **May 08, 2025 ~ May 19, 2025**

Date of Report: **May 19, 2025**

Report Number: **HK2505082354-2E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Table of Contents

	Page
1. Summary	5
1.1. Test Standards	5
1.2. Test Description	5
1.3. Information of the Test Laboratory	6
1.4. Statement of the Measurement Uncertainty	6
2. General Information.....	7
2.1. Environmental Conditions.....	7
2.2. General Description of EUT	7
2.3. Description of Test Modes and Test Frequency.....	8
2.4. Equipments Used During the Test	9
2.5. Related Submittal(S) / Grant (S).....	10
2.6. Modifications	10
2.7. Description of Test Setup.....	10
2.8. Description of Support Units	11
3. Test Conditions and Results	12
3.1. AC Power Line Conducted Emission.....	12
3.2. Radiated Emissions and Band Edge	15
3.3. Maximum Peak Conducted Output Power	26
3.4. 20db Bandwidth	27
3.5. Frequency Separation	31
3.6. Number of Hopping Frequency	33
3.7. Time of Occupancy (Dwell Time)	35
3.8. Out-of-Band Emissions.....	39
3.9. Pseudorandom Frequency Hopping Sequence	49
3.10. Antenna Requirement.....	50
4. Test Setup Photos of the EUT	51
5. Photos of the EUT.....	53

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	May 19, 2025	Jason Zhou



HUAK TESTING



HUAK TESTING

HUAK TESTING

DRT

AL
ONG
OV

HUAK TE



HUAK TE



HUAK TE



HUAK TE

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

1. Summary

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Line Conducted Emission	PASS
FCC Part 15.215	20dB Bandwidth & 99% Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(a)(1)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency & Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS

1.3. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.4. Statement of the Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Measurement Uncertainty	Notes
Transmitter power conducted	$\pm 0.37\text{dB}$	(1)
Transmitter power Radiated	$\pm 3.35\text{dB}$	(1)
Conducted spurious emission 9KHz-40 GHz	$\pm 2.20\text{dB}$	(1)
Occupied Bandwidth	$\pm 3.68\%$	(1)
Radiated Emission 30~1000MHz	$\pm 3.90\text{dB}$	(1)
Radiated Emission Above 1GHz	$\pm 4.28\text{dB}$	(1)
Conducted Disturbance 0.15~30MHz	$\pm 2.71\text{dB}$	(1)



2. General Information

2.1. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	All In One Computer
Model Name	L22W
Series Models:	L22B, S22T, L01, L02, L03, L04, L05, L06
Model Difference:	All model's the function, software and electric circuit are the same, only with a product model named different. Test sample mode: L22W.
Trade Mark:	LCOEVOI
Power supply:	DC 12V From Adapter
Version:	Supported EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79CH
Channel separation:	1MHz
Antenna type:	FPC Antenna
Antenna gain:	1.45dBi
Hardware Version:	V1.0
Software Version:	V1.0
Note:	<p>1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</p> <p>2. Antenna gain Refer to the antenna specifications.</p> <p>3. The cable loss data is obtained from the supplier.</p> <p>4. The test results in the report only apply to the tested sample.</p>

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 79 channels provided to the EUT and Channel 00/39/78 was selected for testing.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The line display in grey were the channel selected for testing.

Preliminary tests were performed in each mode and packet length of BT, and found worst case as bellow, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	Working mode
Radiated Emissions and Band Edge	DH5 Low channel
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth & 99% Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

2.4. Equipments Used During the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	L.I.S.N.	R&S	ENV216	HKE-002	2025/02/19	1 Year
2	L.I.S.N.	R&S	ENV216	HKE-059	2025/02/19	1 Year
3	EMI Test Receiver	R&S	ESR	HKE-005	2025/02/19	1 Year
4	Spectrum analyzer	Agilent	N9020A	HKE-025	2025/02/19	1 Year
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2025/02/19	1 Year
6	Preamplifier	EMCI	EMC051845 S	HKE-006	2025/02/19	1 Year
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2025/02/19	1 Year
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2025/02/19	1 Year
9	6d Attenuator	Pasternack	6db	HKE-184	2025/02/19	1 Year
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2025/02/19	1 Year
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2 Year
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2 Year
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2 Year
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-2	HKE-060	2025/02/19	1 Year
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2025/02/19	1 Year
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2025/02/19	1 Year
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2025/02/19	1 Year
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	1 Year
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	1 Year
22	RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	/	/
23	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	2025/02/19	1 Year
24	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

2.5. Related Submittal(S) / Grant (S)


This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications


No modifications were implemented to meet testing criteria.

2.7. Description of Test Setup

Operation of EUT during AC conducted testing and radiation below 1GHz testing:

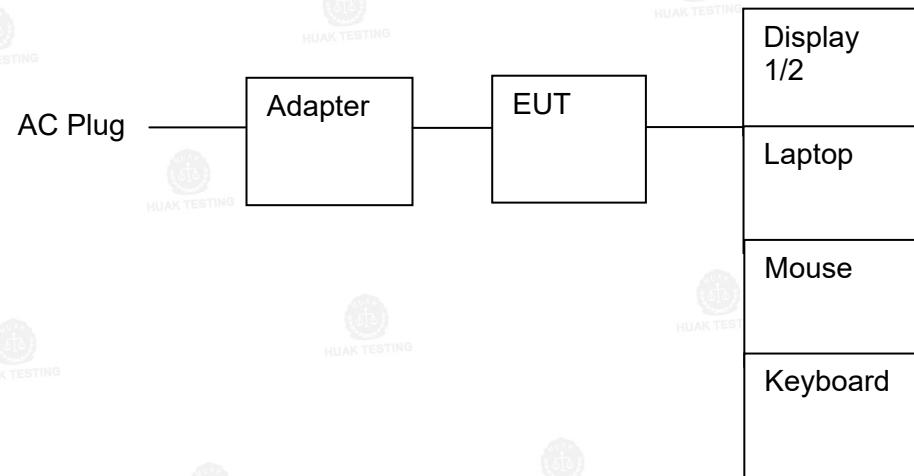

Operation of EUT during radiation above 1GHz testing:



Operation of EUT during RF conducted testing



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

2.8. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	All In One Computer	LCOEVOI	L22W	N/A	EUT
2	Power Line	N/A	N/A	Length:1.52m	Accessory
3	Adapter	N/A	1201F-120-7500	Input: 100-240V, 50/60Hz, 1.6A Output: 12V, 7.5A	Accessory
4	Mouse	N/A	N/A	N/A	Accessory
5	Keyboard	N/A	N/A	N/A	Accessory
6	Display 1	AOC	280LM00004	N/A	Peripheral
7	Display 2	PHILIPS	279E1	N/A	Peripheral
8	Laptop	Lenovo	TP00096A	Input: DC 20V, 2.25~3.25A Output: 5VDC, 0.5A	Peripheral

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20db Bandwidth, Frequency Separation, Number of Hopping Frequency, Time of Occupancy (Dwell Time), Out-of-Band Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3. Test Conditions and Results

3.1. AC Power Line Conducted Emission


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207 and RSS Gen 8.8, AC Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

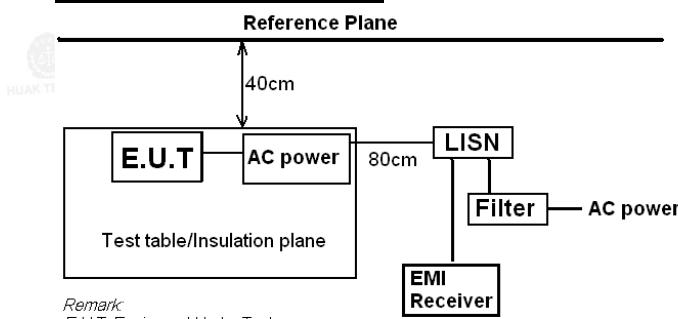

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.




HUAK TESTING

HUAK TESTING

TEST RESULTS

Remark: All modes are tested; only the worst result of was reported as below:

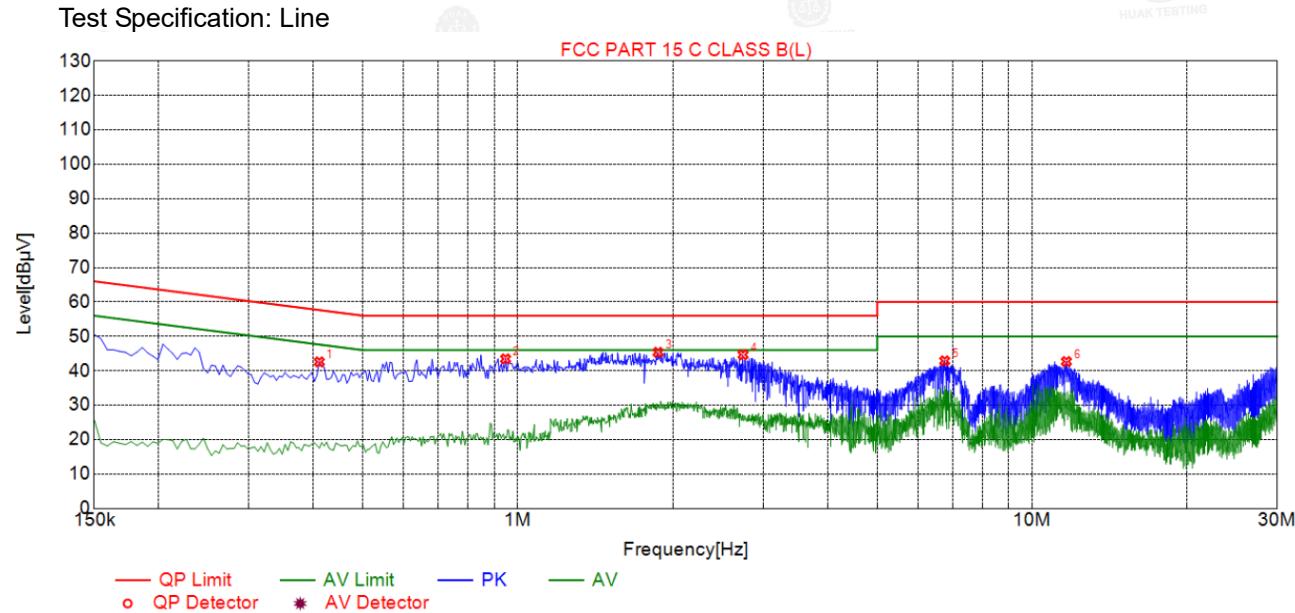

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Reading [dB μ V]	Detector	Type
1	0.4110	42.58	19.83	57.63	15.05	22.75	PK	L
2	0.9465	43.45	19.74	56.00	12.55	23.71	PK	L
3	1.8735	45.36	20.10	56.00	10.64	25.26	PK	L
4	2.7420	44.67	20.25	56.00	11.33	24.42	PK	L
5	6.7650	42.88	20.40	60.00	17.12	22.48	PK	L
6	11.6655	42.68	21.36	60.00	17.32	21.32	PK	L

Remark: Margin = Limit - Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Test Specification: Neutral

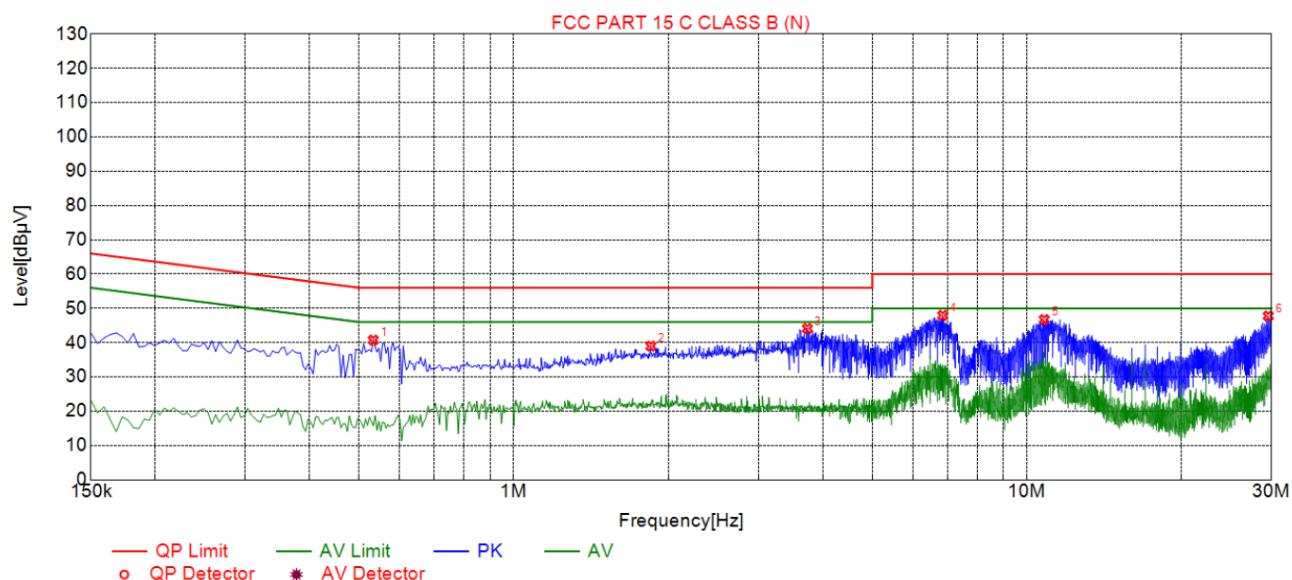

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.5325	40.74	19.75	56.00	15.26	20.99	PK	N
2	1.8510	38.99	19.93	56.00	17.01	19.06	PK	N
3	3.7365	44.13	20.14	56.00	11.87	23.99	PK	N
4	6.8595	47.95	20.48	60.00	12.05	27.47	PK	N
5	10.8195	46.74	21.07	60.00	13.26	25.67	PK	N
6	29.5665	47.78	25.36	60.00	12.22	22.42	PK	N

Remark: Margin = Limit - Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



HUAK TESTING

HUAK TESTING

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


Except when the requirements applicable to a given device state otherwise, emissions from license-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Radiated emission limits

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

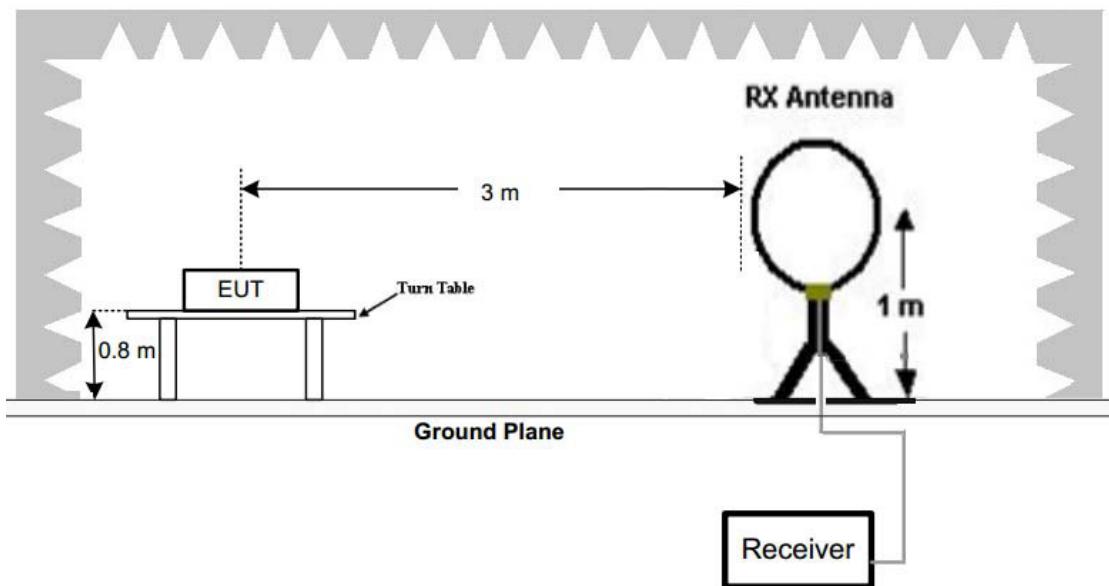


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz.

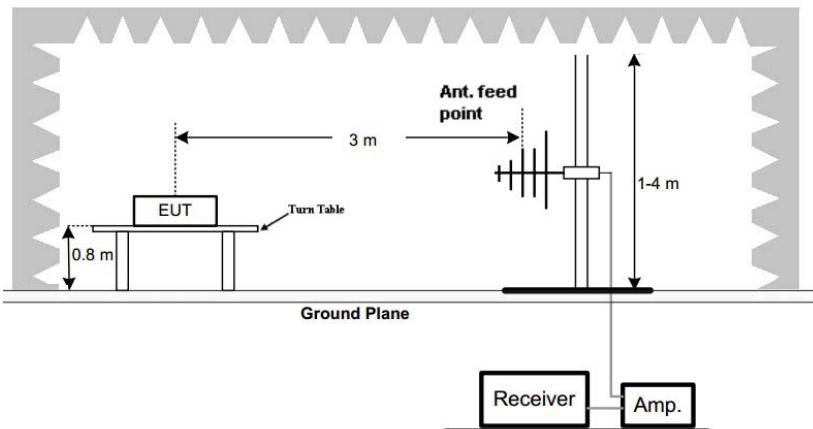

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz.

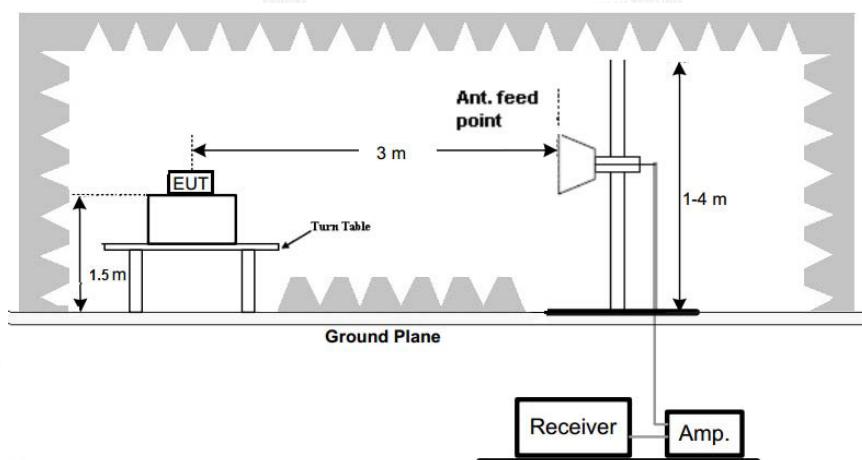

Test Procedure

1. The EUT was placed on turn table which is 0.8m above ground plane for below 1GHz test, and on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:

1. Radiated Emission measured at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 10th harmonic of fundamental and recorded worst case at GFSK DH5 mode.
2. There is no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.




HUAK TESTING

HUAK TESTING

Below 1GHz Test Results:

Horizontal

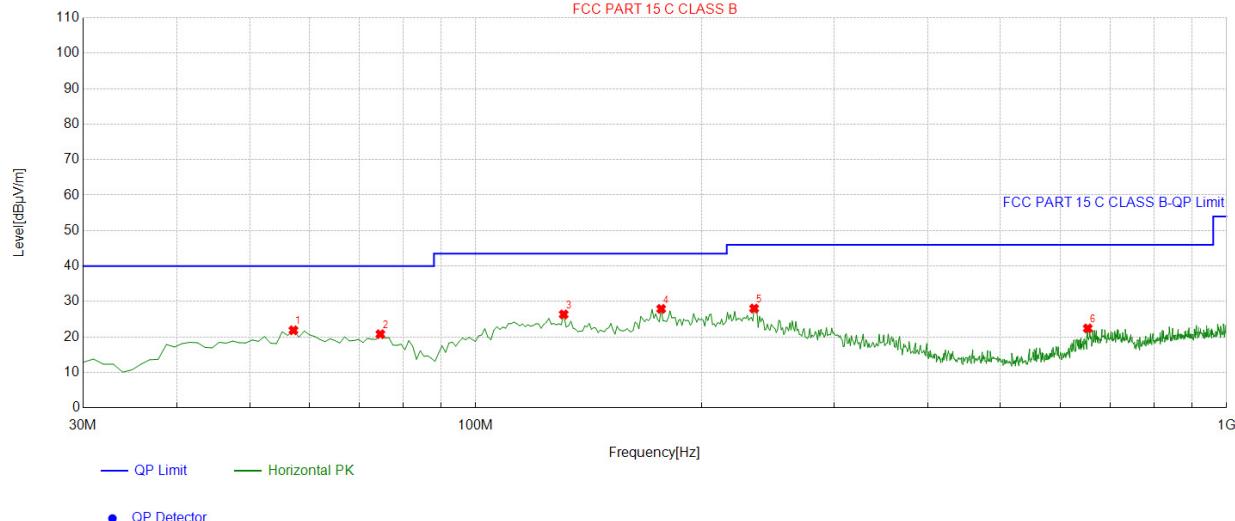

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.1872	-13.76	35.65	21.89	40.00	18.11	100	196	Horizontal
2	74.6647	-17.94	38.73	20.79	40.00	19.21	100	101	Horizontal
3	130.9810	-17.44	43.81	26.37	43.50	17.13	100	84	Horizontal
4	176.6166	-16.66	44.58	27.92	43.50	15.58	100	84	Horizontal
5	234.8749	-13.87	41.90	28.03	46.00	17.97	100	2	Horizontal
6	653.3634	-4.92	27.34	22.42	46.00	23.58	100	161	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com


Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Vertical

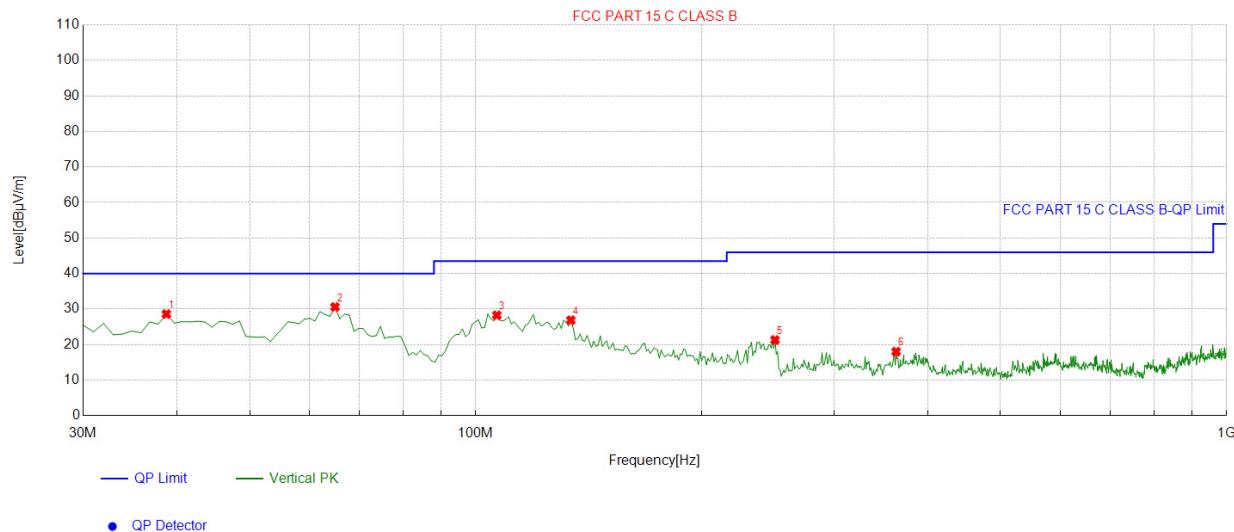

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.7387	-14.30	42.90	28.60	40.00	11.40	100	250	Vertical
2	64.9550	-15.33	45.92	30.59	40.00	9.41	100	89	Vertical
3	106.7067	-14.49	42.75	28.26	43.50	15.24	100	210	Vertical
4	133.8939	-17.40	44.27	26.87	43.50	16.63	100	227	Vertical
5	250.4104	-13.45	34.76	21.31	46.00	24.69	100	146	Vertical
6	363.0430	-9.68	27.70	18.02	46.00	27.98	100	355	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

For 1GHz to 25GHz

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804.00	54.26	-3.65	50.61	74.00	23.39	peak
4804.00	43.19	-3.65	39.54	54.00	14.46	AVG
7206.00	52.66	-0.95	51.71	74.00	22.29	peak
7206.00	41.55	-0.95	40.60	54.00	13.40	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804.00	52.19	-3.65	48.54	74.00	25.46	peak
4804.00	43.09	-3.65	39.44	54.00	14.56	AVG
7206.00	50.62	-0.95	49.67	74.00	24.33	peak
7206.00	42.18	-0.95	41.23	54.00	12.77	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.



HUAK TESTING
HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

CH Middle (2441MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	54.18	-3.54	50.64	74.00	23.36	peak
4882.00	42.91	-3.54	39.37	54.00	14.63	AVG
7323.00	53.66	-0.81	52.85	74.00	21.15	peak
7323.00	40.88	-0.81	40.07	54.00	13.93	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	55.26	-3.54	51.72	74.00	22.28	peak
4882.00	45.72	-3.54	42.18	54.00	11.82	AVG
7323.00	53.16	-0.81	52.35	74.00	21.65	peak
7323.00	42.69	-0.81	41.88	54.00	12.12	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Limit - Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960.00	55.41	-3.43	51.98	74.00	22.02	peak
4960.00	44.79	-3.44	41.35	54.00	12.65	AVG
7440.00	53.67	-0.77	52.90	74.00	21.10	peak
7440.00	43.06	-0.77	42.29	54.00	11.71	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960.00	53.02	-3.43	49.59	74.00	24.41	peak
4960.00	45.62	-3.44	42.18	54.00	11.82	AVG
7440.00	51.42	-0.77	50.65	74.00	23.35	peak
7440.00	42.98	-0.77	42.21	54.00	11.79	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit - Level.

Remark :

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

**HUAK TESTING**

HUAK TESTING

Radiated Band Edge Test:**Hopping****Horizontal (Worst case)**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	54.19	-5.81	48.38	74	25.62	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	53.66	-5.84	47.82	74	26.18	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	53.74	-5.81	47.93	74	26.07	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	52.09	-5.84	46.25	74	27.75	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.64	-5.81	47.83	74	26.17	peak
2483.50	/	-5.81	/	54	/	Avg
2500.00	50.48	-6.06	44.42	74	29.58	peak
2500.00	/	-6.06	/	54	/	Avg

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.09	-5.81	48.28	74	25.72	peak
2483.50	/	-5.81	/	54	/	Avg
2500.00	53.72	-6.06	47.66	74	26.34	peak
2500.00	/	-6.06	/	54	/	Avg

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING
HUAK TESTING

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	54.68	-5.81	48.87	74	25.13	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	53.91	-5.84	48.07	74	25.93	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	53.62	-5.81	47.81	74	26.19	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	51.49	-5.84	45.65	74	28.35	peak
2390.00	/	-5.84	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

**HUAK TESTING**

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.18	-5.81	48.37	74	25.63	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.69	-6.06	47.63	74	26.37	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.12	-5.81	47.31	74	26.69	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	50.77	-6.06	44.71	74	29.29	peak
2500.00	/	-6.06	/	54	/	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.4. 20db Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recoded.

Test Configuration



Test Results

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	CH00	1.017	Pass
	CH39	1.005	
	CH78	0.999	
$\pi/4$ DQPSK	CH00	1.278	Pass
	CH39	1.314	
	CH78	1.362	
8DPSK	CH00	1.296	Pass
	CH39	1.314	
	CH78	1.320	

Test plot as follows:

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



20dB bandwidth



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



8DPSK Modulation



CHOO



CH39



CH78

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING

HUAK TESTING

3.5. Frequency Separation

LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 KHz RBW and 1000 KHz VBW.

TEST CONFIGURATION



TEST RESULTS

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	Middle Channel	1.000	0.678	Pass
$\pi/4$ DQPSK	Middle Channel	1.002	0.908	Pass
8DPSK	Middle Channel	1.000	0.880	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle.

Test plot as follows:

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING


Frequency Separation



GFSK



π/4DQPSK

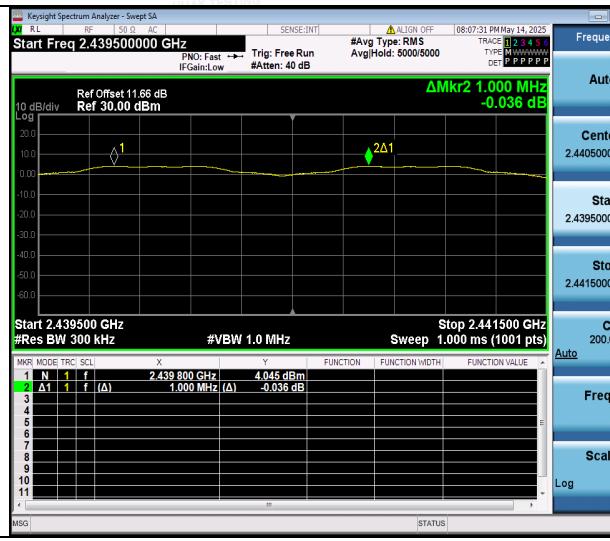

8DPSK

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China