



FCC Part 15C Test Report

FCC ID:2BPYC-TS150G3

Applicant: **NCR LLC**
Address: 5140 Moundview Drive Red Wing MN 55066 USA
Manufacturer: **NCR LLC**
Address: 5140 Moundview Drive Red Wing MN 55066 USA
EUT: **Thermal Gunsights**
Trade Mark: N/A
Model Number: TS150G3
TS250G2
Date of Receipt: Apr. 14, 2025
Test Date: Apr. 14, 2025 to Apr. 25, 2025
Date of Report: Apr. 25, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Result: Pass
Report Number: **DLE-250529001R**

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

	Page
1. VERSION.....	4
2. SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD.....	12
4.1.4 TEST SETUP.....	13
4.1.5 EUT OPERATING CONDITIONS.....	13
4.1.6 TEST RESULT.....	14
4.2.1 RADIATED EMISSION LIMITS.....	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD.....	17
4.2.4 TEST SETUP.....	17
4.2.5 EUT OPERATING CONDITIONS.....	18
4.2.6 TEST RESULTS	18
5.1 TEST REQUIREMENT:.....	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM TEST STANDARD.....	29
5.4 TEST SETUP.....	30
5.5 EUT OPERATING CONDITIONS.....	30
5.6 TEST RESULT.....	31
6.1 APPLIED PROCEDURES / LIMIT	33
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS.....	33
6.6 TEST RESULT.....	34
7. 6DB OCCUPIED BANDWIDTH.....	42
7.1 APPLIED PROCEDURES / LIMIT	42
7.2 TEST PROCEDURE	42
7.3 DEVIATION FROM STANDARD	42
7.4 TEST SETUP	42
7.5 EUT OPERATION CONDITIONS.....	42
7.6 TEST RESULT.....	43
8.PEAK OUTPUT POWER TEST	46
8.1 APPLIED PROCEDURES/LIMIT	46
8.2 TEST PROCEDURE	46
8.3 DEVIATION FROM STANDARD.....	46
8.4 TEST SETUP.....	46
8.5 EUT OPERATION CONDITIONS.....	46
8.6 TEST RESULT.....	47
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....	48



9.1 APPLICABLE STANDARD.....	48
9.2 TEST PROCEDURE	48
9.3 DEVIATION FROM STANDARD.....	48
9.4 TEST SETUP.....	48
9.5 EUT OPERATION CONDITIONS.....	49
9.6 TEST RESULTS	49
10. DUTY CYCLE	57
10.1 APPLIED PROCEDURES / LIMIT	57
10.2 DEVIATION FROM STANDARD.....	57
10.3 TEST SETUP.....	57
11. ANTENNA REQUIREMENT	61
12. TEST SETUP PHOTO	62
13. EUT CONSTRUCTIONAL DETAILS	62



1. VERSION

Report No.	Version	Description	Approved
DLE-250529001R	Rev.01	Initial issue of report	Apr. 25, 2025



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	6dB Occupied Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209 FCC part 15.247(d)	Spurious Emission	PASS	
ANSI C63.10:2013	Duty cycle	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Thermal Gunsights
Model No.:	TS150G3
Serial No.:	TS250G2
Model Different:	Only the model name is different.
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(HT20/HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	PCB Antenna
Antenna gain:	3dBi
Ratings:	Input: 5V  1A Battery: 3.7V  3200mAh, 11.84Wh



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and for battery operated equipment, the equipment tests shall be performed using a new battery.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	MobaXterm
Power level setup	Default




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Thermal Gunsights	N/A	TS150G3	N/A	EUT
A1	AC/DC Adapter	N/A	HNT-M520RZ	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\

RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025



2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektron ik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405 D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBUV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

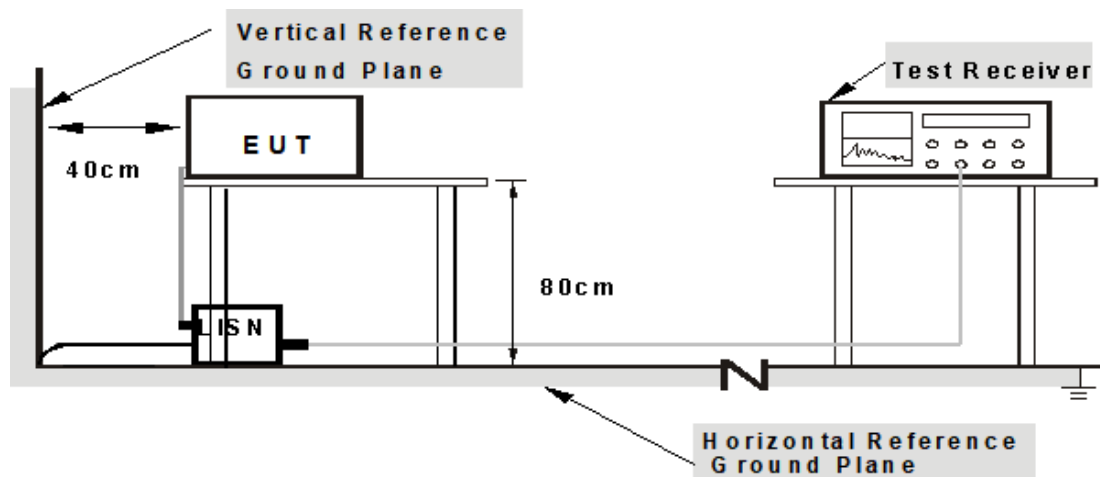

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	TX 802.11n20 - 2412MHz

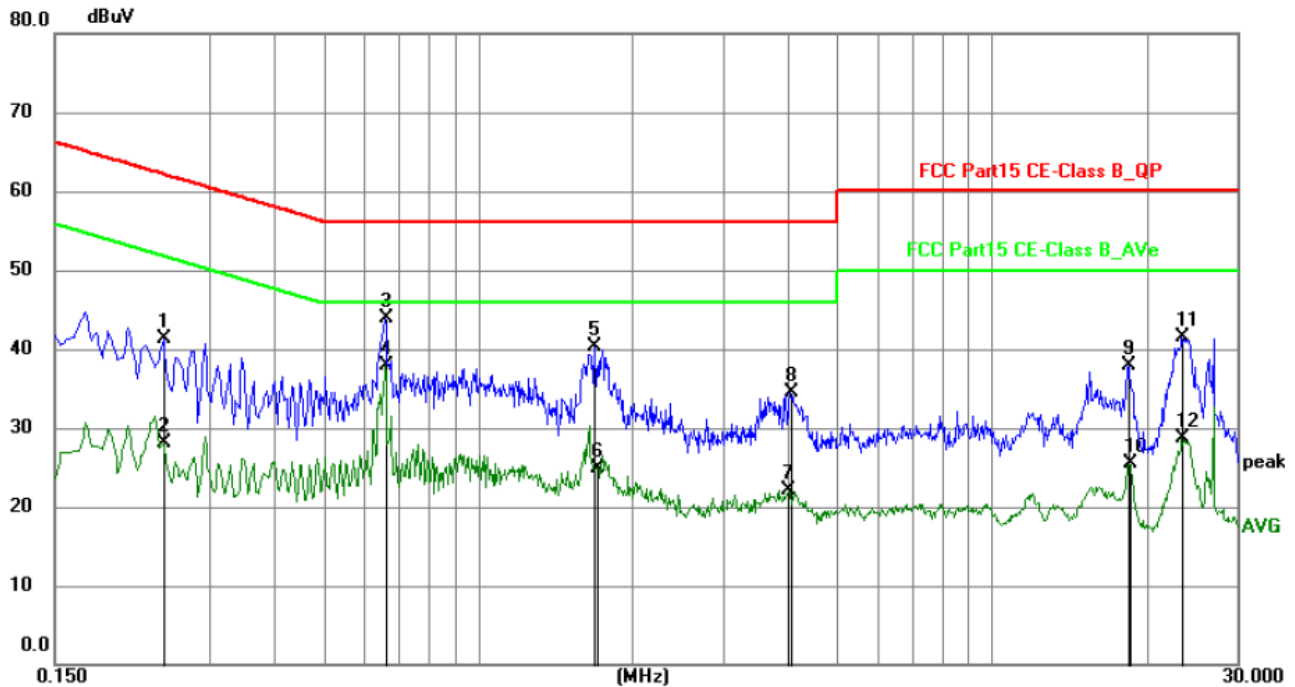

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2445	20.96	20.37	41.33	61.94	-20.61	QP	P
2	0.2445	7.83	20.37	28.20	51.94	-23.74	AVG	P
3	0.6584	23.54	20.29	43.83	56.00	-12.17	QP	P
4	0.6584	17.67	20.29	37.96	46.00	-8.04	AVG	P
5	1.6889	19.93	20.30	40.23	56.00	-15.77	QP	P
6	1.7024	4.68	20.30	24.98	46.00	-21.02	AVG	P
7	4.0109	1.70	20.34	22.04	46.00	-23.96	AVG	P
8	4.0695	14.10	20.35	34.45	56.00	-21.55	QP	P
9	18.4560	17.46	20.50	37.96	60.00	-22.04	QP	P
10	18.5325	5.04	20.50	25.54	50.00	-24.46	AVG	P
11	23.4870	20.96	20.59	41.55	60.00	-18.45	QP	P
12	23.4870	8.02	20.59	28.61	50.00	-21.39	AVG	P



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	TX 802.11n20 - 2412MHz

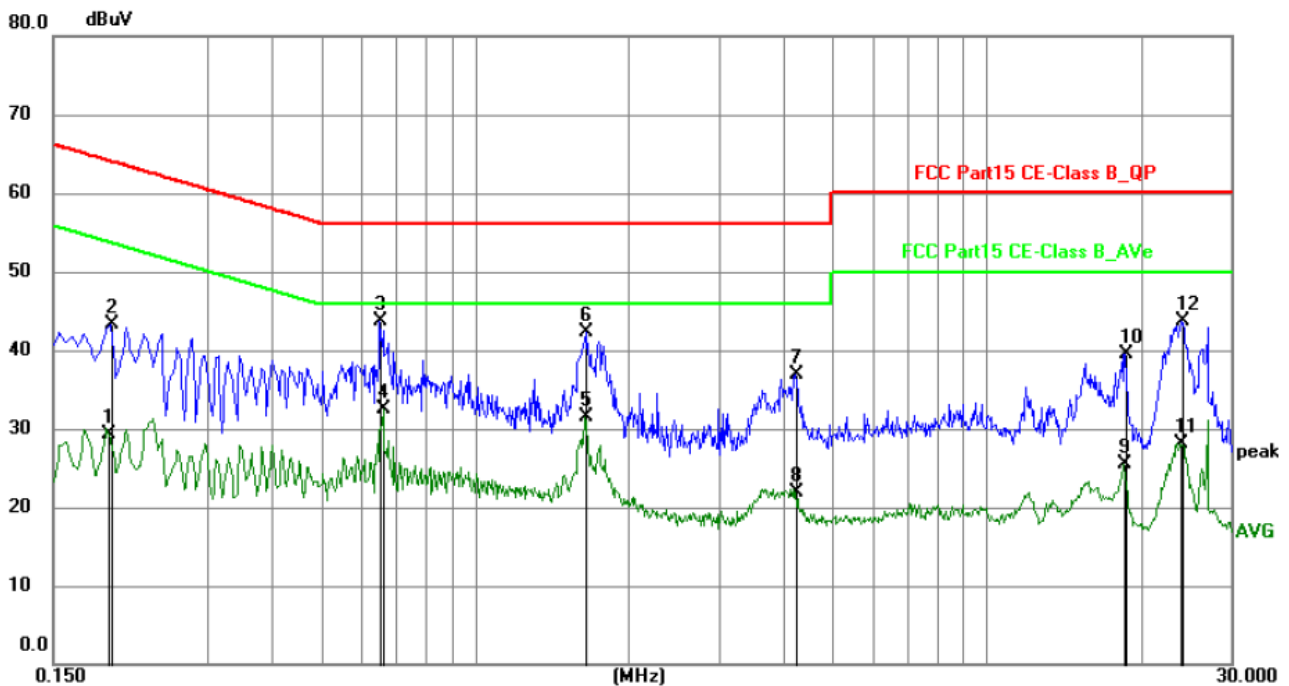

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1924	8.96	20.34	29.30	53.93	-24.63	AVG	P
2	0.1949	22.95	20.35	43.30	63.83	-20.53	QP	P
3	0.6539	23.48	20.29	43.77	56.00	-12.23	QP	P
4	0.6629	12.25	20.29	32.54	46.00	-13.46	AVG	P
5	1.6439	11.17	20.30	31.47	46.00	-14.53	AVG	P
6	1.6529	21.95	20.30	42.25	56.00	-13.75	QP	P
7	4.2360	16.50	20.34	36.84	56.00	-19.16	QP	P
8	4.2360	1.54	20.34	21.88	46.00	-24.12	AVG	P
9	18.5370	4.93	20.52	25.45	50.00	-24.55	AVG	P
10	18.6405	18.99	20.52	39.51	60.00	-20.49	QP	P
11	23.9639	7.49	20.64	28.13	50.00	-21.87	AVG	P
12	24.0900	23.03	20.64	43.67	60.00	-16.33	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case TX 802.11n20 - 2412MHz.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

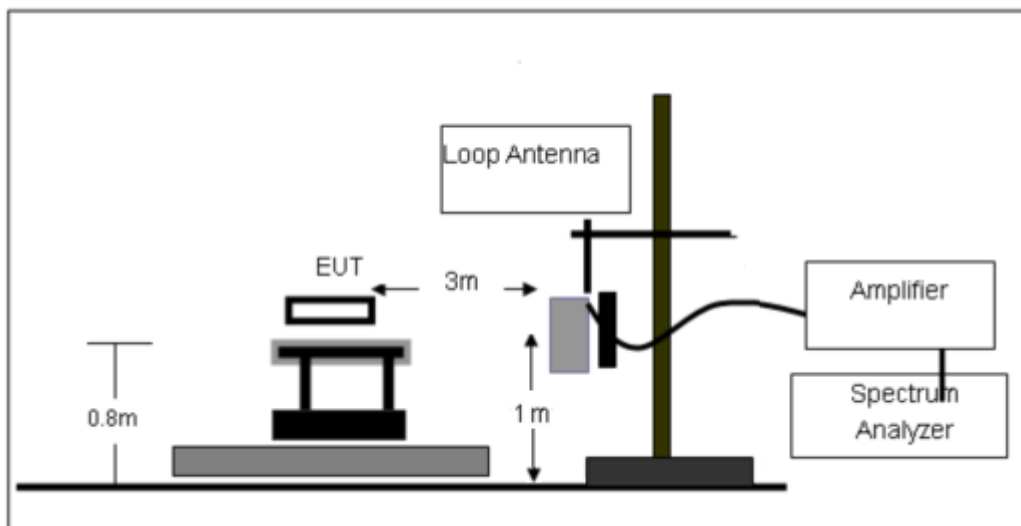

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

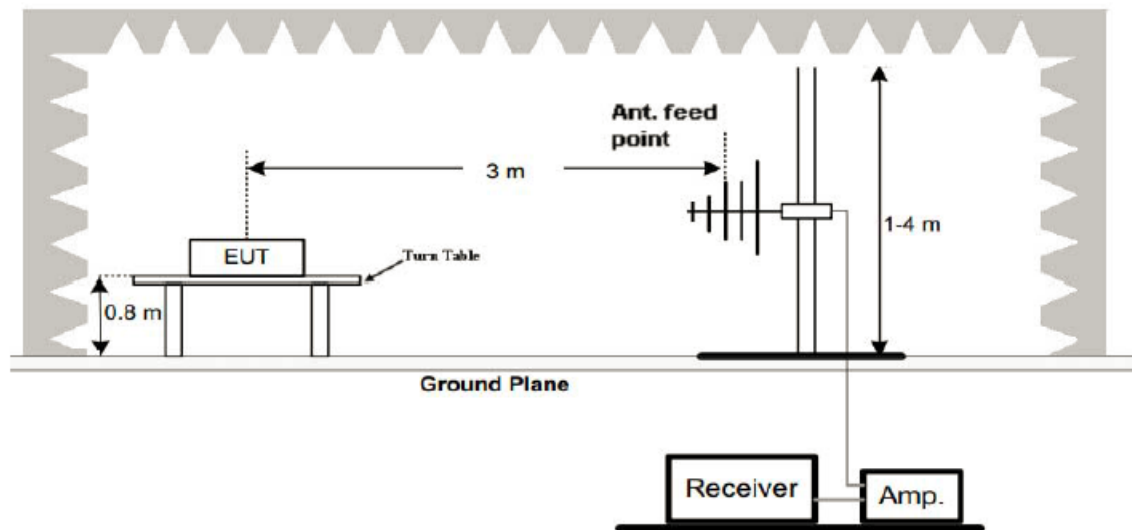

(C) Radiated Emission Test-Up Frequency Above 1GHz

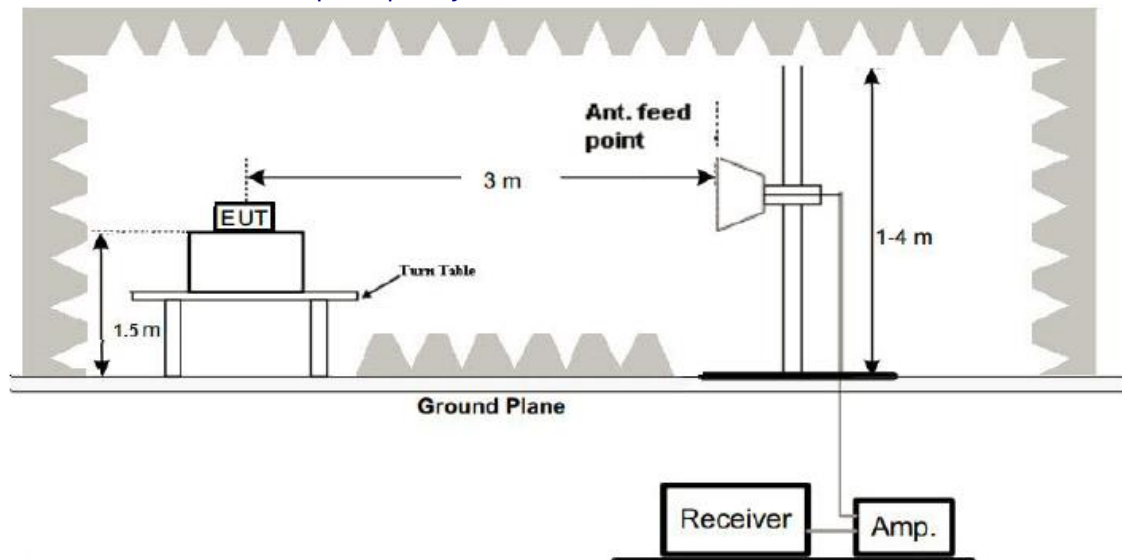

4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11n20 - 2412MHz

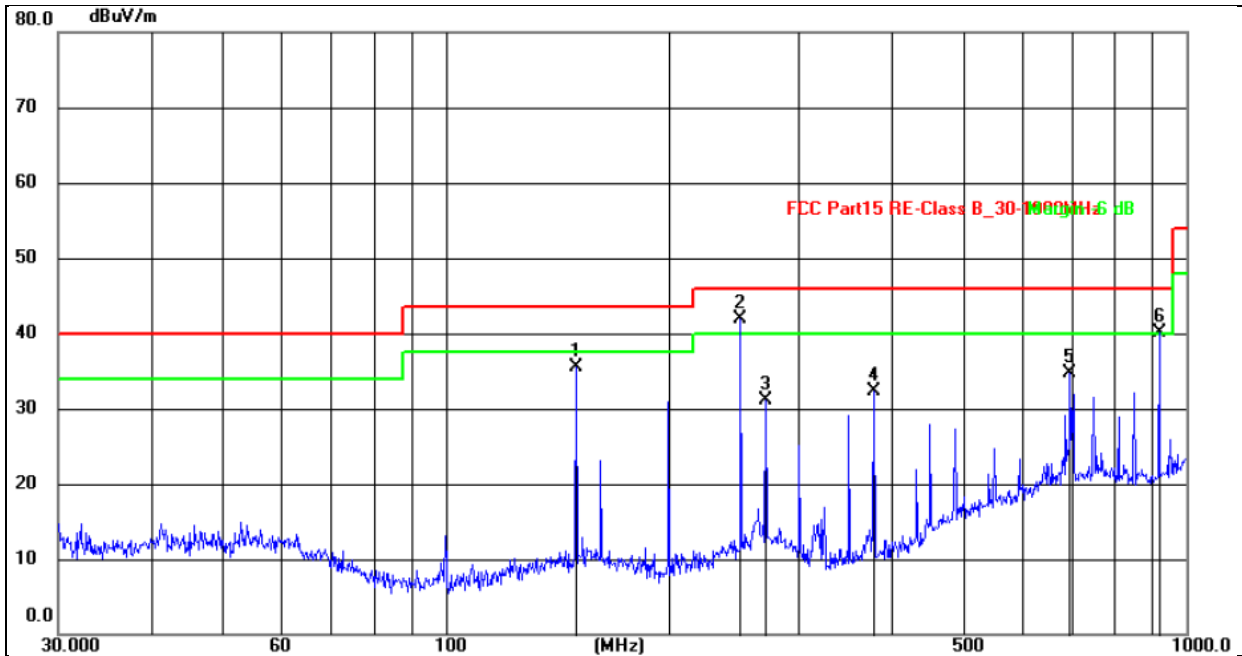

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	150.0108	51.84	-16.35	35.49	43.50	-8.01	QP
2	250.3011	57.53	-15.54	41.99	46.00	-4.01	QP
3	270.3748	45.64	-14.53	31.11	46.00	-14.89	QP
4	378.5842	48.39	-16.16	32.23	46.00	-13.77	QP
5	696.8567	41.15	-6.49	34.66	46.00	-11.34	QP
6	919.2865	46.39	-6.27	40.12	46.00	-5.88	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11n20 - 2412MHz

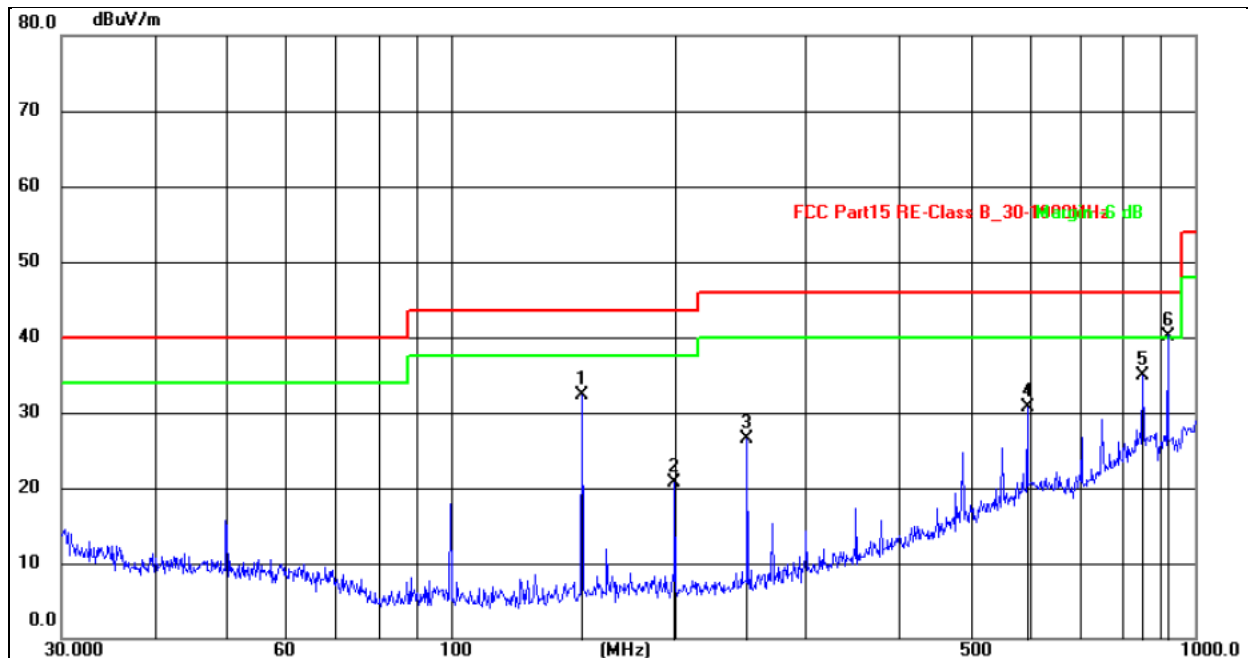

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	150.0108	52.69	-20.35	32.34	43.50	-11.16	QP
2	199.9855	41.19	-20.40	20.79	43.50	-22.71	QP
3	250.3011	46.09	-19.60	26.49	46.00	-19.51	QP
4	595.1327	38.14	-7.51	30.63	46.00	-15.37	QP
5	851.0353	36.68	-1.83	34.85	46.00	-11.15	QP
6	919.2865	40.53	-0.33	40.20	46.00	-5.80	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case TX 802.11n20 - 2412MHz.



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.93	30.55	5.77	24.66	53.81	74.00	-20.19	Pk
V	4824.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
V	7236.00	53.99	30.33	6.32	24.55	54.53	74.00	-19.47	Pk
V	7236.00	43.60	30.33	6.32	24.55	44.14	54.00	-9.86	AV
V	9648.00	50.07	30.85	7.45	24.69	51.36	74.00	-22.64	Pk
V	9648.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
V	12060.00	54.33	31.02	8.99	25.57	57.87	74.00	-16.13	Pk
V	12060.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV
H	4824.00	54.81	30.55	5.77	24.66	54.69	74.00	-19.31	Pk
H	4824.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
H	7236.00	51.20	30.33	6.32	24.55	51.74	74.00	-22.26	Pk
H	7236.00	43.28	30.33	6.32	24.55	43.82	54.00	-10.18	AV
H	9648.00	50.80	30.85	7.45	24.69	52.09	74.00	-21.91	Pk
H	9648.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
H	12060.00	53.07	31.02	8.99	25.57	56.61	74.00	-17.39	Pk
H	12060.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.52	30.55	5.77	24.66	52.40	74.00	-21.60	Pk
V	4874.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
V	7311.00	52.48	30.33	6.32	24.55	53.02	74.00	-20.98	Pk
V	7311.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
V	9748.00	51.87	30.85	7.45	24.69	53.16	74.00	-20.84	Pk
V	9748.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	12185.00	51.29	31.02	8.99	25.57	54.83	74.00	-19.17	Pk
V	12185.00	43.95	31.02	8.99	25.57	47.49	54.00	-6.51	AV
H	4874.00	50.28	30.55	5.77	24.66	50.16	74.00	-23.84	Pk
H	4874.00	43.71	30.55	5.77	24.66	43.59	54.00	-10.41	AV
H	7311.00	53.50	30.33	6.32	24.55	54.04	74.00	-19.96	Pk
H	7311.00	43.36	30.33	6.32	24.55	43.90	54.00	-10.10	AV
H	9748.00	50.21	30.85	7.45	24.69	51.50	74.00	-22.50	Pk
H	9748.00	43.14	30.85	7.45	24.69	44.43	54.00	-9.57	AV
H	12185.00	52.79	31.02	8.99	25.57	56.33	74.00	-17.67	Pk
H	12185.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	52.62	30.55	5.77	24.66	52.50	74.00	-21.50	PK
V	4924.00	43.82	30.55	5.77	24.66	43.70	54.00	-10.30	AV
V	7386.00	53.91	30.33	6.32	24.55	54.45	74.00	-19.55	PK
V	7386.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
V	9848.00	51.17	30.85	7.45	24.69	52.46	74.00	-21.54	PK
V	9848.00	43.10	30.85	7.45	24.69	44.39	54.00	-9.61	AV
V	12310.00	54.89	31.02	8.99	25.57	58.43	74.00	-15.57	PK
V	12310.00	43.59	31.02	8.99	25.57	47.13	54.00	-6.87	AV
H	4924.00	50.02	30.55	5.77	24.66	49.90	74.00	-24.10	PK
H	4924.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	7386.00	53.58	30.33	6.32	24.55	54.12	74.00	-19.88	PK
H	7386.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	9848.00	50.44	30.85	7.45	24.69	51.73	74.00	-22.27	PK
H	9848.00	43.16	30.85	7.45	24.69	44.45	54.00	-9.55	AV
H	12310.00	50.80	31.02	8.99	25.57	54.34	74.00	-19.66	PK
H	12310.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.22	30.55	5.77	24.66	51.10	74.00	-22.90	Pk
V	4824.00	43.74	30.55	5.77	24.66	43.62	54.00	-10.38	AV
V	7236.00	50.31	30.33	6.32	24.55	50.85	74.00	-23.15	Pk
V	7236.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
V	9648.00	52.49	30.85	7.45	24.69	53.78	74.00	-20.22	Pk
V	9648.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
V	12060.00	53.23	31.02	8.99	25.57	56.77	74.00	-17.23	Pk
V	12060.00	43.17	31.02	8.99	25.57	46.71	54.00	-7.29	AV
H	4824.00	54.54	30.55	5.77	24.66	54.42	74.00	-19.58	Pk
H	4824.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
H	7236.00	53.30	30.33	6.32	24.55	53.84	74.00	-20.16	Pk
H	7236.00	43.83	30.33	6.32	24.55	44.37	54.00	-9.63	AV
H	9648.00	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	Pk
H	9648.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12060.00	51.77	31.02	8.99	25.57	55.31	74.00	-18.69	Pk
H	12060.00	43.22	31.02	8.99	25.57	46.76	54.00	-7.24	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.08	30.55	5.77	24.66	50.96	74.00	-23.04	Pk
V	4874.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
V	7311.00	54.02	30.33	6.32	24.55	54.56	74.00	-19.44	Pk
V	7311.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
V	9748.00	53.94	30.85	7.45	24.69	55.23	74.00	-18.77	Pk
V	9748.00	43.40	30.85	7.45	24.69	44.69	54.00	-9.31	AV
V	12185.00	50.25	31.02	8.99	25.57	53.79	74.00	-20.21	Pk
V	12185.00	43.97	31.02	8.99	25.57	47.51	54.00	-6.49	AV
H	4874.00	52.96	30.55	5.77	24.66	52.84	74.00	-21.16	Pk
H	4874.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	7311.00	53.35	30.33	6.32	24.55	53.89	74.00	-20.11	Pk
H	7311.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	9748.00	51.60	30.85	7.45	24.69	52.89	74.00	-21.11	Pk
H	9748.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	12185.00	50.60	31.02	8.99	25.57	54.14	74.00	-19.86	Pk
H	12185.00	43.63	31.02	8.99	25.57	47.17	54.00	-6.83	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	51.58	30.55	5.77	24.66	51.46	74.00	-22.54	PK
V	4924.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
V	7386.00	52.25	30.33	6.32	24.55	52.79	74.00	-21.21	PK
V	7386.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
V	9848.00	51.53	30.85	7.45	24.69	52.82	74.00	-21.18	PK
V	9848.00	43.40	30.85	7.45	24.69	44.69	54.00	-9.31	AV
V	12310.00	53.37	31.02	8.99	25.57	56.91	74.00	-17.09	PK
V	12310.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV
H	4924.00	53.89	30.55	5.77	24.66	53.77	74.00	-20.23	PK
H	4924.00	43.28	30.55	5.77	24.66	43.16	54.00	-10.84	AV
H	7386.00	52.97	30.33	6.32	24.55	53.51	74.00	-20.49	PK
H	7386.00	43.12	30.33	6.32	24.55	43.66	54.00	-10.34	AV
H	9848.00	52.64	30.85	7.45	24.69	53.93	74.00	-20.07	PK
H	9848.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	12310.00	51.88	31.02	8.99	25.57	55.42	74.00	-18.58	PK
H	12310.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	50.14	30.55	5.77	24.66	50.02	74.00	-23.98	PK
V	4824.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
V	7236.00	53.88	30.33	6.32	24.55	54.42	74.00	-19.58	PK
V	7236.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
V	9648.00	53.51	30.85	7.45	24.69	54.80	74.00	-19.20	PK
V	9648.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
V	12060.00	54.00	31.02	8.99	25.57	57.54	74.00	-16.46	PK
V	12060.00	43.04	31.02	8.99	25.57	46.58	54.00	-7.42	AV
H	4824.00	54.75	30.55	5.77	24.66	54.63	74.00	-19.37	PK
H	4824.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
H	7236.00	53.34	30.33	6.32	24.55	53.88	74.00	-20.12	PK
H	7236.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
H	9648.00	50.09	30.85	7.45	24.69	51.38	74.00	-22.62	PK
H	9648.00	43.82	30.85	7.45	24.69	45.11	54.00	-8.89	AV
H	12060.00	50.72	31.02	8.99	25.57	54.26	74.00	-19.74	PK
H	12060.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.29	30.55	5.77	24.66	52.17	74.00	-21.83	PK
V	4874.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
V	7311.00	52.61	30.33	6.32	24.55	53.15	74.00	-20.85	PK
V	7311.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
V	9748.00	53.00	30.85	7.45	24.69	54.29	74.00	-19.71	PK
V	9748.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
V	12185.00	51.59	31.02	8.99	25.57	55.13	74.00	-18.87	PK
V	12185.00	43.05	31.02	8.99	25.57	46.59	54.00	-7.41	AV
H	4874.00	53.39	30.55	5.77	24.66	53.27	74.00	-20.73	PK
H	4874.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
H	7311.00	51.57	30.33	6.32	24.55	52.11	74.00	-21.89	PK
H	7311.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
H	9748.00	54.93	30.85	7.45	24.69	56.22	74.00	-17.78	PK
H	9748.00	43.37	30.85	7.45	24.69	44.66	54.00	-9.34	AV
H	12185.00	51.38	31.02	8.99	25.57	54.92	74.00	-19.08	PK
H	12185.00	43.56	31.02	8.99	25.57	47.10	54.00	-6.90	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	51.55	30.55	5.77	24.66	51.43	74.00	-22.57	PK
V	4924.00	43.69	30.55	5.77	24.66	43.57	54.00	-10.43	AV
V	7386.00	53.34	30.33	6.32	24.55	53.88	74.00	-20.12	PK
V	7386.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	9848.00	54.69	30.85	7.45	24.69	55.98	74.00	-18.02	PK
V	9848.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
V	12310.00	50.35	31.02	8.99	25.57	53.89	74.00	-20.11	PK
V	12310.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV
H	4924.00	53.38	30.55	5.77	24.66	53.26	74.00	-20.74	PK
H	4924.00	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
H	7386.00	51.21	30.33	6.32	24.55	51.75	74.00	-22.25	PK
H	7386.00	43.73	30.33	6.32	24.55	44.27	54.00	-9.73	AV
H	9848.00	52.34	30.85	7.45	24.69	53.63	74.00	-20.37	PK
H	9848.00	43.79	30.85	7.45	24.69	45.08	54.00	-8.92	AV
H	12310.00	54.00	31.02	8.99	25.57	57.54	74.00	-16.46	PK
H	12310.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844.00	50.33	30.55	5.77	24.66	50.21	74.00	-23.79	PK
V	4844.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
V	7266.00	53.66	30.33	6.32	24.55	54.20	74.00	-19.80	PK
V	7266.00	43.26	30.33	6.32	24.55	43.80	54.00	-10.20	AV
V	9688.00	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
V	9688.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
V	12110.00	54.79	31.02	8.99	25.57	58.33	74.00	-15.67	PK
V	12110.00	43.32	31.02	8.99	25.57	46.86	54.00	-7.14	AV
H	4844.00	52.83	30.55	5.77	24.66	52.71	74.00	-21.29	PK
H	4844.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
H	7266.00	53.80	30.33	6.32	24.55	54.34	74.00	-19.66	PK
H	7266.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
H	9688.00	51.42	30.85	7.45	24.69	52.71	74.00	-21.29	PK
H	9688.00	43.71	30.85	7.45	24.69	45.00	54.00	-9.00	AV
H	12110.00	51.65	31.02	8.99	25.57	55.19	74.00	-18.81	PK
H	12110.00	43.54	31.02	8.99	25.57	47.08	54.00	-6.92	AV

Polar (H/V)	Frequenc y	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.43	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	4874.00	43.99	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	7311.00	52.83	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7311.00	43.63	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	9748.00	51.27	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	9748.00	43.11	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12185.00	53.12	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	12185.00	43.16	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	4874.00	52.56	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	4874.00	43.73	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	7311.00	54.27	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	7311.00	43.12	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	9748.00	50.98	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	9748.00	43.40	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	12185.00	54.41	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	12185.00	43.77	31.02	8.99	25.57	45.75	54.00	-8.25	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	51.71	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	4904.00	43.65	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	7356.00	52.27	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7356.00	43.74	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	9808.00	51.59	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	9808.00	43.66	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12260.00	50.85	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	12260.00	43.20	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	4904.00	51.86	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	4904.00	43.59	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	7356.00	54.07	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	7356.00	43.40	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	9808.00	50.73	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	9808.00	43.21	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	12260.00	54.11	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	12260.00	43.39	31.02	8.99	25.57	45.75	54.00	-8.25	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED Band EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

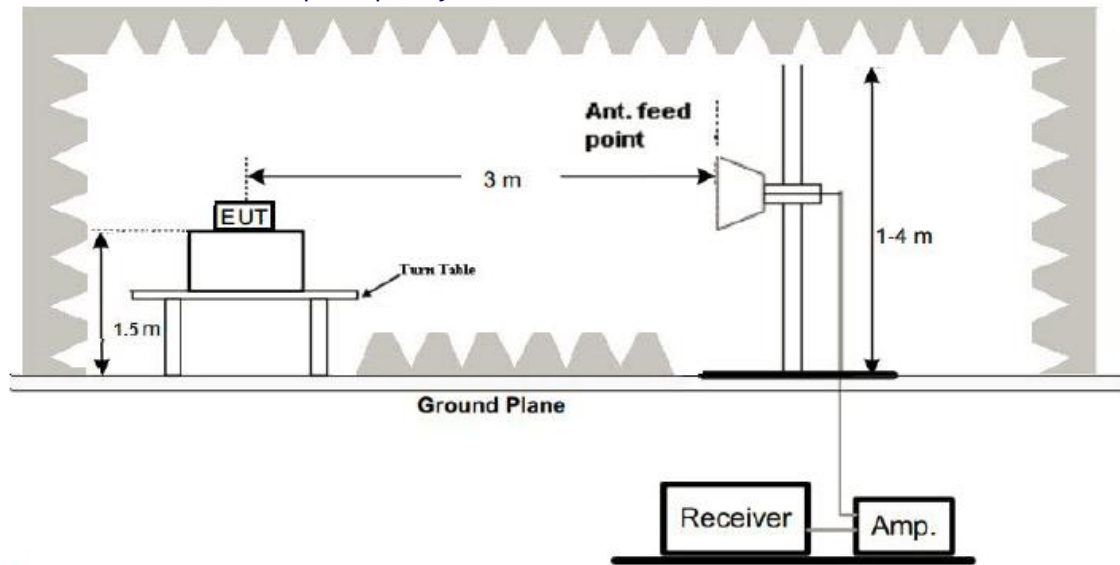

5.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
802.11 b	Low Channel: 2412MHz										
	H	2310.00	54.56	30.22	4.85	23.98	53.17	74.00	-20.83	PK	PASS
	H	2310.00	44.38	30.22	4.85	23.98	42.99	54.00	-11.01	AV	PASS
	H	2350.00	54.11	30.22	4.85	23.98	52.72	74.00	-21.28	PK	PASS
	H	2350.00	44.14	30.22	4.85	23.98	42.75	54.00	-11.25	AV	PASS
	H	2390.00	53.61	30.22	4.85	23.98	52.22	74.00	-21.78	PK	PASS
	H	2390.00	44.24	30.22	4.85	23.98	42.85	54.00	-11.15	AV	PASS
	V	2310.00	53.42	30.22	4.85	23.98	52.03	74.00	-21.97	PK	PASS
	V	2310.00	44.99	30.22	4.85	23.98	43.60	54.00	-10.40	AV	PASS
	V	2350.00	54.29	30.22	4.85	23.98	52.90	74.00	54.29	PK	PASS
	V	2350.00	44.07	30.22	4.85	23.98	42.68	54.00	44.07	AV	PASS
	V	2390.00	53.95	30.22	4.85	23.98	52.56	74.00	53.95	PK	PASS
	V	2390.00	44.58	30.22	4.85	23.98	43.19	54.00	44.58	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.03	30.22	4.85	23.98	51.64	74.00	-22.36	PK	PASS
	H	2483.50	44.59	30.22	4.85	23.98	43.20	54.00	-10.80	AV	PASS
	H	2500.00	54.47	30.22	4.85	23.98	53.08	74.00	-20.92	PK	PASS
	H	2500.00	44.70	30.22	4.85	23.98	43.31	54.00	-10.69	AV	PASS
	V	2483.50	53.99	30.22	4.85	23.98	52.60	74.00	-21.40	PK	PASS
	V	2483.50	44.23	30.22	4.85	23.98	42.84	54.00	-11.16	AV	PASS
V	2500.00	53.31	30.22	4.85	23.98	51.92	74.00	-22.08	PK	PASS	
V	2500.00	44.43	30.22	4.85	23.98	43.04	54.00	-10.96	AV	PASS	
802.11 g	Low Channel: 2412MHz										
	H	2310.00	54.99	30.22	4.85	23.98	53.60	74.00	-20.40	PK	PASS
	H	2310.00	44.15	30.22	4.85	23.98	42.76	54.00	-11.24	AV	PASS
	H	2350.00	53.64	30.22	4.85	23.98	52.25	74.00	-21.75	PK	PASS
	H	2350.00	44.41	30.22	4.85	23.98	43.02	54.00	-10.98	AV	PASS
	H	2390.00	53.73	30.22	4.85	23.98	52.34	74.00	-21.66	PK	PASS
	H	2390.00	44.44	30.22	4.85	23.98	43.05	54.00	-10.95	AV	PASS
	V	2310.00	53.90	30.22	4.85	23.98	52.51	74.00	-21.49	PK	PASS
	V	2310.00	44.56	30.22	4.85	23.98	43.17	54.00	-10.83	AV	PASS
	V	2350.00	54.70	30.22	4.85	23.98	53.31	74.00	-20.69	PK	PASS
	V	2350.00	44.25	30.22	4.85	23.98	42.86	54.00	-11.14	AV	PASS
	V	2390.00	53.53	30.22	4.85	23.98	52.14	74.00	-21.86	PK	PASS
	V	2390.00	44.21	30.22	4.85	23.98	42.82	54.00	-11.18	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	54.58	30.22	4.85	23.98	53.19	74.00	-20.81	PK	PASS
	H	2483.50	44.57	30.22	4.85	23.98	43.18	54.00	-10.82	AV	PASS
	H	2500.00	53.06	30.22	4.85	23.98	51.67	74.00	-22.33	PK	PASS
	H	2500.00	44.93	30.22	4.85	23.98	43.54	54.00	-10.46	AV	PASS
	V	2483.50	53.52	30.22	4.85	23.98	52.13	74.00	-21.87	PK	PASS
	V	2483.50	44.92	30.22	4.85						



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

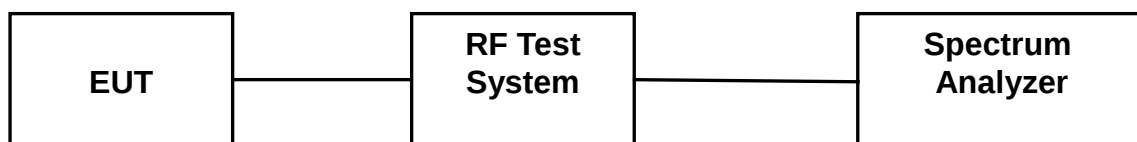

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.4 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-16.050	8	PASS
2437 MHz	-15.337	8	PASS
2462 MHz	-16.296	8	PASS

TX CH01

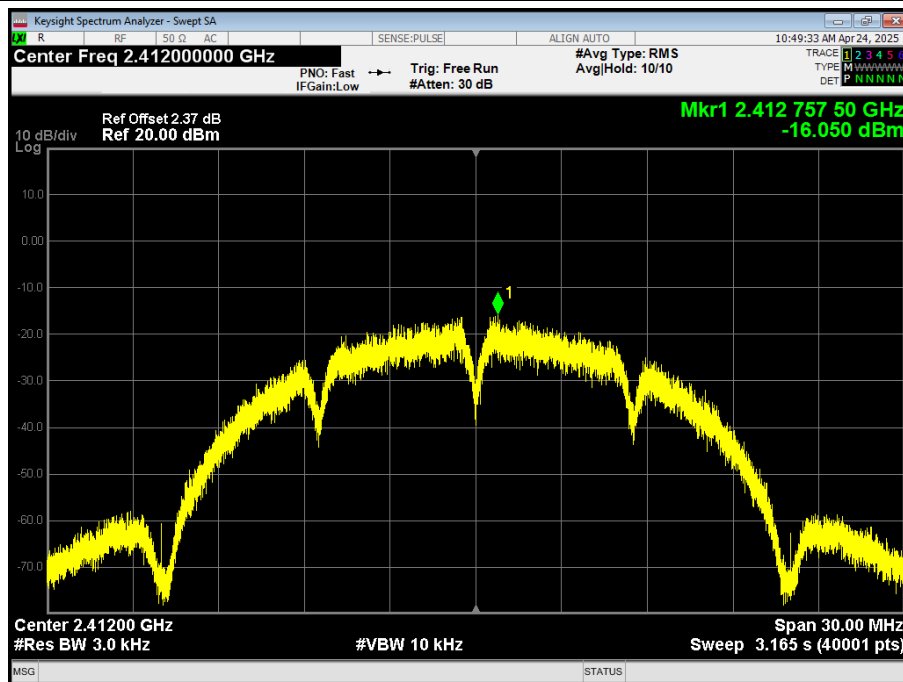




TX CH06

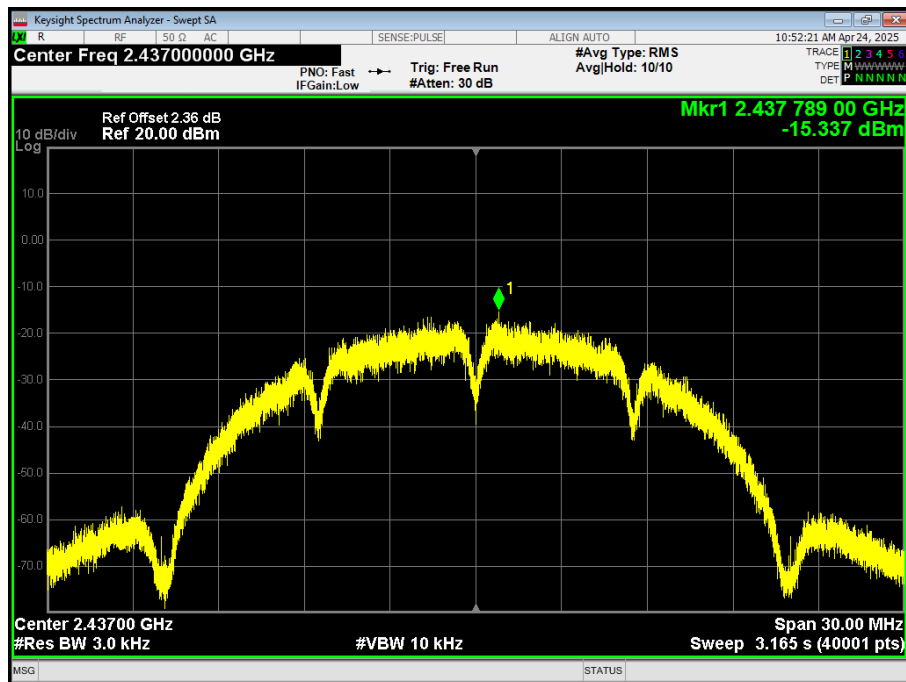

TX CH11

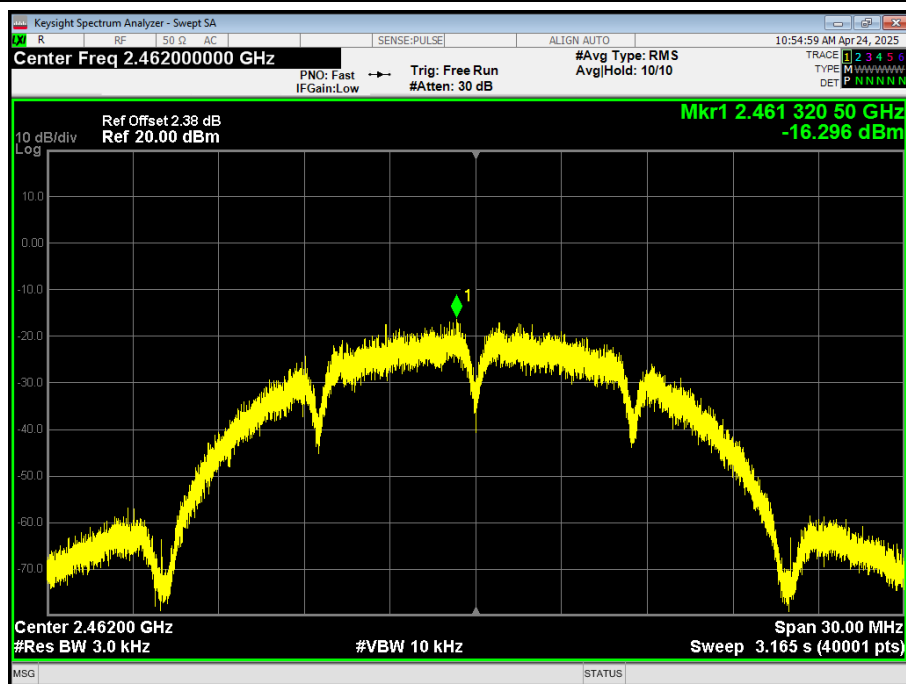




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-21.796	8	PASS
2437 MHz	-22.345	8	PASS
2462 MHz	-22.244	8	PASS

TX CH01

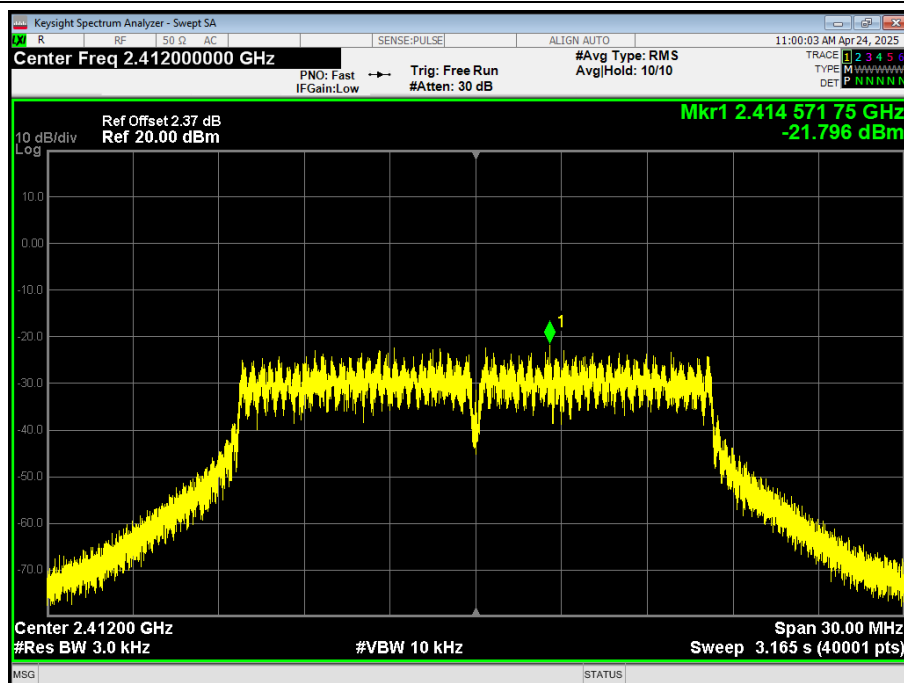




TX CH06

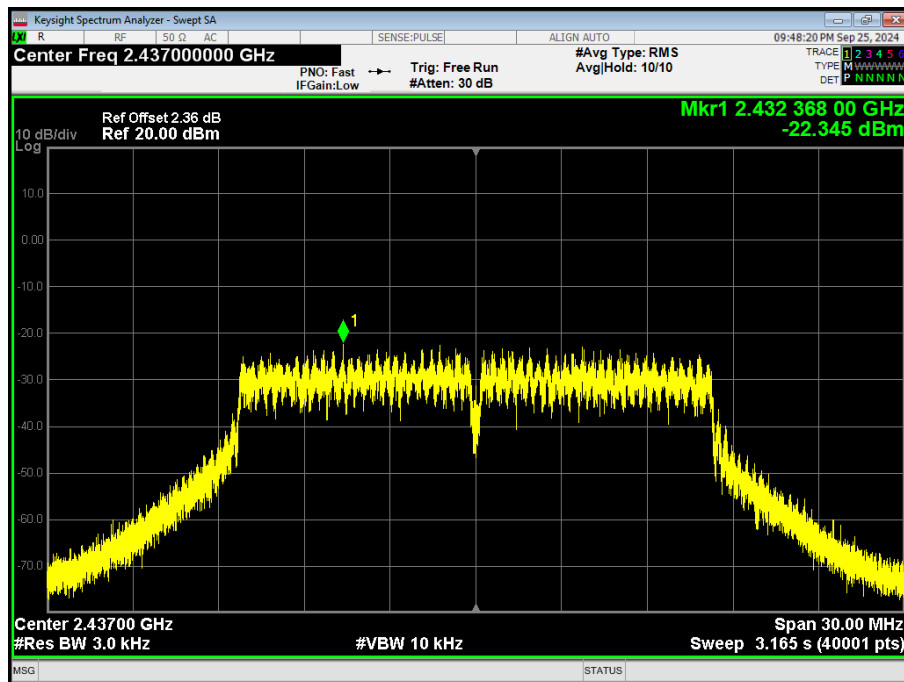


TX CH11

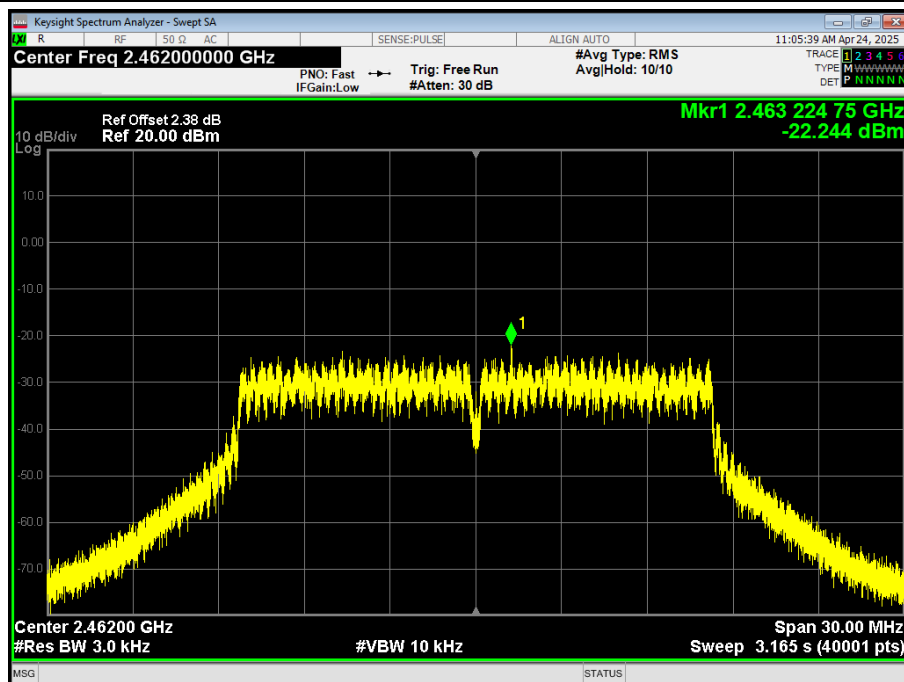




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-22.515	8	PASS
2437 MHz	-22.738	8	PASS
2462 MHz	-23.161	8	PASS

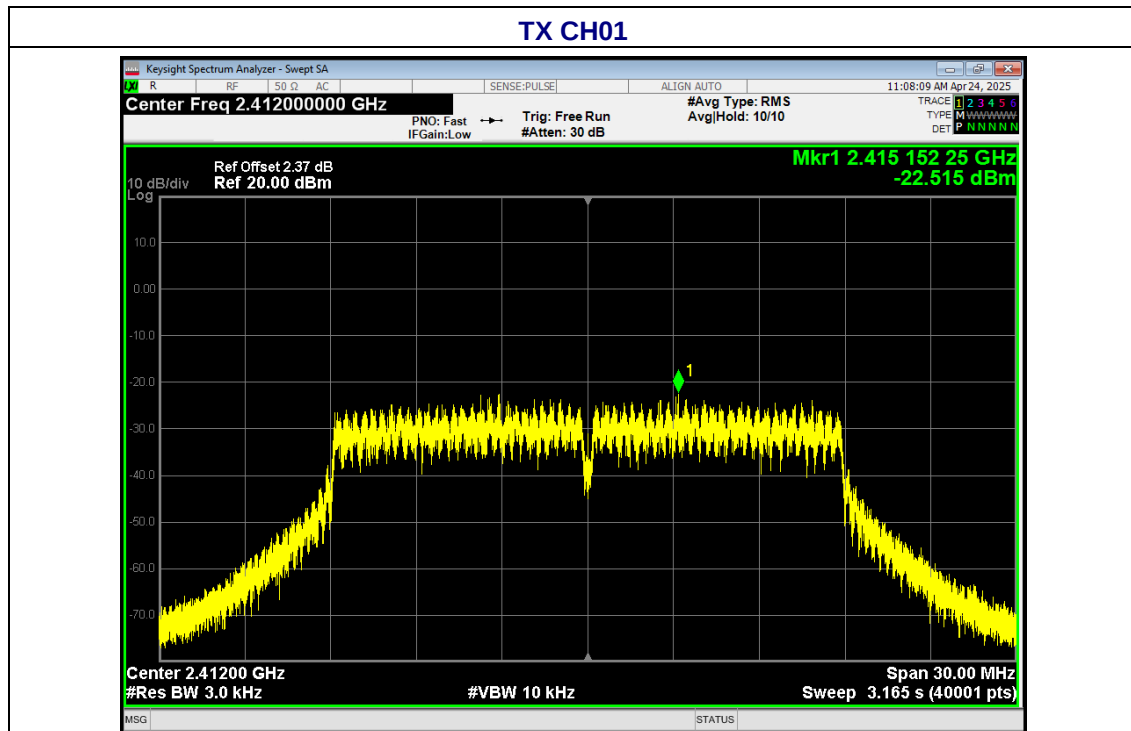




TX CH06

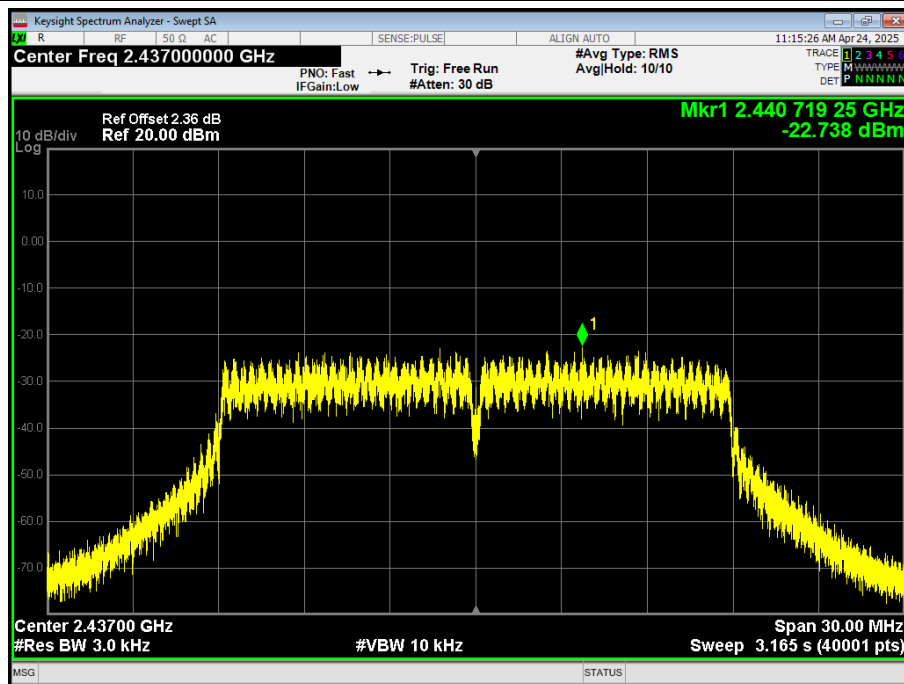


TX CH11

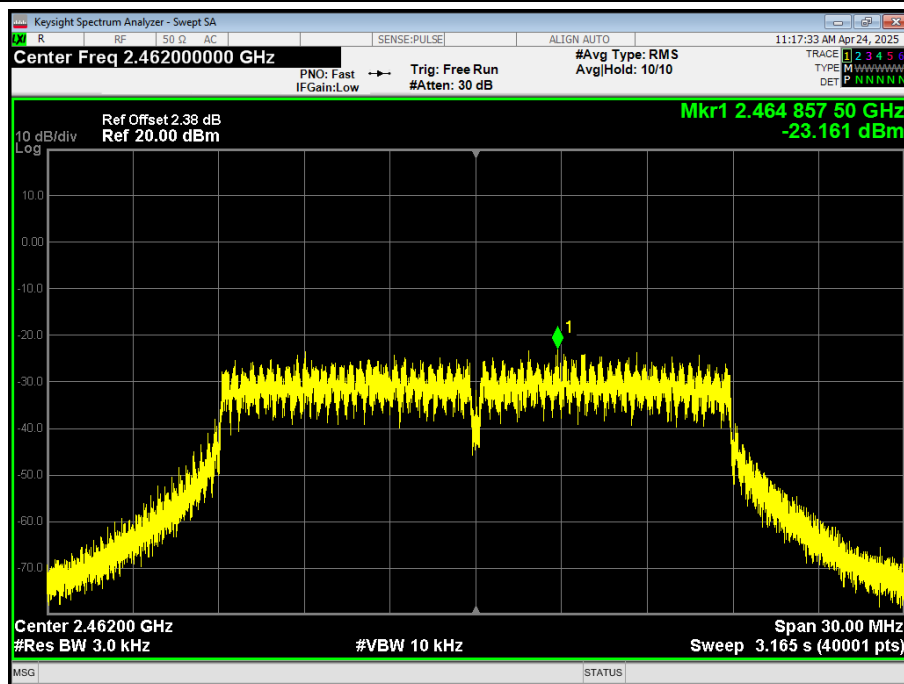




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-25.055	8	PASS
2437 MHz	-26.047	8	PASS
2452 MHz	-25.564	8	PASS

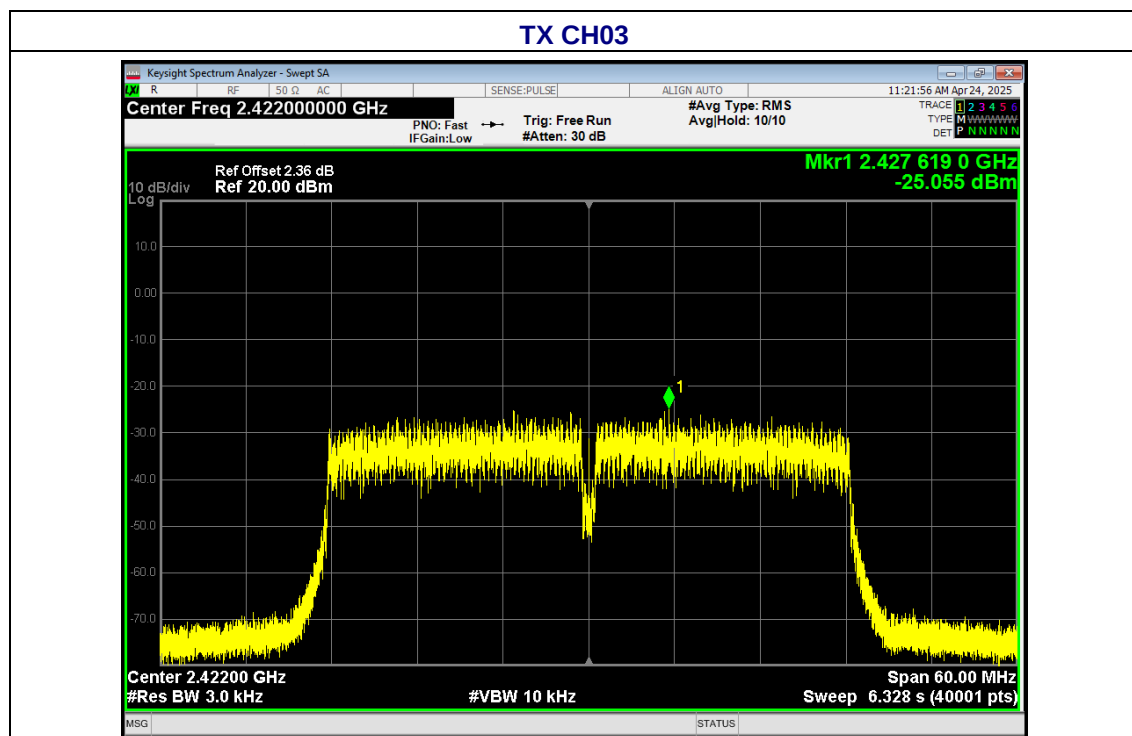




TX CH06

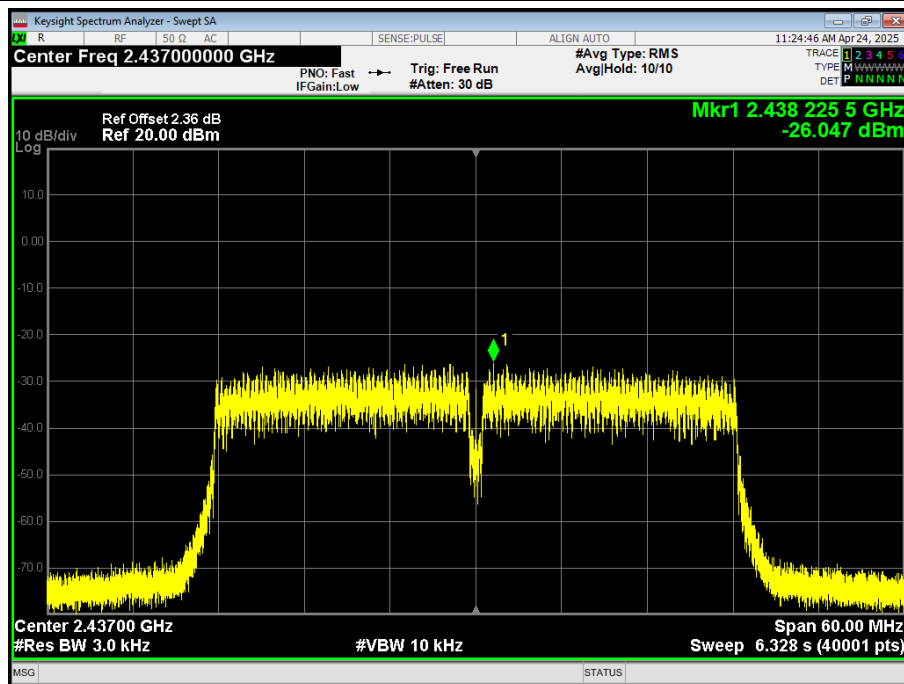

TX CH09

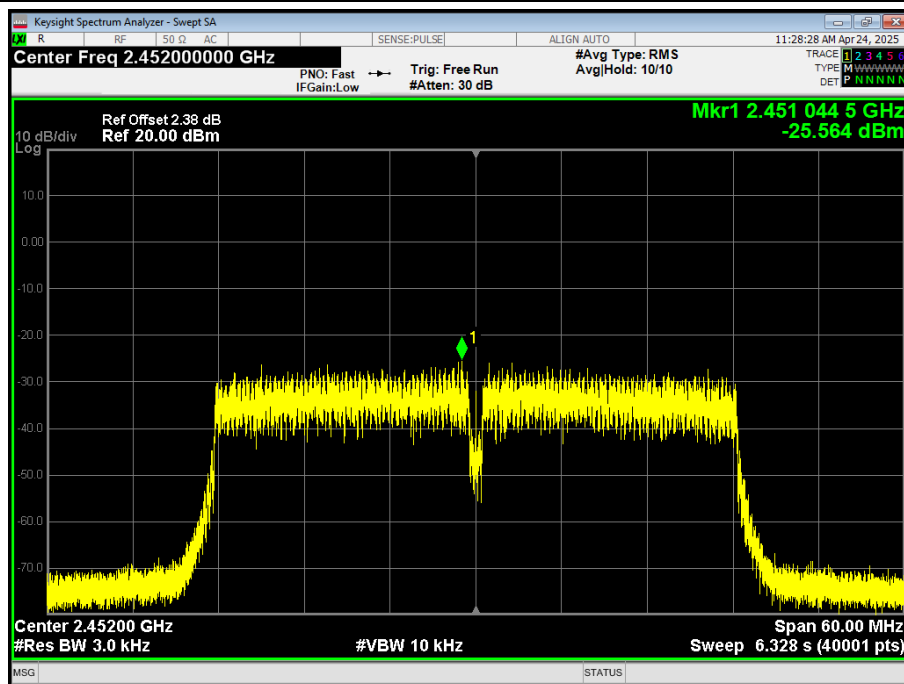



7. 6DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB Occupied Bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

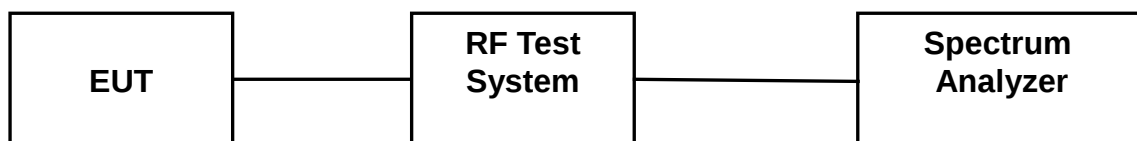

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Test CH	6dB Occupied Bandwidth (MHz)					Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Limit(KHz)	
Lowest	9.552	16.311	17.285	35.291	>500	Pass
Middle	9.514	16.293	17.187	35.148		
Highest	10.03	16.325	17.292	35.440		





Test plot as follows:



802.11b

802.11g



Lowest channel

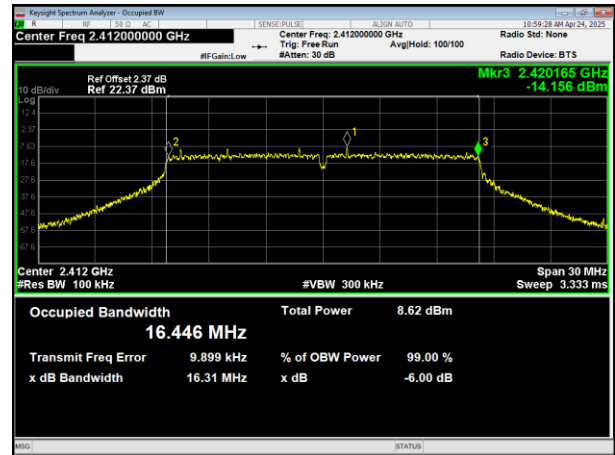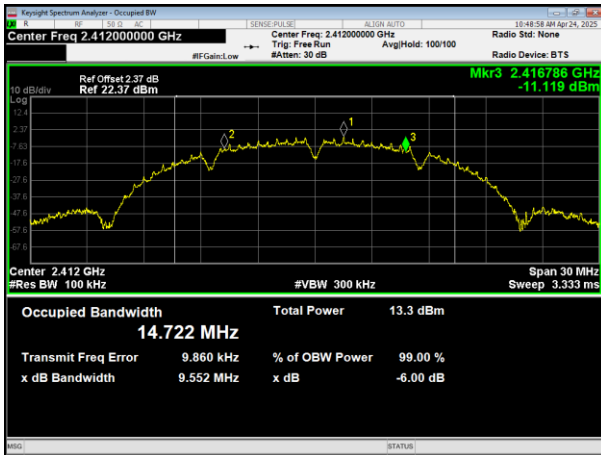

Middle channel

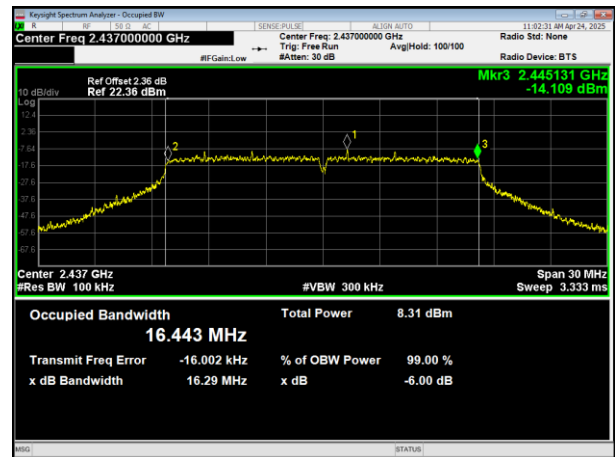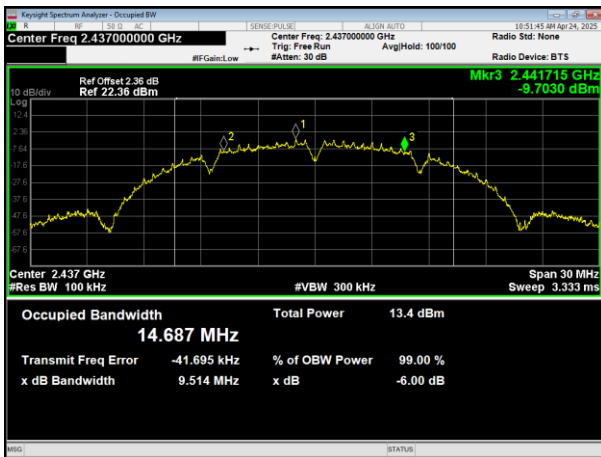

Highest channel

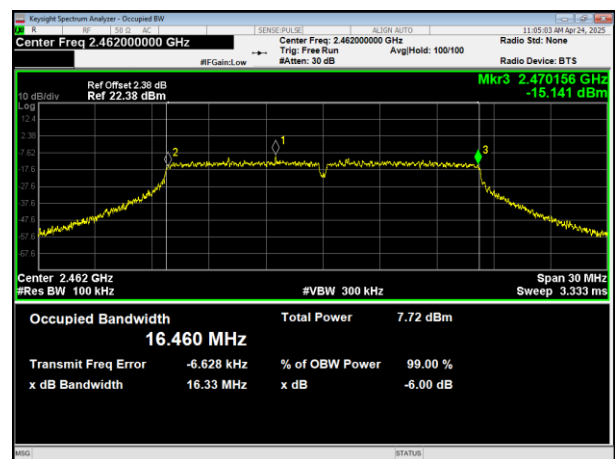
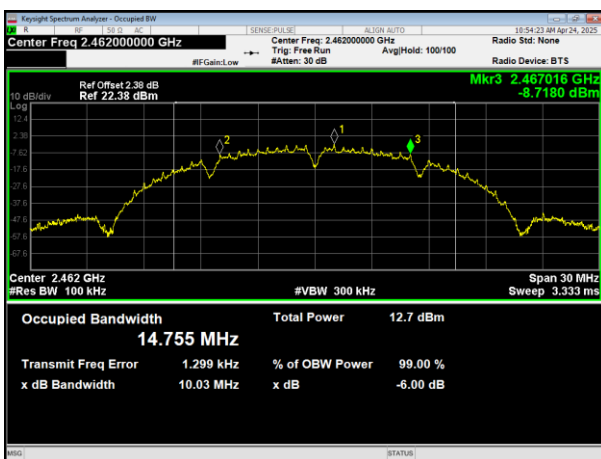






802.11n20

802.11n40



Lowest channel

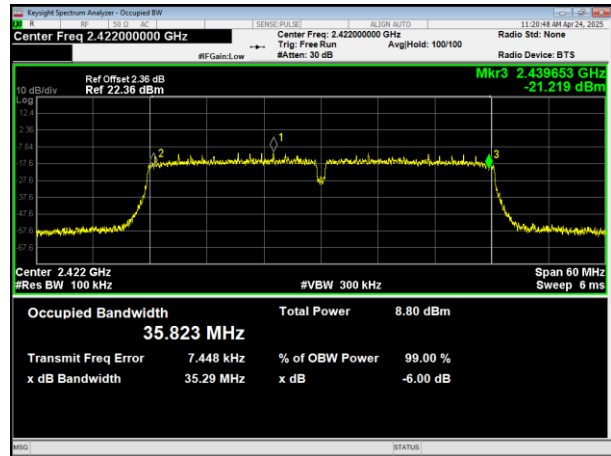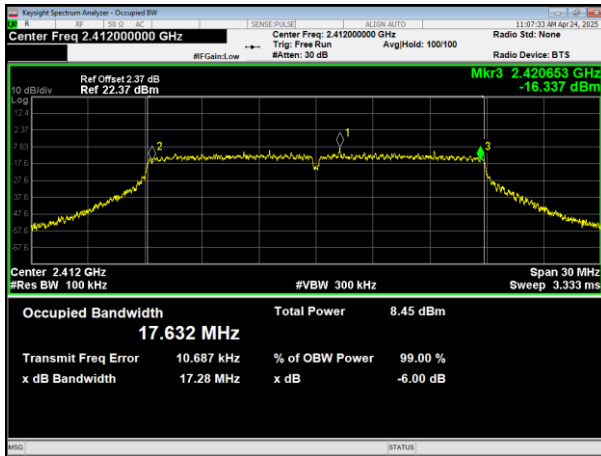

Middle channel

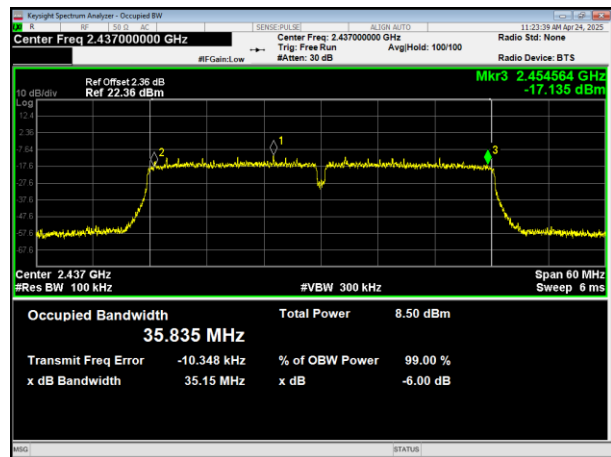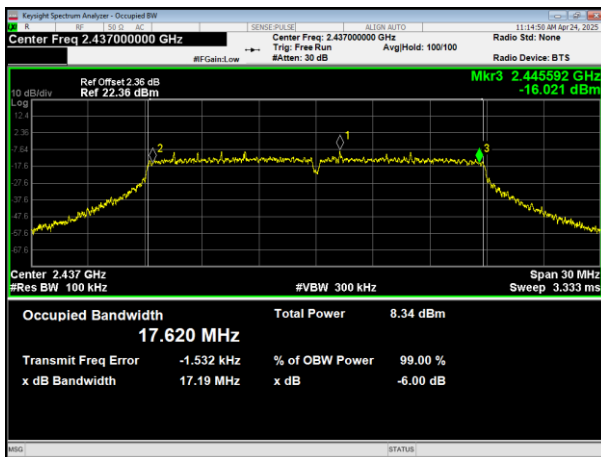

Highest channel

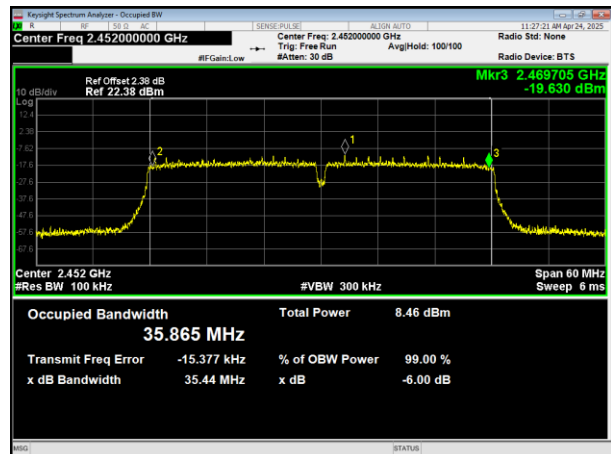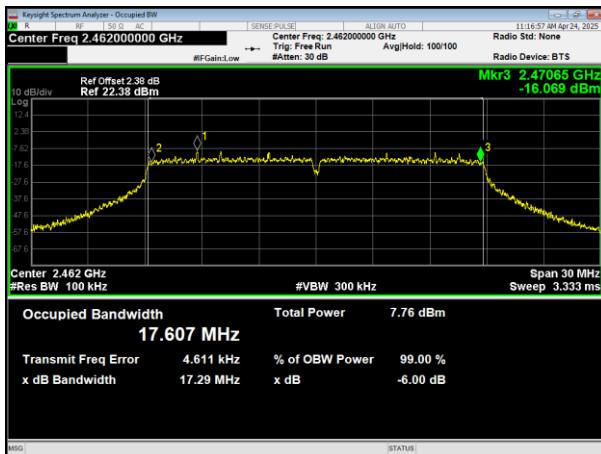

**8. PEAK OUTPUT POWER TEST**

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	8.352	7.548	7.202	7.388	30.00	Pass
Middle	8.398	7.274	7.134	7.227		
Highest	7.743	6.635	6.594	7.153		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

A. Reference level measurement, establish a reference level by using the following procedure:

- Set instrument center frequency to FHSS channel center frequency.
- Set the span to ≥ 1.5 times the 20dB bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

B.Emission level measurement, establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP






9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 9.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS


Test mode: 802.11b

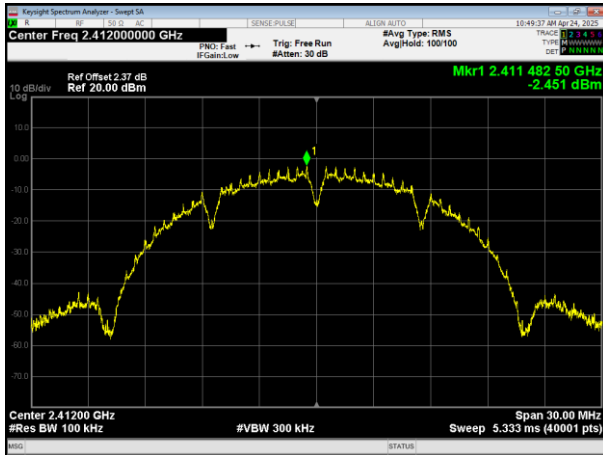


Lowest Ref

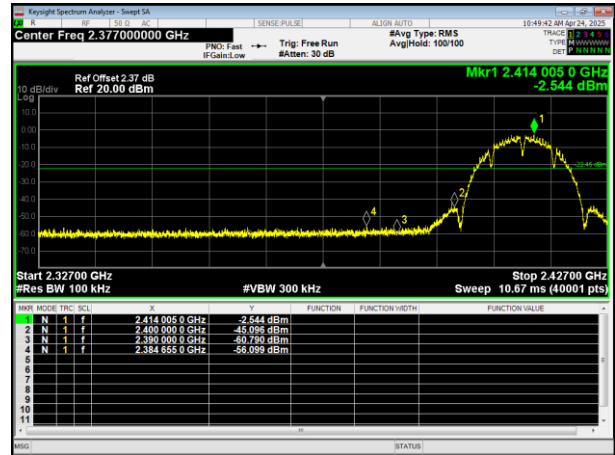

Lowest Emission

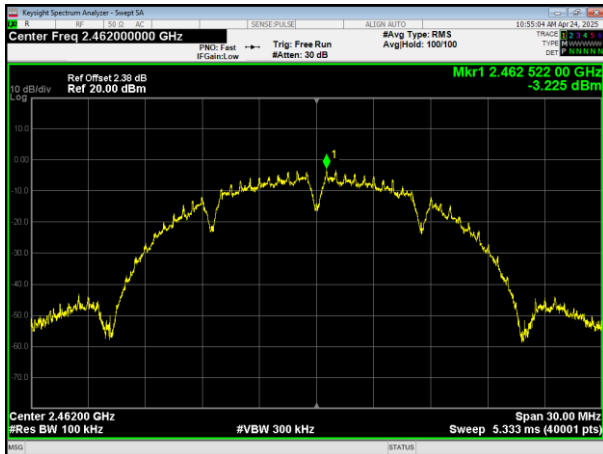


Highest Ref

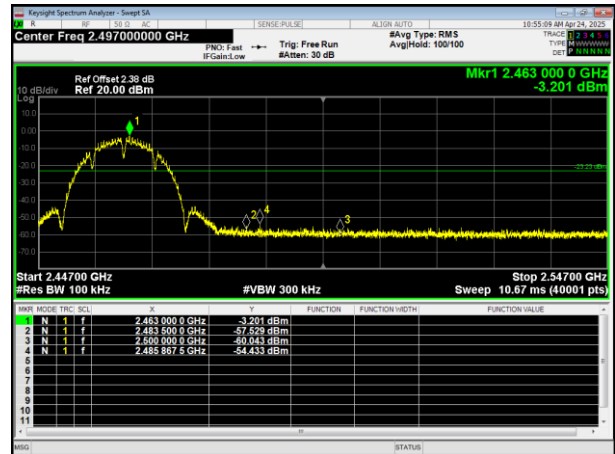


Highest Emission




Test mode: 802.11g

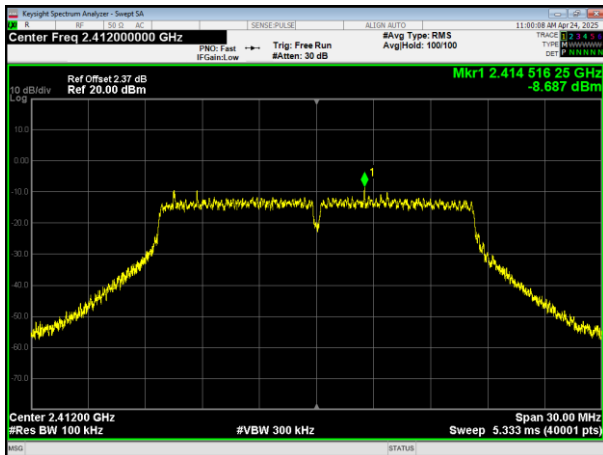


Lowest Ref

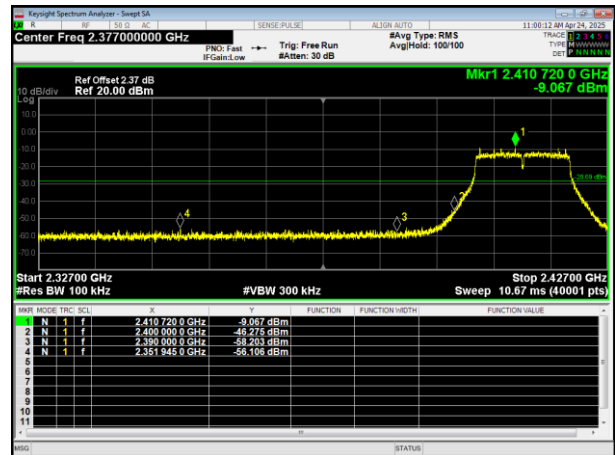

Lowest Emission

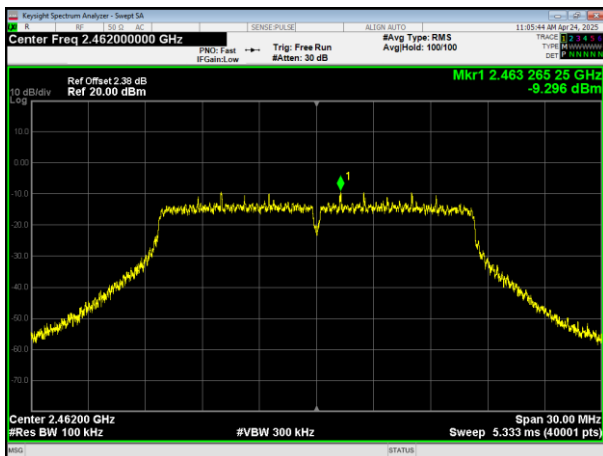


Highest Ref

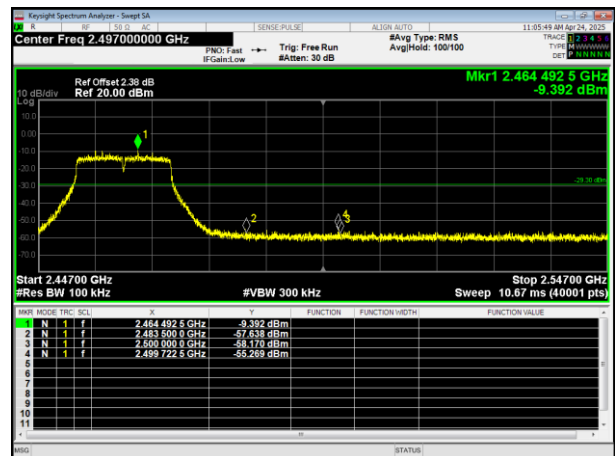


Highest Emission




Test mode: 802.11n20

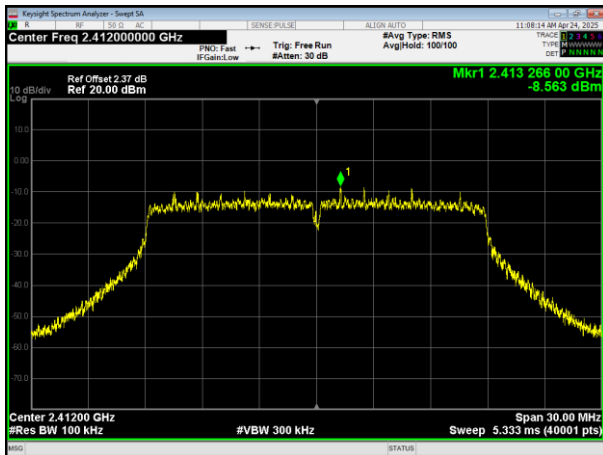


Lowest Ref

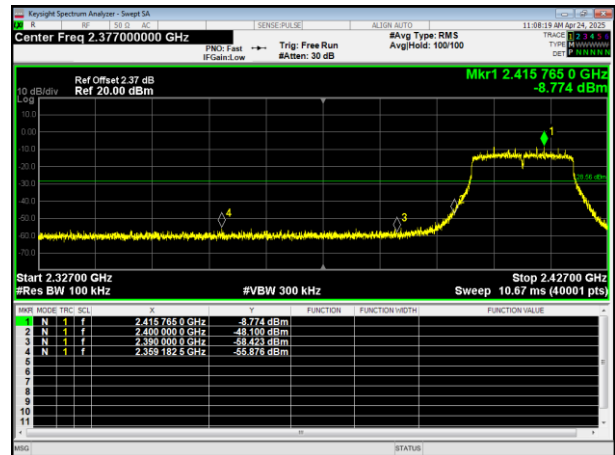

Lowest Emission

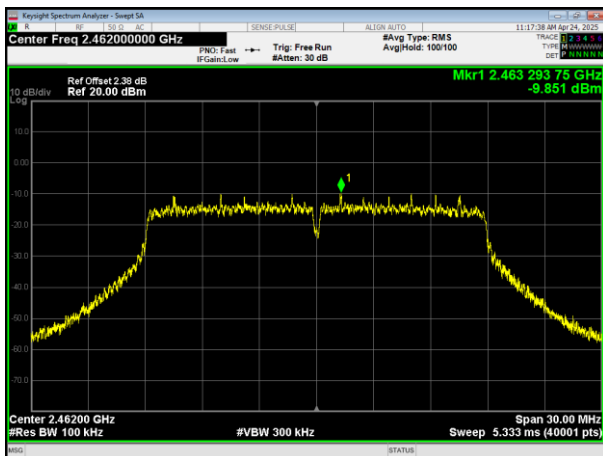


Highest Ref

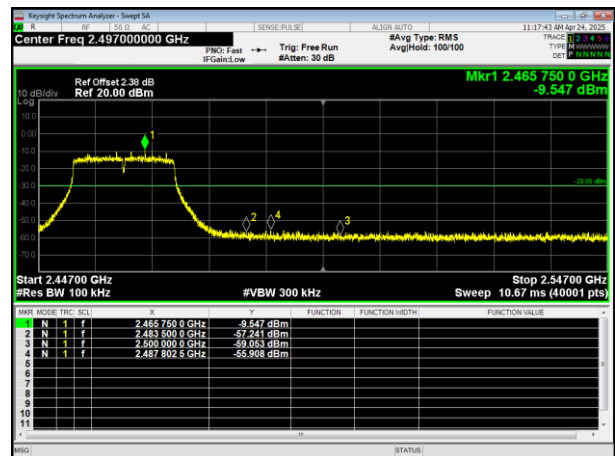


Highest Emission




Test mode: 802.11n40

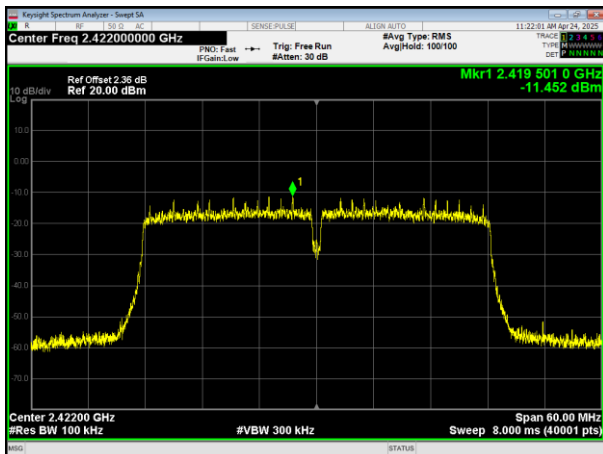


Lowest Ref

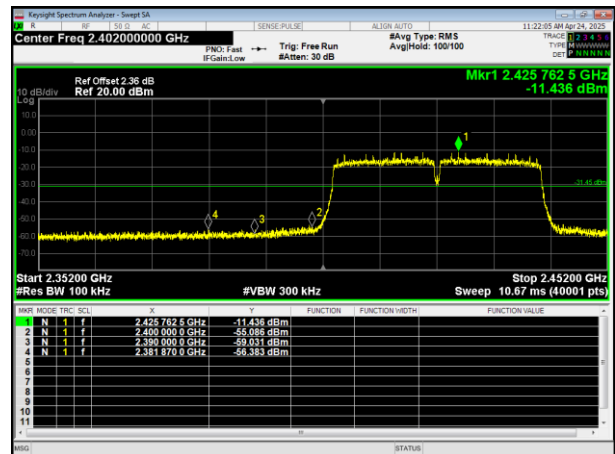

Lowest Emission

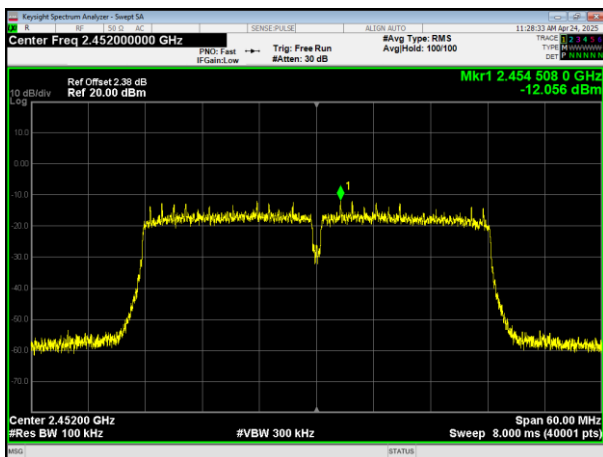

Highest Ref

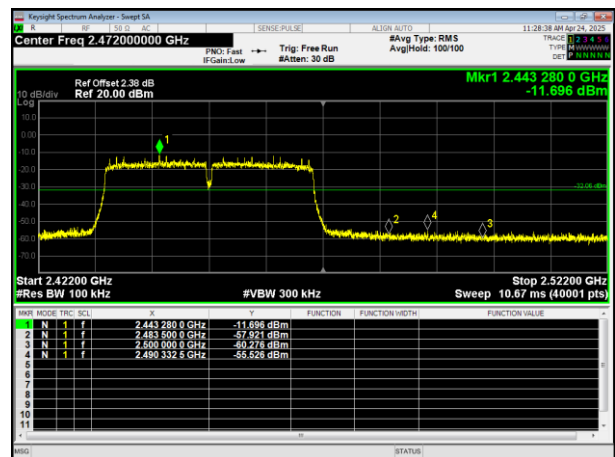



Highest Emission





Test plot as follows:

802.11b


Lowest channel

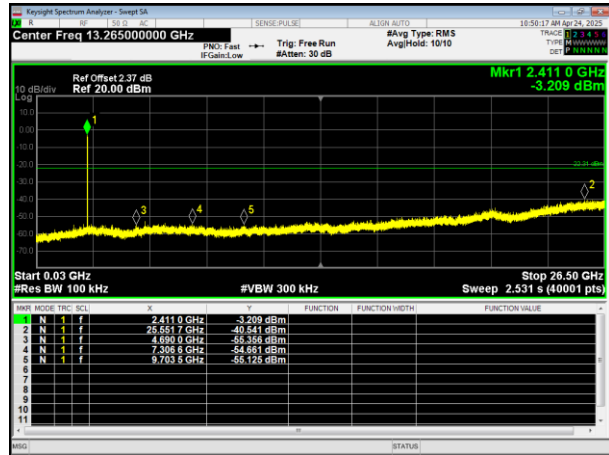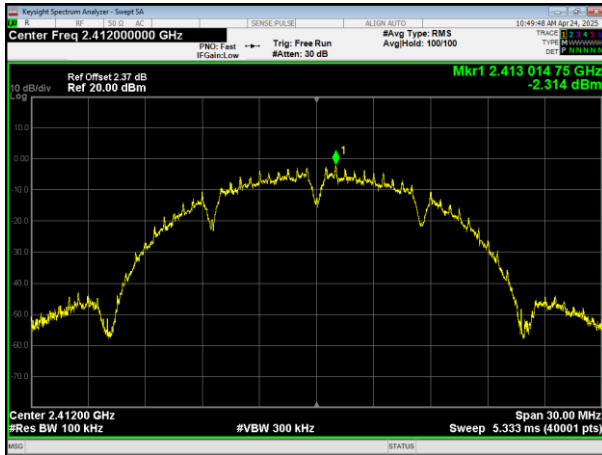

Middle channel

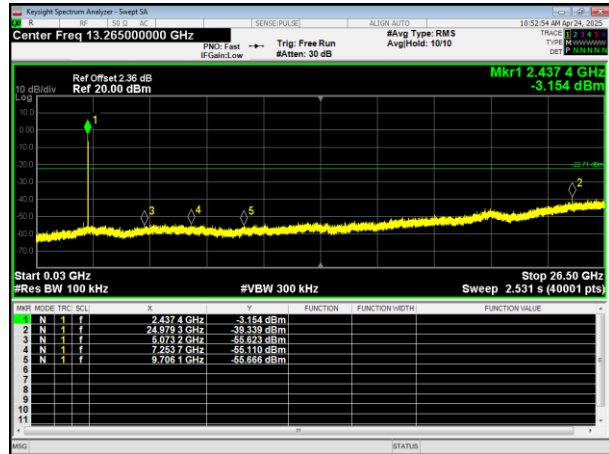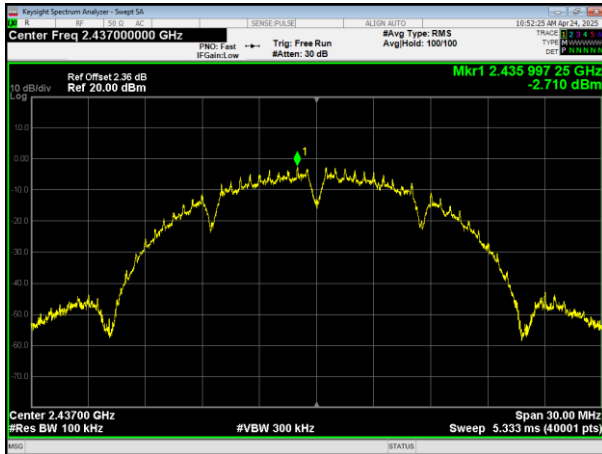



Highest channel

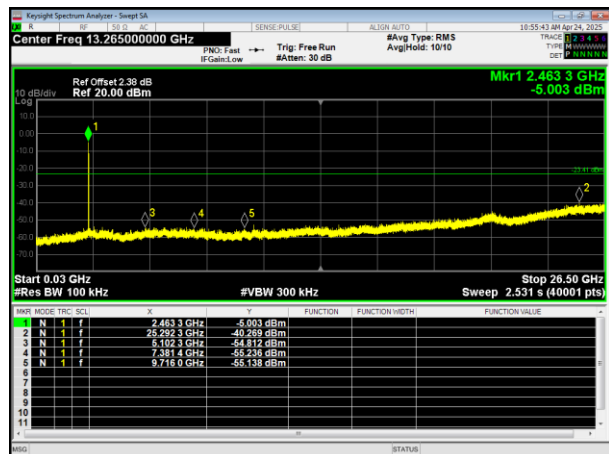





802.11g



Lowest channel

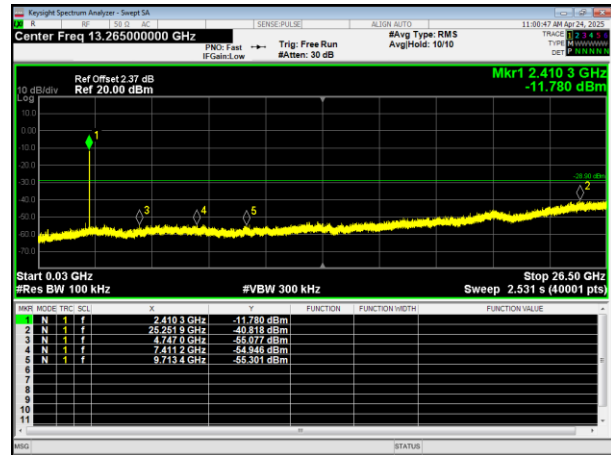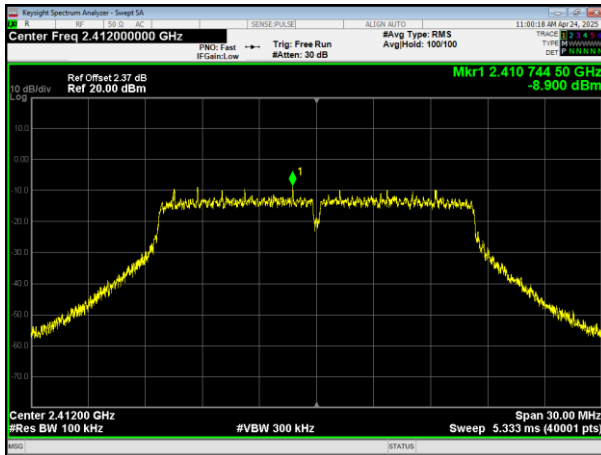

Middle channel

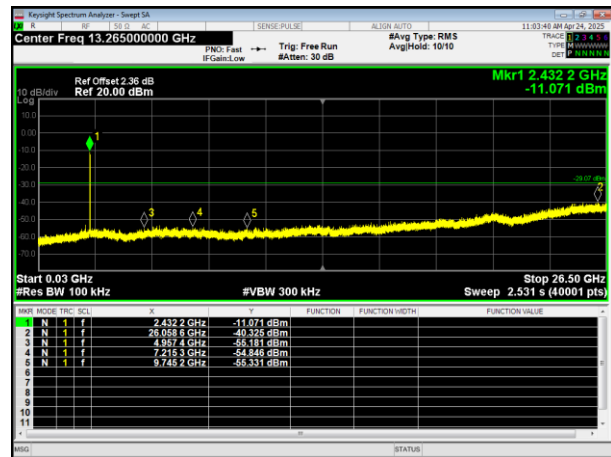
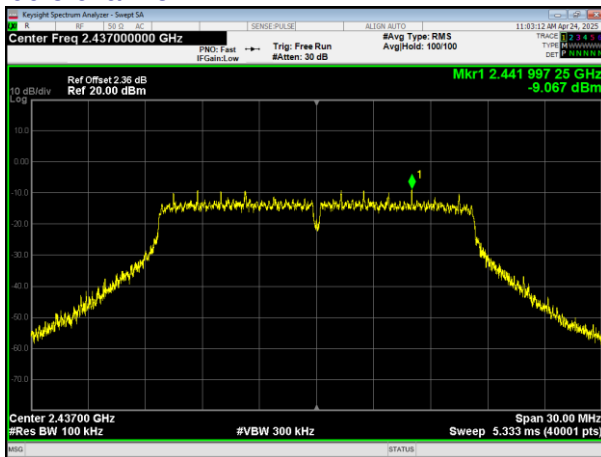


Highest channel

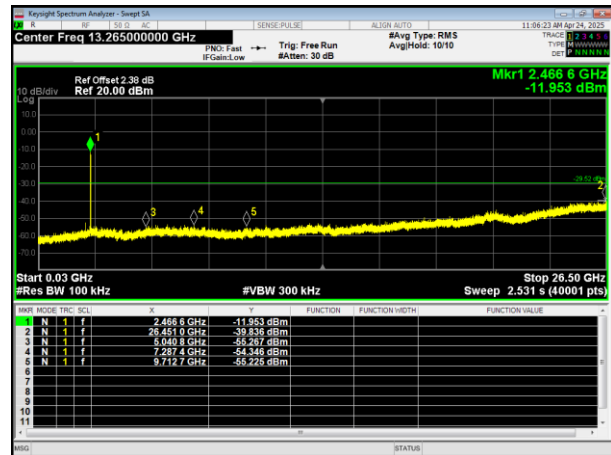
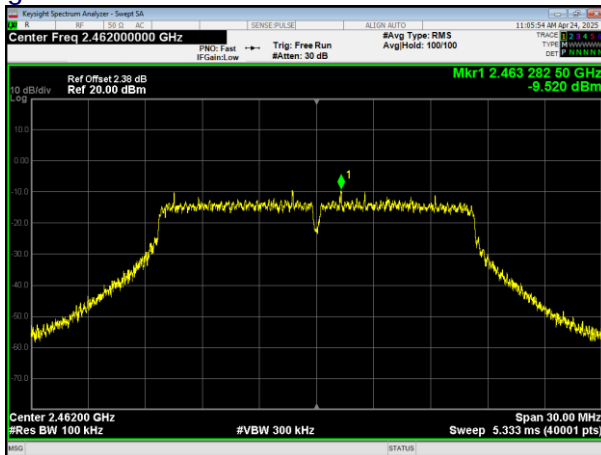






802.11n(HT20) Lowest channel

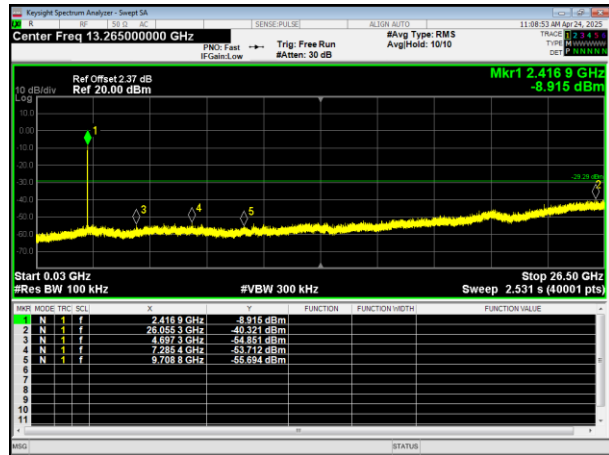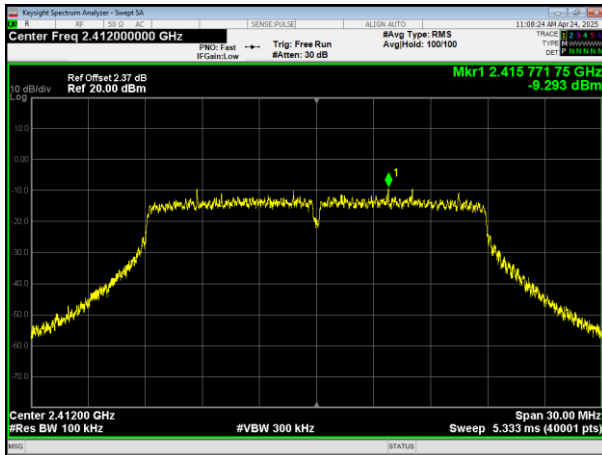

Middle channel

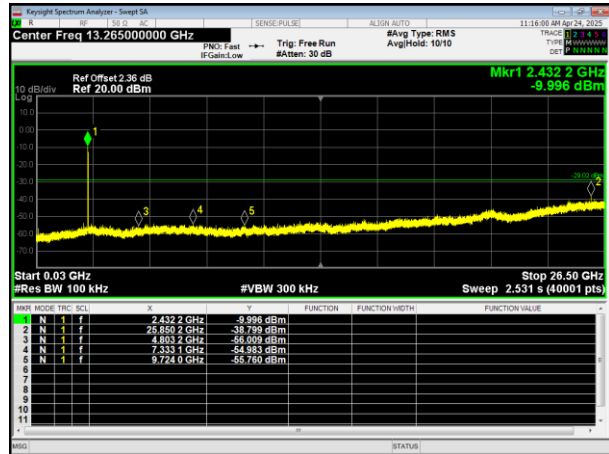
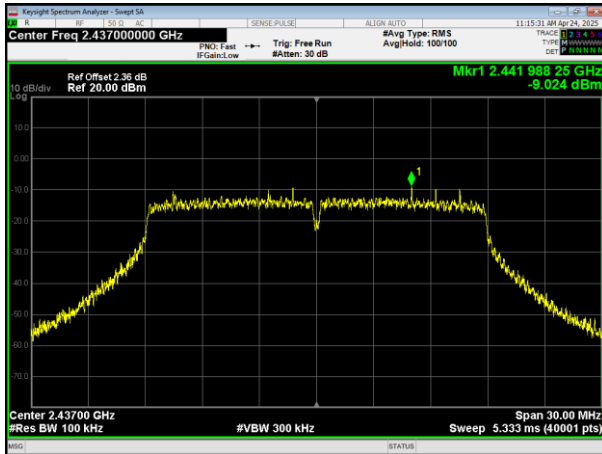


Highest channel

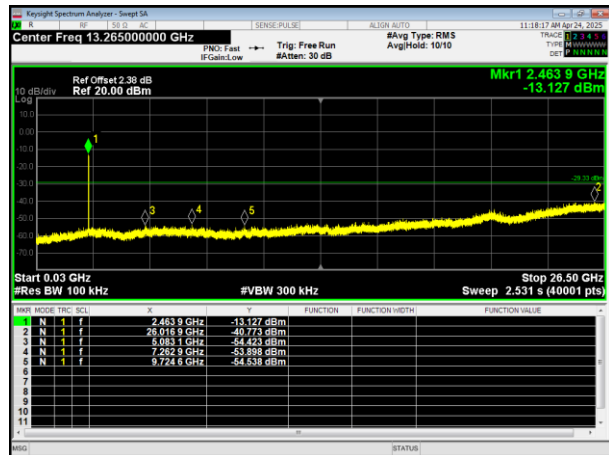
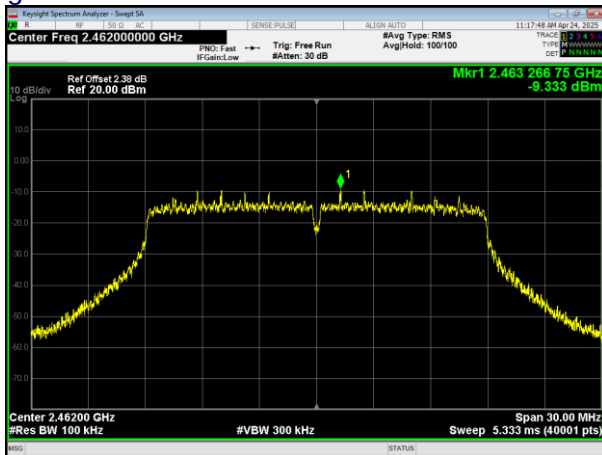






802.11n(HT40) Lowest channel

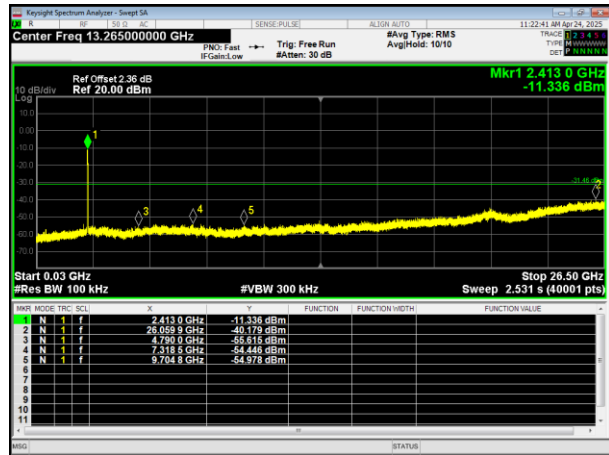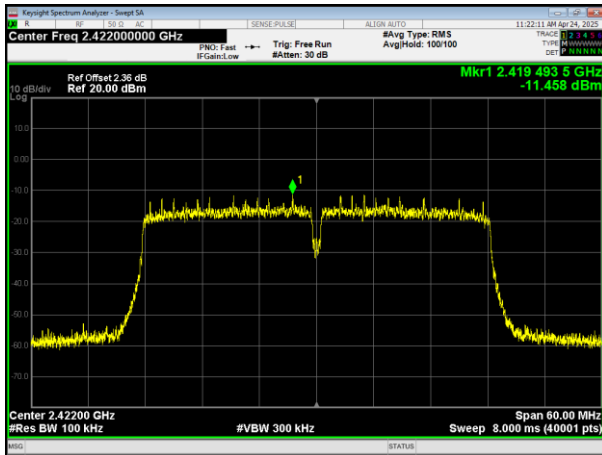

Middle channel

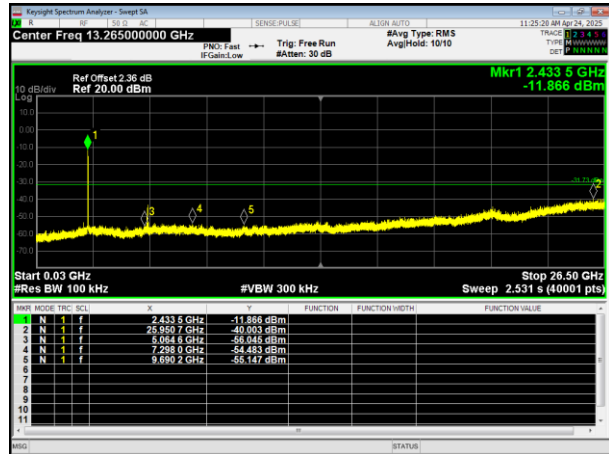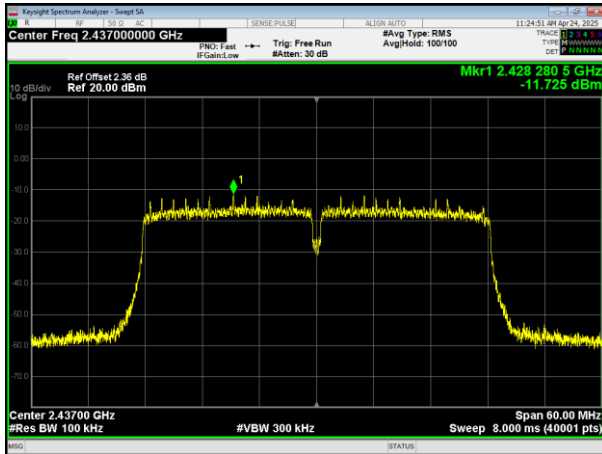

Highest channel

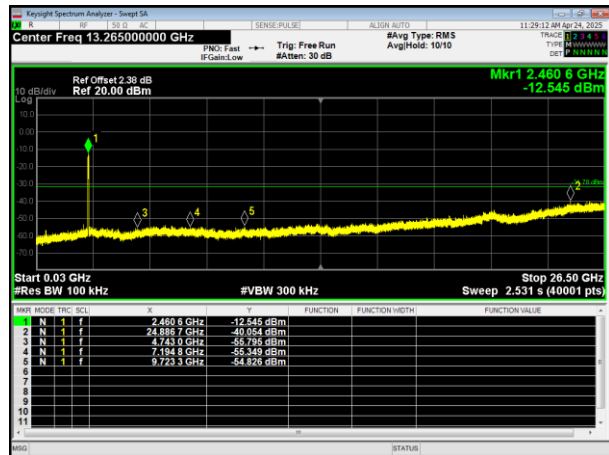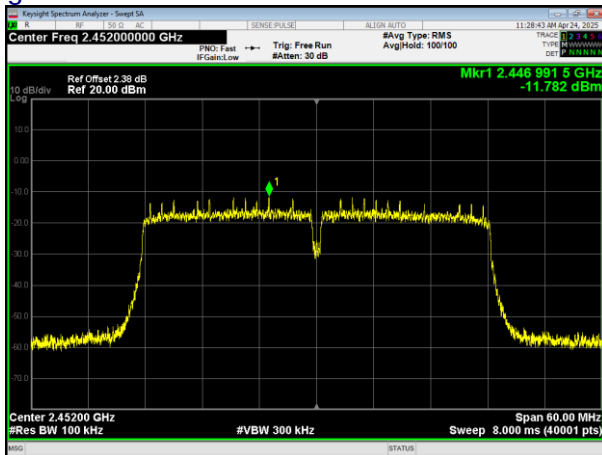



10. DUTY CYCLE

Test Method:	ANSI C63.10:2013
--------------	------------------

10.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

10.2 DEVIATION FROM STANDARD


No deviation.

10.3 TEST SETUP

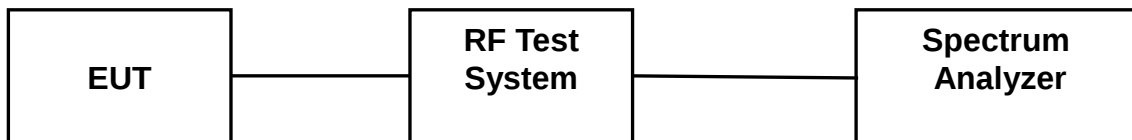




Mode	Frequency (MHz)	Duty Cycle (%)
802.11b	2412	98.89
802.11g	2412	94.50
802.11n20	2412	95.52
802.11n40	2422	83.93

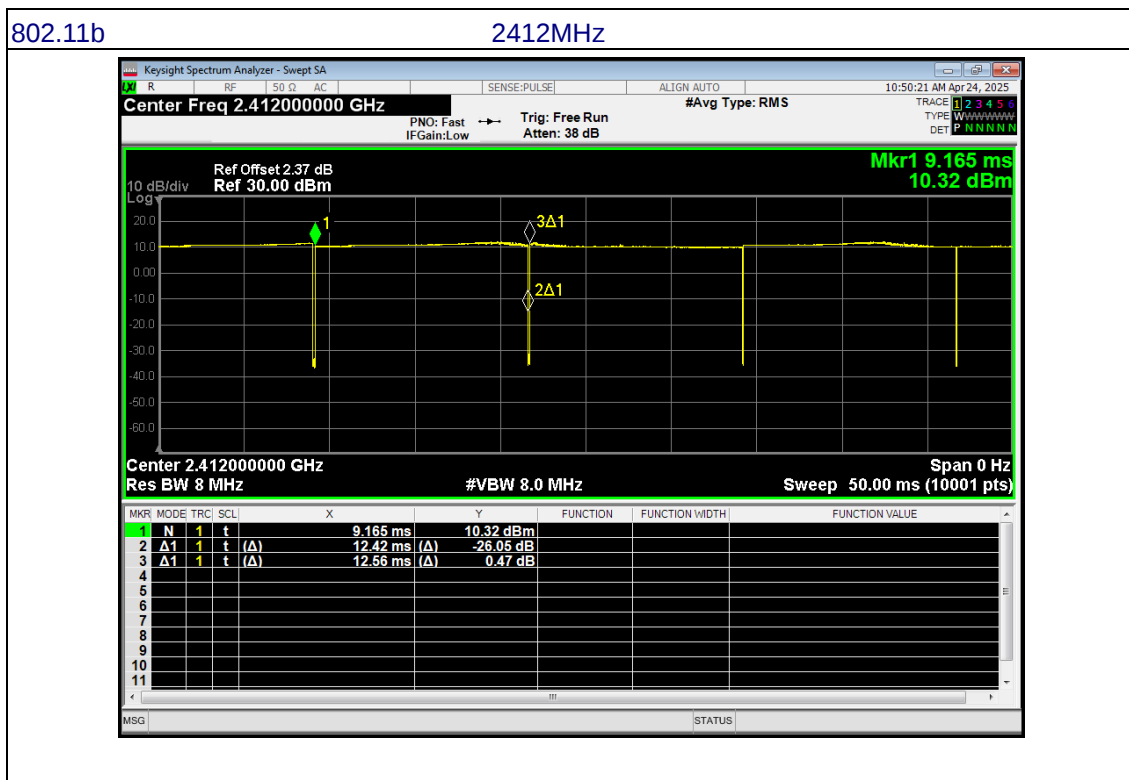



802.11n40

2422MHz

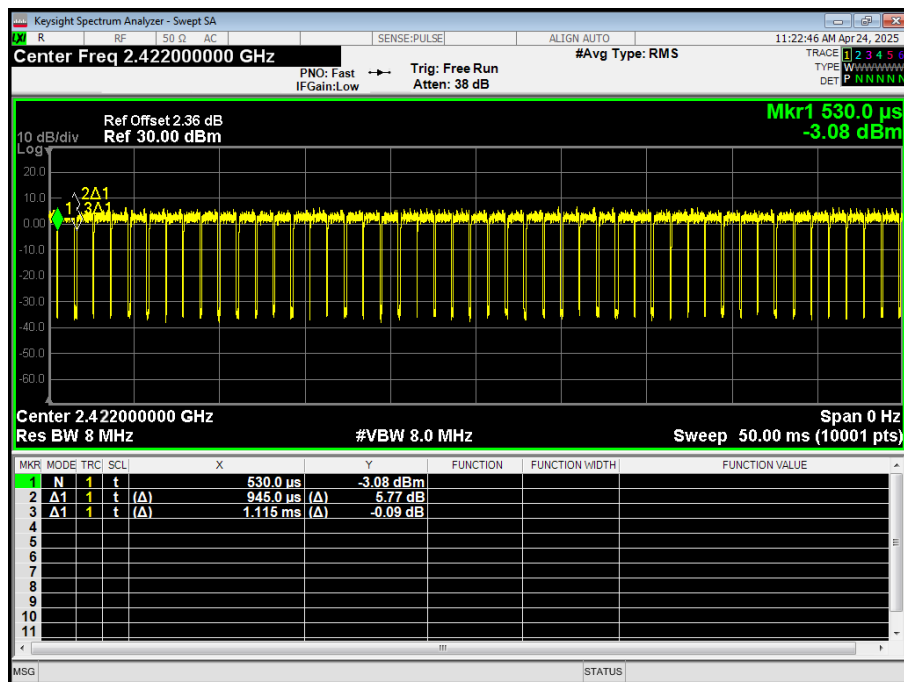

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle= Ton /Total*100%



11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antenna is 3dBi, reference to the appendix II for details	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****