

FCC Part 15C TEST REPORT

FCC ID: 2BPZS-AGDY2


Prepared for : Shenzhen Gaojie Glasses Technology Co., Ltd
Address : Room 724, Building F, Digital Silicon Valley, No. 89, Hengping Road, Yuanshan Street, Longgang District, Shenzhen City, Guangdong Province
Trade Name : N/A
E.U.T : Smart Bluetooth Glasses
Model Number : AGD-Y2

Prepared by : Keyway Testing Technology(Guangdong) Co., Ltd.
Address : Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Tel: 86-769-87182258

Fax: 86-769-87181058

Report No. : TR25050576-E-000
Date of Test: : 2025.5.23 ~ 2025.5.28
Date of Report : 2025.5.28

Applicant:	Shenzhen Gaojie Glasses Technology Co., Ltd	
Address:	Room 724, Building F, Digital Silicon Valley, No. 89, Hengping Road, Yuanshan Street, Longgang District, Shenzhen City, Guangdong Province	
Manufacturer:	Shenzhen Gaojie Glasses Technology Co., Ltd	
Address:	Room 724, Building F, Digital Silicon Valley, No. 89, Hengping Road, Yuanshan Street, Longgang District, Shenzhen City, Guangdong Province	
E.U.T:	Smart Bluetooth Glasses	
Model Number:	AGD-Y2	
Trade Name:	N/A	
Date of Receipt:	2025.5.22	
Date of Test:	2025.5.23 ~ 2025.5.28	
Test Specification :	FCC CFR47 Part 15 Section 15.247	
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.	
		Issue Date: 2025.5.28
Tested by:	Reviewed by:	Authorized by:
		
Jacob Ouyang /Engineer	Billy Zeng / Supervisor	Cherry Chen / Manager
<i>Abbreviations: OK/P=passed fail/F=failed N/A=not applicable E.U.T=equipment under tested</i>		
<i>This device described above has been tested by Keyway, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.</i>		
<i>This report shall not be reproduced except in full, without the written approval of Keyway, this document may be altered or revised by Keyway, personal only, and shall be noted in the revision of the document.</i>		



Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2025.5.28		Original

Contents

	Page
1 TEST SUMMARY	6
2 TEST FACILITY	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF E.U.T.	8
3.2 CHANNEL LIST	8
3.3 TEST SETUP CONFIGURATION	10
3.4 TEST MODE	10
4 EQUIPMENT DURING TEST	11
4.1 EQUIPMENTS LIST	11
4.2 MEASUREMENT UNCERTAINTY	13
4.3 DESCRIPTION OF SUPPORT UNITS	14
5 CONDUCTED EMISSION	15
5.1 E.U.T. OPERATION	15
5.2 EUT SETUP	15
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
5.4 MEASUREMENT PROCEDURE:	16
5.5 CONDUCTED EMISSION LIMIT	16
5.6 MEASUREMENT DESCRIPTION	16
5.7 CONDUCTED EMISSION TEST RESULT	16
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	17
6.2 TEST SETUP	17
6.3 SPECTRUM ANALYZER SETUP	19
6.4 TEST PROCEDURE	19
6.5 SUMMARY OF TEST RESULTS	21
7 MAXIMUM PEAK OUTPUT POWER TEST	28
7.1 TEST STANDARD AND LIMIT	28
7.2 TEST SETUP	28
7.3 TEST PROCEDURE	28

7.4 TEST DATA	28
8 20DB OCCUPY BANDWIDTH & 99% OCB TEST	32
8.1 TEST STANDARD	32
8.2 TEST SETUP	32
8.3 TEST PROCEDURE	32
8.4 TEST DATA	32
9 CARRIER FREQUENCY SEPARATION TEST	35
9.1 TEST STANDARD AND LIMIT	35
9.2 TEST SETUP	35
9.3 TEST PROCEDURE	35
9.4 TEST DATA	35
10 NUMBER OF HOPPING CHANNEL TEST	37
10.1 TEST STANDARD AND LIMIT	37
10.2 TEST SETUP	37
10.3 TEST PROCEDURE	37
10.4 TEST DATA	38
12 DWELL TIME TEST	40
12.1 TEST STANDARD AND LIMIT	40
12.2 TEST SETUP	40
12.3 TEST PROCEDURE	40
12.4 TEST DATA	41
13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	45
13.1 TEST STANDARD AND LIMIT	45
13.2 TEST SETUP	45
13.3 TEST PROCEDURE	45
13.4 TEST DATA	46
14 ANTENNA REQUIREMENT	51
14.1 TEST STANDARD AND REQUIREMENT	51
14.2 ANTENNA CONNECTED CONSTRUCTION	51

1 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions and Restricted Bandedge	15.205(a) 15.209 15.247(d)	PASS
Conducted Unwanted emissions and Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	N/A
20dB Bandwidth & 99% OCB	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

2 TEST FACILITY

Lab Qualifications	:	Certificated by Nemko Registration No.: ELA 814 Date of registration: September 25, 2024 Certificated by CMA China Registration No.: 202319016955 Date of registration: July 23, 2024 Certificated by A2LA Certificate Number: 7404.01 Valid To: March 31, 2027
Name of Firm	:	Keyway Testing Technology(Guangdong) Co., Ltd.
Site Location	:	Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Smart Bluetooth Glasses
Model Name	:	AGD-Y2
Sample ID	:	20200523
Sample(s) Status:	:	Engineer sample
Additional model	:	N/A
Model difference	:	N/A
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	79 channels
Antenna Type	:	PCB Antenna
Antenna Gain	:	0dBi
Type of Modulation	:	GFSK, $\pi/4$ DQPSK, 8DPSK
Power supply	:	Battery 3.7V
Hardware Version	:	V1.0
Software Version	:	V1.0
Adapter Information	:	N/A.
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.


Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-


Channel	Frequency(MHz)
0	2402
39	2441
78	2480

3.3 Test Setup Configuration


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	bt_tool_v1.1.2
Power level setup	0dBm

4 Equipment During Test

4.1 Equipments List

Equipment	Manufacturer	Model No.	Serial No.	Date of Cal.	Valid until
For conducted emission at the mains terminals and signal port test 944 Shielded Room					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-089	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr 14, 25	Apr 13, 26
ArtificialMains Network	Rohde&Schwarz	ENV216	101314	Mar 05, 25	Mar 04, 26
RF Cable	FUJIKURA	3D-2W	KWET-030	Apr 14, 25	Apr 13, 26
Socket	Gongniu	KWET-003A1	KWET-003A1	Feb 21, 25	Feb 20, 26
For radiated emission test (30MHz-1GHz)966 Chamber 2					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-087	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101178	Apr 14, 25	Apr 13, 26
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00829	May 10, 25	May 09, 26
3m Semi-anechoic Chamber	YIHENDIANZI	966	YH-KW-966-02	Mar 07, 26	Mar 06, 29
RF Cable	EMC Instruments	EMCCFD400-NM-NM-2000	240307	Apr 14, 25	Apr 13, 26
RF Cable	EMC Instruments	EMCCFD400-NM-NM-9000	240309	Apr 14, 25	Apr 13, 26
For radiated emission test (Above 1GHz)966 Chamber 2					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-087	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101178	Apr 14, 25	Apr 13, 26
Spectrum Analyzer	Agilent	N9020A	MY56070279	Apr 14, 25	Apr 13, 26
Spectrum analyzer	R&S	FSV 40	101059	Nov 06, 25	Nov 05, 26
Horn Antenna	DAZE	ZN30701	11003	Jul 27, 25	Jul 26, 26
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1368	May 16, 25	May 15, 26

Signal Amplifier	WCS Technology	DLNA-18000-40000	KWET-138	Apr 19, 25	Apr 18, 26
3m anechoic Chamber	YIHENDIANZI	966	YH-KW-966-02	Mar 07, 25	Mar 06, 29
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-1000	240301	Apr 14, 25	Apr 13, 26
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-2000	240302	Apr 14, 25	Apr 13, 26
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-9000	240303	Apr 14, 25	Apr 13, 26
RF Cable(18G-40GHz)	WCS Technology	CA360P-29M29M-1M	W2415130001	Apr 14, 25	Apr 13, 26
RF Cable(18G-40GHz)	WCS Technology	CA360P-29M29M-9M	W2415110001	Apr 14, 25	Apr 13, 26
For conducted emission test (RF)					
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Apr 14, 25	Apr 13, 26
RF SWITCH BOX	CSKJ	SMU-1003	KWET-047	Apr 14, 25	Apr 13, 26
Limiter	R&S	ESH3-Z2	102696	Apr 14, 25	Apr 13, 26
Power Meter	Agilent	E4418B	MY41294414	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1m-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1m-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1.5FT-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1.5FT-SMSM+	1623	May 15, 25	May 14, 26
Coupler	Keysight	ZHDC-10-63-S+	SF331801603	May 15, 25	May 14, 26
Test Software	CSKJ	CS-305X	KWET-149	/	/

4.2 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Duty Cycle	$\pm 2\%$
Spurious emissions, conducted	$\pm 0.21\text{dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Radiated Emission(25GHz~40GHz)	$\pm 3.38\text{dB}$

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Smart Bluetooth Glasses	N/A	AGD-Y2	N/A	EUT
E-2	Notebook	lenovo	B40-80	MP07F6JD	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method:	: ANSI C63.10:2013
Test Result:	: PASS
Frequency Range:	: 150kHz to 30MHz
Class/Severity:	: Class B
Detector:	: Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :


Temperature:	: 23.2°C
Humidity:	: 51 % RH
Atmospheric Pressure:	: 101.12 kPa
Test Voltage	: AC 120V/60Hz

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

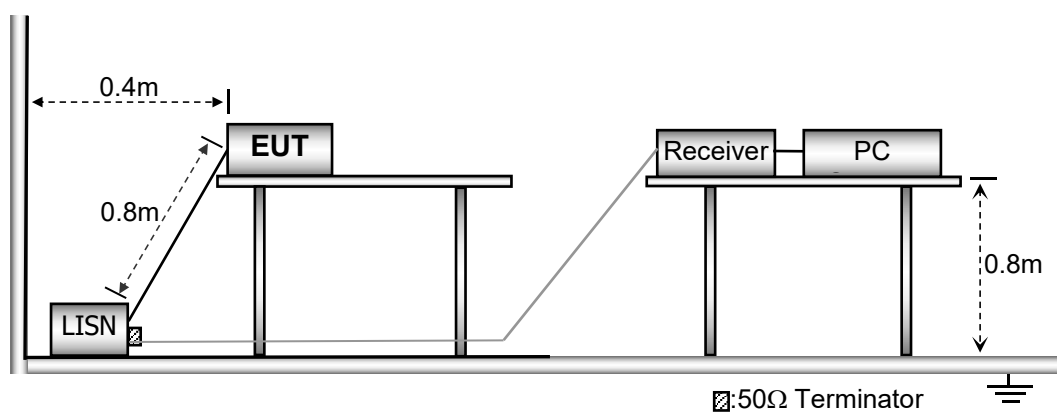

5.3 Test SET-UP (Block Diagram of Configuration)

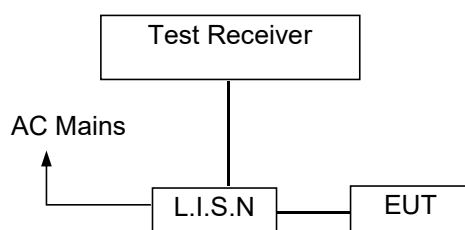

5.4 Measurement Procedure:

1. The EUT was placed on a table, which is 12mm above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

N/A

Noted: Do not intentionally/USE emit radiation during charging.

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
 Humidity : 55.5% RH
 Atmospheric Pressure : 101.3kPa
 Test Voltage : AC 120V60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

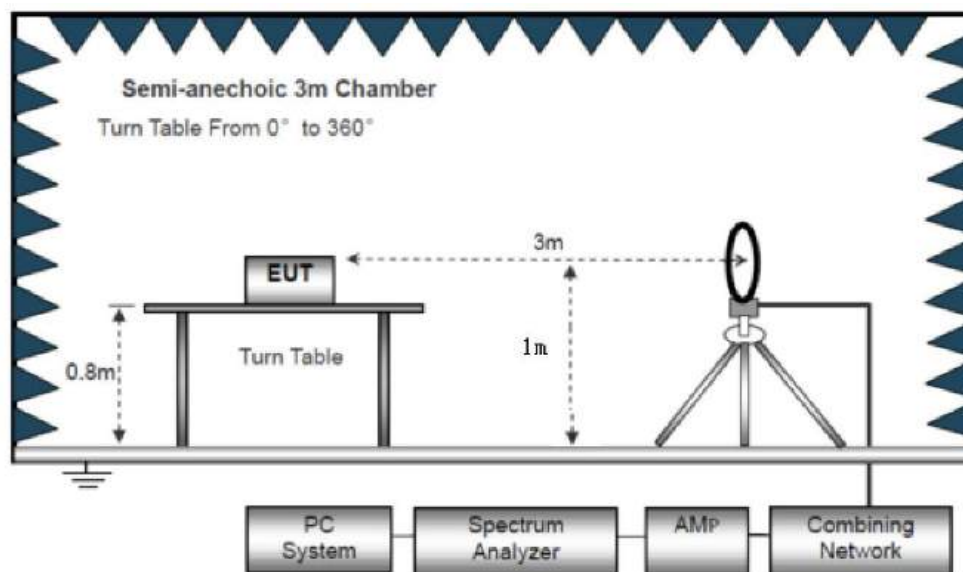

The test setup for emission measurement from 30 MHz to 1 GHz.

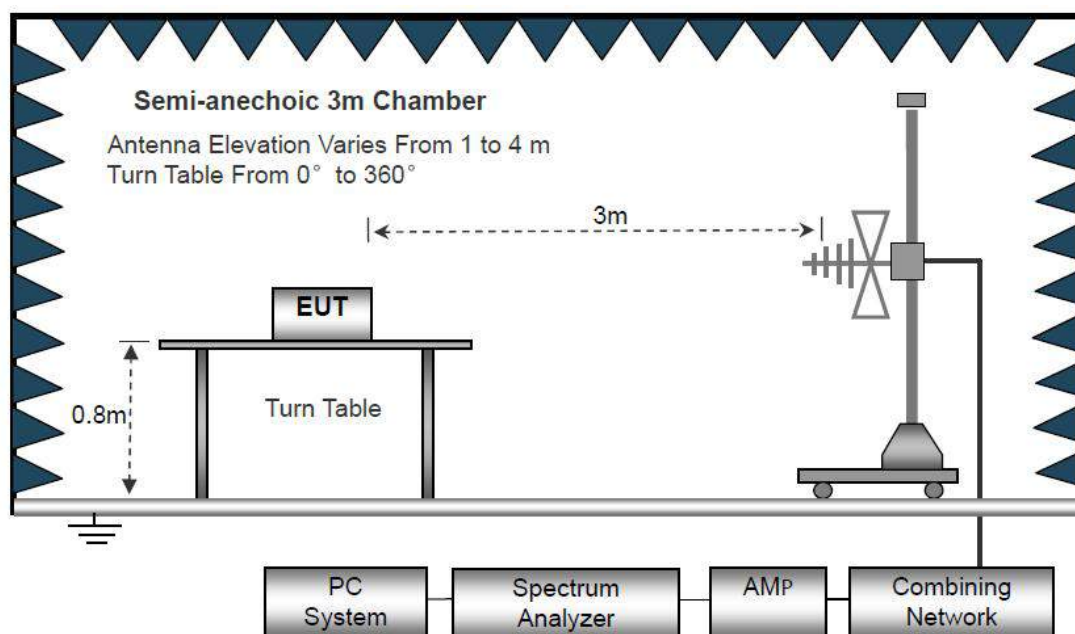

The test setup for emission measurement above 1 GHz.

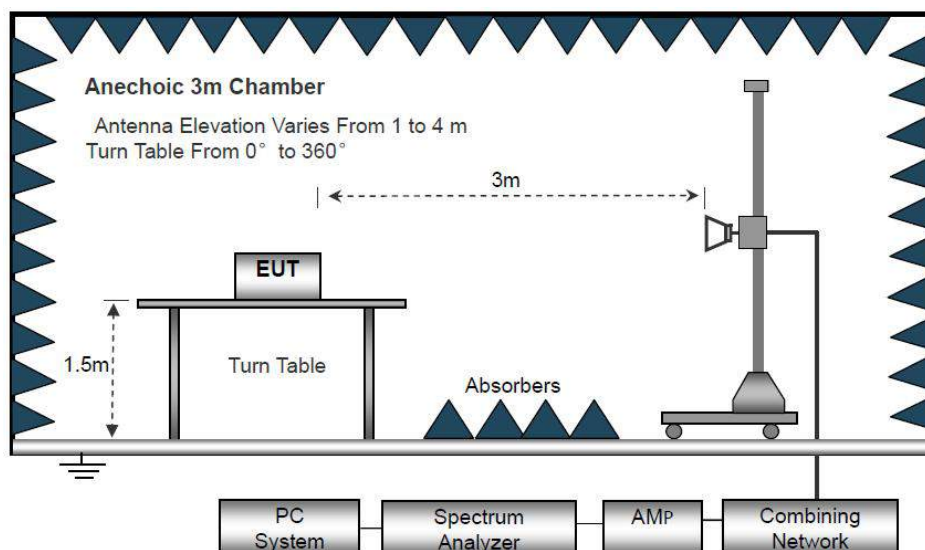

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 12mm above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 12mm above ground plane.

3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq.	Ant.Pol.	Emission Level	Limit 3m	Over
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);


Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel (2402MHz) Worst case GFSK for record:

Model:	AGD-Y2
--------	--------

Test plot for Horizontal

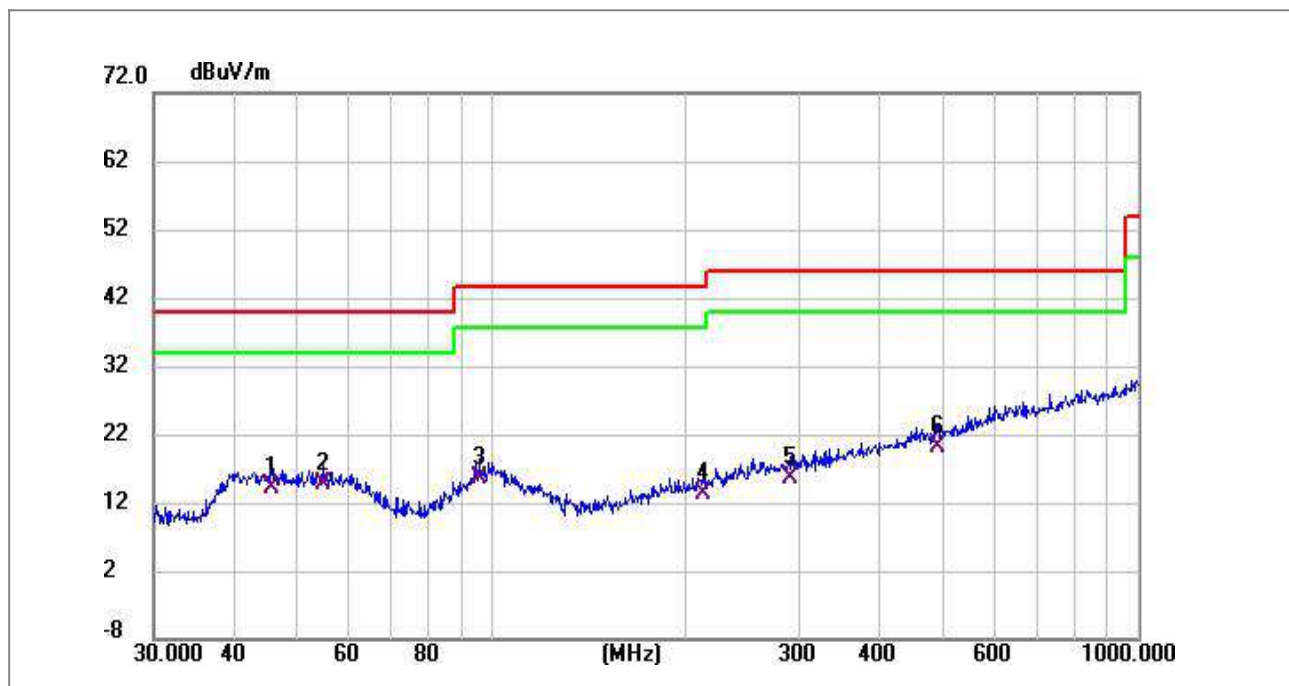

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.695	1.79	12.45	14.24	40.00	-25.76	QP	200	249	P	
2 *	55.027	2.63	12.06	14.69	40.00	-25.31	QP	200	1	P	
3	95.762	3.07	12.41	15.48	43.50	-28.02	QP	200	1	P	
4	212.269	1.68	11.47	13.15	43.50	-30.35	QP	200	347	P	
5	291.036	1.73	13.97	15.70	46.00	-30.30	QP	200	358	P	
6	490.745	1.90	18.37	20.27	46.00	-25.73	QP	200	49	P	

Remark:Emission Level=Reading+ Factor

Model: AGD-Y2

Test plot for Vertical



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.276	2.84	12.70	15.54	40.00	-24.46	QP	100	2	P	
2	47.659	2.88	12.37	15.25	40.00	-24.75	QP	100	17	P	
3 *	56.001	4.71	12.01	16.72	40.00	-23.28	QP	100	137	P	
4	86.200	1.85	9.91	11.76	40.00	-28.24	QP	100	323	P	
5	100.581	1.44	13.69	15.13	43.50	-28.37	QP	100	2	P	
6	396.242	2.46	16.60	19.06	46.00	-26.94	QP	100	189	P	

Remark:Emission Level=Reading+Factor

Test Frequency 1GHz-25GHz

Bluetooth (GFSK, $\pi/4$ DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	48.36	34.12	5.03	32.39	51.66	74	-22.34	Pk
V	4804.00	40.45	34.12	5.03	32.39	43.75	54	-10.25	AV
V	7206.00	42.01	32.54	6.29	35.86	51.62	74	-22.38	Pk
V	7206.00	31.91	32.54	6.29	35.86	41.52	54	-12.48	AV
V	9608.00	41.34	32.98	7.55	38.4	54.31	74	-19.69	Pk
V	9608.00	30.72	32.98	7.55	38.4	43.69	54	-10.31	AV
V	12010.00	37.49	32.09	8.93	39	53.33	74	-20.67	Pk
V	12010.00	29.39	32.09	8.93	39	45.23	54	-8.77	AV
H	4804.00	50.20	34.12	5.03	32.39	53.50	74	-20.50	Pk
H	4804.00	40.38	34.12	5.03	32.39	43.68	54	-10.32	AV
H	7206.00	43.00	32.54	6.29	35.86	52.61	74	-21.39	Pk
H	7206.00	33.73	32.54	6.29	35.86	43.34	54	-10.66	AV
H	9608.00	40.87	32.98	7.55	38.4	53.84	74	-20.16	Pk
H	9608.00	30.59	32.98	7.55	38.4	43.56	54	-10.44	AV
H	12010.00	39.75	32.09	8.93	39	55.59	74	-18.41	Pk
H	12010.00	30.85	32.09	8.93	39	46.69	54	-7.31	AV



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	49.75	34.07	5.09	32.59	53.36	74	-20.64	Pk
V	4882	40.16	34.07	5.09	32.59	43.77	54	-10.23	AV
V	7323	41.81	32.63	6.34	35.96	51.48	74	-22.52	Pk
V	7323	32.41	32.63	6.34	35.96	42.08	54	-11.92	AV
V	9764	41.85	32.92	7.59	38.4	54.92	74	-19.08	Pk
V	9764	32.52	32.92	7.59	38.4	45.59	54	-8.41	AV
V	12205	38.73	31.96	8.88	39.04	54.69	74	-19.31	Pk
V	12205	30.44	31.96	8.88	39.04	46.40	54	-7.60	AV
H	4882	50.19	34.07	5.09	32.59	53.80	74	-20.20	Pk
H	4882	41.14	34.07	5.09	32.59	44.75	54	-9.25	AV
H	7323	42.73	32.63	6.34	35.96	52.40	74	-21.60	Pk
H	7323	34.69	32.63	6.34	35.96	44.36	54	-9.64	AV
H	9764	42.00	32.92	7.59	38.4	55.07	74	-18.93	Pk
H	9764	32.01	32.92	7.59	38.4	45.08	54	-8.92	AV
H	12205	39.14	31.96	8.88	39.04	55.10	74	-18.90	Pk
H	12205	29.70	31.96	8.88	39.04	45.66	54	-8.34	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	50.23	34.02	5.15	32.8	54.16	74	-19.84	Pk
V	4960	39.89	34.02	5.15	32.8	43.82	54	-10.18	AV
V	7440	43.07	32.71	6.4	36.05	52.81	74	-21.19	Pk
V	7440	32.28	32.71	6.4	36.05	42.02	54	-11.98	AV
V	9920	42.33	32.86	7.62	38.4	55.49	74	-18.51	Pk
V	9920	31.45	32.86	7.62	38.4	44.61	54	-9.39	AV
V	12400	40.07	31.82	8.84	39.08	56.17	74	-17.83	Pk
V	12400	30.04	31.82	8.84	39.08	46.14	54	-7.86	AV
H	4960	50.66	34.02	5.15	32.8	54.59	74	-19.41	Pk
H	4960	40.98	34.02	5.15	32.8	44.91	54	-9.09	AV
H	7440	44.03	32.71	6.4	36.05	53.77	74	-20.23	Pk
H	7440	34.85	32.71	6.4	36.05	44.59	54	-9.41	AV
H	9920	41.98	32.86	7.62	38.4	55.14	74	-18.86	Pk
H	9920	30.77	32.86	7.62	38.4	43.93	54	-10.07	AV
H	12400	38.99	31.82	8.84	39.08	55.09	74	-18.91	Pk
H	12400	29.01	31.82	8.84	39.08	45.11	54	-8.89	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, $\pi/4$ DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
GFSK	Low Channel: 2402MHz										
	H	2390.00	56.15	35.17	3.48	27.49	51.95	74	-22.05	PK	PASS
	H	2390.00	45.76	35.17	3.48	27.49	41.56	54	-12.44	AV	PASS
	H	2400.00	56.75	35.16	3.49	27.52	52.60	74	-21.40	PK	PASS
	H	2400.00	45.14	35.16	3.49	27.52	40.99	54	-13.01	AV	PASS
	V	2390.00	56.90	35.17	3.48	27.49	52.70	74	-21.30	PK	PASS
	V	2390.00	49.29	35.17	3.48	27.49	45.09	54	-8.91	AV	PASS
	V	2400.00	55.96	35.16	3.49	27.52	51.81	74	-22.19	PK	PASS
	V	2400.00	47.39	35.16	3.49	27.52	43.24	54	-10.76	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	55.16	35.11	3.56	27.75	51.36	74	-22.64	PK	PASS
	H	2483.50	47.29	35.11	3.56	27.75	43.49	54	-10.51	AV	PASS
	H	2500.00	57.24	35.1	3.57	27.8	53.51	74	-20.49	PK	PASS
	H	2500.00	47.13	35.1	3.57	27.8	43.40	54	-10.6	AV	PASS
	V	2483.50	56.84	35.11	3.56	27.75	53.04	74	-20.96	PK	PASS
	V	2483.50	46.79	35.11	3.56	27.75	42.99	54	-11.01	AV	PASS
	V	2500.00	55.39	35.1	3.57	27.8	51.66	74	-22.34	PK	PASS
	V	2500.00	46.04	35.1	3.57	27.8	42.31	54	-11.69	AV	PASS

Remark:


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

7 Maximum Peak Output Power Test

7.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

7.2 Test Setup




7.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

7.4 Test Data

Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH1	0	-1.59	0.69	None	≤30	PASS
		39	-1.04	0.79	None		PASS
		78	-0.39	0.91	None		PASS
$\pi/4$ DQPSK	2-DH1	0	-0.82	0.83	None	≤20.97	PASS
		39	-0.33	0.93	None		PASS
		78	0.30	1.07	None		PASS
8DPSK	3-DH1	0	-0.25	0.94	None	≤20.97	PASS
		39	0.12	1.03	None		PASS
		78	0.67	1.17	None		PASS

Test plots

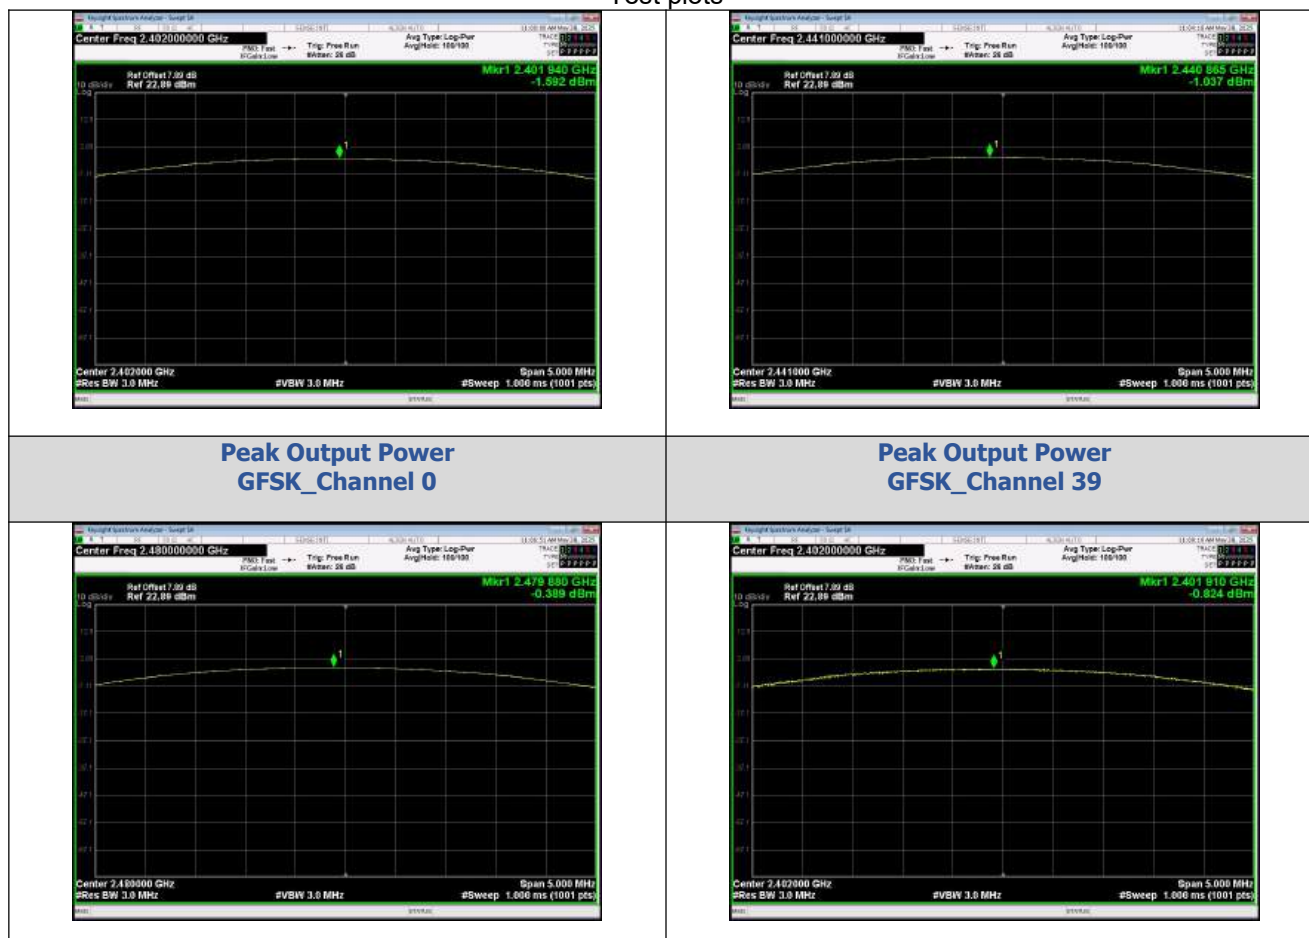

**Peak Output Power
GFSK_Channel 78**




**Peak Output Power
n/4DQPSK_Channel 0**



**Peak Output Power
n/4DQPSK_Channel 39**



**Peak Output Power
n/4DQPSK_Channel 78**

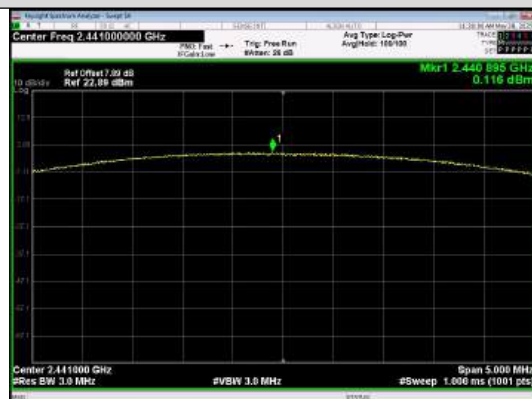

**Peak Output Power
8DPSK_Channel 0**



**Peak Output Power
8DPSK_Channel 39**

**Peak Output Power
8DPSK_Channel 78**




8 20DB Occupy Bandwidth & 99% OCB Test

8.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

8.2 Test Setup



8.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 91 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4 Test Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	99% Bandwidth (MHz)	Result
GFSK	Lowest	0.9288	0.84360	Pass
	Middle	0.9819	0.85208	
	Highest	0.9811	0.86013	
π /4DQPSK	Lowest	1.260	1.1625	Pass
	Middle	1.265	1.1704	
	Highest	1.285	1.1796	
8-DPSK	Lowest	1.220	1.1584	Pass
	Middle	1.222	1.1653	
	Highest	1.248	1.1690	

Test plots



GFSK_DH1_Channel 0



n/4DQPSK_2-DH1_Channel 0



GFSK_DH1_Channel 39



n/4DQPSK_2-DH1_Channel 39



GFSK_DH1_Channel 78



n/4DQPSK_2-DH1_Channel 78



8DPSK_3-DH1_Channel 0



8DPSK_3-DH1_Channel 39




8DPSK_3-DH1_Channel 78

9 Carrier Frequency Separation Test

9.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	GFSK: 20dB bandwidth π /4DQPSK & 8DPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.2 Test Setup




9.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data

Modulation	Separation (MHz)	Limit(MHz)	Result
GFSK	1.0021	0.655	PASS
π /4DQPSK	1.0027	0.857	PASS
8-DPSK	1	0.832	PASS

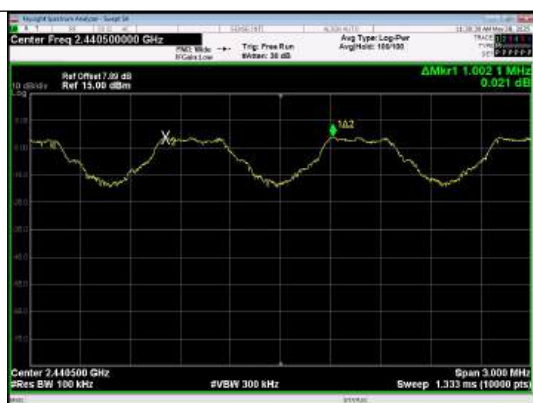

GFSK


 π /4DQPSK


8DPSK


Void

10 Number of Hopping Channel Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	≥15 channels

10.2 Test Setup



10.3 Test Procedure



The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data


Mode	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
GFSK	HOPP	DH1	79	≥ 15	Pass
Pi/4DQPSK	HOPP	2DH1	79	≥ 15	Pass
8DPSK	HOPP	3DH1	79	≥ 15	Pass

Test Plots

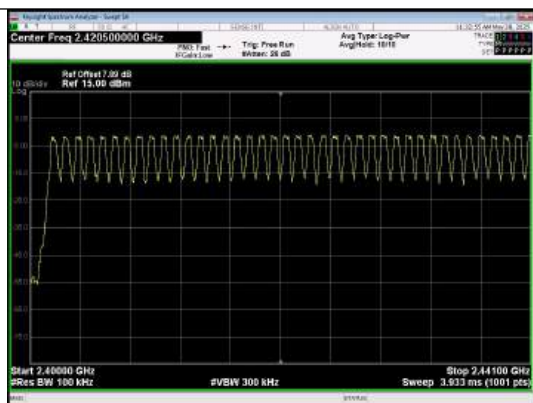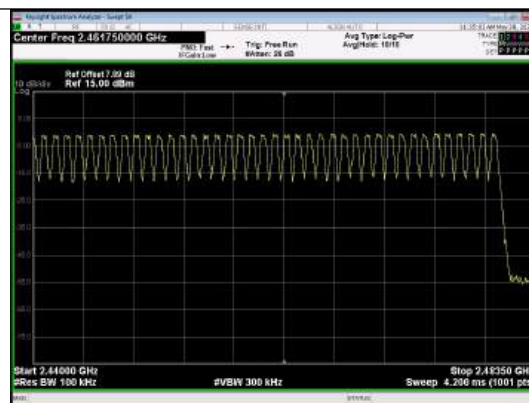
Low End Spectrum Channel Hopping Plot
GFSK

High End Spectrum Channel Hopping Plot
GFSK

Low End Spectrum Channel Hopping Plot
n/4DQPSK

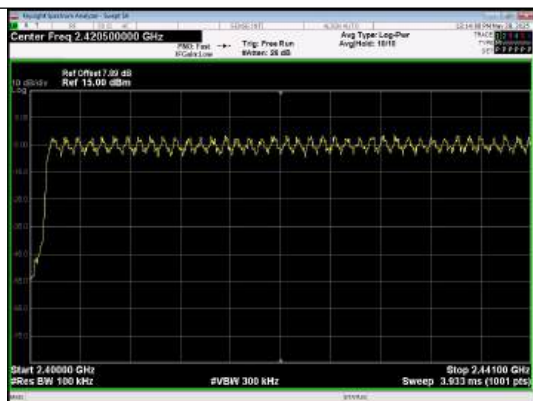High End Spectrum Channel Hopping Plot
n/4DQPSK



**Low End Spectrum Channel Hopping Plot
8DPSK**




**High End Spectrum Channel Hopping Plot
8DPSK**

12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure


The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:


1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = clear write.
6. Trace mode = normal.
7. Allow trace to fully stabilize.

12.4 Test Data

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH5	CH0 (2402MHz)	2.880	117	336.96	< 400	PASS
	DH5	CH39 (2441MHz)	2.880	108	311.04		PASS
	DH5	CH78 (2480MHz)	2.880	113	325.44		PASS
$\pi/4$ DQPSK	2-DH5	CH0 (2402MHz)	2.880	104	299.52		PASS
	2-DH5	CH39 (2441MHz)	2.880	98	282.24		PASS
	2-DH5	CH78 (2480MHz)	2.880	114	328.32		PASS
8DPSK	3-DH5	CH0 (2402MHz)	2.880	107	308.16		PASS
	3-DH5	CH39 (2441MHz)	2.880	98	282.24		PASS
	3-DH5	CH78 (2480MHz)	2.880	104	299.52		PASS

Test Plots

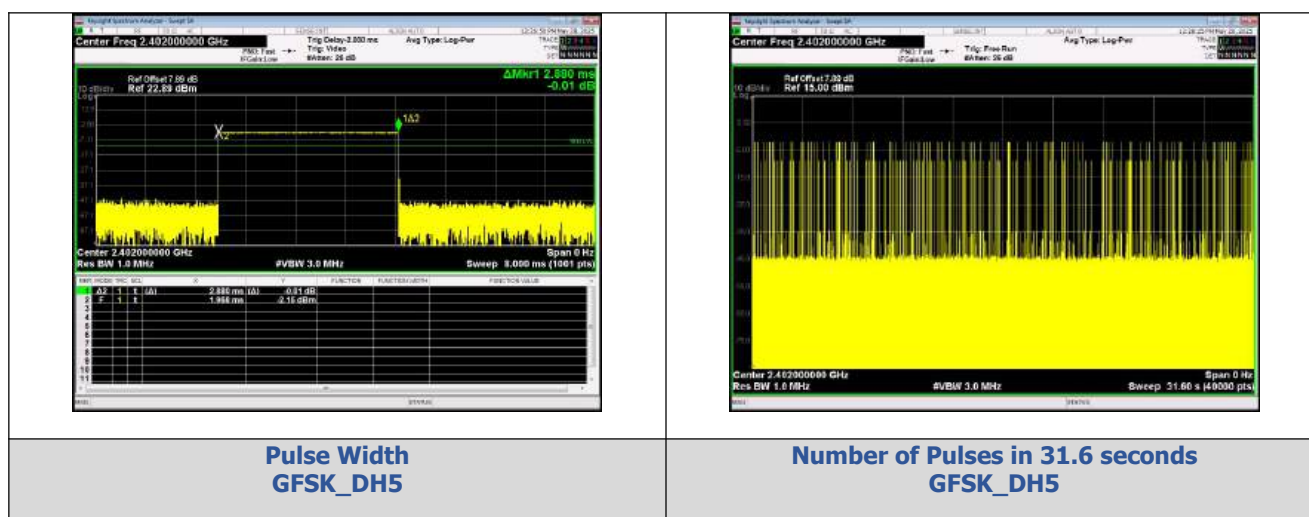


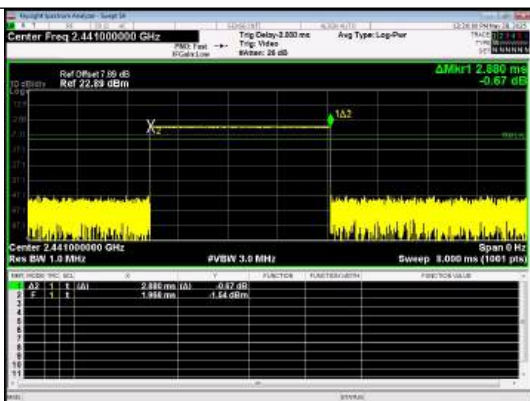


Pulse Width
GFSK_DH5




Number of Pulses in 31.6 seconds
GFSK_DH5

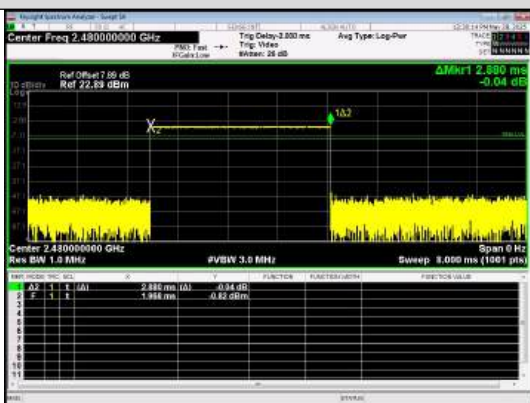

Pulse Width
GFSK_DH5

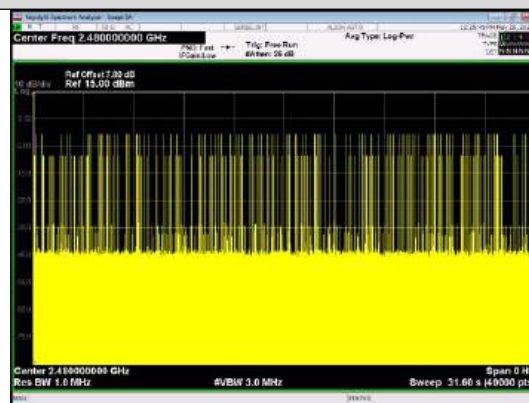


Number of Pulses in 31.6 seconds
GFSK_DH5

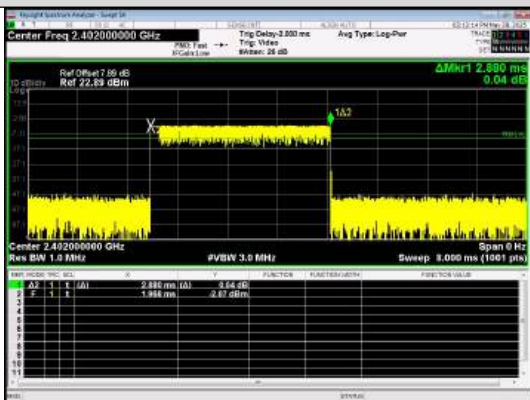


Pulse Width
n/4DQPSK_2-DH5




Number of Pulses in 31.6 seconds
n/4DQPSK_2-DH5

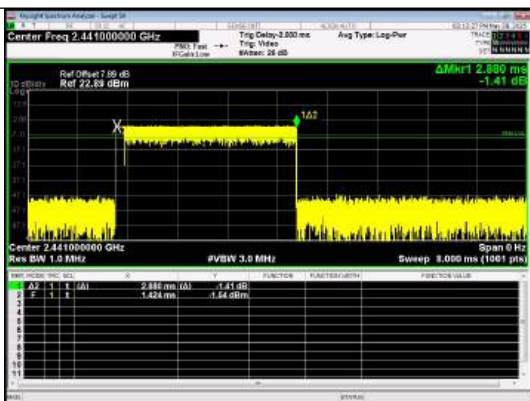

Pulse Width
n/4DQPSK_2-DH5

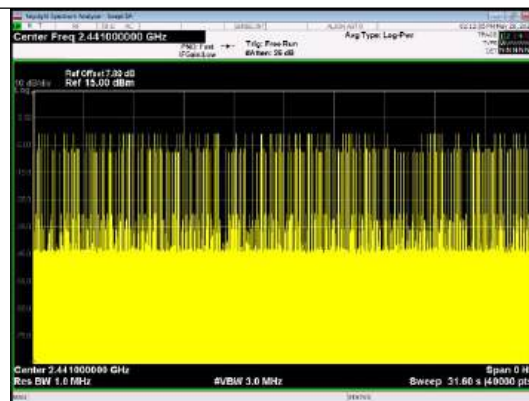


Number of Pulses in 31.6 seconds
n/4DQPSK_2-DH5

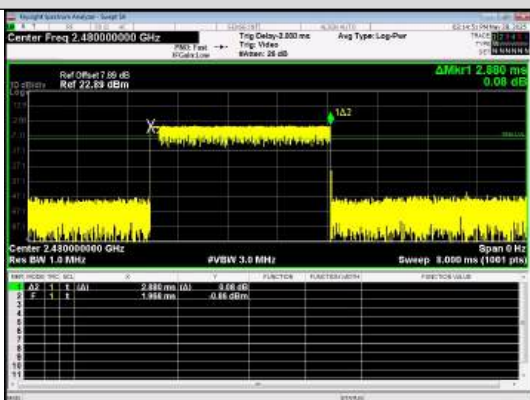

Pulse Width
n/4DQPSK_2-DH5




Number of Pulses in 31.6 seconds
n/4DQPSK_2-DH5

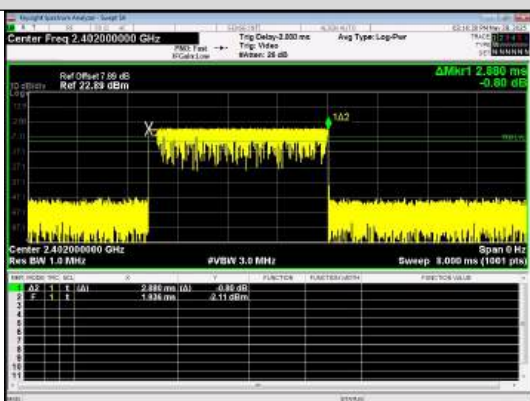

Pulse Width
8DPSK_3-DH5



Number of Pulses in 31.6 seconds
8DPSK_3-DH5

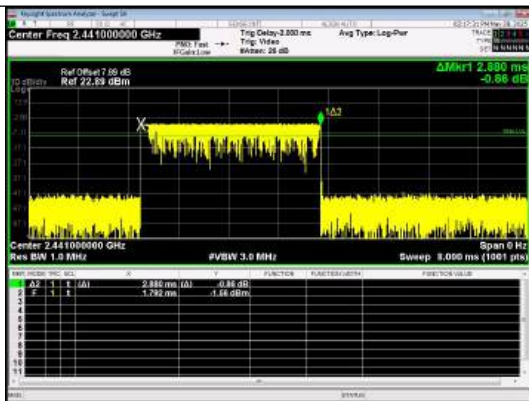

Pulse Width
8DPSK_3-DH5



Number of Pulses in 31.6 seconds
8DPSK_3-DH5



Pulse Width
8DPSK_3-DH5




Number of Pulses in 31.6 seconds
8DPSK_3-DH5

13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

13.4 Test Data


Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH1	0	2400.00	-52.042	-21.75	-30.292	PASS
			21148.3	-46.020	-21.75	-24.270	PASS
			21571.5	-46.505	-21.16	-25.345	PASS
		39	2483.50	-55.796	-20.54	-35.256	PASS
		78	21147.7	-46.319	-20.54	-25.779	PASS
			2400.00	-50.398	-21.77	-28.628	PASS
$\pi/4$ DQPSK	2-DH1	0	21578.4	-47.178	-21.77	-25.408	PASS
			21197.0	-47.443	-21.23	-26.213	PASS
		39	2483.50	-55.658	-20.53	-35.128	PASS
		78	21162.6	-46.446	-20.53	-25.916	PASS
			2400.00	-51.598	-21.68	-29.918	PASS
		0	21167.6	-46.532	-21.68	-24.852	PASS
8DPSK	3-DH1	0	21152.7	-46.472	-21.2	-25.272	PASS
			2483.50	-56.784	-20.56	-36.224	PASS
		39	2483.50	-56.784	-20.56	-36.224	PASS
		78	21230.7	-46.533	-20.56	-25.973	PASS


Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH1	Hopping	2400.00	-51.989	-21.41	-30.579	PASS
			2483.50	-54.777	-20.51	-34.267	PASS
$\pi/4$ DQPSK	2-DH1		2394.90	-52.520	-21.86	-30.660	PASS
			2400.00	-54.138	-21.86	-32.278	PASS
8DPSK	3-DH1		2483.50	-53.829	-20.66	-33.169	PASS
			2393.46	-52.160	-21.95	-30.210	PASS






Test Graphs

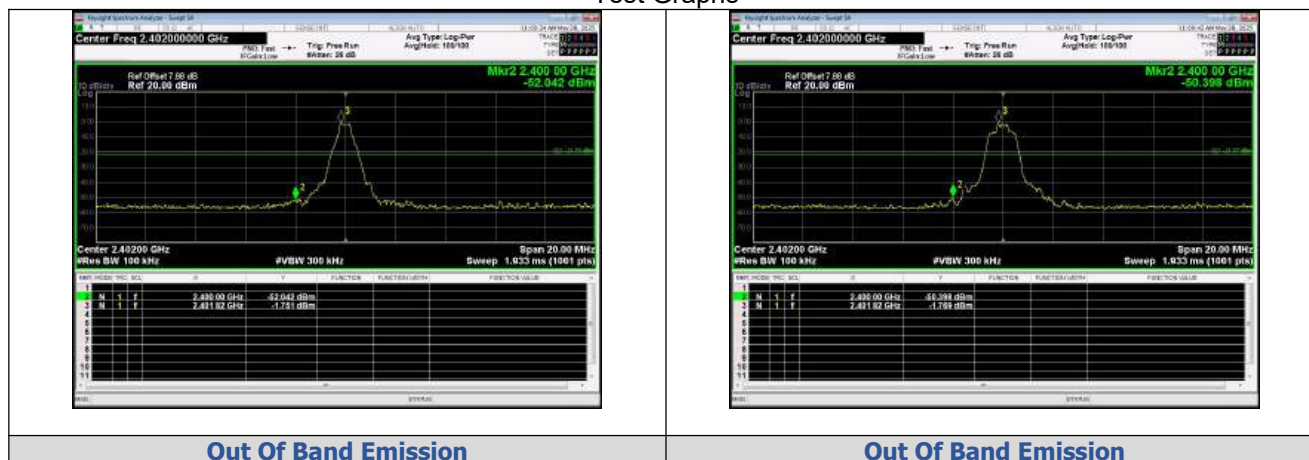


GFSK_DH1_Channel 0

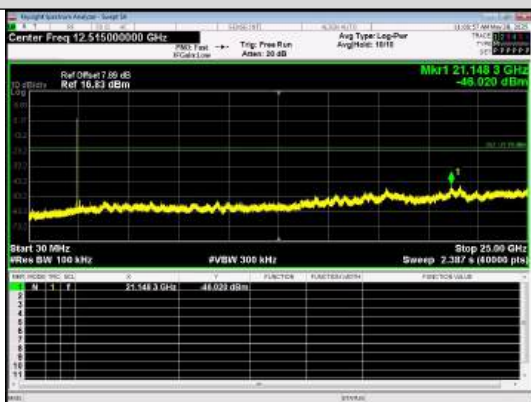


n/4QPSK_2-DH1_Channel 0

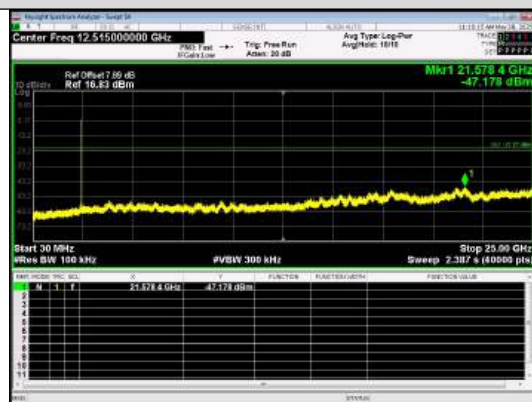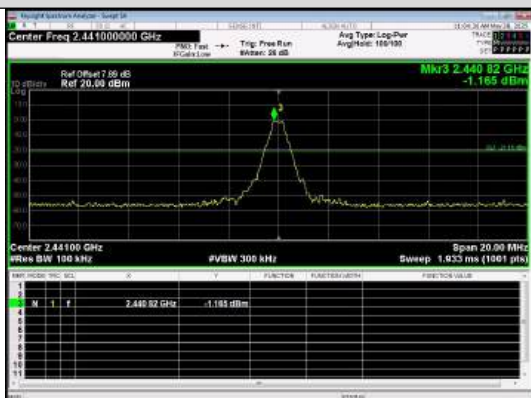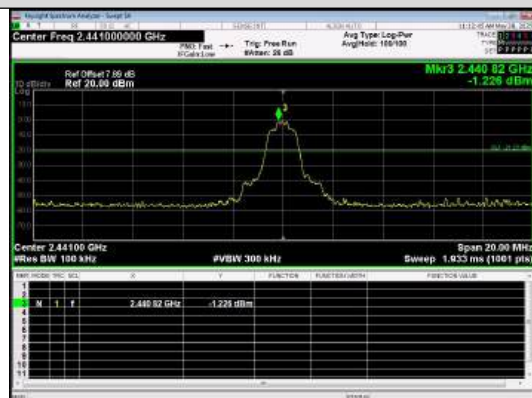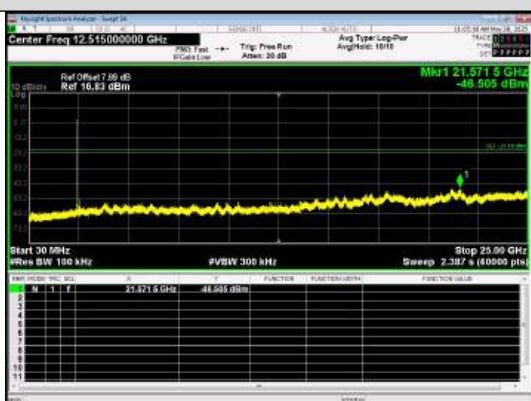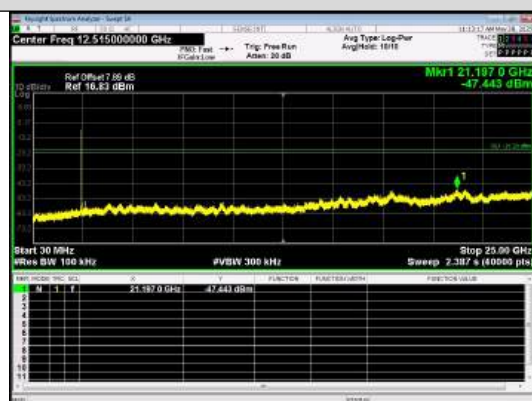
30.0 MHz - 25000.0 MHz
GFSK_DH1_Channel 0

30.0 MHz - 25000.0 MHz
n/4QPSK_2-DH1_Channel 0

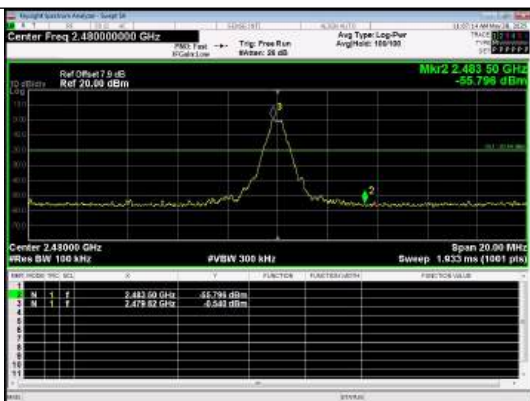Out Of Band Emission
GFSK_DH1_Channel 39

Out Of Band Emission
n/4QPSK_2-DH1_Channel 39

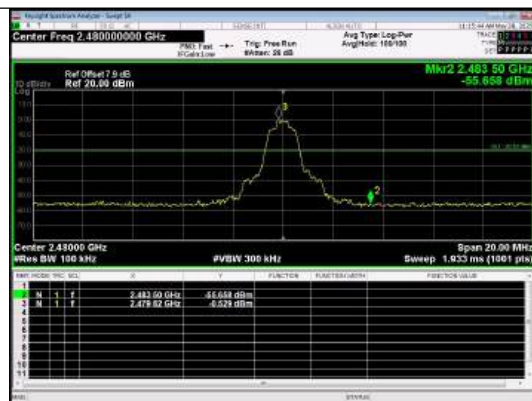30.0 MHz - 25000.0 MHz
GFSK_DH1_Channel 39


30.0 MHz - 25000.0 MHz
n/4QPSK_2-DH1_Channel 39




**Out Of Band Emission
GFSK_DH1_Channel 78**




**Out Of Band Emission
n/4DQPSK_2-DH1_Channel 78**

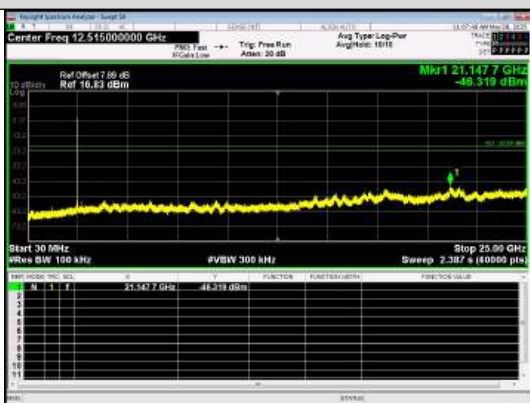


**30.0 MHz - 25000.0 MHz
GFSK_DH1_Channel 78**

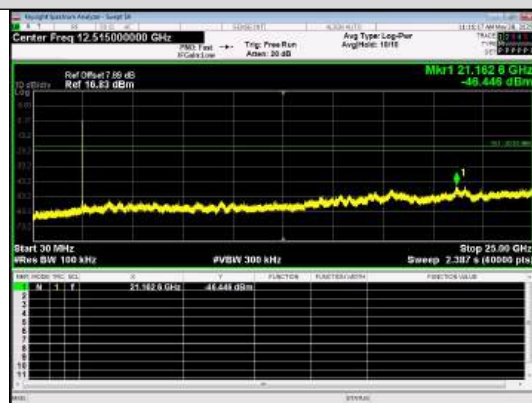


**30.0 MHz - 25000.0 MHz
n/4DQPSK_2-DH1_Channel 78**

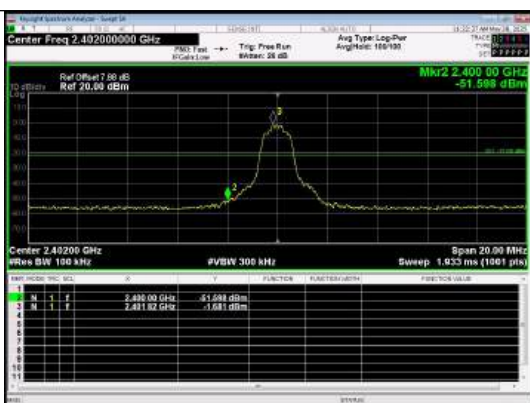


**Out Of Band Emission
8DPSK_3-DH1_Channel 0**

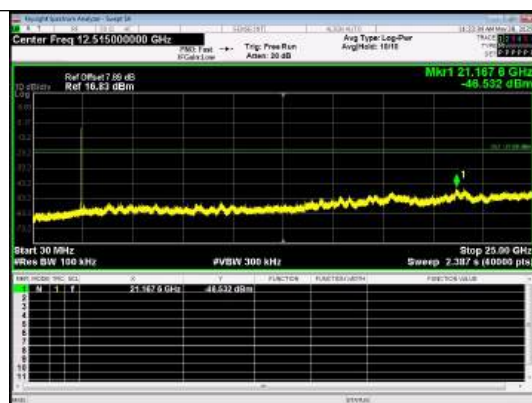


**30.0 MHz - 25000.0 MHz
8DPSK_3-DH1_Channel 0**

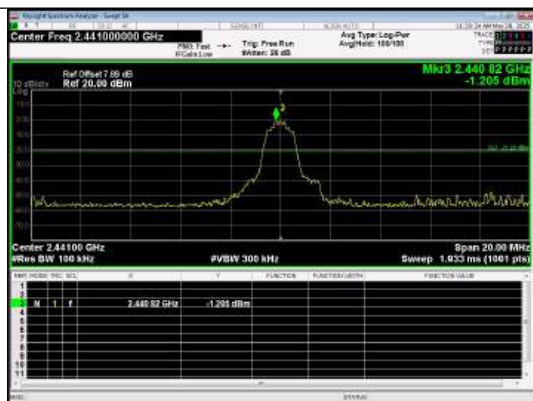


**Out Of Band Emission
8DPSK_3-DH1_Channel 39**

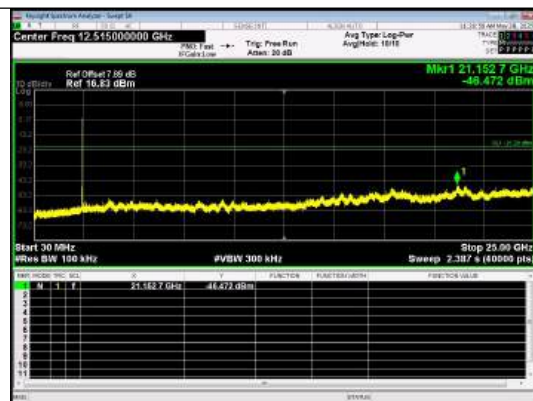


**30.0 MHz - 25000.0 MHz
8DPSK_3-DH1_Channel 39**

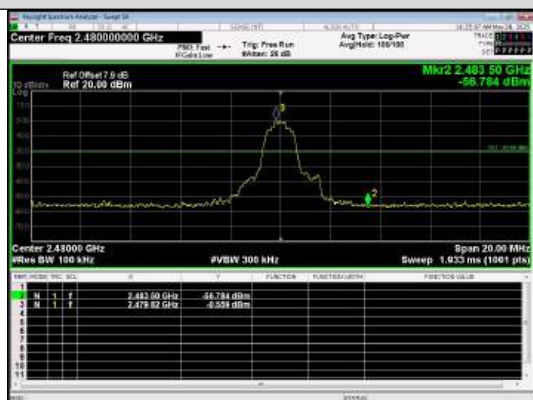


**Out Of Band Emission
8DPSK_3-DH1_Channel 78**

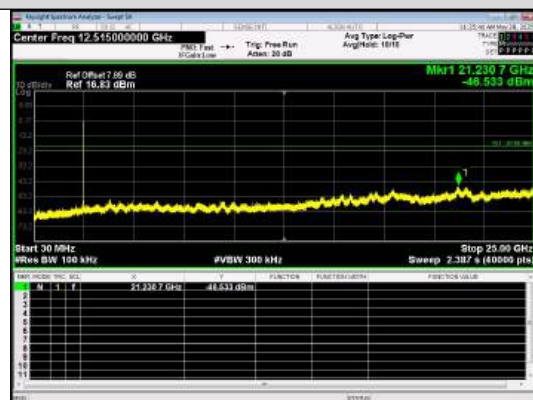

**30.0 MHz - 25000.0 MHz
8DPSK_3-DH1_Channel 78**

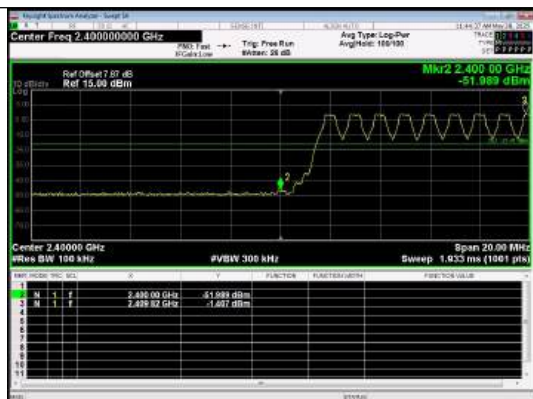


Out Of Band Emission(Left)


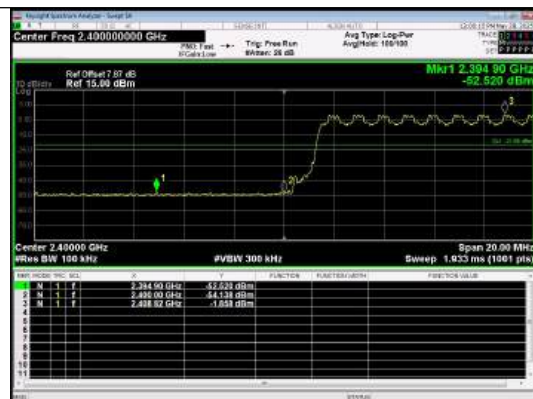


Out Of Band Emission(Left)

GFSK_DH1_Channel Hopping

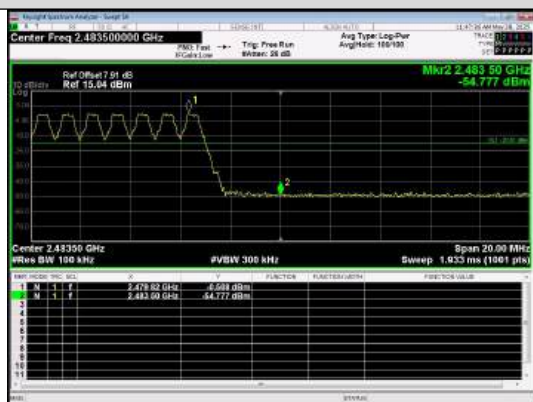
Out Of Band Emission(Right)
GFSK_DH1_Channel Hopping

π/4QPSK_2-DH1_Channel Hopping

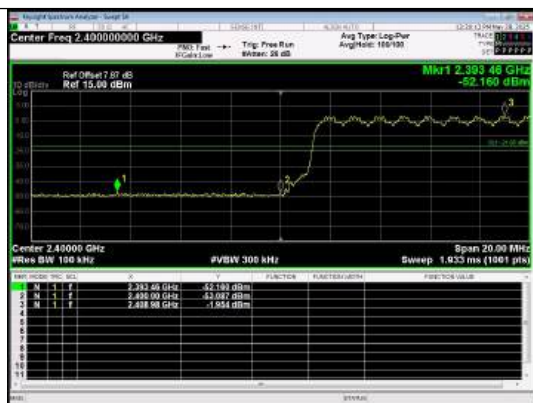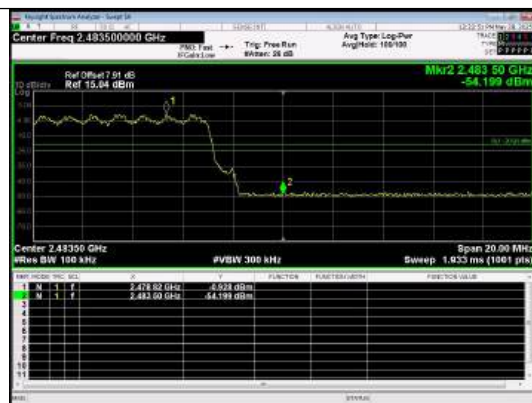
Out Of Band Emission(Right)
π/4QPSK_2-DH1_Channel Hopping

Out Of Band Emission(Left)
8DPSK_3-DH1_Channel Hopping

Out Of Band Emission(Right)
8DPSK_3-DH1_Channel Hopping

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.

----- End of Report -----