



RF TEST REPORT

Product Name: Wireless SmartSpeaker

Model Name: ACS360

FCC ID: 2BQ4S-ACS360

Issued For : Techdyne International Pty Ltd

13 Colonsay Street Templestowe Victoria Australia

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177,
Renmin West Road, Jinsha, Kengzi Street, Pingshan District,
Shenzhen, Guangdong, China

Report Number: LGT24J149RF01

Sample Received Date: Oct. 28, 2024

Date of Test: Oct. 28, 2024 – Nov. 14, 2024

Date of Issue: Nov. 14, 2024

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Techdyne International Pty Ltd
Address: 13 Colonsay Street Templestowe Victoria Australia
Manufacturer: Techdyne International Pty Ltd
Address: 13 Colonsay Street Templestowe Victoria Australia
Product Name: Wireless SmartSpeaker
Trademark: **autocoach:**
Model Name: ACS360
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 EUT OPERATING CONDITIONS	13
3.5 TEST RESULTS	14
4. RADIATED EMISSION MEASUREMENT	16
4.1 RADIATED EMISSION LIMITS	16
4.2 TEST PROCEDURE	18
4.3 TEST SETUP	18
4.4 EUT OPERATING CONDITIONS	19
4.5 FIELD STRENGTH CALCULATION	19
4.6 TEST RESULTS (BAND EDGE REQUIREMENTS)	24
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 TEST SETUP	25
5.4 EUT OPERATION CONDITIONS	25
5.5 TEST RESULTS	25
6. POWER SPECTRAL DENSITY TEST	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 TEST SETUP	26
6.4 EUT OPERATION CONDITIONS	26



6.5 TEST RESULTS	26
7. BANDWIDTH TEST	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 TEST SETUP	27
7.4 EUT OPERATION CONDITIONS	27
7.5 TEST RESULTS	27
8. PEAK OUTPUT POWER TEST	28
8.1 LIMIT	28
8.2 TEST PROCEDURE	28
8.3 TEST SETUP	28
8.4 EUT OPERATION CONDITIONS	28
8.5 TEST RESULTS	28
9. ANTENNA REQUIREMENT	29
9.1 STANDARD REQUIREMENT	29
9.2 EUT ANTENNA	29
APPENDIX I - TEST RESULTS	30
DUTY CYCLE	30
MAXIMUM PEAK CONDUCTED OUTPUT POWER	32
-6DB BANDWIDTH	33
OCCUPIED CHANNEL BANDWIDTH	35
MAXIMUM POWER SPECTRAL DENSITY LEVEL	37
BAND EDGE	39
CONDUCTED RF SPURIOUS EMISSION	42
APPENDIX II - MEASUREMENT PHOTOS	45
APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	46



Revision History

Rev.	Issue Date	Revisions
00	Nov. 14, 2024	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 Part 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Occupied Channel Bandwidth	$\pm 3.2 \%$
3	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
4	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
5	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
6	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
7	All emissions, radiated >6G	$\pm 5.48\text{dB}$
8	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
9	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Wireless SmartSpeaker	
Trademark:	autocoach:	
Model Name:	ACS360	
Series Model:	N/A	
Model Difference:	N/A	
Product Description:	Operation Frequency:	2405~2480 MHz
	Modulation Type:	QPSK
	Number Of Channel:	16CH
	Antenna Designation:	PCB
	Antenna Gain (dBi)	3.3
Channel List:	Please refer to the Note 3.	
Rating:	Input: DC 5V 0.5A 2.5 W	
Battery:	Capacity: 5000mAh Rated Voltage: 3.7V	
Hardware Version:	Rev H	
Software Version:	1.60	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.
- 3.

Channel List			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	11	2455
02	2410	12	2460
03	2415	13	2465
04	2420	14	2470
05	2425	15	2475
06	2430	16	2480
07	2435	--	--
08	2440	--	--
09	2445	--	--
10	2450	--	--



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH01(2405MHz)	QPSK
Mode 2	TX CH08(2440MHz)	QPSK
Mode 3	TX CH16(2480MHz)	QPSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We have be tested for all avaiable U.S. voltage and frequency (For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

(3) The battery is fully-charged during the radited and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4: Keeping BLE TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: ZigBee	
SecureCRT_6.5.0.380	Mode Or Modulation type	Power setting
	QPSK	2



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB-A to 3.5mm Cable	N/A	N/A	N/A	1m
Artificial load	N/A	N/A	N/A	N/A

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	HKF-16	N/A	N/A
Adapter	Tenpao	S005CAU0500100	N/A	Input: 100-240V ~ 50/60Hz 0.2A Output: 5V, 1A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
LISN	COM-POWER	LI-115	02032	2024.03.09	2025.03.08
LISN	SCHWARZBECK	NNLK 8122	00160	2024.03.09	2025.03.08
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2024.03.09	2025.03.08
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600-NMNM-2M	N.A	2024.06.03	2025.06.02
Temperature & Humidity	KTJ	TA218B	N.A	2024.03.09	2025.03.08
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
Active loop Antenna	ETS	6502	00049544	2023.10.13	2025.10.12
Spectrum Analyzer	Keysight	N9010B	MY60242508	2024.08.05	2025.08.04
Bilog Antenna(30M-1G)	SCHWARZBECK	VULB 9168	2705	2022.12.12	2025.12.11
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211060273	2022.06.08	2025.06.07
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2024.03.09	2025.03.08
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2024.03.09	2025.03.08
Pre-amplifier(18-40G)	com-mw	LNPA_18-40-01	18050003	2024.03.09	2025.03.08
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600-NMNM-8M	N.A	2024.06.03	2025.06.02
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B-NMSM-1M9	N.A	2024.06.11	2025.06.10
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241-05000KMSKMS	N.A	2024.06.13	2025.06.12
Wireless Communications Test Set	R&S	CMW 500	137737	2024.03.09	2025.03.08
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2024.08.05	2025.08.04
Signal Analyzer	Keysight	N9020A	MY50530994	2024.03.09	2025.03.08
RF Automatic Test system	MW	MW100-RFCB	MW220322LG-033	2024.03.09	2025.03.08
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2024.03.09	2025.03.08
Temperature & Humidity test chamber	AISRY	LX-1000L	171200018	2024.03.09	2025.03.08
Attenuator	eastsheep	90db	N.A	2024.03.09	2025.03.08
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Digital multimeter	MASTECH	MS8261	MBGBC83053	2024.03.09	2025.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

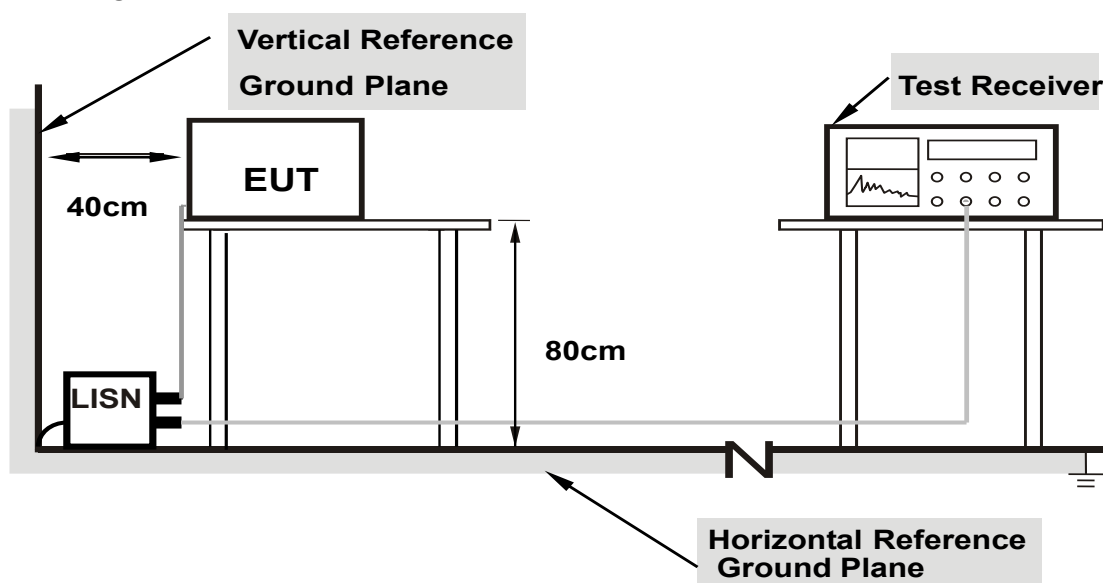

- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**


3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS


Project: LGT24J149	Test Engineer: LiuH
EUT: Wireless SmartSpeaker	Temperature: 24.2°C
M/N: ACS360	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2024-10-28
Test Mode: TX	
Note:	

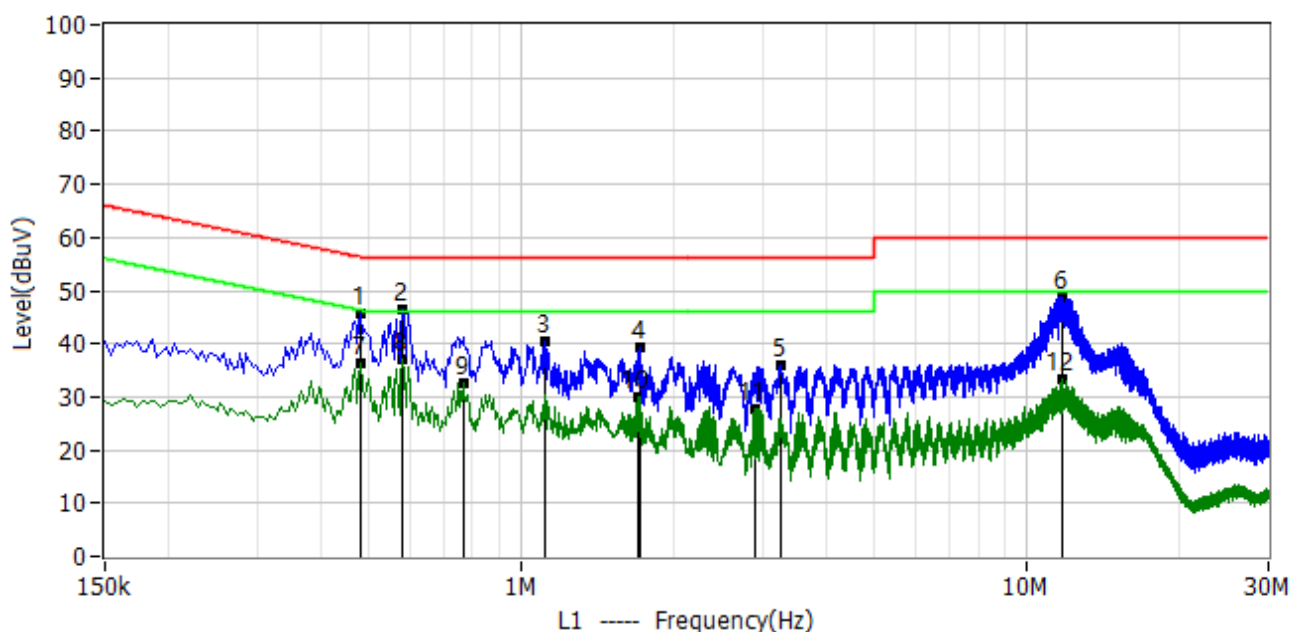

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.482	34.98	10.57	45.55	56.30	-10.75	QP	L1
2*	0.582	35.94	10.57	46.51	56.00	-9.49	QP	L1
3*	1.114	29.72	10.72	40.44	56.00	-15.56	QP	L1
4*	1.710	28.35	10.90	39.25	56.00	-16.75	QP	L1
5*	3.262	24.91	11.18	36.09	56.00	-19.91	QP	L1
6*	11.766	37.71	11.15	48.86	60.00	-11.14	QP	L1
7*	0.482	25.73	10.57	36.30	46.30	-10.00	AV	L1
8*	0.582	26.36	10.57	36.93	46.00	-9.07	AV	L1
9*	0.766	21.95	10.59	32.54	46.00	-13.46	AV	L1
10*	1.694	19.15	10.90	30.05	46.00	-15.95	AV	L1
11*	2.894	16.53	11.17	27.70	46.00	-18.30	AV	L1
12*	11.722	22.19	11.15	33.34	50.00	-16.66	AV	L1



Project: LGT24J149	Test Engineer: LiuH
EUT: Wireless SmartSpeaker	Temperature: 24.2°C
M/N: ACS360	Humidity: 49%RH
Test Voltage: AC 120V/60Hz	Test Data: 2024-10-28
Test Mode: TX	
Note:	

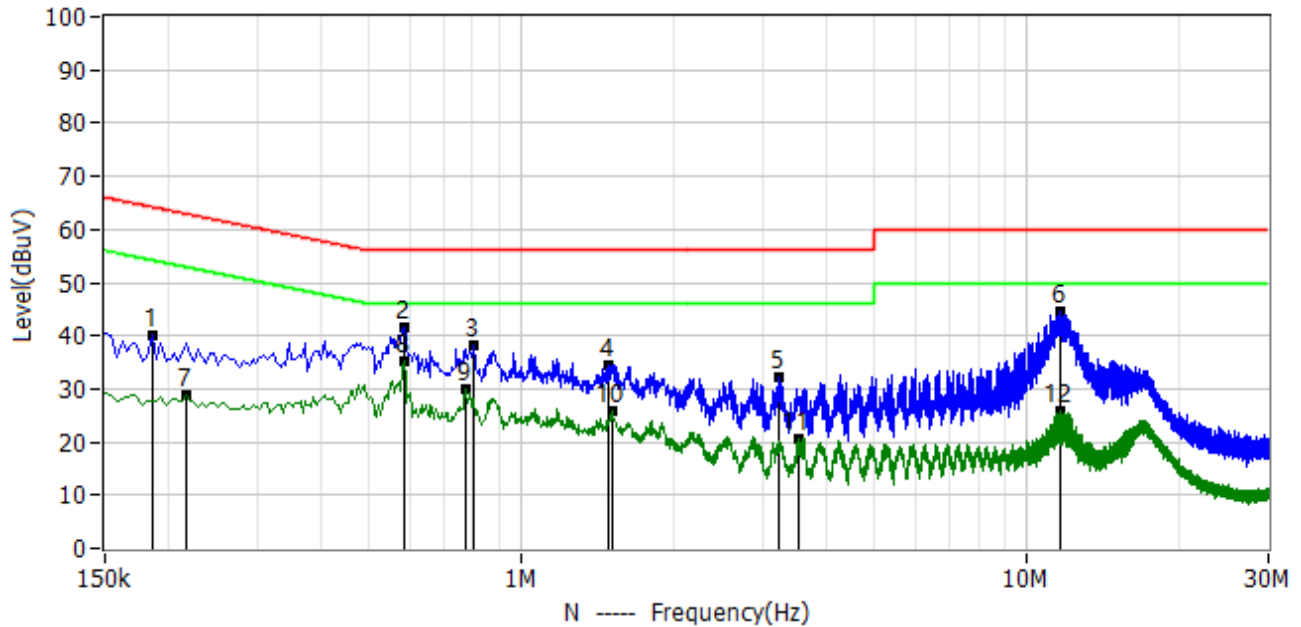

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.186	29.37	10.56	39.93	64.21	-24.28	QP	N
2*	0.586	31.03	10.55	41.58	56.00	-14.42	QP	N
3*	0.806	27.68	10.56	38.24	56.00	-17.76	QP	N
4*	1.486	23.95	10.65	34.60	56.00	-21.40	QP	N
5*	3.230	21.54	10.79	32.33	56.00	-23.67	QP	N
6*	11.650	33.32	11.11	44.43	60.00	-15.57	QP	N
7*	0.218	18.38	10.57	28.95	52.89	-23.94	AV	N
8*	0.586	24.52	10.55	35.07	46.00	-10.93	AV	N
9*	0.774	19.32	10.56	29.88	46.00	-16.12	AV	N
10*	1.510	15.07	10.65	25.72	46.00	-20.28	AV	N
11*	3.542	9.83	10.80	20.63	46.00	-25.37	AV	N
12*	11.578	14.82	11.11	25.93	50.00	-24.07	AV	N



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz (Peak/QP/AV)
Stop Frequency	150KHz/30MHz (Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz (Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz (Peak/AV)
Stop Frequency	10th carrier hamonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

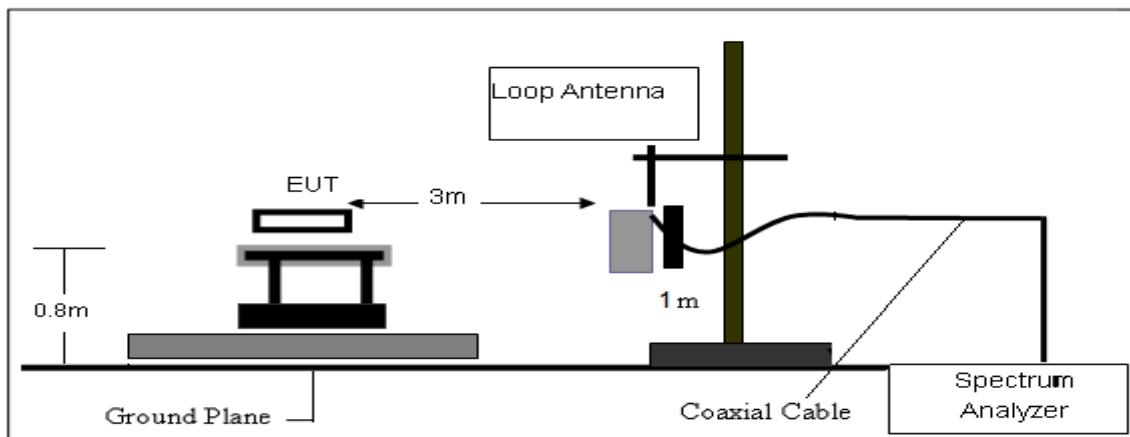

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

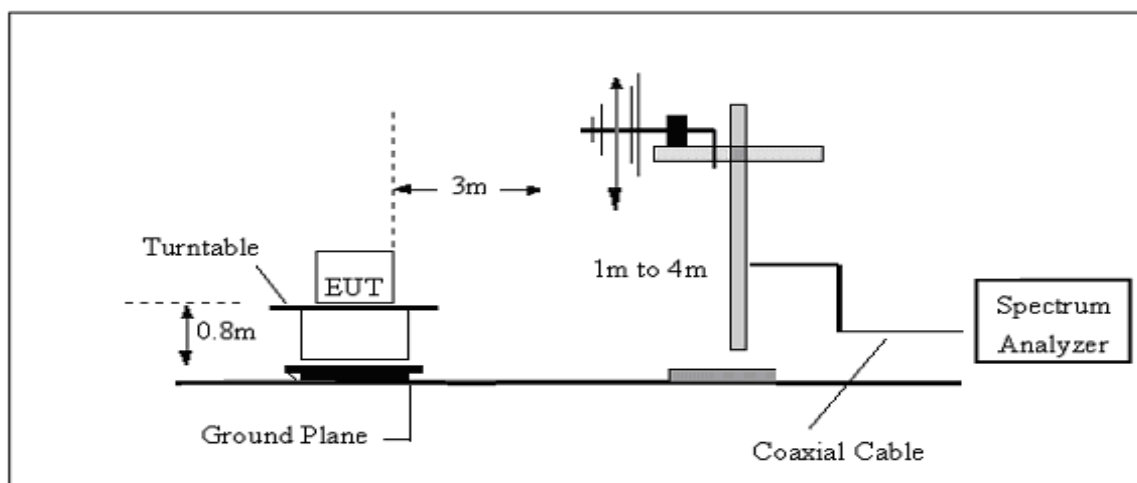

(C) Radiated Emission Test-Up Frequency Above 1GHz

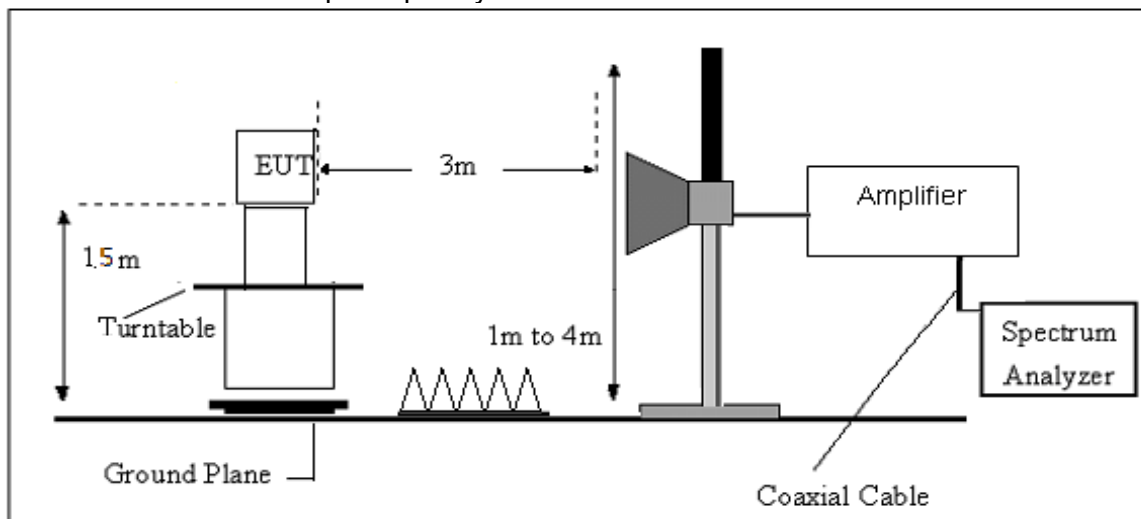

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.

4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



4.6 TEST RESULTS

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Project: LGT24J149	Test Engineer: LiuH
EUT: Wireless SmartSpeaker	Temperature: 26°C
M/N: ACS360	Humidity: 50%RH
Test Voltage: Battery	Test Data: 2024-10-30
Test Mode: TX	
Note:	

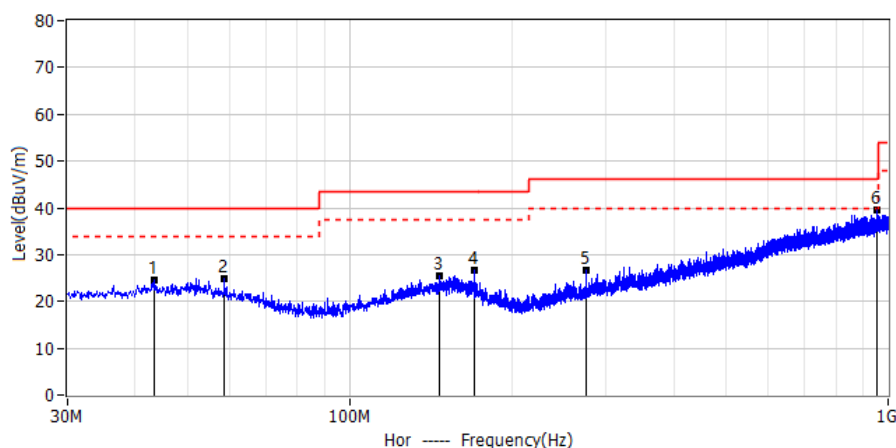

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	43.459	3.83	20.76	24.59	40.00	-15.41	QP	Hor
2*	58.736	5.19	19.56	24.75	40.00	-15.25	QP	Hor
3*	147.249	3.75	21.60	25.35	43.50	-18.15	QP	Hor
4*	170.529	6.18	20.57	26.75	43.50	-16.75	QP	Hor
5*	275.410	6.46	20.28	26.74	46.00	-19.26	QP	Hor
6*	952.955	5.83	33.79	39.62	46.00	-6.38	QP	Hor

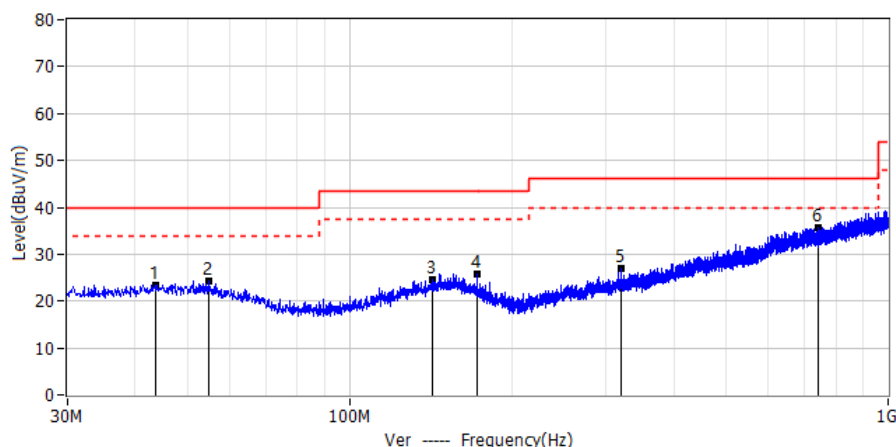

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	43.580	2.72	20.75	23.47	40.00	-16.53	QP	Ver
2*	54.978	4.07	20.10	24.17	40.00	-15.83	QP	Ver
3*	142.399	3.50	21.12	24.62	43.50	-18.88	QP	Ver
4*	172.954	5.33	20.31	25.64	43.50	-17.86	QP	Ver
5*	319.666	4.74	22.37	27.11	46.00	-18.89	QP	Ver
6*	740.525	4.83	30.87	35.70	46.00	-10.30	QP	Ver



Results of Radiated Emissions (Above 1000MHz)

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (2405 MHz)							
3264.65	55.47	-8.45	47.02	74.00	-26.98	PK	Vertical
3264.65	45.83	-8.45	37.38	54.00	-16.62	AV	Vertical
3264.70	56.17	-8.45	47.72	74.00	-26.28	PK	Horizontal
3264.70	45.88	-8.45	37.43	54.00	-16.57	AV	Horizontal
4804.51	54.87	-6.09	48.78	74.00	-25.22	PK	Vertical
4804.51	45.24	-6.09	39.15	54.00	-14.85	AV	Vertical
4804.36	55.29	-6.09	49.20	74.00	-24.80	PK	Horizontal
4804.36	44.23	-6.09	38.14	54.00	-15.86	AV	Horizontal
5359.59	57.22	-6.68	50.54	74.00	-23.46	PK	Vertical
5359.59	47.29	-6.68	40.61	54.00	-13.39	AV	Vertical
5359.78	56.69	-6.68	50.01	74.00	-23.99	PK	Horizontal
5359.78	47.79	-6.68	41.11	54.00	-12.89	AV	Horizontal
7205.71	60.34	-8.13	52.21	74.00	-21.79	PK	Vertical
7205.71	49.51	-8.13	41.38	54.00	-12.62	AV	Vertical
7205.71	60.85	-8.13	52.72	74.00	-21.28	PK	Horizontal
7205.71	49.73	-8.13	41.60	54.00	-12.40	AV	Horizontal
Middle Channel (2440 MHz)							
3264.89	55.98	-8.45	47.53	74.00	-26.47	PK	Vertical
3264.89	46.48	-8.45	38.03	54.00	-15.97	AV	Vertical
3264.57	55.76	-8.45	47.31	74.00	-26.69	PK	Horizontal
3264.57	46.12	-8.45	37.67	54.00	-16.33	AV	Horizontal
4880.56	54.66	-6.09	48.57	74.00	-25.43	PK	Vertical
4880.56	44.99	-6.09	38.90	54.00	-15.10	AV	Vertical
4880.31	54.95	-6.09	48.86	74.00	-25.14	PK	Horizontal
4880.31	44.13	-6.09	38.04	54.00	-15.96	AV	Horizontal
5359.83	57.74	-6.68	51.06	74.00	-22.94	PK	Vertical
5359.83	46.98	-6.68	40.30	54.00	-13.70	AV	Vertical
5359.84	57.78	-6.68	51.10	74.00	-22.90	PK	Horizontal
5359.84	47.95	-6.68	41.27	54.00	-12.73	AV	Horizontal
7310.78	59.63	-8.13	51.50	74.00	-22.50	PK	Vertical
7310.78	50.72	-8.13	42.59	54.00	-11.41	AV	Vertical
7310.91	60.07	-8.13	51.94	74.00	-22.06	PK	Horizontal
7310.91	50.92	-8.13	42.79	54.00	-11.21	AV	Horizontal
High Channel (2480 MHz)							
3264.79	56.37	-8.45	47.92	74.00	-26.08	PK	Vertical



3264.79	46.18	-8.45	37.73	54.00	-16.27	AV	Vertical
3264.62	55.83	-8.45	47.38	74.00	-26.62	PK	Horizontal
3264.62	46.59	-8.45	38.14	54.00	-15.86	AV	Horizontal
4960.39	54.82	-6.09	48.73	74.00	-25.27	PK	Vertical
4960.39	45.23	-6.09	39.14	54.00	-14.86	AV	Vertical
4960.44	55.21	-6.09	49.12	74.00	-24.88	PK	Horizontal
4960.44	45.06	-6.09	38.97	54.00	-15.03	AV	Horizontal
5359.87	56.61	-6.68	49.93	74.00	-24.07	PK	Vertical
5359.87	47.81	-6.68	41.13	54.00	-12.87	AV	Vertical
5359.84	56.93	-6.68	50.25	74.00	-23.75	PK	Horizontal
5359.84	47.07	-6.68	40.39	54.00	-13.61	AV	Horizontal
7439.84	60.64	-8.13	52.51	74.00	-21.49	PK	Vertical
7439.84	49.57	-8.13	41.44	54.00	-12.56	AV	Vertical
7439.93	60.16	-8.13	52.03	74.00	-21.97	PK	Horizontal
7439.93	50.93	-8.13	42.80	54.00	-11.20	AV	Horizontal

Remark:

In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.



4.6 TEST RESULTS (BAND EDGE REQUIREMENTS)

Frequency (MHz)	Reading (dBμV)	Orrected Factor (dB)	Reslut (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
QPSK							
2390.00	13.21	34.10	47.31	74.00	-26.69	PK	Vertical
2390.00	1.34	34.10	35.44	54.00	-18.56	AV	Vertical
2390.00	13.30	34.10	47.40	74.00	-26.60	PK	Horizontal
2390.00	1.08	34.10	35.18	54.00	-18.82	AV	Horizontal
2400.00	13.00	34.11	47.11	74.00	-26.89	PK	Vertical
2400.00	2.16	34.11	36.27	54.00	-17.73	AV	Vertical
2400.00	12.55	34.11	46.66	74.00	-27.34	PK	Horizontal
2400.00	2.57	34.11	36.68	54.00	-17.32	AV	Horizontal
2483.50	15.31	34.44	49.75	74.00	-24.25	PK	Vertical
2483.50	2.15	34.44	36.59	54.00	-17.41	AV	Vertical
2483.50	14.48	34.44	48.92	74.00	-25.08	PK	Horizontal
2483.50	2.99	34.44	37.43	54.00	-16.57	AV	Horizontal
Low measurement frequencies is range from 2310 to 2404 MHz, high measurement frequencies is range from 2478 to 2500 MHz.							



5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT which is powered by the \${ POWER BY}, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

For the measurement records, refer to the appendix I.

Note: Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.



6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ (RBW $\geq 3\text{KHz}$)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

For the measurement records, refer to the appendix I.



7. BANDWIDTH TEST

7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

For the measurement records, refer to the appendix I.



8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

For the measurement records, refer to the appendix I.



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.



APPENDIX I - TEST RESULTS


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	zigbee	2405	Ant1	3.186	10.25	31.08	5.08	0.31
NVNT	zigbee	2440	Ant1	3.18	10.248	31.03	5.08	0.31
NVNT	zigbee	2480	Ant1	3.188	10.256	31.08	5.08	0.31




Test Graphs


Duty Cycle NVNT zigbee 2405MHz Ant1

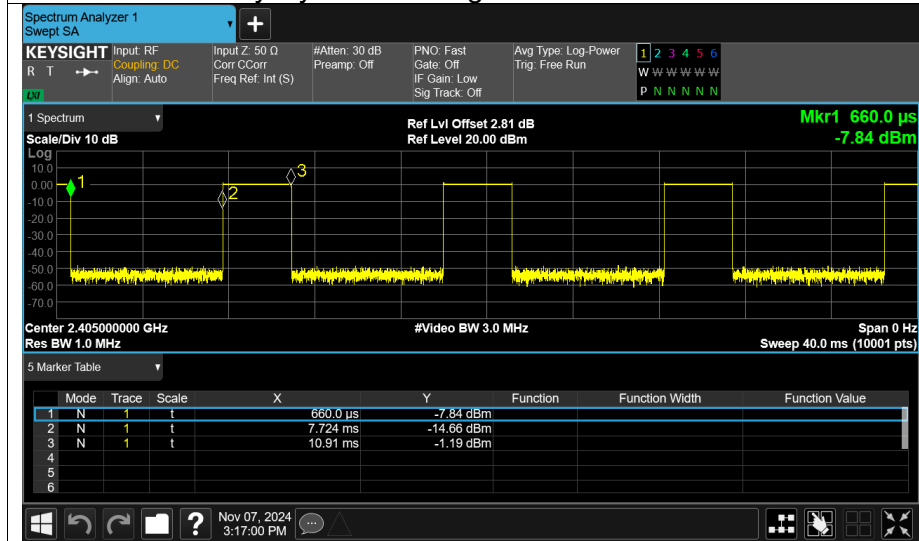

Duty Cycle NVNT zigbee 2440MHz Ant1

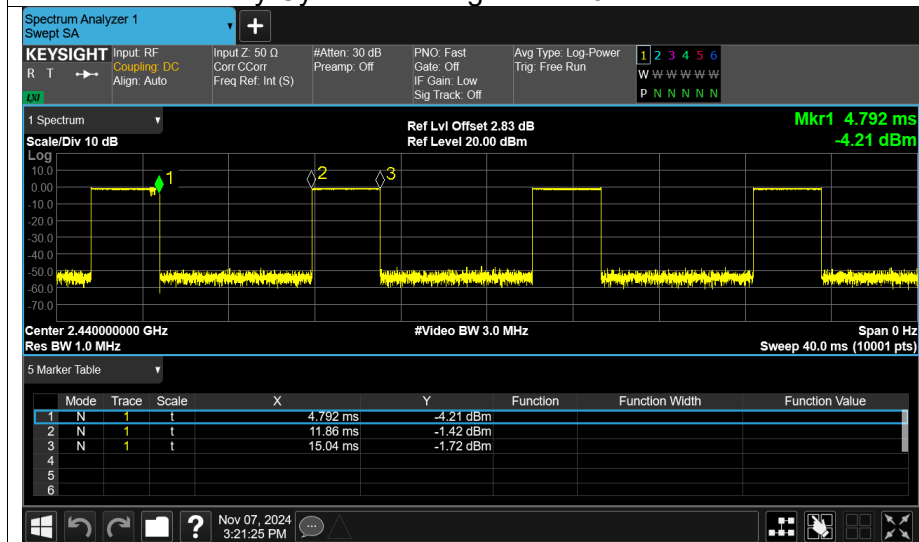

Duty Cycle NVNT zigbee 2480MHz Ant1

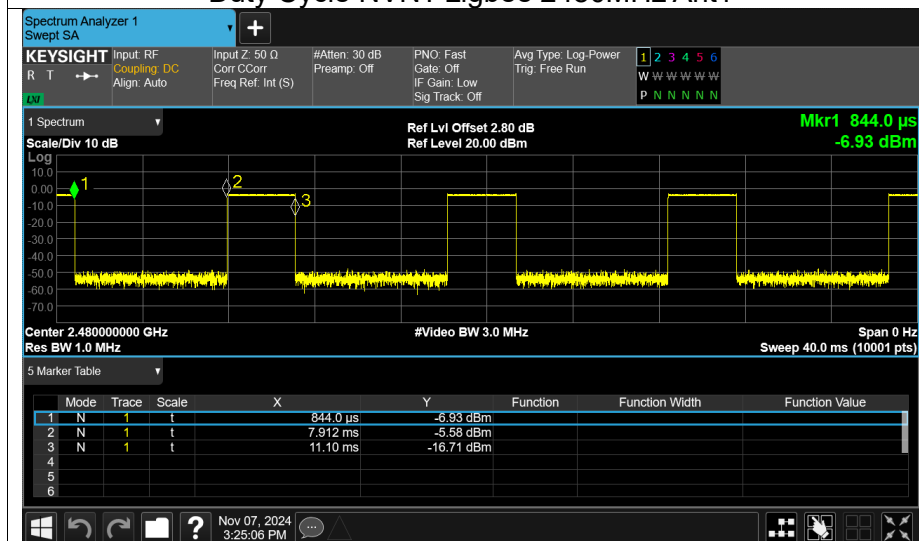



Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	zigbee	2405	Ant1	2.95	30	Pass
NVNT	zigbee	2440	Ant1	1.62	30	Pass
NVNT	zigbee	2480	Ant1	-1.12	30	Pass



-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	zigbee	2405	Ant1	1.55	0.5	Pass
NVNT	zigbee	2440	Ant1	1.816	0.5	Pass
NVNT	zigbee	2480	Ant1	1.626	0.5	Pass





Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	zigbee	2405	Ant1	2.237
NVNT	zigbee	2440	Ant1	2.222
NVNT	zigbee	2480	Ant1	2.246

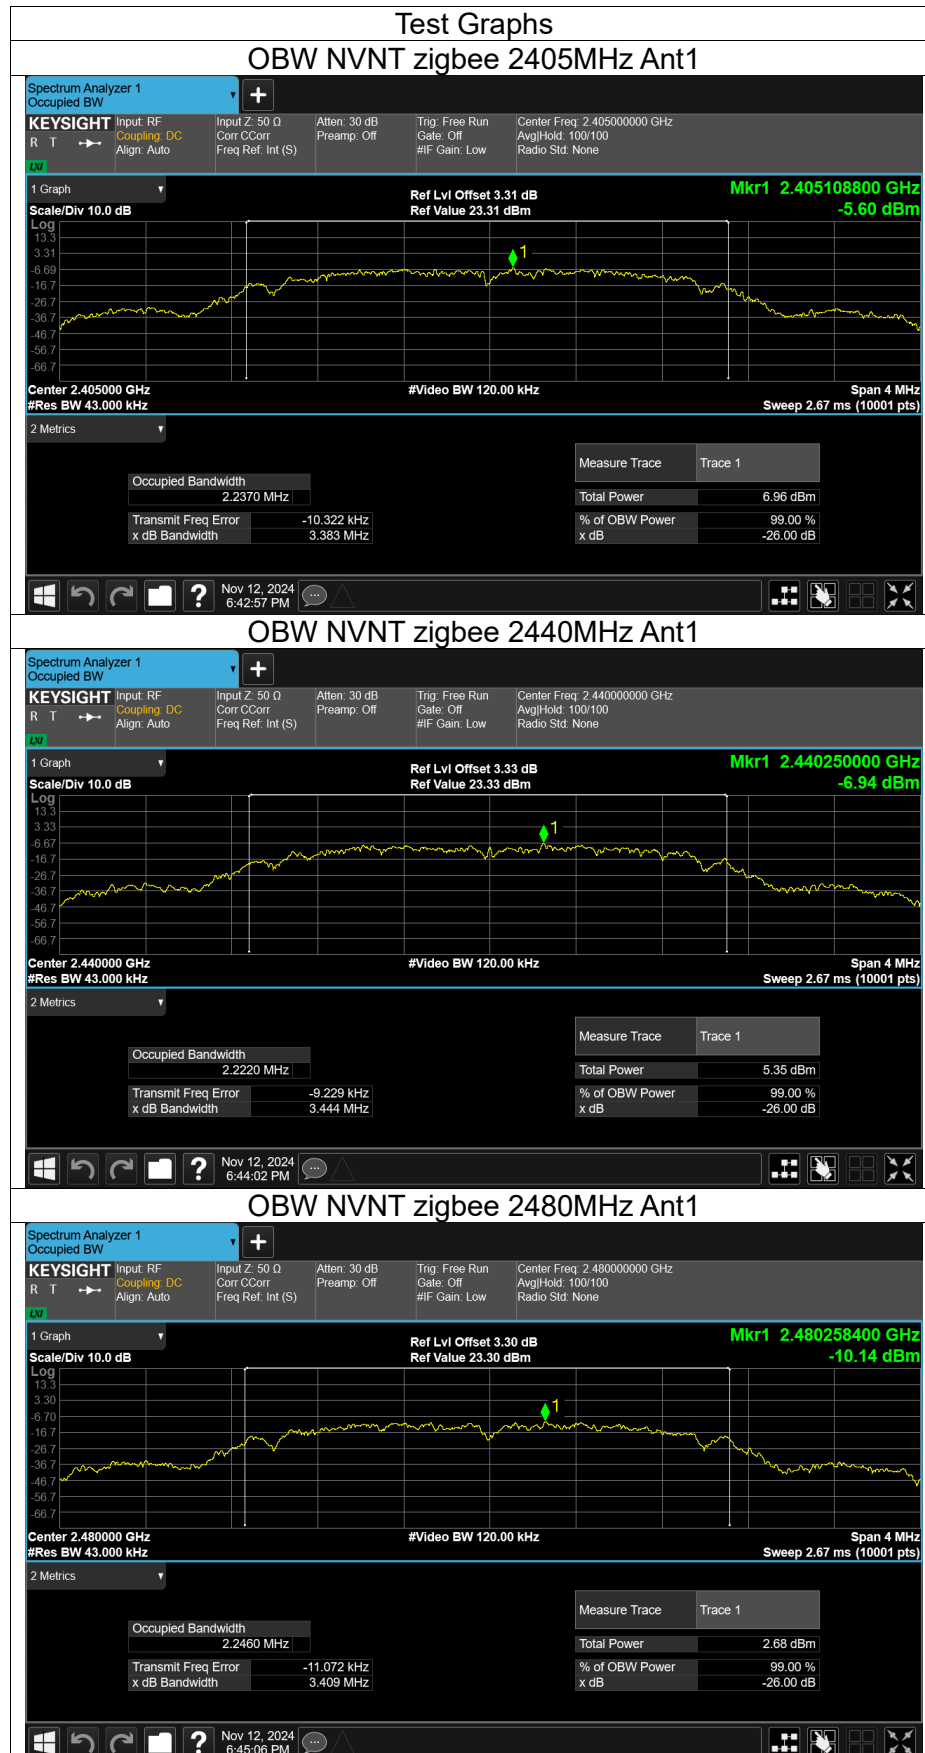



Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	zigbee	2405	Ant1	-11.42	8	Pass
NVNT	zigbee	2440	Ant1	-12.66	8	Pass
NVNT	zigbee	2480	Ant1	-14.95	8	Pass

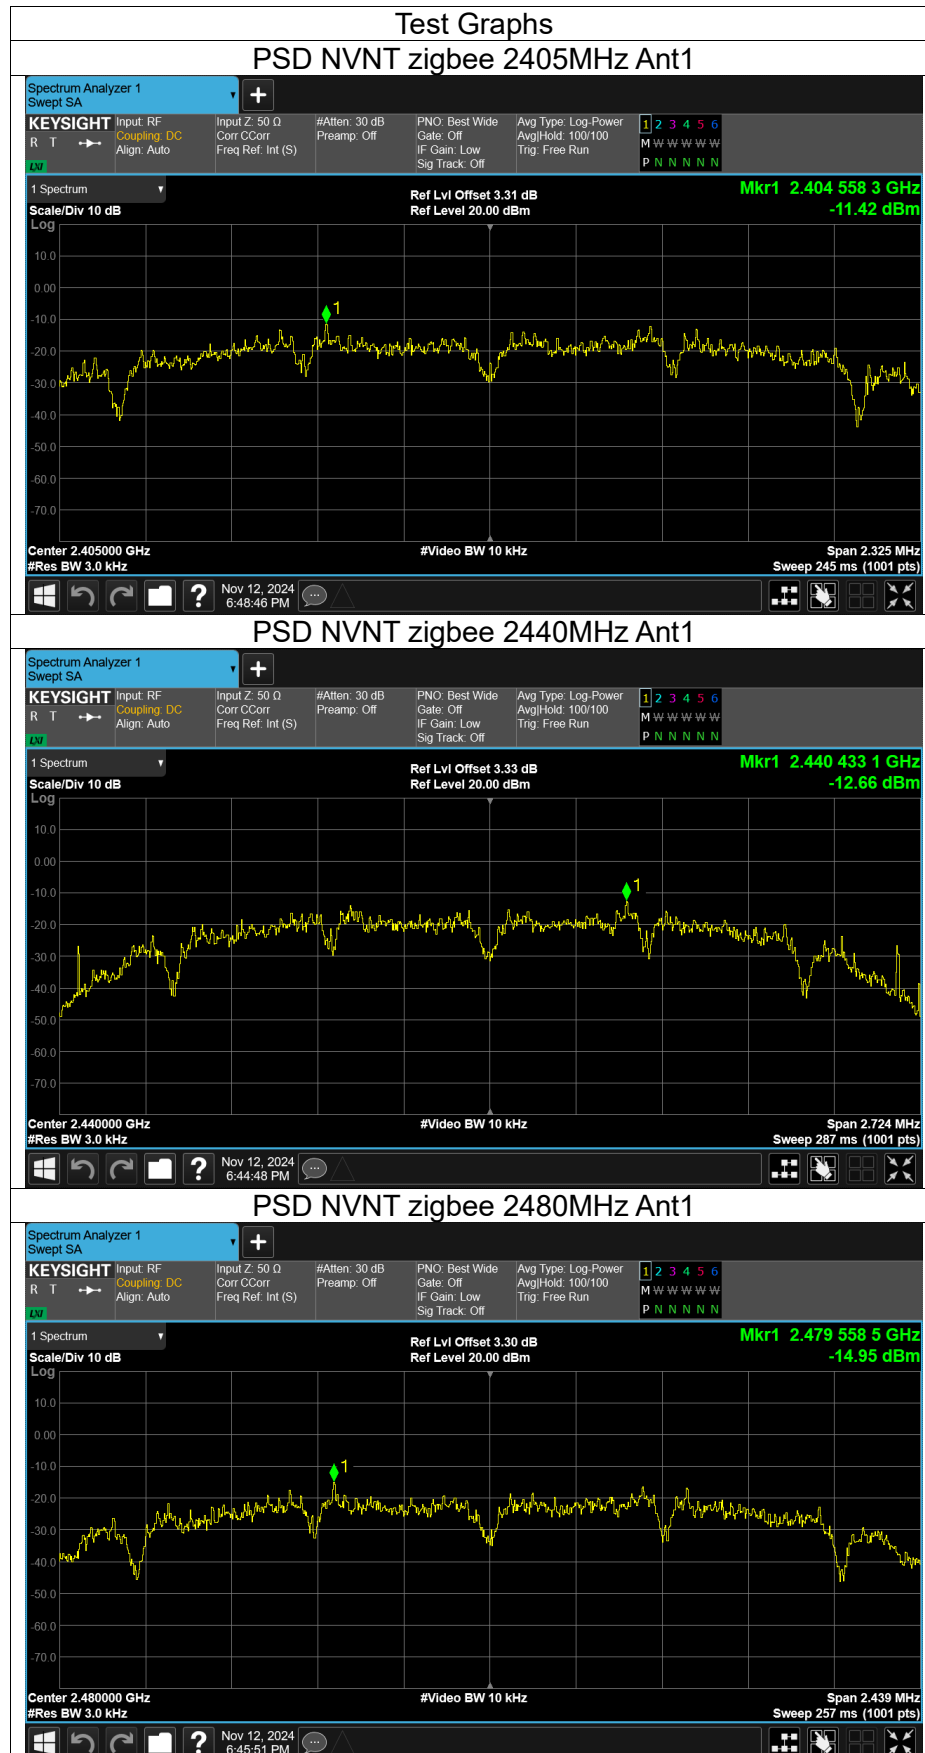




Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	zigbee	2405	Ant1	-52.56	-20	Pass
NVNT	zigbee	2480	Ant1	-47.63	-20	Pass




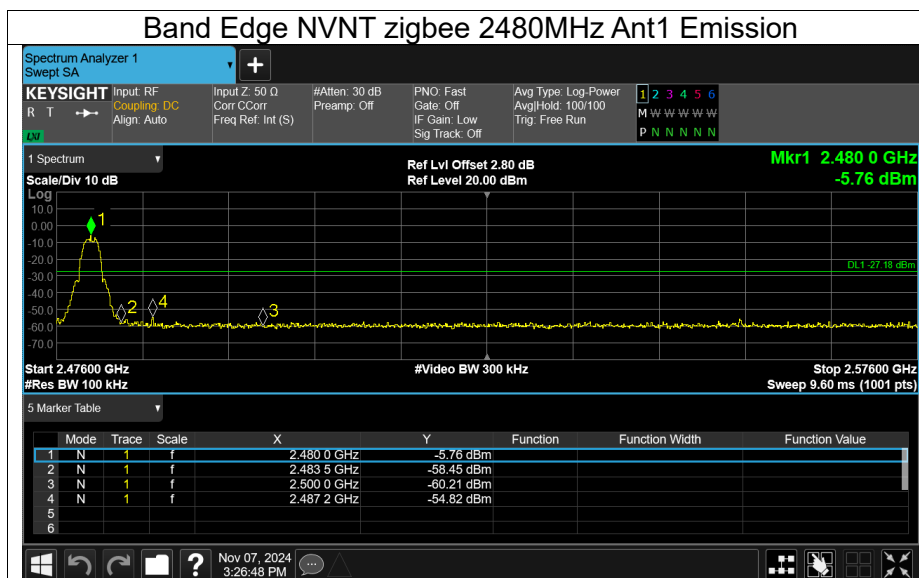




Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	zigbee	2405	Ant1	-44.53	-20	Pass
NVNT	zigbee	2440	Ant1	-45.31	-20	Pass
NVNT	zigbee	2480	Ant1	-41.23	-20	Pass

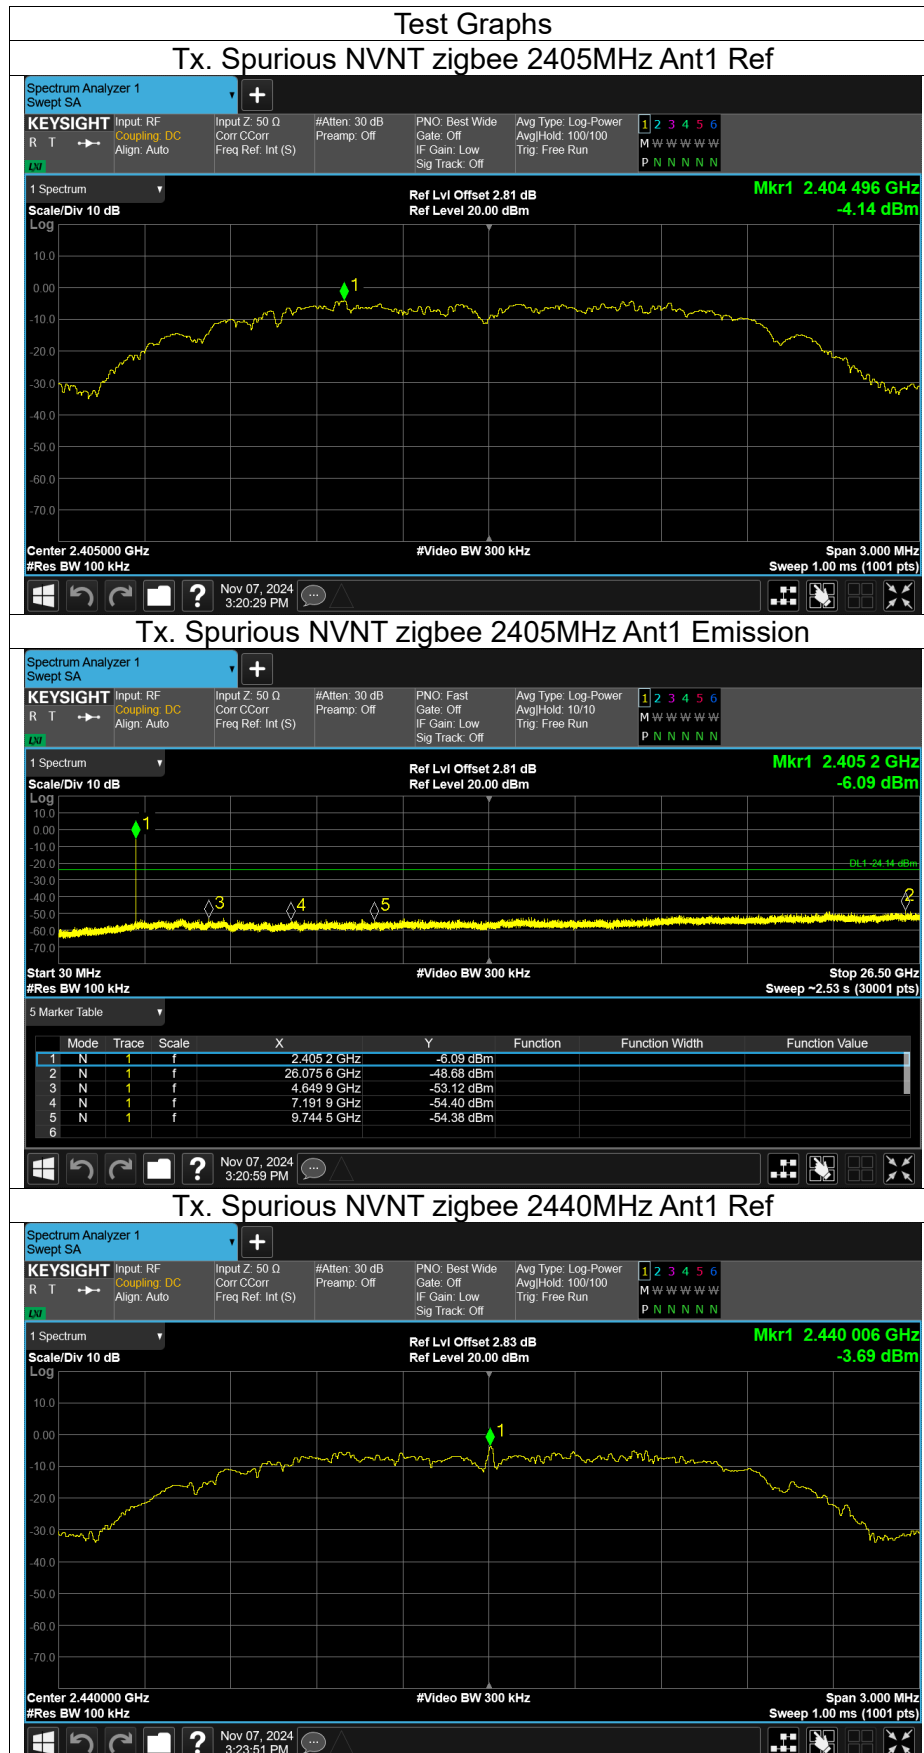

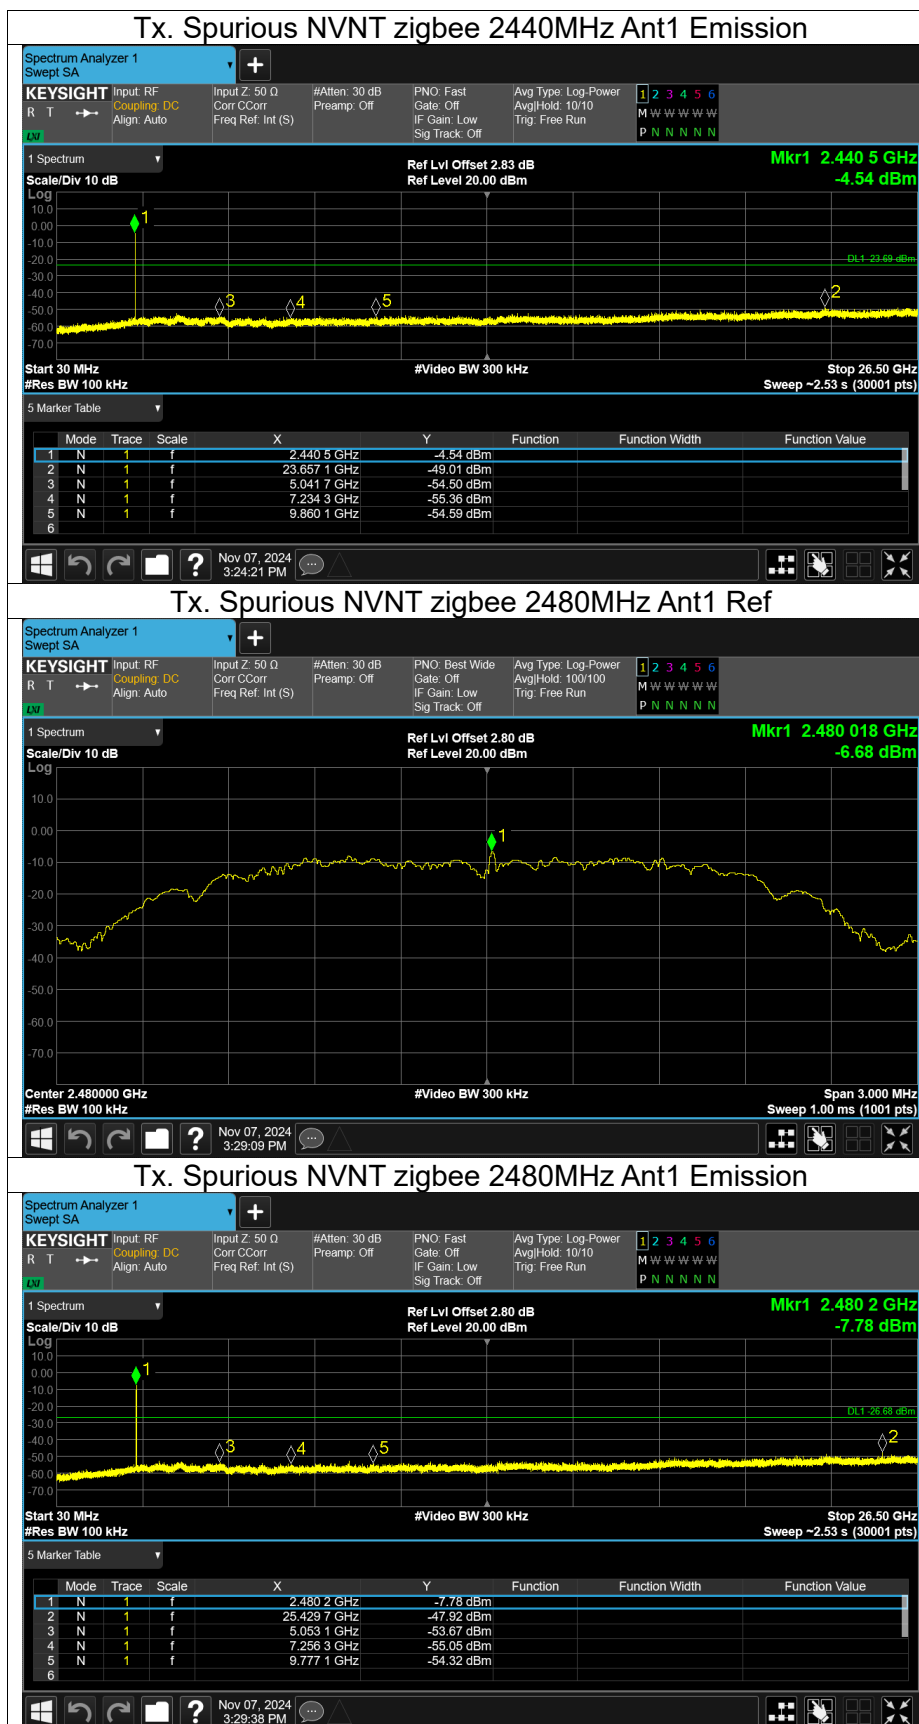



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID & IC.



APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Note: Please see the attached ACS360_EUT Photos.

※※※※※END OF THE REPORT※※※※※