



RF EXPOSURE EVALUATION

FCC ID:2BQ9T-FS2401

Product Name:	Magnetic Ring Stand with Wireless Charging
Model No.:	FS-2401
Serial No.:	N/A
Model Difference:	N/A
Operation Frequency:	115kHz-205kHz
Modulation Type:	ASK
Antenna Type:	Loop Coil Antenna
Power Supply:	Type-C Cable Input: 9V---2A, 12V---1.67A Wireless Output: 5W/7.5W/10W/15W
Transmitting Mode:	Keep the EUT in continuously wireless charging mode
Date of Test:	Jul. 14, 2025 to Jul. 26, 2025
Date of issue:	Jul. 26, 2025



a. EUT mode for mobile exposure:

Test Modes:	Test Coil:	Description:
Mode 1	ANT 1	AC/DC Adapter (12V/1.67A) + EUT + Phone (Battery Status: <1%)
Mode 2		AC/DC Adapter (12V/1.67A) + EUT + Phone (Battery Status: 50%)
Mode 3		AC/DC Adapter (12V/1.67A) + EUT + Phone (Battery Status: >98%)
Mode 4		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <1%)
Mode 5		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: 50%)
Mode 6		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: >98%)

b. EUT mode for portable exposure:

Test Modes:	Test Coil:	Description:
Mode 1a	ANT 1	AC/DC Adapter (12V/1.67A) + EUT + Phone (Battery Status: <1%)
Mode 2a		AC/DC Adapter (12V/1.67A) + EUT + Phone (Battery Status: 50%)
Mode 3a		AC/DC Adapter (12V/1.67A) + EUT + Phone (Battery Status: >98%)
Mode 4a		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <1%)
Mode 5a		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: 50%)
Mode 6a		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: >98%)



TABLE OF CONTENTS

1. Measuring Standard	4
1.1 KDB 680106 D01 Wireless Power Transfer v04	4
1.2 Measurement Uncertainty	4
2. Requirements	4
2.1 According to the item 5.2 of KDB 680106 D01v04:	4
3. Method Of Measurement	5
3.1 Applicable Standard	5
3.2 Block diagram of Test Setup	5
3.3 For mobile exposure conditions:	5
3.4 For portable exposure conditions:	5
3.5 Limits for Maximum Permissible Exposure (MPE):	6
3.6 Test Procedure:	6
4. Test instrument and equipment list	6
4.1 Test Instruments list	6
4.2 Test auxiliary equipment list	6
5. Test Result	7
5.1 For portable exposure result (Test mode 1a to 3a recorded)	7
5.2 For mobile exposure result (Test mode 1 to 3 recorded)	12
6. Test Set-up Photo	13
6.1 Test distance: 20cm	13
6.2 Test distance: 6cm	16



1. Measuring Standard

1.1 KDB 680106 D01 Wireless Power Transfer v04

1.2 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	H-filed	$\pm 0.93\text{dB}$
2	E-filed	$\pm 0.51\text{dB}$

2. Requirements

2.1 According to the item 5.2 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

a) The power transfer frequency is below 1 MHz.

Yes. The device operates in the frequency from 115kHz to 205kHz.

b) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

Yes, The maximum output power of the primary coil is 15 watts.

c) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact).

Yes. Client device is placed directly in contact with the transmitter.

d) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

NO. The EUT is a portable wireless charger.

e) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a $1/d$ (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes.

The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures

Yes. The EUT coil is evaluated at maximum output power and the test results are less than 50% of the limit.

f) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well.

NO, The EUT has one coil.




3. Method Of Measurement

3.1 Applicable Standard

According to S1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB 680106 D01 Wireless Power Transfer v04.

3.2 Block diagram of Test Setup

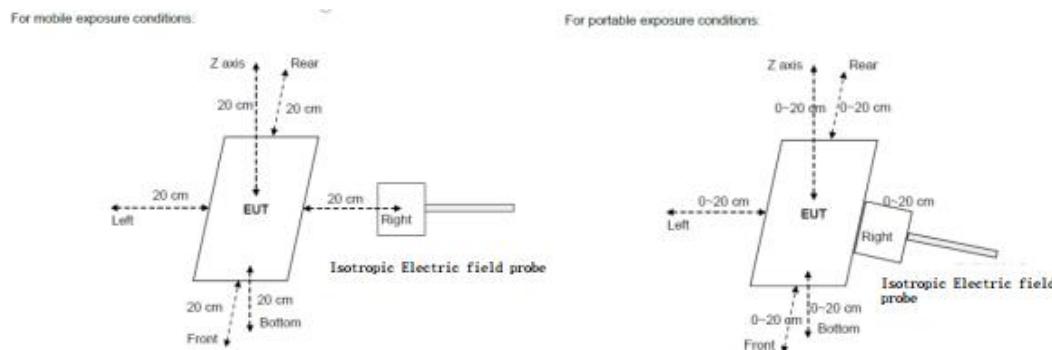

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 20cm - 0cm measured from the center of the top, and 20cm - 0cm measured from the center of the rest.

3.3 For mobile exposure conditions:

- The RF exposure test was performed in an echoic chamber;
- E and H-field measurements should be made with the center of the probe at a distance of 20 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair;
- The highest emission level was recorded and compared with limit;
- The EUT was measured according to the dictates of KDB 680106 D01v04.

3.4 For portable exposure conditions:

- The RF exposure test was performed in an echoic chamber;
- E and H-field measurements should be made with the probe at 0 - 20 cm for all side of the EUT;
- The highest emission level was recorded and compared with limit;
- Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm starting from as close as possible out to 20cm.



3.5 Limits for Maximum Permissible Exposure (MPE):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3.6 Test Procedure:

- 1) The RF exposure test was performed on 360 degree turn table in an echoic chamber.
- 2) 20 cm-0cm measured from the center of the top, and 20cm-0cm measured from the center of the rest sides.
- 3) The turn table was rotated 360 degree to search of highest strength.
- 4) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 5) The EUT were measured according to the dictates of KDB 680106 D01v04.

4. Test instrument and equipment list

4.1 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	180ZX10220	Sep. 29, 2024	Sep. 28, 2025
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	Sep. 29, 2024	Sep. 28, 2025

4.2 Test auxiliary equipment list

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Magnetic Ring Stand with Wireless Charging	N/A	FS-2401	N/A	EUT
E-2	AC/DC Adapter	SAMSUNG	EP-T4510	N/A	Auxiliary
E-3	Phone	APPLE	iPhone 13 Pro Max	N/A	Auxiliary



5. Test Result

5.1 For portable exposure result (Test mode 1a to 3a recorded)

H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	<1%	0.0178	0.0175	0.0176	0.0175	0.0174	0.0173
18	<1%	0.0238	0.0234	0.0236	0.0234	0.0233	0.0231
16	<1%	0.0327	0.0322	0.0325	0.0322	0.0320	0.0318
14	<1%	0.0465	0.0459	0.0462	0.0459	0.0456	0.0452
12	<1%	0.0689	0.0679	0.0684	0.0679	0.0674	0.0669
10	<1%	0.1066	0.1051	0.1058	0.1051	0.1043	0.1036
8	<1%	0.1731	0.1707	0.1719	0.1707	0.1695	0.1682
6	<1%	0.2938	0.2896	0.2917	0.2896	0.2876	0.2855

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	<1%	0.0142	0.0140	0.0141	0.0140	0.0139	0.0138	0.815	1.63
18	<1%	0.0190	0.0187	0.0189	0.0187	0.0186	0.0185	0.815	1.63
16	<1%	0.0262	0.0258	0.0260	0.0258	0.0256	0.0254	0.815	1.63
14	<1%	0.0372	0.0367	0.0370	0.0367	0.0365	0.0362	0.815	1.63
12	<1%	0.0551	0.0543	0.0547	0.0543	0.0539	0.0535	0.815	1.63
10	<1%	0.0853	0.0841	0.0847	0.0841	0.0835	0.0829	0.815	1.63
8	<1%	0.1385	0.1365	0.1375	0.1365	0.1356	0.1346	0.815	1.63
6	<1%	0.2350	0.2317	0.2334	0.2317	0.2300	0.2284	0.815	1.63



H-Field Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	50%	0.0169	0.0166	0.0168	0.0166	0.0164	0.0161
18	50%	0.0226	0.0223	0.0224	0.0223	0.0219	0.0216
16	50%	0.0311	0.0306	0.0309	0.0306	0.0302	0.0297
14	50%	0.0443	0.0436	0.0439	0.0436	0.0429	0.0423
12	50%	0.0655	0.0645	0.0650	0.0645	0.0635	0.0626
10	50%	0.1013	0.0998	0.1006	0.0998	0.0983	0.0968
8	50%	0.1646	0.1622	0.1634	0.1622	0.1597	0.1573
6	50%	0.2793	0.2751	0.2772	0.2751	0.2710	0.2669

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	50%	0.0135	0.0133	0.0134	0.0133	0.0131	0.0129	0.815	1.63
18	50%	0.0181	0.0178	0.0179	0.0178	0.0175	0.0173	0.815	1.63
16	50%	0.0249	0.0245	0.0247	0.0245	0.0241	0.0238	0.815	1.63
14	50%	0.0354	0.0349	0.0351	0.0349	0.0344	0.0338	0.815	1.63
12	50%	0.0524	0.0516	0.0520	0.0516	0.0508	0.0501	0.815	1.63
10	50%	0.0810	0.0798	0.0804	0.0798	0.0786	0.0774	0.815	1.63
8	50%	0.1317	0.1297	0.1307	0.1297	0.1278	0.1258	0.815	1.63
6	50%	0.2234	0.2201	0.2218	0.2201	0.2168	0.2135	0.815	1.63



H-Filed Strength at (distance from 6cm to 20cm at 2cm iteration) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	>98%	0.0155	0.0153	0.0154	0.0151	0.0153	0.0150
18	>98%	0.0207	0.0204	0.0206	0.0202	0.0204	0.0201
16	>98%	0.0286	0.0281	0.0283	0.0279	0.0281	0.0276
14	>98%	0.0406	0.0400	0.0403	0.0397	0.0400	0.0393
12	>98%	0.0601	0.0592	0.0597	0.0587	0.0592	0.0582
10	>98%	0.0931	0.0916	0.0923	0.0908	0.0916	0.0901
8	>98%	0.1512	0.1487	0.1500	0.1475	0.1487	0.1463
6	>98%	0.2565	0.2524	0.2545	0.2503	0.2524	0.2483

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	>98%	0.0124	0.0122	0.0123	0.0121	0.0122	0.0120	0.815	1.63
18	>98%	0.0166	0.0163	0.0165	0.0162	0.0163	0.0161	0.815	1.63
16	>98%	0.0228	0.0225	0.0227	0.0223	0.0225	0.0221	0.815	1.63
14	>98%	0.0325	0.0320	0.0323	0.0317	0.0320	0.0315	0.815	1.63
12	>98%	0.0481	0.0473	0.0477	0.0469	0.0473	0.0466	0.815	1.63
10	>98%	0.0744	0.0732	0.0738	0.0726	0.0732	0.0720	0.815	1.63
8	>98%	0.1209	0.1190	0.1200	0.1180	0.1190	0.1170	0.815	1.63
6	>98%	0.2052	0.2019	0.2036	0.2003	0.2019	0.1986	0.815	1.63

Note: A/m = uT/1.25



H-Field Strength at (distance from 4cm to 0cm) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
4	<1%	0.4029	0.3972	0.4001	0.3972	0.3944	0.3916	0.815	1.63
2	<1%	0.6322	0.6233	0.6278	0.6233	0.6189	0.6144	0.815	1.63
0	<1%	0.7617	0.7510	0.7563	0.7510	0.7456	0.7402	0.815	1.63
4	50%	0.3830	0.3774	0.3802	0.3774	0.3717	0.3660	0.815	1.63
2	50%	0.6011	0.5922	0.5966	0.5922	0.5833	0.5744	0.815	1.63
0	50%	0.7241	0.7134	0.7188	0.7134	0.7027	0.6920	0.815	1.63
4	>98%	0.3518	0.3462	0.3490	0.3433	0.3462	0.3405	0.815	1.63
2	>98%	0.5521	0.5432	0.5476	0.5387	0.5432	0.5343	0.815	1.63
0	>98%	0.6651	0.6544	0.6598	0.6491	0.6544	0.6437	0.815	1.63

Note: Biot-Savar law:

(1) Magnetic field on the axis of a current-carrying circle coil:

$$B = \frac{\mu_0 I R^2}{2(R^2 + X^2)^{3/2}}$$

R is the coil outside diameter radius.

X is the distance from the test point to the center of the coil circle.

B is the magnetic magnetic field.

(2) According to the KDB 680106, the model needs to be validated by probe measurements at the two points closest to the surface of the device, in 2cm increments, and if there is a 30% agreement between the model and the (E-field and/or h-field) probe measurements, the validation is considered sufficient.

(3) We derived the field strengths at 10cm to 8cm and 8cm to 6cm, respectively, which are close to the actual test values, based on the field strength at 6 cm, the field strength at 4cm and 2cm and 0 cm can be deduced.

(4) A table of error data between the assessed and measured values:

distance (cm)	Measurements (A/m)	distance (cm)	Assessed	Error	Limit
			(A/m)	(%)	(%)
10	0.0829	\	\	\	\
8	0.1342	10 to 8	0.1307	2.61	<30
6	0.2289	8 to 6	0.2218	3.10	<30



(5) Calculation process:

distance (cm)	Battery Level:	Position Left (A/m)
8	<1%	0.1385
6	<1%	0.2350
4	<1%	0.4029
2	<1%	0.6322
0	<1%	0.7617

$$8\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.1385 * 2(0.055^2 + 0.08^2)^{\frac{3}{2}} = 0.000253454$$

$$\text{To 6cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000253454}{2(0.055^2+0.06^2)^{\frac{3}{2}}} = 0.2350$$

$$6\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.2350 * 2(0.055^2 + 0.06^2)^{\frac{3}{2}} = 0.000253454$$

$$\text{To 4cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000253454}{2(0.055^2+0.04^2)^{\frac{3}{2}}} = 0.4029$$

$$4\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.4029 * 2(0.055^2 + 0.04^2)^{\frac{3}{2}} = 0.000253454$$

$$\text{To 2cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000253454}{2(0.055^2+0.02^2)^{\frac{3}{2}}} = 0.6322$$

$$2\text{cm: } u_0IR^2 = B * 2(R^2 + X^2)^{\frac{3}{2}} = 0.6322 * 2(0.055^2 + 0.02^2)^{\frac{3}{2}} = 0.000253454$$

$$\text{To 0cm: } B = \frac{u_0IR^2}{2(R^2+X^2)^{\frac{3}{2}}} = \frac{0.000253454}{2(0.055^2+0^2)^{\frac{3}{2}}} = 0.7617$$



5.2 For mobile exposure result (Test mode 1 to 3 recorded)

H-Field Strength at (distance from 20cm) surrounding the EUT (A/m):

distance (cm)	Battery Level:	Position Left (uT)	Position Right (uT)	Position Rear (uT)	Position Front (uT)	Position Top (uT)	Position Bottom (uT)
20	<1%	0.0188	0.0186	0.0187	0.0186	0.0185	0.0183
20	50%	0.0172	0.0171	0.0170	0.0169	0.0170	0.0169
20	>98%	0.0157	0.0155	0.0156	0.0154	0.0153	0.0151

distance (cm)	Battery Level:	Position Left (A/m)	Position Right (A/m)	Position Rear (A/m)	Position Front (A/m)	Position Top (A/m)	Position Bottom (A/m)	50% Limits (A/m)	Limits (A/m)
20	<1%	0.01504	0.01488	0.01496	0.01488	0.0148	0.01464	0.815	1.63
20	50%	0.01376	0.01368	0.0136	0.01352	0.0136	0.01352	0.815	1.63
20	>98%	0.01256	0.0124	0.01248	0.01232	0.01224	0.01208	0.815	1.63



Note: A/m = uT/1.25




6. Test Set-up Photo

Probe	Length	Width	Radius
	11cm	11cm	5.5cm

6.1 Test distance: 20cm

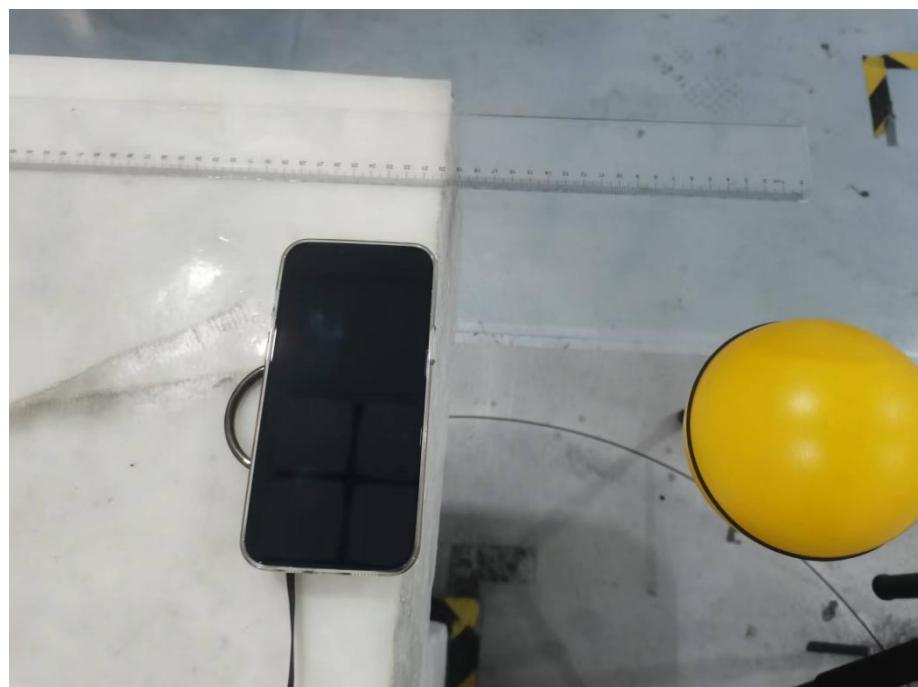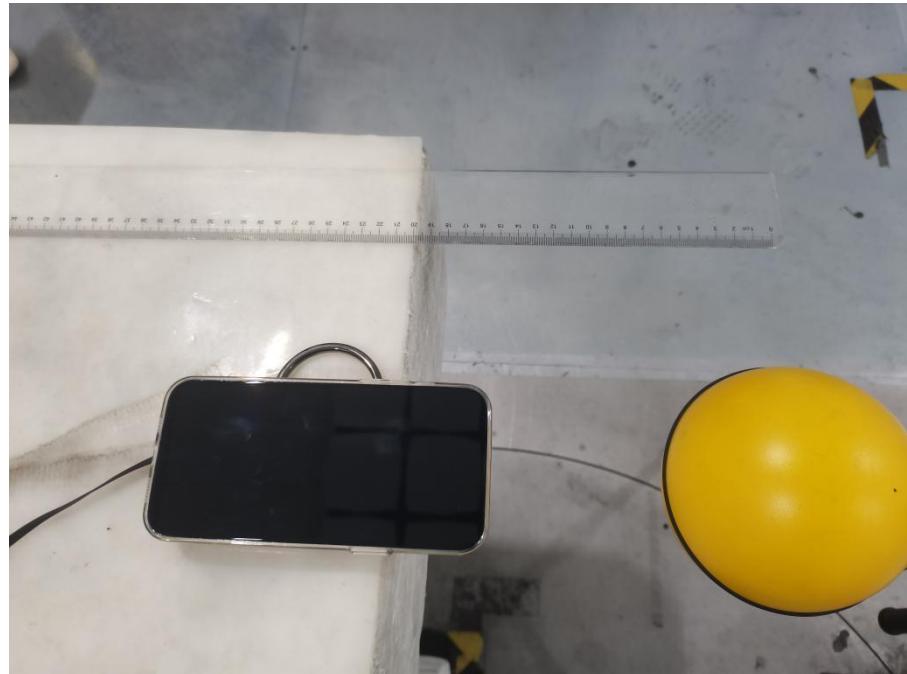

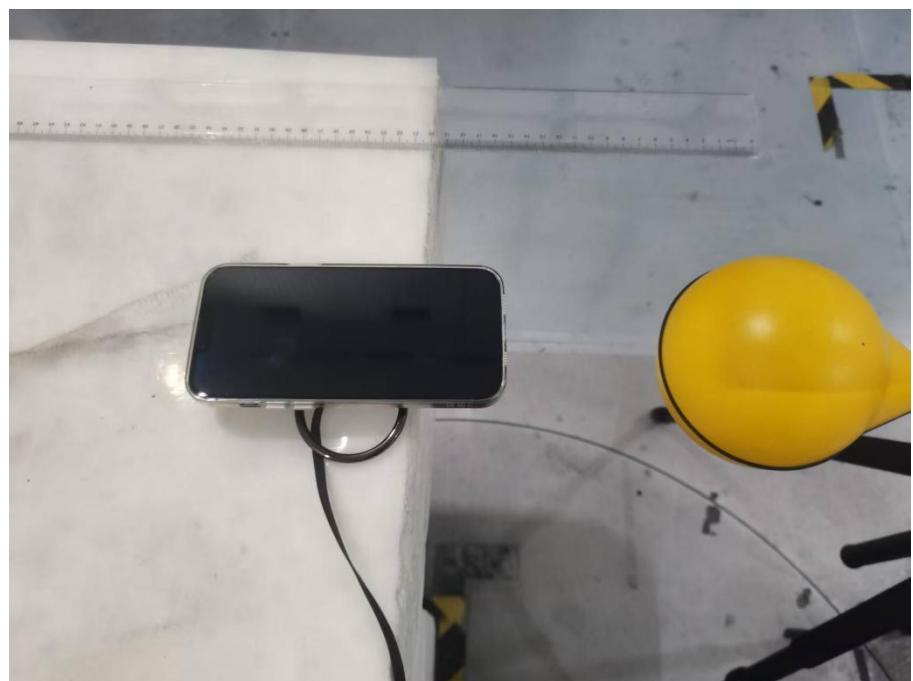






6.2 Test distance: 6cm



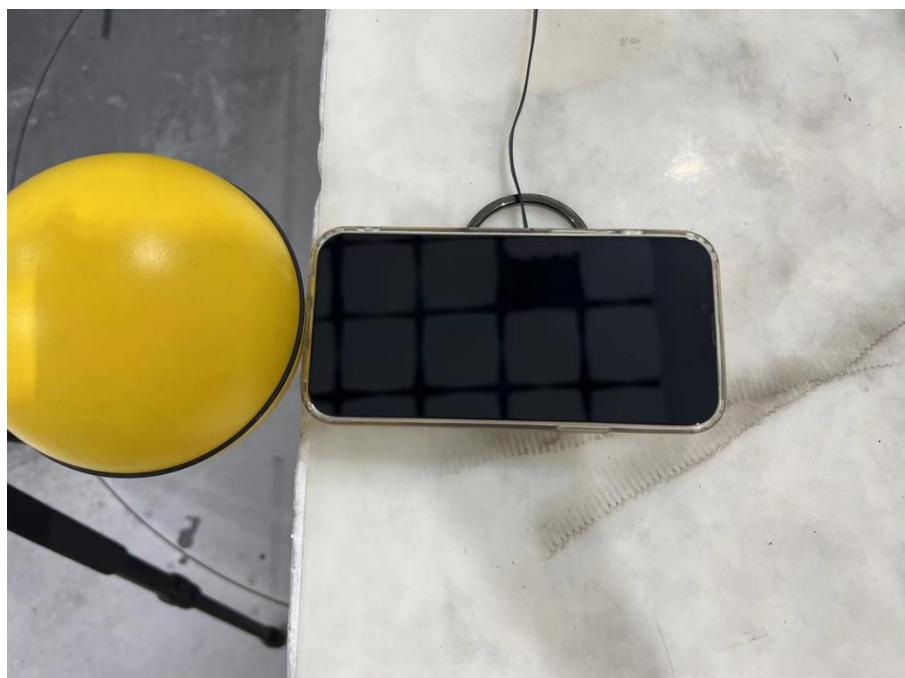



***** END OF REPORT *****